



Scoping Summary for the General Separations Area Western Groundwater Operable Unit (U)

SEMS Number: 85

ERD-EN-2005-0127

Final

November 2021

DISCLAIMER

This document was prepared in conjunction with work accomplished under Contract No. DE-AC09-08SR22470 with the U.S. Department of Energy.

This work was prepared under an agreement with and funded by the U.S. Government. Neither the U.S. Government or its employees, nor any of its contractors, subcontractors or their employees, makes any express or implied: 1. warranty or assumes any legal liability for the accuracy, completeness, or for the use or results of such use of any information, product, or process disclosed; or 2. representation that such use or results of such use would not infringe privately owned rights; or 3. endorsement or recommendation of any specifically identified commercial product, process, or service. Any views and opinions of authors expressed in this work do not necessarily state or reflect those of the United States Government, or its contractors, or subcontractors.

Printed in the United States of America

Prepared for
U.S. Department of Energy
and
Savannah River Nuclear Solutions, LLC
Aiken, South Carolina

TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
LIST OF FIGURES.....	iii
LIST OF TABLES.....	iv
LIST OF APPENDICES.....	iv
KEY CHANGES TO THE SCOPING SUMMARY.....	iv
RECORD OF CORE TEAM AGREEMENTS	v
1.0 PROJECT PHASE AND STATUS	1
2.0 BACKGROUND	1
3.0 LAND USE	2
4.0 SUBUNITS	3
4.1 Groundwater Subunit	3
4.1.1 <i>Problem Warranting Action</i>	10
4.1.2 <i>Remedial Action Objectives</i>	10
4.1.3 <i>Scope of Problem</i>	10
4.1.4 <i>Likely Response Actions</i>	10
4.1.5 <i>Uncertainties</i>	11
4.2 Surface Water	11
4.2.1 <i>Problem Warranting Action</i>	11
4.2.2 <i>Remedial Action Objectives</i>	12
4.2.3 <i>Surface Water Scope of Problem Warranting Action</i>	12
4.2.4 <i>Surface Water Likely Response Actions</i>	12
4.2.5 <i>Uncertainties</i>	12
5.0 OPERABLE UNIT STRATEGY.....	12

LIST OF FIGURES

<u>Figure</u>	<u>Page</u>
Figure 1. Groundwater Operable Units At The General Separations Area	15
Figure 2. GSA Western Groundwater OU Sample Locations And Well Map	16
Figure 3. Trichloroethylene Results (Max 2020) Upper Three Runs Aquifer	17
Figure 4. Tritium Concentration In The North Plume	18
Figure 5. TCE Concentration Near The Source In The West Plume	19
Figure 6. TCE Concentrations In The Distal Part Of The West Plume	20
Figure 7. Nonvolatile Beta Results (Max 2020) Upper Three Runs Aquifer.....	21
Figure 8. Tritium Results (Max 2020) Upper Three Runs Aquifer	22

LIST OF TABLES

<u>Table</u>	<u>Page</u>
Table 1. Groundwater Monitoring Network	23

LIST OF APPENDICES

<u>Appendix</u>	<u>Page</u>
A Isotopic Speciation Results for FGW 005C	A-1
B 2020 Monitoring Well Results Data Matrix Table and Field Conditions Key Codes	B-1

KEY CHANGES TO THE SCOPING SUMMARY

Section	Description of Change	Rationale for Change
4.1 and 4.2	Revised sections to include results from 2020 GW sampling.	These changes update the Scoping Summary to include results from sampling in 2020.
Figures 6, 7, and 8	Figures were updated based on the results of 2020 GW sampling.	These changes update the Scoping Summary with sampling results from 2020.
Appendix B	Data table was updated with the results of 2020 GW sampling.	These changes update the Scoping Summary with sampling results from 2020.

RECORD OF CORE TEAM AGREEMENTS

Agreement	Meeting
Core Team agreed to transition to annual sampling for locations FGW-023 and FGW-024.	October 2017
Locations FGW-023 and FGW-024 will be sampled at least 2 more times and results will be discussed in the 2016 Scoping Summary. Continued monitoring of these locations will be evaluated.	September 2015
Technetium-99 will be added to the analyte list for the South plume.	September 2014
Sampling data (one event) for new locations, FGW-023 and FGW-024, will be included in the final Scoping Summary for 2014.	September 2014
At the South plume, the Core Team agreed to move forward with installation of one surface water sample station and one shallow seepage piezometer on a tributary to the west of the Biomass Facility. The need for additional monitoring points will be evaluated based on monitoring results.	August 2013
Sampling of established wells will be performed annually. New monitoring locations added to the OU will be sampled semi-annually until a baseline is established.	August 2013
As documented in the GSA Eastern and Western GW OUs GW Monitoring Optimization White Paper, SRNS-RP-2012-00783, Rev. 1, January 2014, the Core Team agreed to discontinue monitoring at wells FNB-3, FNB-12, FBP-13D, FBP-44D, FBP-46D, FBP-47D, BRR-5D and UTR-7.	August 2013
As documented in the GSA Eastern and Western GW OUs GW Monitoring Optimization White Paper, SRNS-RP-2012-00783, Rev. 1, January 2014, the Core Team agreed to add alpha and beta/gamma speciation to analyte list for well FGW005C.	August 2013
The Core Team recognized the difficulty of installing a new well down gradient of UTR-18R and agreed that a new well is not needed at this time as long as SRS continues to monitor water at the seep in well UTR-18R.	August 2013
Add one monitoring well in the lower aquifer zone down gradient of FGW-012C, if possible.	August 2012
Add one seepage and one surface water monitoring location down gradient of FGW-012C along unnamed tributary, if surface water is present.	August 2012
Data are being collected and reported for future evaluation of VOC degradation as a remedial alternative.	August 2011
The Core Team agreed to include information on wells FBP 44D, 46D, and 47D in the August 2011 Scoping Summary instead of submitting the February 2011 white paper that was agreed to during the June 2010 meeting.	August 2011
FBP 44D, FBP 46D, and FBP 47D can be dry during periods of lower water table. This could represent a data gap if the UTR 18R seepage piezometer is also dry (monitors the same aquifer zone). UTR 18R typically contains water. Historical data associated with the dry wells will be evaluated with respect to contaminants to determine if modifications to the well network are necessary to define plume extent. The evaluation will be reported in February 2011 as a white paper.	June 2010

This page was intentionally left blank.

1.0 PROJECT PHASE AND STATUS

The *Resource Conservation and Recovery Act (RCRA) Facility Investigation (RFI)/Remedial Investigation (RI) Phase 1 Work Plan for the General Separations Area (GSA) Western Groundwater Operable Unit (OU)*, Revision 1.1, was approved by the United States Environmental Protection Agency (USEPA) and by the South Carolina Department of Health and Environmental Control (SCDHEC) on September 9, 2004. A Field Start was achieved for the OU on September 20, 2004.

In 2007, SRS completed establishment of the groundwater (GW) monitoring network. The GSA Western GW OU is currently in a GW monitoring program. The purpose of this Scoping Summary is to present the analytical data obtained in 2020 from GW monitoring to the Core Team (i.e., representatives from the United States Department of Energy [USDOE], USEPA, and SCDHEC) to determine if the monitoring network and analytical suite remain appropriate for continued monitoring. In 2020, concentrations have remained consistent with results from 2019 and continued sampling of the GW monitoring network is recommended. GW plumes remain stable with respect to concentrations and extent, and surface waters are not above maximum contaminant limits (MCLs).

2.0 BACKGROUND

The GSA is located on a topographic ridge near the center of the SRS. The GSA Western GW OU is located in the northwest portion of the GSA on a GW divide. It encompasses the GW beneath approximately (~) 485.6 hectares (ha [1,200 acres {ac}]) in F Area. This OU is bordered to the south by the F-Area Hazardous Waste Management Facility and to the east by the Mixed Waste Management Facility (see Figure 1). Because the OU is located on a GW divide, shallow GW flows toward both Fourmile Branch and Upper Three Runs Creek (UTRC) (see Figure 2).

The GSA Western GW OU underlies many operating facilities and waste units in and around F Area that are potential sources of contamination. Some of these facilities and units have been investigated during previous RCRA RFI/RI characterization work. From

these investigations and from review of the existing monitoring well networks, three distinct GW plumes have been identified in the Upper Three Runs Aquifer (UTRA). The plumes are identified by geographic reference as the North plume, the West plume, and the South plume.

Some of the operating facilities in the area are undergoing decontamination and decommissioning and will be brought to closure in the near term. Because other facilities will remain active into the future, in September 2005, the Core Team determined:

- It is not appropriate to achieve a Record of Decision (ROD) on the GSA Western GW OU until all sources of potential contamination are brought to closure (including closure of the F-Area High Level Waste Tanks).
- The most appropriate action at this time is continued GW monitoring to ensure that surface water resources are adequately protected.
- If contamination in the GW is thought to represent a threat to surface water resources, the Core Team will reconvene to determine if early response actions are required.

SRS characterized the nature and extent of GW contamination. The primary GW contaminants are volatile organic compounds (VOCs), radionuclides, and nitrate. Tritium, iodine-129, and trichloroethylene (TCE) are sporadically above MCLs in GW at points of discharge at the seep lines. However, concentrations in adjacent surface water are consistently below MCLs.

3.0 LAND USE

The area encompassed by the GSA Western GW OU is heavily developed with many active industrial facilities. No future residential use of this area is anticipated. Land use of the entire GSA Western GW OU area will be controlled to prevent use of the GW that exceeds MCLs. The UTRA and Gordon Aquifer (GA) are not used as a drinking water source at SRS.

4.0 SUBUNITS

The GSA Western GW OU includes the following two subunits:

- GW (i.e., North Plume, West Plume, South Plume), including shallow GW discharging to surface at the seep lines, and
- Surface Water.

In September 2005, the Core Team determined that soil contamination from the potential source units will be addressed during closure of the individual waste units and operating facilities.

4.1 GW Subunit

The UTRA is the shallow-most aquifer beneath the GSA Western GW OU and consists of two aquifer zones; the Upper Aquifer Zone (UAZ) and the Lower Aquifer Zone (LAZ). The GA underlies the UTRA and is separated from the UTRA by the Gordon Confining Unit (GCU). Contamination is present only in the UTRA. Previous investigations have demonstrated that within the GSA Western GW OU, the GA is protected by a competent confinement unit (e.g., GCU) and contamination is not migrating into the aquifer.

In 2020, the GSA Western GW OU was under a GW monitoring program that consisted of sampling 33 monitoring wells, 4 shallow sampling points at the seep lines (i.e., seep line piezometers), and 4 surface water sampling stations (Table 1 and Figure 2). Starting in 2014, sampling of the monitoring network is performed annually for established wells except for the wells associated with the F-Area Retention Basin (281-3F). Wells FRB1, FRB2, FRB3, and FRB4 are sampled semi-annually according to the F-Area Retention Basin ROD. New wells for the GSA Western GW OU are sampled semi-annually until a baseline is established in accordance with Table 1. The results from the 2020 monitoring of the well network are discussed below for the North, West, and South plumes. The analytical data for 2020 are presented in Appendix B.

Beginning in 2011, all locations in the North and West plumes have been sampled for TCE and degradation products. This is necessary to ensure that sufficient data are available to

evaluate natural attenuation as a future remedial action. Cis-1,2-dichloroethylene has been detected in the GW in the West plume in the past; however, concentrations were very low and below the laboratory analytical quantitation limit (i.e., 1 micrograms per liter [$\mu\text{g/L}$]). In 2020, Cis-1,2-dichloroethylene and vinyl chloride were both non-detect (less than detection limit $0.3 \mu\text{g/L}$) in the North and West plumes.

GW contaminants in the UTRA include VOCs, radionuclides, and nitrate. Tritium, TCE, and nonvolatile beta are recognized as the most widespread contaminants in the GW at the OU and thus are mapped each year. Other constituents are co-mingled with these primary contaminants. For example, TCE is the primary chlorinated solvent present yet the plume typically also contains limited quantities of tetrachloroethylene (PCE) and trichlorofluoromethane (TCFM) co-located with the TCE. Tritium and nonvolatile beta are the most widespread radioactive contaminants; however, other radionuclides such as iodine-129, strontium-90, uranium-238, etc., are also co-located within these plumes. Thus, mapping of the primary contaminants is useful to evaluate the distribution and nature of the plumes from year to year.

North Plume

The North plume covers an area of ~ 20.2 ha (50 ac) on the north side of the F-Area industrial facilities. Within this portion of the OU, the water table and the plume are located completely within the LAZ of the UTRA. GW flow in this aquifer is north toward UTRC and its tributaries. During 2020, GW samples were collected from four wells, two seepage piezometers, and two surface water locations. All locations yielded samples in 2020.

Previous investigations have shown that elevated concentrations of TCE, gross alpha, and nonvolatile beta are present to the east and north-east of the OFASB. In 2002, depth discrete samples measured TCE concentrations up to $85 \mu\text{g/L}$. Elevated concentrations of gross alpha and nonvolatile beta were also detected. Sample locations from this investigation were shown in the November 2005 Scoping Summary. This area of the plume is likely from sources within the F-Area fence line such as facilities associated with the now decommissioned Naval Fuels and the Fabrication Shop located north of F Canyon.

During the 2020 monitoring period, TCE concentrations were similar to 2019 concentrations and ranged between non-detect and 12.8 µg/L. The maximum concentration in the North plume was detected at well FNB 15 (12.8 µg/L) (Figure 3). At adjacent well FNB 13, TCE was 6.39 µg/L. TCE was only detected at one other location (0.79 J µg/L at UTR-016) in the North plume. Both PCE and TCFM were below the MCL in the North plume.

In addition to VOCs, gross alpha, nonvolatile beta, nitrate, iodine-129, strontium-90, and tritium have been present in the UTRA at levels greater than MCLs. In 2020, concentrations were similar to levels measured in 2019 and only slightly greater than respective MCLs at most locations. The maximum concentration of I-129 was measured near the OFASB at well FNB 2, the concentration of I-129 was 5.44 picocuries per liter (pCi/L) which was slightly less than the 2019 result. I-129 was also above the MCL at wells FNB 5, FNB 13 and FNB 15. Tritium concentrations down gradient of the OFASB have been decreasing over the past eighteen years and are currently below the MCL as shown in Figure 4. The downward concentration trend since monitoring began in year 2000 is indicative of a plume that is shrinking and a tritium source term that is depleted. The maximum concentration of Nitrate was similar to last year at 19 milligrams per liter (mg/L) (FNB 15). Nitrate was below the MCL (10 mg/L) at the remaining North plume locations in 2020. Nonvolatile beta (55.5 pCi/L) and Sr-90 (8.87 pCi/L) also exceeded their respective MCLs at wells FNB 15 and FNB 13, respectively downgradient of the OFASB.

In 2020, shallow GW discharging at the seepline was monitored by two seepline piezometers (UTR 6 and UTR 16). Historically, tritium has been detected near or slightly above the MCL at location UTR 16 and I-129 has also been sporadically measured above the MCL in the past. During the 2020 sampling at UTR 6 and UTR 16, tritium (1.47 pCi/mL and 2.89 pCi/mL, respectively) was below the MCL and I-129 was non-detect at UTR 6 and below the MCL at UTR 16 (0.78 J pCi/L). Levels of tritium and I-129 were both similar to what was measured in 2019.

In accordance with the monitoring strategy, surface water samples are also collected near the points of GW discharge. Samples from surface water stations UTR 003 and UTR 004 were both non-detect for I-129 and had very low results for tritium, with the highest being 2.18 picocuries per milliliter (pCi/mL) (2020).

Overall, the 2020 results were similar to 2019 results. The data continue to indicate that the plume remains stable to decreasing with respect to extent and concentrations. Surface water is not being impacted above MCLs. Continued monitoring is recommended for the North plume. Monitoring results for 2020 are provided in Appendix B.

West Plume

The West plume occupies ~26.3 ha (65 ac) on the western side of F Area. The plume is located within both the UAZ and LAZ of the UTRA. GW flow in this area is generally west toward UTRC. During 2020, GW samples were obtained from all 12 wells. At the seepage line, a sample was collected from piezometer UTR 18R, but surface water station UTR 005 was dry and unable to be sampled. Sampling results from the monitoring network are included in Appendix B.

Overall, the West plume is comprised primarily of VOCs (PCE, TCE, and TCFM), nitrates, and gross alpha/nonvolatile beta constituents. In 2020, the data show MCL exceedances for the following: TCE, TCFM, nitrates, gross alpha, nonvolatile beta, iodine-129, radium-226, radium-228, strontium-90, tritium, uranium-233/234 and uranium-238. VOCs and nitrates are the most widespread contaminants for the West plume.

VOCs are present beneath the F-Area Burning/Rubble Pits (FBRP) (231-R, 231-1F, and 231-2F) and up gradient of the FBRP toward the F-Area facilities. The most prevalent VOCs are TCE and TCFM. The highest concentrations of TCE are located at the northwest edge of the F-Area facilities at wells FGW 003C, FGW 005C, FGW 022C, and FBP43C. In 2020, the maximum concentrations of TCE and TCFM were located at wells FGW003C and FBP 43 DL, respectively (29.2 µg/L and 18.6 µg/L, respectively). TCE concentrations in this part of the plume (wells FGW 003C, FGW 005C, FGW 022C, and FBP 43C) have been stable to decreasing over time (Figure 5), with the exception of FGW

003C which increased from 2016 to 2018 and since then has shown variable concentrations up to 2020.

In 2020, TCE concentrations remained steady at 7.3 µg/L in the distal part of the plume (Figure 6). PCE concentrations were slightly less than last year's results (2020 maximum result of 2.36 µg/L). In 2020, TCFM exceeded the MCL at well FBP 10D (14.6 µg/L) but was below the MCL at FBP 2A (2.82 J µg/L) and FBP 6D (3.17 µg/L).

The maximum concentrations of nitrates, gross alpha, and nonvolatile beta are also present adjacent to the F-Area facilities and the F-Area Inactive Process Sewer Line (FIPSL) at LAZ wells FGW 005C and FGW 022C. In 2020, the maximum nitrate concentration was less than last year's concentration at 27 mg/L (FGW 022C). Gross alpha concentrations were similar to results from 2019 (1,510 pCi/L at FGW 005C) and nonvolatile beta increased to 1,760 pCi/L (FGW 005C) in 2020. At well FGW 005C, the specific isotopes associated with the elevated gross alpha are uranium-233/234 (395 pCi/L) and uranium-238 (1,240 pCi/L) and the beta emitting isotopes present are primarily strontium-90 (407.3 pCi/L) and technetium-99 (274 pCi/L). The results of isotopic speciation for FGW 005C are included in Appendix A.

At the West plume, the concentrations of gross alpha and nonvolatile beta attenuate rapidly with distance away from the F-Area facilities. As shown in Figure 7, the nonvolatile beta plume terminates approximately half-way between the F-Area fence line and the wetlands of UTRC and poses no threat to surface water.

Since 2006, PCE, TCE and TCFM have been detected in GW near the seepline at piezometer UTR 18R; however, surface water samples collected at UTR-005-FOU have historically been non-detect for VOCs. In 2020, the maximum concentration in GW at the seepline was 0.58 J µg/L for TCE and was below the MCL. PCE was also below the MCL in 2020 at 0.38 J µg/L. TCFM was not detected. UTR 018R is located at the base of a slope in an area of localized GW seeps. At this area, the rate of GW discharge is so low that standing water is not present year-round. Also, the seepline sample point (UTR 18R) is ~182.9 meters (600 feet) from UTRC and GW discharged to the surface typically seeps

back into the ground or evaporates before reaching the creek. Downgradient of the seep piezometer, the concentration of all constituents has historically been below the MCL at surface water location UTR 005. In 2020, a sample was unable to be collected at UTR 005 because it was dry.

Overall, 2020 data continue to indicate that the plumes remain stable with respect to extent and concentrations. Both the VOC and nonvolatile beta plumes terminate prior to discharging at seeps to UTRC. When surface water is present at UTR 005-FOU it is not expected to be impacted above MCLs in that concentrations at seepage piezometer UTR 18R upgradient of UTR 005-FOU are below MCLs. Continued monitoring is recommended for the West plume. Monitoring results for 2020 are provided in Appendix B.

South Plume

The South plume covers an area of ~22.3 ha (55 ac) on the south west corner of F Area. The plume is located within the UAZ and LAZ of the UTRA. GW flow in this portion of the OU is generally south west toward UTRC. During 2020, GW samples were collected from 13 wells. Analytical results are presented in Appendix B.

The South plume consists primarily of tritium and nonvolatile beta constituents. VOCs are not present at the South plume. Specific radionuclides that have been present above MCLs include iodine-129, strontium-90, radium-226, radium-228, technetium-99, and tritium. SRS believes these constituents are sourced from the RCRA permitted FIPSL. Potential sources of contamination include historic releases along sections of the FIPSL. A collapsed section of the vitrified clay FIPSL is known to exist down gradient of the Tank Farm. The collapsed section is shown in Figure 2. Potential sampling locations near the collapsed section of the FIPSL are not accessible at this time due to interferences with power lines and active steam lines.

In 2020, nonvolatile beta was the most widespread contaminant detected. It was present at levels exceeding 50 pCi/L in six of the thirteen wells with concentrations ranging from 78.6 pCi/L (FSL 7D) to 956 pCi/L (FTF 28). Historically, the elevated concentrations have

been detected in the area of wells FTF 28 and FSL 5D near the FIPSL collapsed section, and also at down gradient well FGW 12C.

In addition to nonvolatile beta activity, a few wells near the FIPSL have exceeded the MCL for iodine-129, nitrate, strontium-90, radium-226, radium-228, technetium-99, and tritium. In 2020, all of these analytes exceeded the MCL in at least one well with maximum concentrations as follows: iodine-129 (33 pCi/L), nitrate (15 mg/L) radium-226 (8.09 pCi/L), radium-228 (8 pCi/L), strontium-90 (54 pCi/L), technetium-99 (1170 pCi/L), and tritium (106 pCi/mL). The maximum concentrations occurred in wells along or near the FIPSL, except for nitrate and tritium which was highest at well FGW 12C.

Overall, the 2020 data indicate that the plume remains stable with respect to extent and concentrations. Monitoring results are provided in Appendix B.

During the August 2012 Core Team meeting, uncertainties associated with the extent of the South plume in the LAZ and the possibility of the South plume discharging to surface water were discussed. The Core Team recommended investigating a tributary to UTRC that is located down gradient of well FGW 012C for potential sampling locations. The potential locations investigated included one surface water sample station, one seepline piezometer location, and a location for one new GW monitoring well, if needed. A field walk-down was held on April 16, 2013, with representatives from USEPA, SCDHEC, and SRS. Based on the walk-down, GW discharge to the tributary was determined to begin approximately half-way down its length with the tributary being discharged to the floodplain swamp of UTRC. The upper reaches of the tributary were dry.

In September 2014, SRS installed a surface water sample station (FGW 024) near the discharge point to the swamp and in August 2014, a shallow piezometer (FGW 023) to sample GW discharging to the surface. Nitrate-nitrite, radium-226, radium-228, nonvolatile beta, technetium-99 and tritium have all been detected, but all concentrations were very low and below MCLs. The 2020 sampling results continue to indicate the South plume is not impacting this tributary to UTRC. The results are presented in Appendix B.

F-Area Retention Basin

Previously, the Core Team decided to incorporate the monitoring and reporting for the FRB (281-3F) in this report. The GSA Western GW OU monitoring network includes sampling at four wells for the FRB (FRB 1 through FRB 4). The monitoring network is shown on Figure 2 and details are provided in Table 1. The wells are sampled semi-annually according to the FRB OU ROD. Samples were collected from all wells during the second and fourth quarter in 2020. All results were below MCLs at the FRB. The analytical data are presented in Appendix B.

4.1.1 Problem Warranting Action

- VOCs, nitrate, and radionuclides in the UTRA are present at levels that exceed the respective MCLs.
- VOCs and radionuclides have been present in GW at the seepage line at levels above the MCLs.

4.1.2 Remedial Action Objectives

- Ensure that contaminants in GW do not impact surface water at levels that exceed MCLs.
- Prevent human exposure to contaminants in GW at levels that exceed MCLs.

4.1.3 Scope of Problem

- GW contaminants in the UTRA include VOCs, radionuclides, and nitrate. Tritium, TCE, and nonvolatile beta are recognized as the most widespread contaminants in the GW at the OU. Figures 3, 7, and 8 show the distribution of these contaminants in the UTRA during 2019.

4.1.4 Likely Response Actions

- Continued monitoring of GW in the UTRA and at the seepage line on an annual frequency.
-

4.1.5 Uncertainties

- There is some uncertainty regarding the potential sources of shallow GW contamination due to the number of operating facilities and waste units within the boundaries of the GSA Western GW OU. Individually and collectively, these facilities and waste sites have contaminated the shallow aquifer that underlies this GW OU. The closure of the F-Area facilities will manage the uncertainties associated with residual sources. The uncertainty regarding source areas will ultimately be addressed by the F-Area OU remedial investigation (prior to Area Closure). Until then, the impact of the combined sources on GW will be tracked by continued GW monitoring in the GSA Western GW OU. The well network for each plume area, sampling frequency, and specific analyte lists are summarized in Table 1.

4.2 Surface Water

Shallow GW within the OU discharges to surface water at the seeplines of UTRC and Fourmile Branch. The Phase 1 Work Plan specified that if GW contamination was detected at the seeplines above the MCLs, then surface water quality in the stream(s) would be evaluated. Four surface water sample locations are used to monitor water quality in the GW monitoring plan (see Figure 2). In June 2010, the Core Team agreed to sample the surface water at the same frequency as the GW.

Characterization and monitoring well data show that GW contamination exists above MCLs beneath the seepline at a few locations within the OU. At the North and West plumes, GW at the seepline has exceeded MCLs for tritium, strontium-90, iodine-129, and VOCs in the past. However, 2020 sample results for surface water in the streams has demonstrated that contaminant levels are below MCLs in the tributaries to UTRC.

4.2.1 Problem Warranting Action

- No problems warranting action have been identified for surface water at the OU.
-

4.2.2 Remedial Action Objectives

- To date there were no MCL exceedances in surface water; therefore, remedial action objectives are not applicable at this time.

4.2.3 Surface Water Scope of Problem Warranting Action

The GSA Western GW OU contains three distinct areas of GW contamination. Since routine monitoring started in 2005, two of these plumes, the North plume and the West plume, have been above MCLs in GW near the discharge zone to the seepines. However, GW at the seepine in the North plume and the West plume was below the MCLs for all constituents in 2020. Historically, confirmation sampling of the surface water has demonstrated that contaminant levels have been and continue to be below MCLs in the tributaries to UTRC.

4.2.4 Surface Water Likely Response Actions

- Monitoring of surface water per the schedule in Table 1.

4.2.5 Uncertainties

- It is uncertain if surface water of tributaries to UTRC will be impacted by GW discharging from the North and West plumes. Historically, at some of the seepine locations contaminants have been detected above the MCL in GW. However, the associated streams continue to remain below MCLs for all contaminants. As more data is obtained, trends will be developed as necessary. This uncertainty is managed by monitoring surface water in the tributaries to UTRC. Sample locations and analytes are summarized in Table 1.

5.0 OPERABLE UNIT STRATEGY

- SRS will sample the monitoring network annually for contaminants of concern until there is a decision to modify the frequency. New monitoring locations (GW and surface water) added to the GSA Western Groundwater OU will be sampled semi-annually until a baseline is established. Evaluation will be based on data trends. This information is reported in an annual update to this Scoping Summary.
-

- SRS will convene the Core Team annually (or as necessary) to review data, re-evaluate the well network, sampling frequency, and analyte list, assess the effectiveness of the OU logic, and decide if the monitoring strategy is still appropriate or if changes are required (including the need for immediate action).
 - SRS will notify the Core Team promptly if monitoring data indicate a problem that requires immediate attention.
-

This page was intentionally left blank.

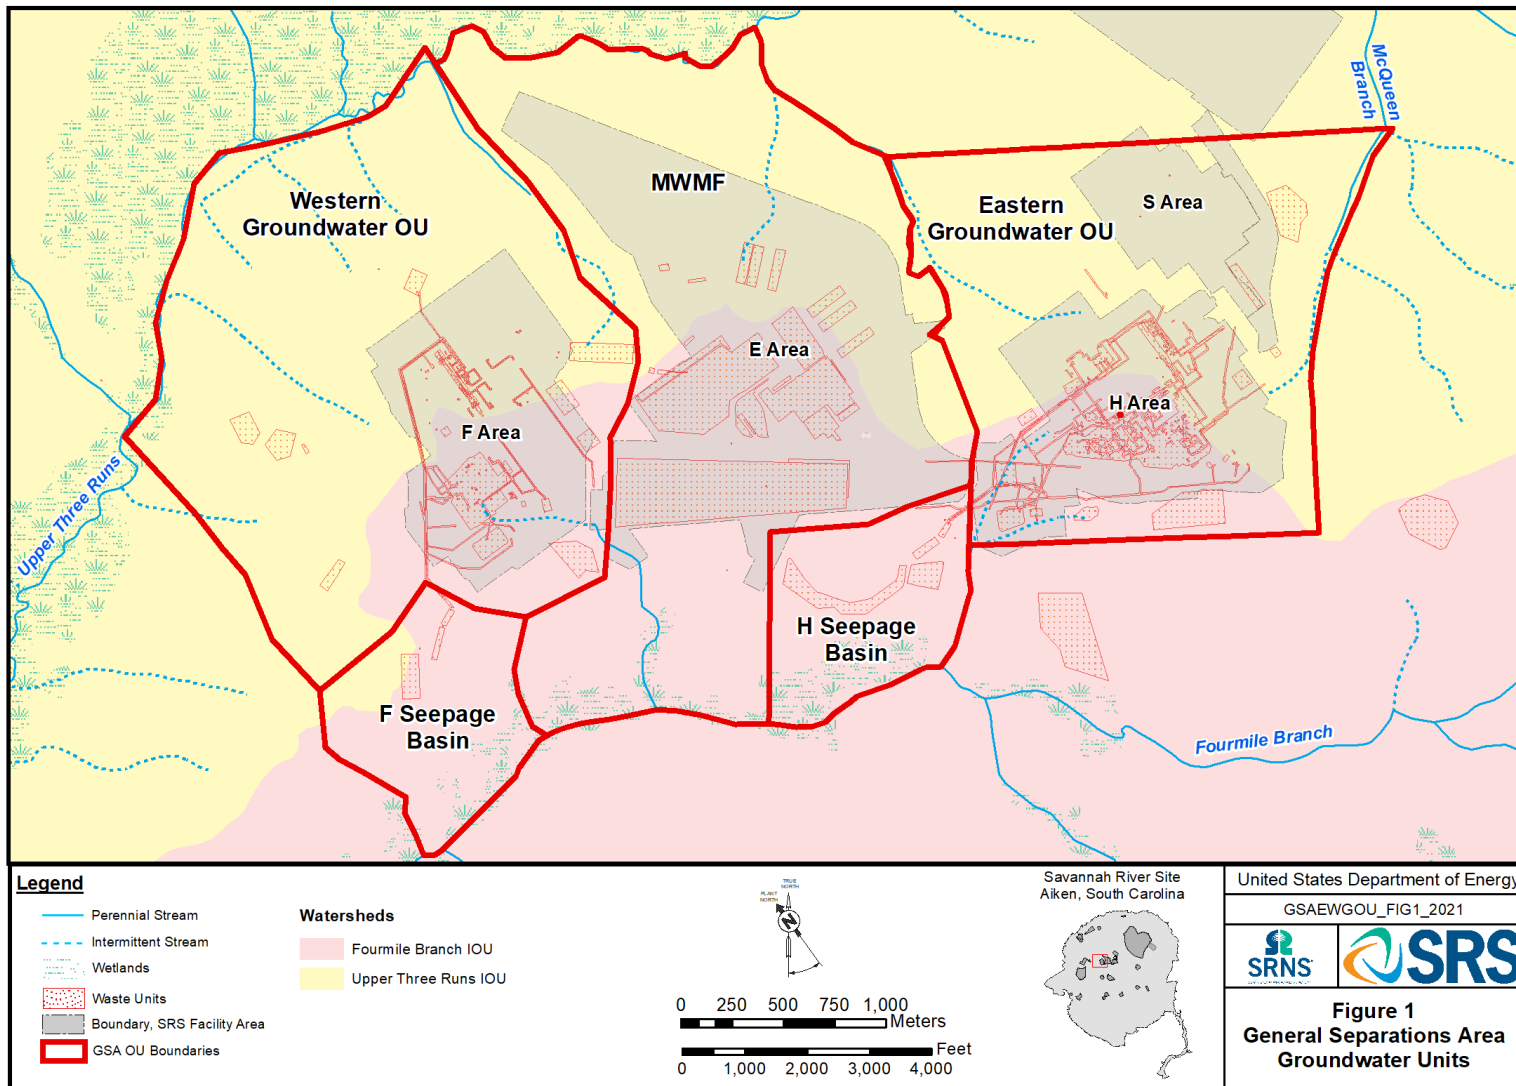


Figure 1. Groundwater Operable Units at the General Separations Area

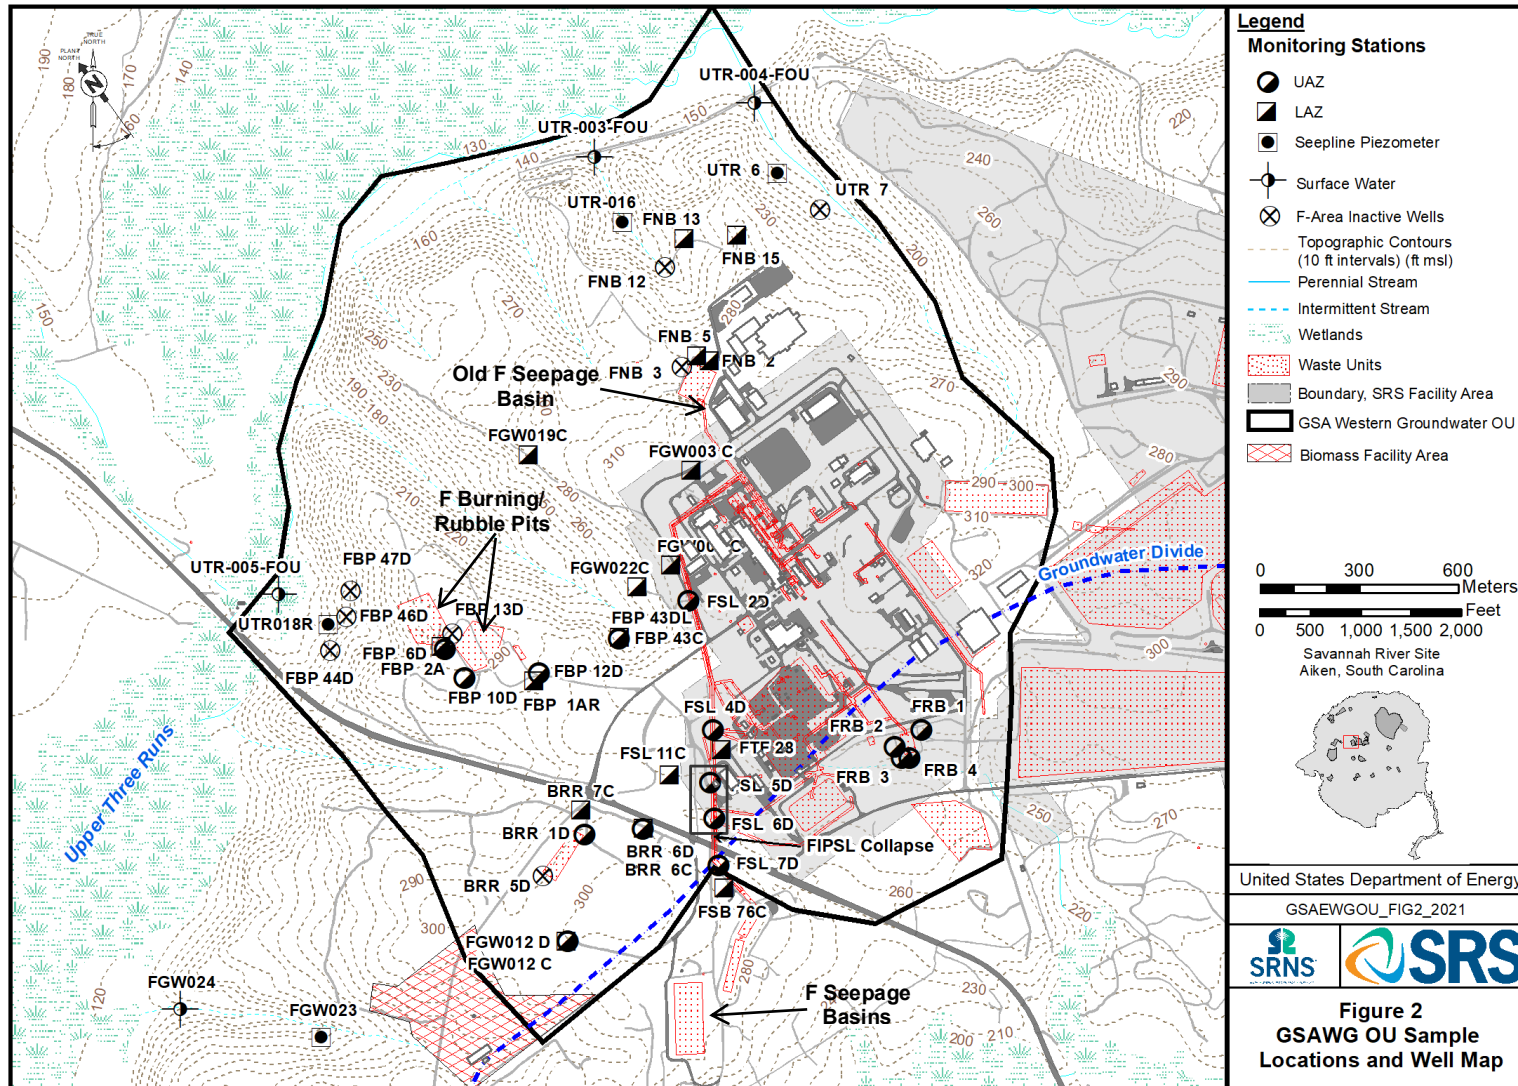


Figure 2. GSA Western Groundwater OU Sample Locations and Well Map

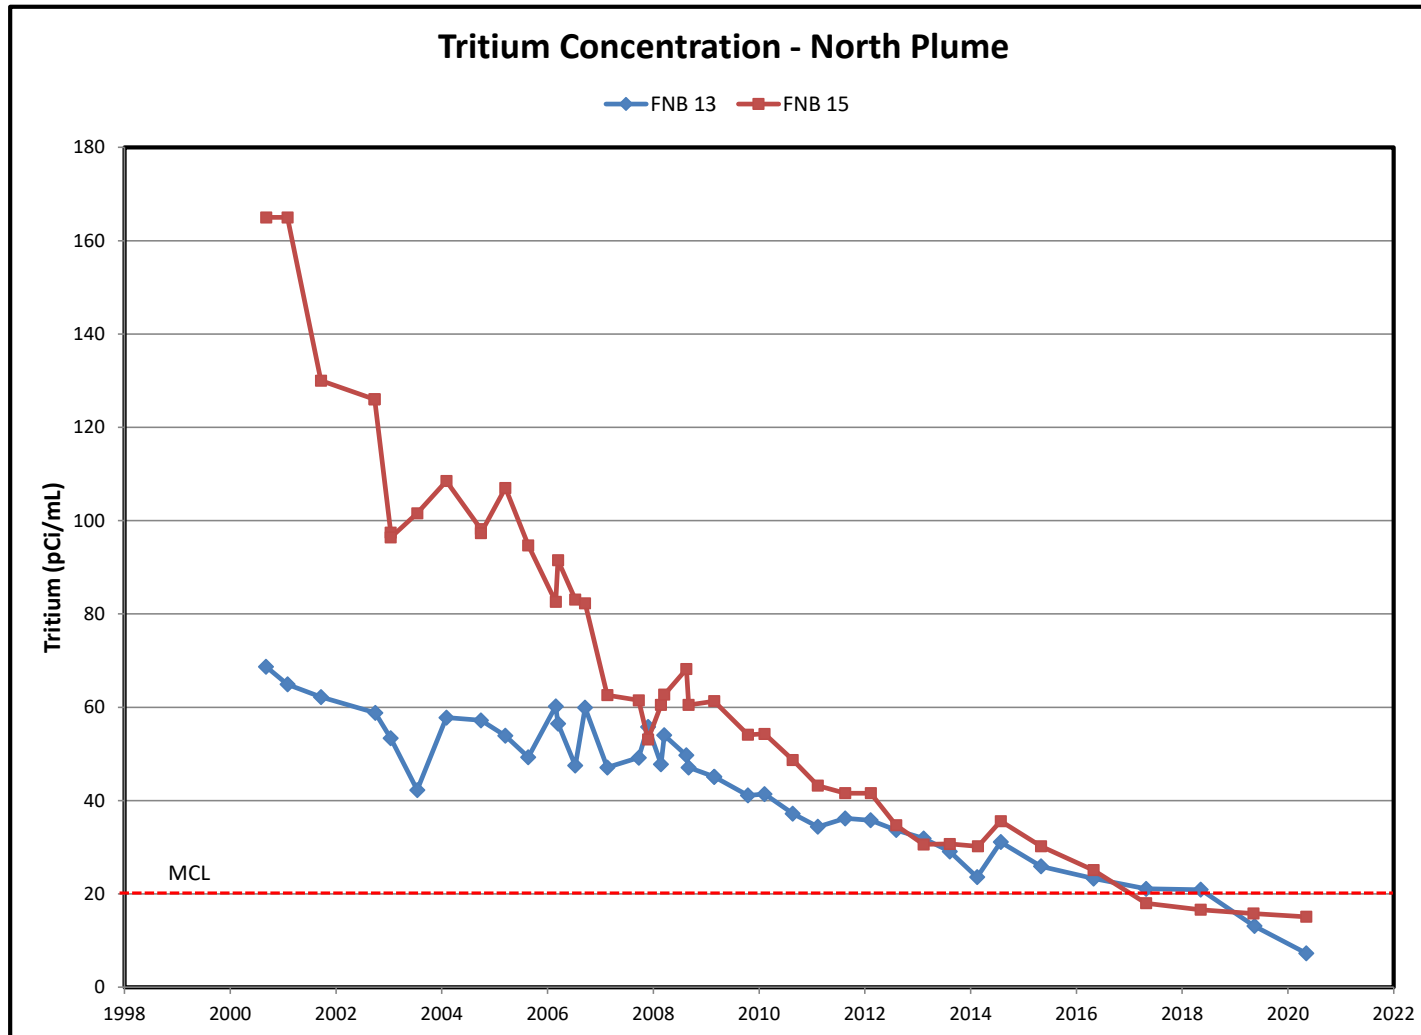


Figure 4. Tritium Concentration in the North Plume

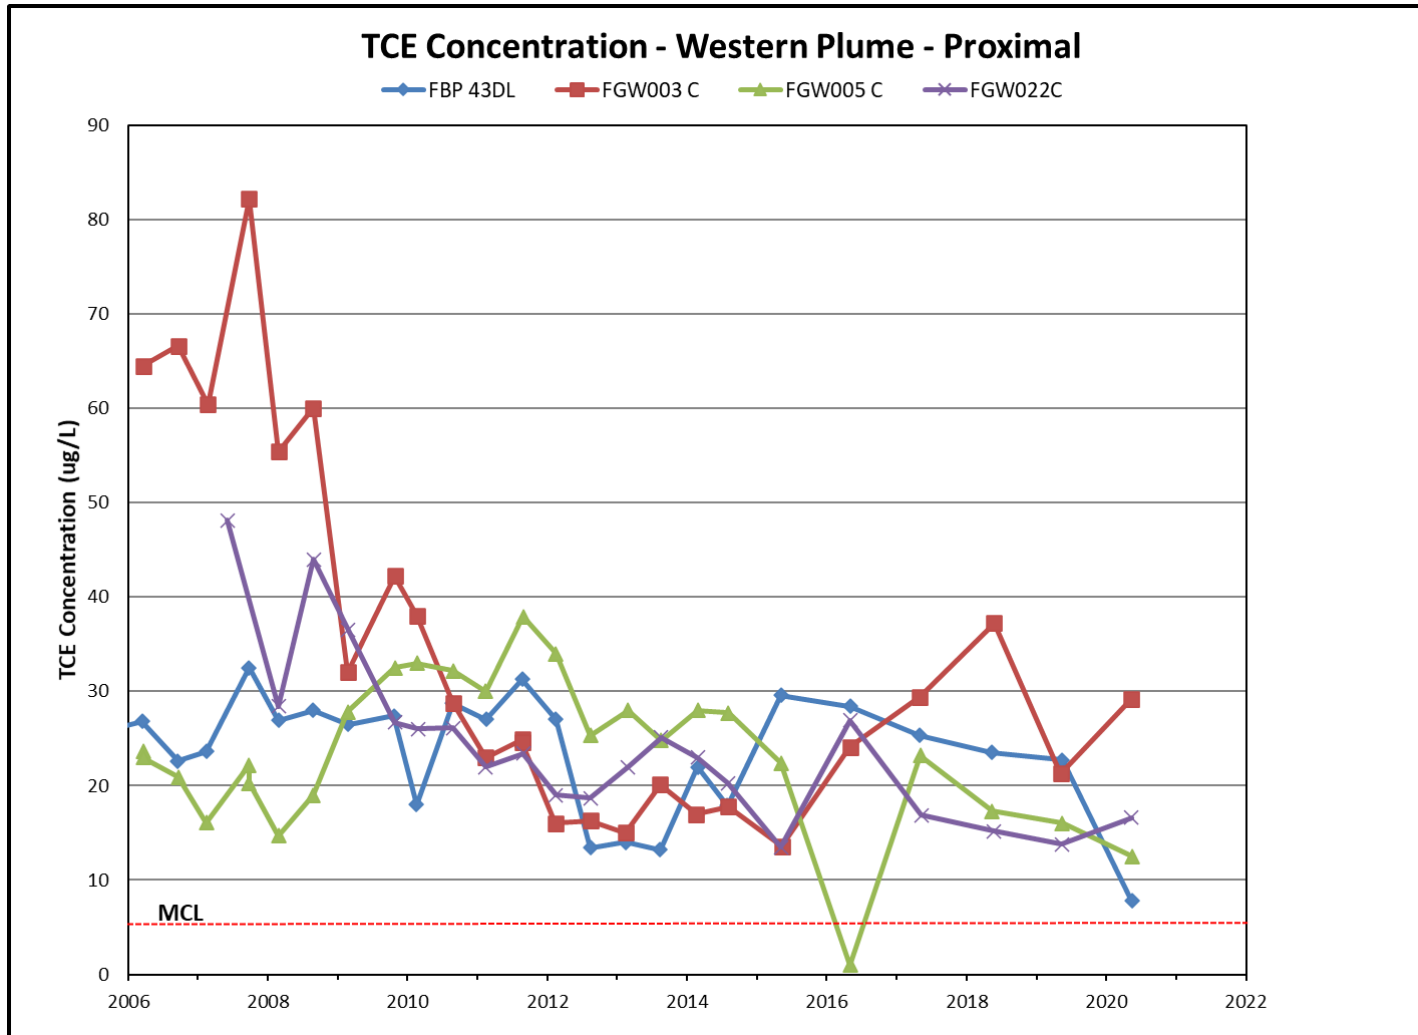


Figure 5. TCE Concentration Near the Source in the West Plume

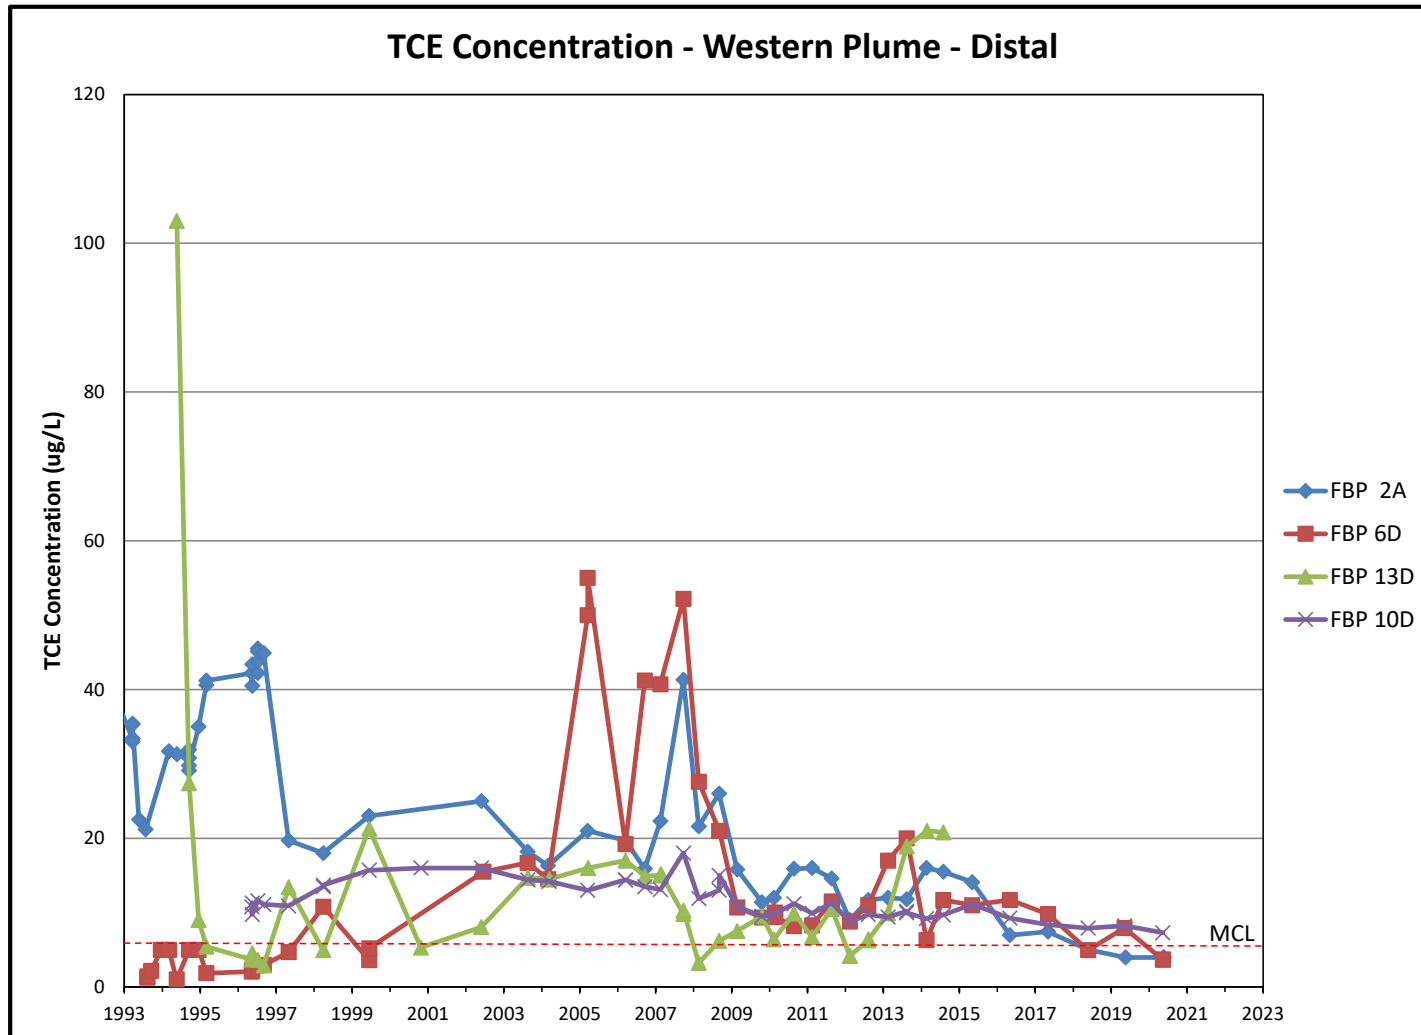


Figure 6. TCE Concentrations in the Distal Part of the West Plume

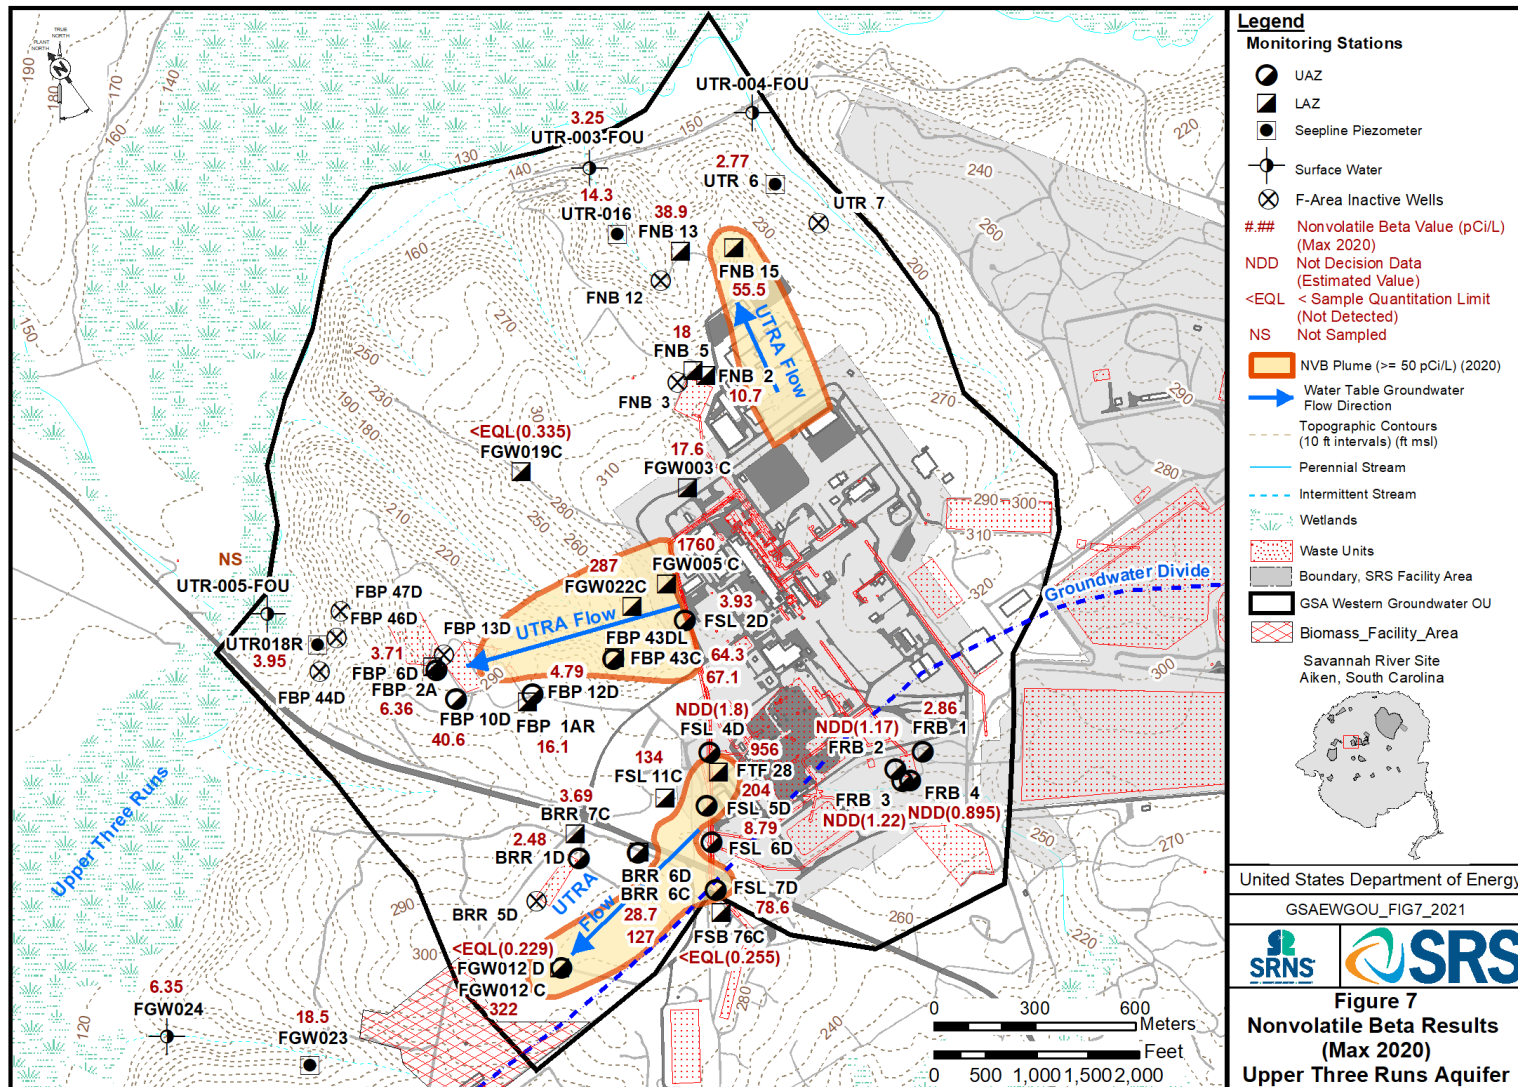


Figure 7. Nonvolatile Beta Results (Max 2020) Upper Three Runs Aquifer

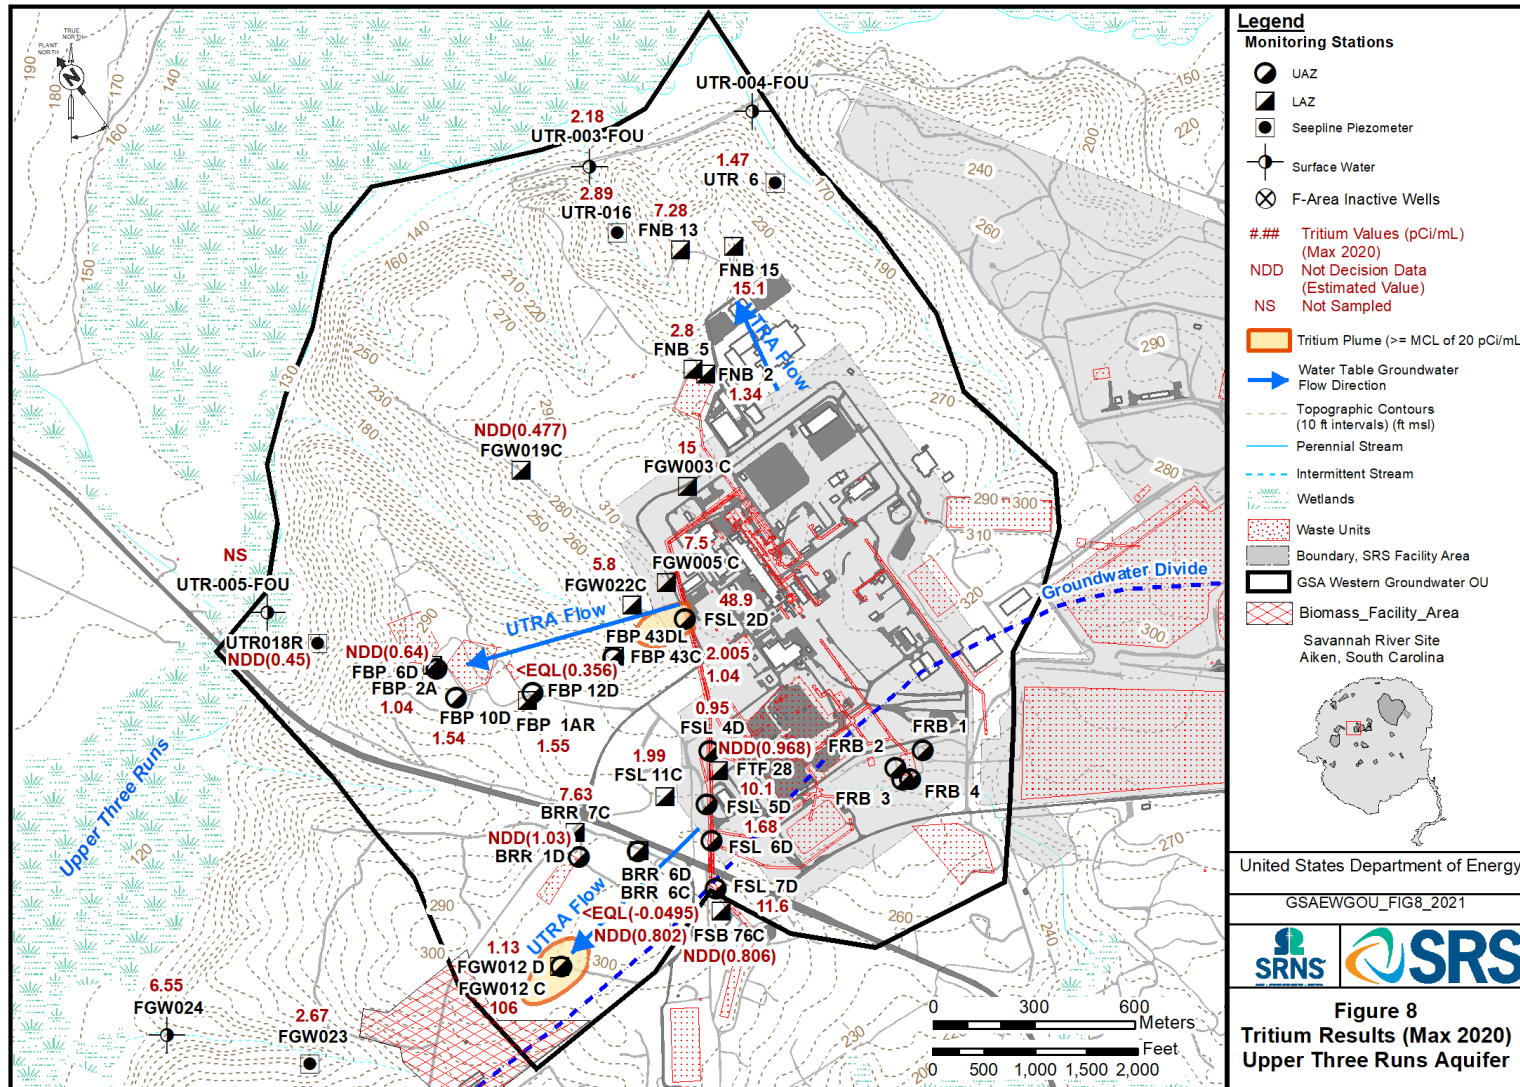


Figure 8. Tritium Results (Max 2020) Upper Three Runs Aquifer

Table 1. Monitoring Network

Plume Description	Aquifer Zone	Well ID	Analyte List
West Plume	UAZ of UTRA	FBP10D, FBP6D, FBP12D, FBP43DL, FSL2D	Nitrate, gross alpha, nonvolatile beta, tritium, and TCL VOCs
	LAZ of UTRA	FBP 1AR, FBP2A, FBP43C, FGW003C, FGW005C, FGW019C, FGW022C	Alpha and beta/gamma speciation for FGW005C
	Seepline/ Surface Water	UTR18R, UTR005	At surface water locations: field parameters for VOC degradation and degradation products
North Plume	LAZ of UTRA	FNB2, FNB5, FNB13, FNB15	Nitrate, gross alpha, nonvolatile beta, tritium, iodine-129, strontium-90, and TCL VOCs
	Seepline/ Surface Water	UTR16, UTR6, UTR003, UTR004	
South Plume	UAZ of UTRA	BRR1D, BRR6D, FSL4D, FSL5D, FSL6D, FSL7D, FSB76C, FGW012D	Nitrate, gross alpha, nonvolatile beta, tritium, iodine-129, radium-226, 228, strontium-90, technetium-99, uranium-233/234, 238
	LAZ of UTRA	BRR6C, BRR7C, FTF28, FSL11C, FGW012C	
	Seepline/ Surface Water	FGW024, FGW023	
F Area Retention Basin	UAZ of UTRA	FRB1, FRB2, FRB3, FRB4	Gross alpha, nonvolatile beta, cesium-137, strontium-90, radium-226, TCE

- Sampling of the monitoring network is performed annually for existing wells starting in 2014 except for the F-Area Retention Basin. The FRB wells are sampled semi-annually according to the ROD. New monitoring locations added to the OU will be sampled semi-annually until a baseline is established. The monitoring network was revised during the August 2013 scoping meeting based on the Monitoring Optimization White Paper, SRNS-RP-2012-00783, Rev. 1, January 2014.
- Sample locations are shown on Figure 2. FBP-45D was abandoned in 2009.

This page was intentionally left blank.

APPENDIX A

Isotopic Speciation Results for FGW 005C

Well ID	Date	Analyte	Detection Limit	Quantitation Limit	Lab Qualifier	Review Qualifier	Result	Units
FGW005 C	5/13/2020	AMERICIUM-241	0.19	0.3754	U	U	0.0216	pCi/L
FGW005 C	5/13/2020	AMERICIUM-241	0.183	0.304	U	U	-0.03889	pCi/L
FGW005 C	5/13/2020	AMERICIUM-241	26.8	64.4	U	U	8.137	pCi/L
FGW005 C	5/13/2020	AMERICIUM-243	0.1	0.2324	U	U	0.0526	pCi/L
FGW005 C	5/13/2020	AMERICIUM-243	0.129	0.2954	U	U	0.06972	pCi/L
FGW005 C	5/13/2020	CARBON-14	12.7	28.22	U	R	7.26	pCi/L
FGW005 C	5/13/2020	CARBON-14	12.9	28.44	U	R	5.46	pCi/L
FGW005 C	5/13/2020	CESIUM-137	16.6	35.42	U	U	0.143	pCi/L
FGW005 C	5/13/2020	CESIUM-137	20.6	44.6	U	U	4.938	pCi/L
FGW005 C	5/13/2020	COBALT-60	19.7	54.9	U	U	-8.293	pCi/L
FGW005 C	5/13/2020	CURIUM-242	0.216	0.3636	U	U	-0.0677	pCi/L
FGW005 C	5/13/2020	CURIUM-242	0.203	0.3466	U	U	-0.0508	pCi/L
FGW005 C	5/13/2020	CURIUM-245/246	0.091	0.1858	U	U	0.0244	pCi/L
FGW005 C	5/13/2020	CURIUM-245/246	0.08	0.2279	U	U	0.0782	pCi/L
FGW005 C	5/13/2020	IODINE-129	0.624	1.548			2.78	pCi/L
FGW005 C	5/13/2020	NEPTUNIUM-237	0.14	0.52			0.828	pCi/L
FGW005 C	5/13/2020	NEPTUNIUM-237	0.104	0.462			0.8776	pCi/L
FGW005 C	5/13/2020	PLUTONIUM-238	0.144	0.2946	U	U	0.0204	pCi/L
FGW005 C	5/13/2020	PLUTONIUM-238	0.06	0.1845	J	J	0.1009	pCi/L
FGW005 C	5/13/2020	PLUTONIUM-239/240	0.091	0.1873	U	U	0.0229	pCi/L
FGW005 C	5/13/2020	PLUTONIUM-239/240	0.081	0.1783	U	U	0.03714	pCi/L
FGW005 C	5/13/2020	PLUTONIUM-242	0.133	0.505			0.798	pCi/L
FGW005 C	5/13/2020	PLUTONIUM-242	0.091	0.4427			0.8723	pCi/L
FGW005 C	5/13/2020	RADIUM-226	0.092	1.7004			18.02	pCi/L
FGW005 C	5/13/2020	RADIUM-226	0.089	1.5768			16.4	pCi/L
FGW005 C	5/13/2020	RADIUM-228	0.397	3.997			73.9	pCi/L
FGW005 C	5/13/2020	RADIUM-228	0.44	4.28			79.39	pCi/L
FGW005 C	5/13/2020	STRONTIUM-90	0.304	7.544			407.3	pCi/L
FGW005 C	5/13/2020	STRONTIUM-90	0.322	7.522			403	pCi/L
FGW005 C	5/13/2020	TECHNETIUM-99	1.77	12.31			274	pCi/L
FGW005 C	5/13/2020	THORIUM-228	0.268	0.646	U	U	0.205	pCi/L
FGW005 C	5/13/2020	THORIUM-228	0.231	0.551	U	U	0.1364	pCi/L
FGW005 C	5/13/2020	THORIUM-230	0.263	0.633	U	U	0.082	pCi/L
FGW005 C	5/13/2020	THORIUM-230	0.269	0.619	U	U	0.01835	pCi/L
FGW005 C	5/13/2020	THORIUM-232	0.165	0.2892	U	U	-0.0146	pCi/L
FGW005 C	5/13/2020	THORIUM-232	0.129	0.266	U	U	0.03077	pCi/L
FGW005 C	5/13/2020	TRITIUM	0.562	2.024			7.5	pCi/mL
FGW005 C	5/13/2020	URANIUM-233/234	7.3	90.5			395	pCi/L
FGW005 C	5/13/2020	URANIUM-235	7.62	33.82	J	J	30.6	pCi/L
FGW005 C	5/13/2020	URANIUM-238	8.58	156.18			1240	pCi/L

This page was intentionally left blank.

APPENDIX B

2020 Monitoring Well Results Data Matrix Table and Field Conditions Key Codes

Field Code	Explanation
A	Pump is surging excessively; aerated
B	Blank sample was collected
C	Well is continuously pumping
D	Well is dry-no sample or field data collected
E	Equipment blank was collected
I	Well went dry during sampling; field data collected but insufficient water to collect all samples
L	Well went dry before sampling began; only depth to water can be determined
N	Well was not stabilized before sampling began
P	Inaccessibility or mechanical failure prevented sample collection and field analysis of the water
S	No water in standpipe; for water level events only
T	Samples were collected, but some samples were not sent to the laboratory due to high turbidity
W	Unable to sample well because of stabilization or sampling equipment failure; water-level measurements were obtained
X	Well went dry during purging; samples collected after well recovered measurements obtained
0	OK
1	Pump Dry
2	Sampled after recovery
3	Gallons purged through sample port
4	DI water obtained from 772-7B
5	High turbidity
6	Flow meter leaking
7	Pump failure
8	Flow meter not operating
9	# gallons added
10	Well is inaccessible, well cannot be Sampled
11	Well abandoned
12	No water to surface
13	Field measurements only
14	Not all samples were collected
15	Equipment failure
16	No water in standpipe
17	Bailed well
18	Water level tape not long enough
19	Well not sampled, maintenance required
20	Well sampled, maintenance required
21	Measurement Exceeded Criteria

This page was intentionally left blank.
