Savannah River NUCLEAR SOLUTIONS℠
FLUOR • NEWPORT NEWS NUCLEAR • HONEYWELL

2018 Annual Comprehensive TNX Area Groundwater Monitoring and Remedial Action Effectiveness Interim Report (U)

SEMS NUMBERS: 21, 29

SRNS-RP-2019-00391

Revision 0

June 2019

SAVANNAH RIVER SITE • AIKEN, SOUTH CAROLINA

DISCLAIMER

This document was prepared in conjunction with work accomplished under Contract No. DE-AC09-08SR22470 with the U.S. Department of Energy.

This work was prepared under an agreement with and funded by the U.S. Government. Neither the U.S. Government or its employees, nor any of its contractors, subcontractors or their employees, makes any express or implied: 1. warranty or assumes any legal liability for the accuracy, completeness, or for the use or results of such use of any information, product, or process disclosed; or 2. representation that such use or results of such use would not infringe privately owned rights; or 3. endorsement or recommendation of any specifically identified commercial product, process, or service. Any views and opinions of authors expressed in this work do not necessarily state or reflect those of the United States Government, or its contractors, or subcontractors.

Printed in the United States of America
Prepared for
U.S. Department of Energy
And
Savannah River Nuclear Solutions, LLC
Aiken, South Carolina

EXECUTIVE SUMMARY

The *2018 Annual Comprehensive TNX Area Groundwater Monitoring and Remedial Action Effectiveness Interim Report* has been prepared to support the regulatory reporting requirements for the TNX Area Groundwater (TNX) Operable Unit (OU) at the Savannah River Site. The reporting requirements are specified in the *TNX Effectiveness Monitoring Strategy Addendum to the TNX Groundwater Operable Unit Remedial Design Report/Remedial Action Work Plan* (U) (WSRC 1995, Revision 1.5, Attachment 17). In accordance with the Effectiveness Monitoring Strategy, an annual report must be submitted on or before June 30, 2019, to document groundwater conditions and evaluate remedial action effectiveness based on data collected during the second and fourth quarter, calendar year 2018.

Past operation processes within the TNX Area resulted in contamination of the vadose zone and groundwater. All potential sources of groundwater contamination were assessed and remediated as part of the TNX Area OU Record of Decision or the T-Area OU Record of Decision.

Current Remedial Action

Remedial actions are currently implemented to address the chlorinated volatile organic compound contamination in the vadose zone with a soil vapor extraction system which started up in 2002, and edible oil treatment to target the groundwater which started as a treatability study in 2008.

The edible oil treatability study demonstrated the ability to decrease the contaminant mass and areal extent of the trichloroethylene plume in less time and at lower cost than the remedy selected in the TNX Area OU Record of Decision, and still be protective of the groundwater. The effectiveness of edible oil warranted a change in the remedy for TNX groundwater. An Explanation of Significant Difference was issued on June 12, 2013 with the following modifications to the remedy selected in the Record of Decision for the TNX Area OU groundwater component:

- Injection of additional edible oil treatment as needed using the existing well network if a sustained rebound lasting over one (1) year in excess of 75 µg/L of trichloroethylene, tetrachloroethylene, or carbon tetrachloride occurs in any well. If the rebound occurs, then additional edible oil will be determined appropriate by the United States Department of

Energy, South Carolina Department of Health and Environmental Control, and the United States Environmental Protection Agency.

- Permanent removal of the T-1 Air Stripper from service. The T-1 Air Stripper was closed in accordance with a state approved closure plan.

In 2015, although the rebound conditions to trigger additional oil injections had not been exceeded, additional edible oil was injected at ten monitoring wells to prevent future rebound of trichloroethylene concentrations. Emulsified Oil Substrate® was reinjected into the original treatment zone and both neat oil and Emulsified Oil Substrate® were injected outside of the original treatment zone to target monitoring wells with elevated trichloroethylene concentrations.

Results collected since the 2015 edible oil injections indicate that injection fluids were placed into the aquifer successfully. Trichloroethylene concentrations are less than the maximum contamination level in all wells in the treatment area, and reductive conditions are present in the treatment area. During the 2Q2018, trichloroethylene concentrations exceeding the maximum concentration level were located downgradient of the edible oil treatment area (i.e., TCM 5, TIR 1U, TNX 28D, and TRW 2). During the fourth quarter 2018, trichloroethylene concentrations were less than the maximum concentration level in all monitoring wells. Future sampling will determine the longevity of the low trichloroethylene concentrations.

Soil vapor extraction continues to remove mass from the vadose zone near the TNX Burying Ground. Five MicroBlowers™ removed approximately 0.74 pounds of solvent during 2018.

Previous Remedial Action

Previous remedial action included a recovery well network and air stripper system, which operated from 1996 to 2007, and one recirculation well. The recirculation well was deemed ineffective and removed from service in 1997.

The recovery well system proved to be effective in capturing and treating chlorinated volatile organic compounds, resulting in depletion of the chlorinated volatile organic compounds in the groundwater near the TNXBurying Ground. To accommodate the edible oil treatability study at the TNX Area OU, the recovery well system was shut down and put in standby mode in December 2007. Reductions in contaminant mass during the edible oil study accelerated the time to reach

the maximum contaminant levels and lead to the permanent shut down and removal of the T-1 Air Stripper in 2013.

Groundwater Monitoring

The TNX groundwater monitoring program includes sampling a network of 42 monitoring wells (Figure ES-1) during the second and fourth quarters of each calendar year.

Three parameters (i.e., gross alpha, trichloroethylene, and uranium [total recoverable]) exceeded maximum contaminant levels during 2018. No plume is depicted for trichloroethylene, since concentrations were all less than the maximum concentration level (5 µg/L) during the fourth quarter 2018 (Figure ES-2). The trichloroethylene plume and source has been significantly reduced in the treatment area in response to the injection of edible oil (Figure ES-3). The distribution of uranium (total recoverable), and gross alpha is isolated, with the highest concentrations observed primarily in the vicinity of the TNX Burying Ground (i.e., TBG 4) and in the wetlands downgradient of the Old TNX Seepage Basin (i.e., TCM 5).

1,4-Dioxane was sampled in 2018 at all monitoring wells during the second and fourth quarter. 1,4-Dioxane was detected in two monitoring wells (i.e., TBG 5 and TNX 13D) in 2018.

Recommendation

The new monitoring well XSB006R was installed downgradient of the OTSB in April 2019. XSB006R will be added to the 2019 sampling schedule and the data will be reported in the 2019 annual report and subsequent annual reports.

The South Carolina Department of Health and Environmental Control certified analytical method used to determine the 1,4-dioxane concentrations (i.e., EPA 8260BSIM) cannot achieve detection limits less than the regional screening level for drinking water (0.46 µg/L). In 2019, Savannah River Site acquired a laboratory that can achieve the regional screening level using analytical method EPA 522. For future sampling events, both EPA 522 and EPA 8260BSIM will be used to analyze 1,4-dioxane in addition to the SCDHEC certified method EPA 8260BSIM in all wells and the results reported in the 2019 annual report and subsequent annual reports.

South Carolina Department of Health and Environmental Control recommended adding a new monitoring well between TNX 28D and the TNX 72 well cluster, based on the recent history of TCE concentrations exceeding the MCL at TNX 28D since 2016. Trichloroethylene

concentrations at TNX 28D will be evaluated for three consecutive years before deciding on installing a new monitoring well. After three consecutive years (i.e., 2019), SRS will initiate a meeting with the USDOE, USEPA, and SCDHEC to discuss the possible installation of a new monitoring well.

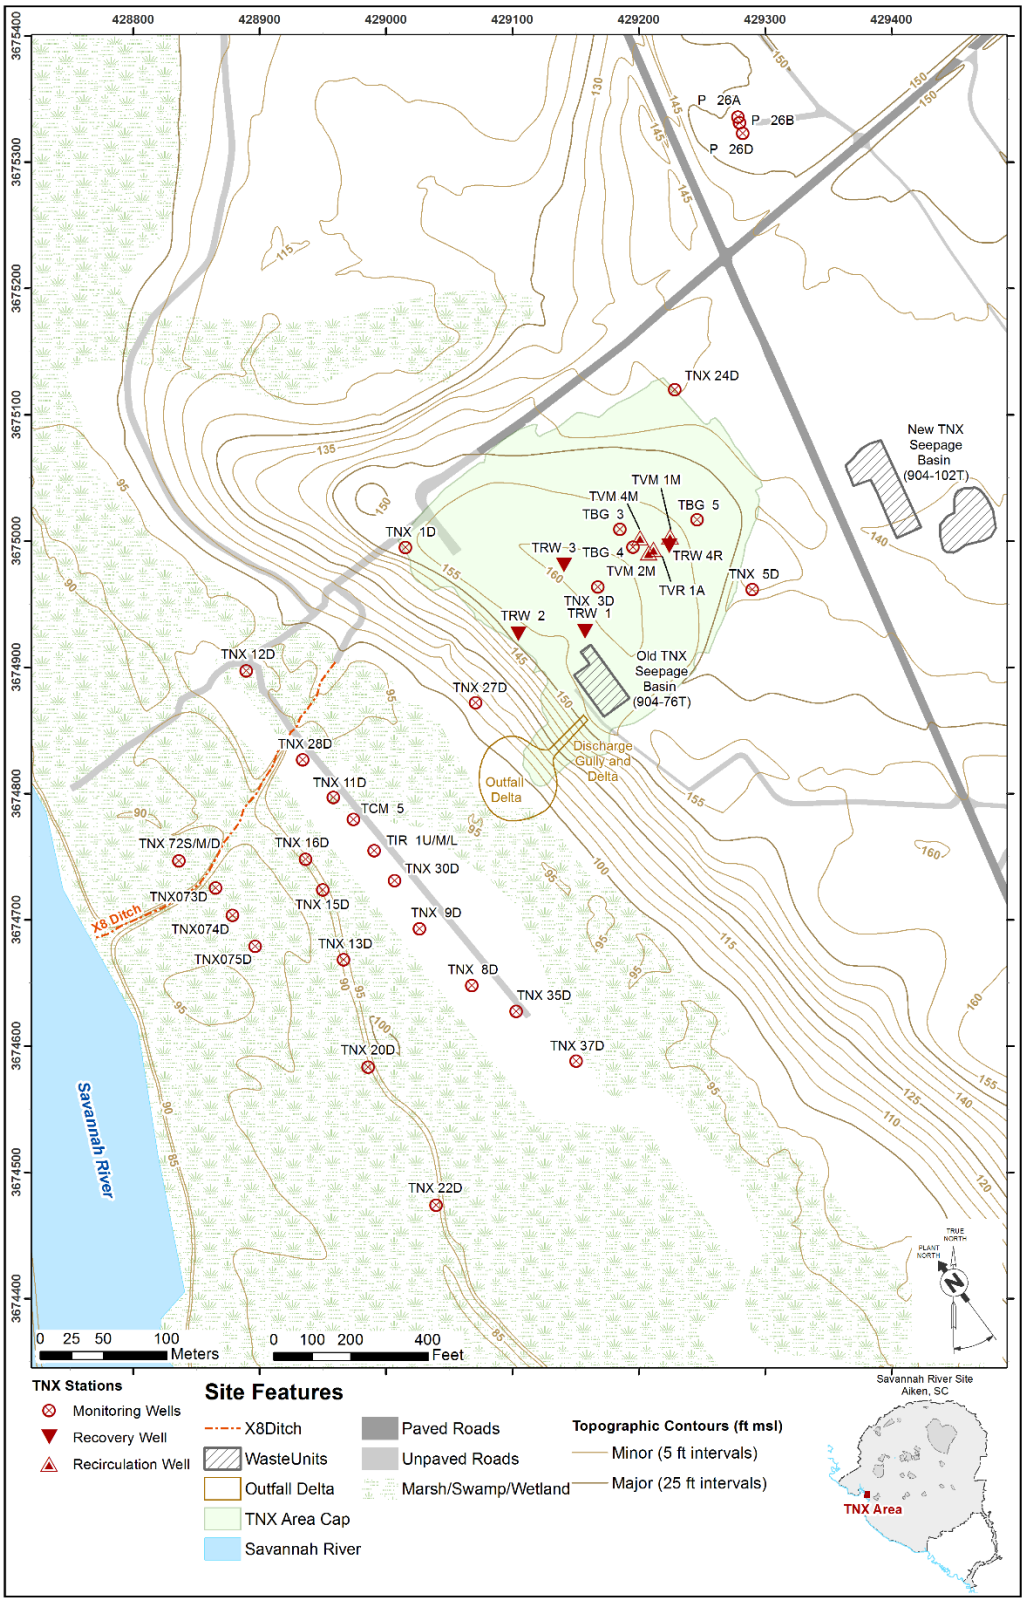

Figure ES-1. TNX Area Well Locations

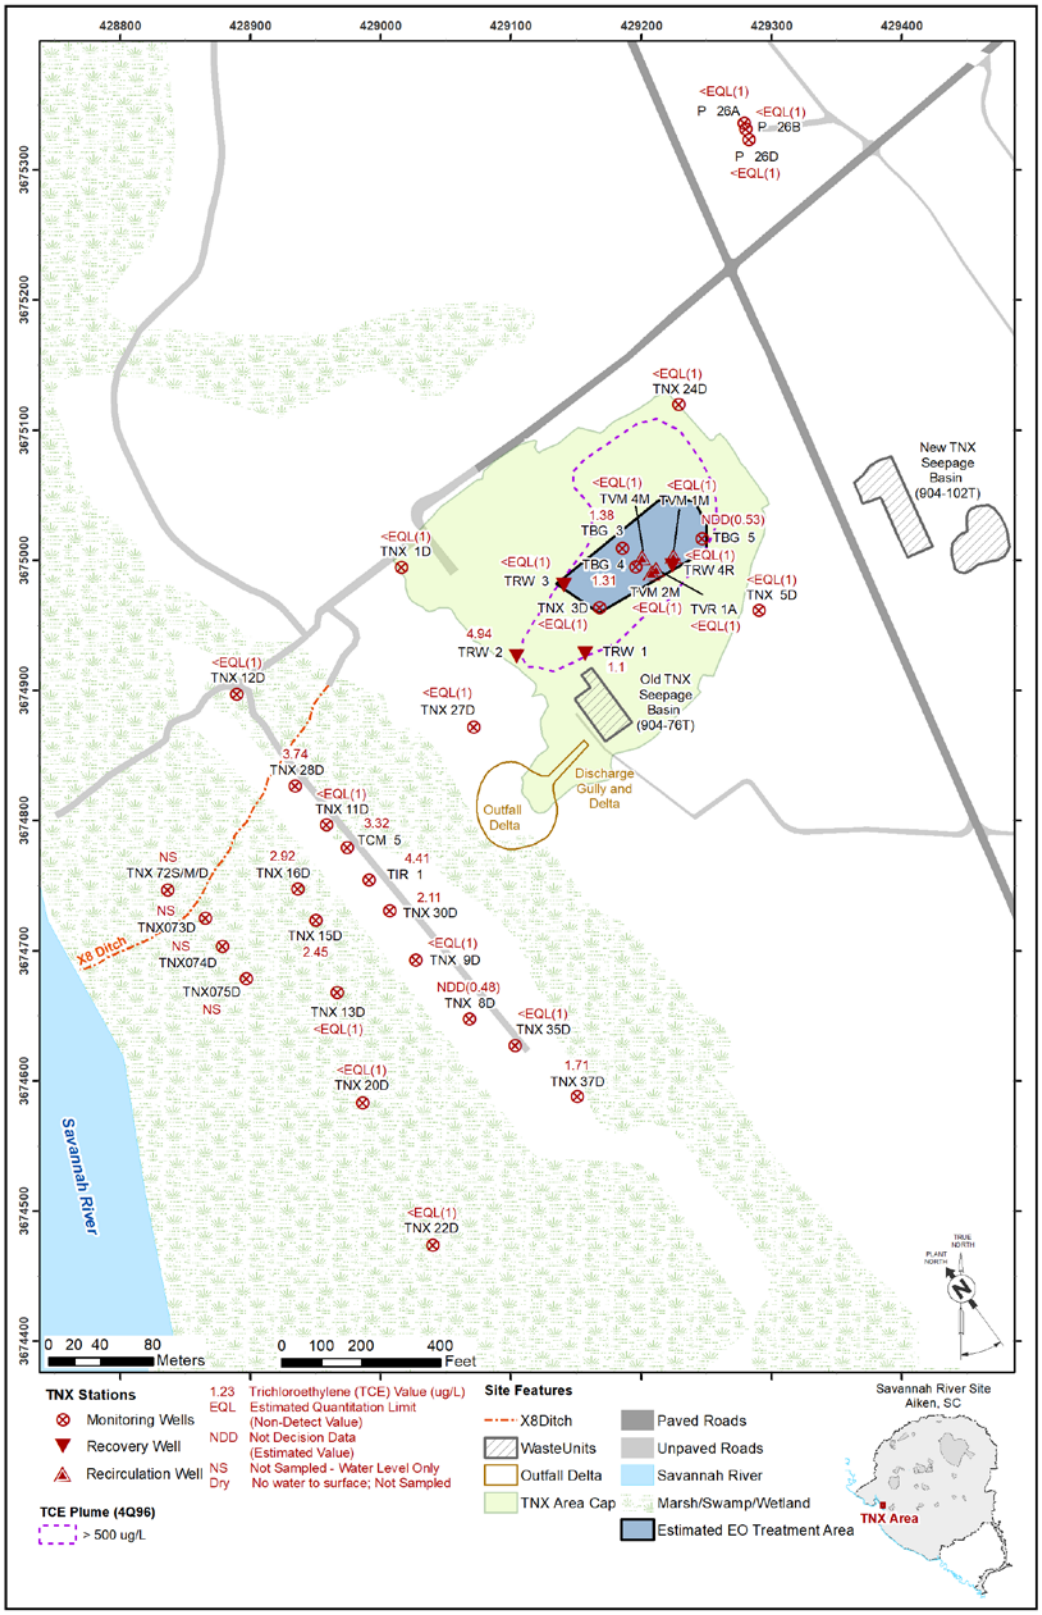

Figure ES-2. TNX Area Trichloroethylene (TCE) Concentration in Groundwater, 4Q2018 with >500 µg/L TCE Plume from 4Q1996 Superimposed

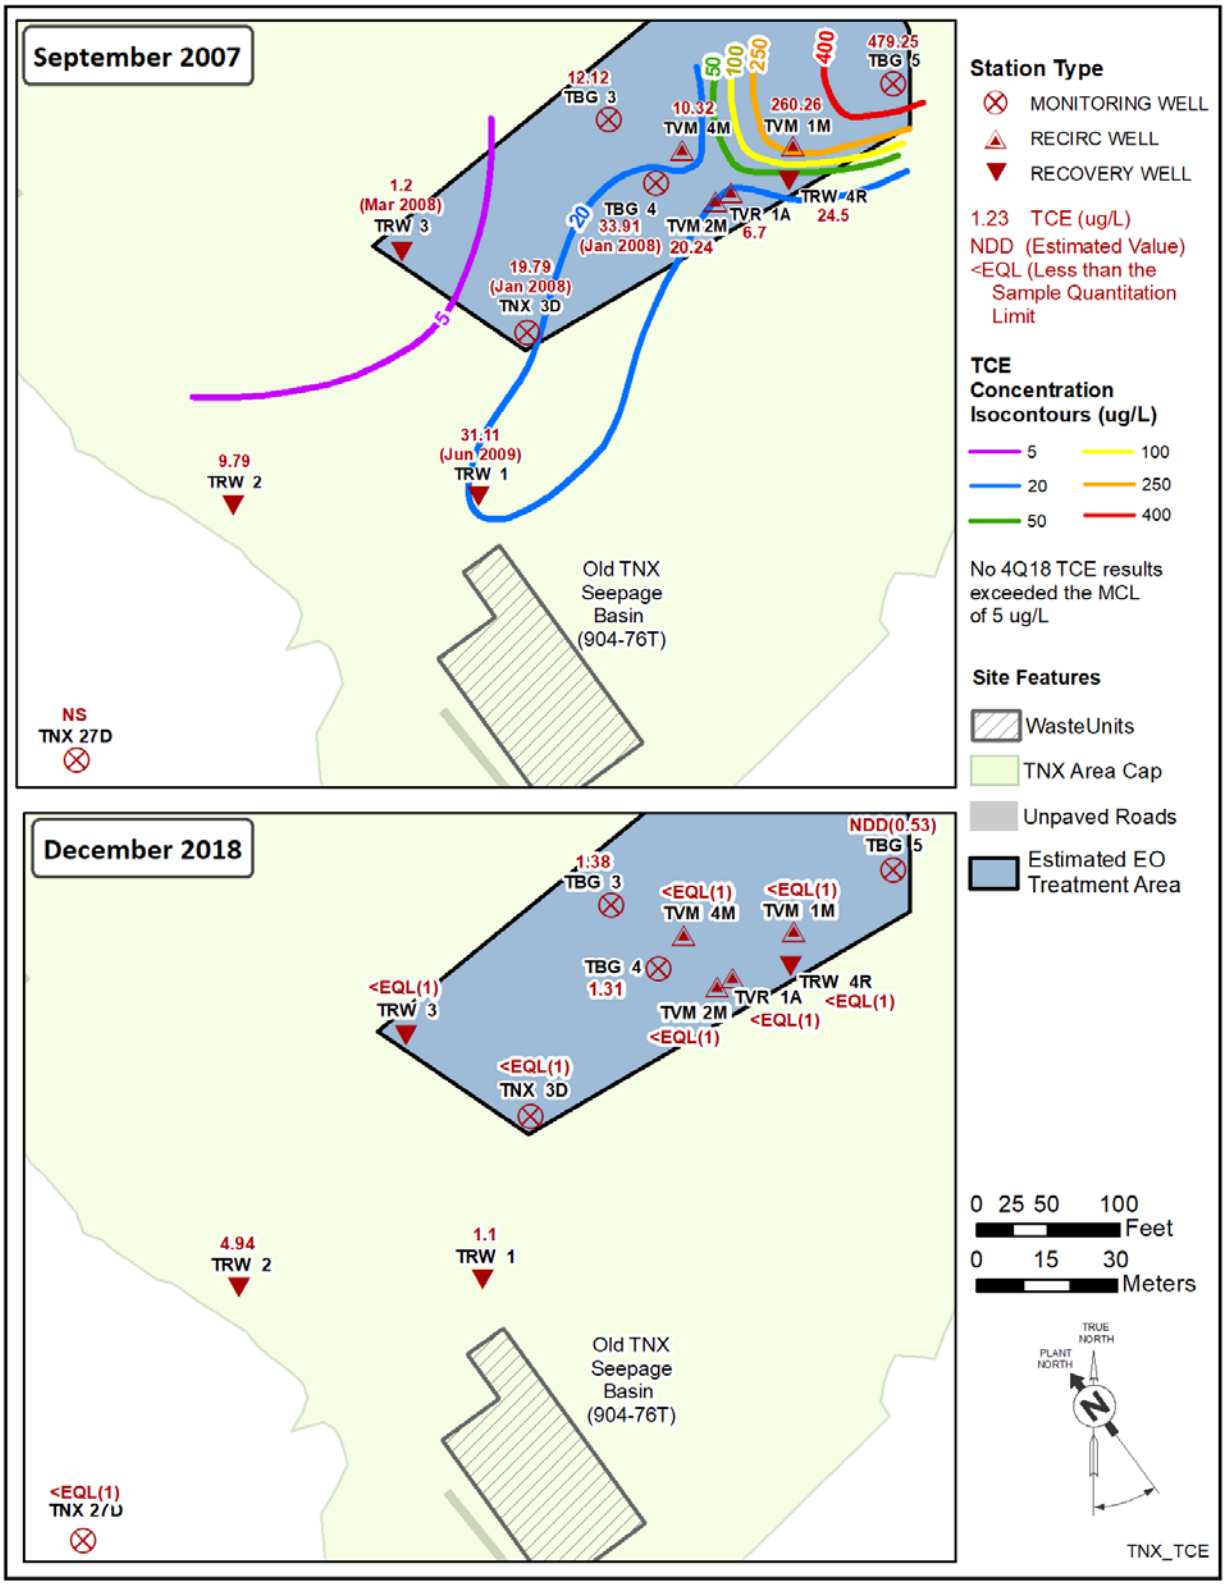

Figure ES-3. Comparison of Trichloroethylene Concentration in the Treatment Zone in 2007 and 2018

This page intentionally left blank.

TABLE OF CONTENTS

Section **Page No.**

EXECUTIVE SUMMARY **1**
LIST OF FIGURES ..... **ii**
LIST OF TABLES ..... **ii**
LIST OF APPENDICES ..... **ii**
LIST OF ABBREVIATIONS AND ACRONYMS ..... **iii**
1.0 Introduction **1**
1.1 Purpose 1
1.2 Unit History/Description 1
1.3 Regulatory History 3
2.0 Site Hydrogeology **6**
3.0 Remedial Action **8**
3.1 Objectives 8
3.2 Soil Vapor Extraction 8
3.3 Edible Oil Treatment 9
3.4 Recovery Well/Air Stripper System 11
3.5 Radiologically Contaminated Groundwater 11
4.0 Monitoring Network **15**
4.1 Sampling Events 16
5.0 Field and Analytical Results **19**
5.1 Precipitation Measurements 19
5.2 Water-Level Measurements 19
5.3 pH 20
5.4 Analytical Results 20
6.0 Evaluation of Field and Analytical Results **30**
6.1 Potentiometric Surface 30
6.2 pH 31
6.3 VOC Constituents (i.e., PCE, TCE, Cis-1,2-DCE, VC, Ethylene, and CCl_4) 31
6.4 Edible Oil Parameters 34
6.5 Combined Radium, Uranium, Gross Alpha, and Adjusted Gross Alpha 37
6.6 Mercury and NO_3/NO_2 as N 39
6.7 1,4-Dioxane 40
7.0 System Performance **41**
7.1 Soil Vapor Extraction (SVE) Operations 41
7.2 Edible Oil Injections 41
8.0 Summary/Recommendations **49**

8.1 Summary 49
8.2 Recommendations 50
9.0 References 51

LIST OF FIGURES

Figure **Page No.**
Figure ES-1. TNX Area Well Locations ES-5
Figure ES-2. TNX Area Trichloroethylene (TCE) Concentration in Groundwater, 4Q2017 with >500 µg/L TCE Plume from 4Q1996 Superimposed ES-6
Figure ES-3. Comparison of Trichloroethylene Concentration in the Treatment Zone in 2007 and 2017 .... ES-7

LIST OF TABLES

Table **Page No.**
Table 3–1. Injection Well Elevations and Injection Volumes 13
Table 4–1. TNX Monitoring Well Network 17
Table 4–2. Summary of the Groundwater Sampling and Analyses Plan at TNX (2nd and 4th Quarters) 18
Table 5–1. Rainfall (inches) at 400-D, 1973 to 2018 27
Table 5–1. Rainfall (inches) at 400-D, 1973 to 2018 (*Continued/Ended*) 28
Table 5–2. Constituents Exceeding USEPA NPDWS MCLs in T-Area Wells During 2018 29
Table 7–1. Well Construction and Operation for TNX SVE Wells 43
Table 7–2. Monthly SVE Well VOC Mass Removal (2018) 45
Table 7–2. Monthly SVE Well VOC Mass Removal (2018, continued) 46
Table 7–3. VOC Mass Removed by SVE (2018) 47

LIST OF APPENDICES

Appendix **Page No.**
Appendix A Figures A-1
Appendix B Groundwater Monitoring Results (Matrix Tables) B-1
Appendix C Data Review Key C-1
Appendix D Hydrographs D-1
Appendix E Time-Series Plots E-1

LIST OF ABBREVIATIONS AND ACRONYMS

amsl	above mean sea level
CCl_4	carbon tetrachloride
CERCLA	Comprehensive Environmental Response, Compensation And Liability Act
cfm	cubic feet per minute
cm	centimeter
DG	Discharge Gully
DO	dissolved oxygen
DWPF	Defense Waste Processing Facility
EO	edible oil
EOS®	Emulsified Oil Substrate®
EQL	estimated quantitation limit
ESD	Explanation of Significant Difference
ft	feet
gal	gallon
GAU	Gordon aquifer unit
GCU	Gordon confining unit
gpm	gallons per minute
HGCA	Hybrid Groundwater Corrective Action
in	inch
IROD	Interim Record of Decision
km	kilometer
LAZ	Lower Aquifer Zone
lb	pound
MCL	maximum contaminant level
µg/L	micrograms per liter
m	meter
m^3	cubic meter
mV	millivolt
NTSB	New TNX Seepage Basin
ORP	oxidation reduction potential
OTSB	Old TNX Seepage Basin

LIST OF ABBREVIATIONS AND ACRONYMS *(Continued/End)*

OU	Operable Unit
PCE	tetrachloroethylene
pCi/g	picocuries per gram
pCi/L	picocuries per liter
ppb	parts per billion
Q	quarter
RCRA	Resource Conservation and Recovery Act
ROD	Record of Decision
RSL	regional screening level
SCDHEC	South Carolina Department of Health and Environmental Control
SRNS	Savannah River Nuclear Solutions, LLC
SRS	Savannah River Site
SVE	Soil Vapor Extraction
TAOU	T-Area Operable Unit
TBG	TNX Burying Ground
TCE	trichloroethylene
TNX OD	TNX Outfall Delta
TOC	total organic carbon
USDOE	United States Department of Energy
USEPA	United States Environmental Protection Agency
UTRAU	Upper Three Runs aquifer unit
VC	vinyl chloride
VFA	volatile fatty acid
VOC	volatile organic compound
WSRC	Westinghouse Savannah River Company (prior to 2005)
WSRC	Washington Savannah River Company, LLC (post 2005)

1.0 INTRODUCTION

1.1 Purpose

The 2018 Annual Comprehensive TNX Area Groundwater Monitoring and Remedial Action Effectiveness Interim Report[i] was prepared to support the regulatory reporting requirements for the TNX Area Operable Unit (OU) at the Savannah River Site (SRS), and provide interim results from the edible oil (EO) remedial action deployed in 2015. The reporting requirements are specified in the TNX Effectiveness Monitoring Strategy Addendum to the TNX Groundwater Operable Unit Remedial Design Report/Remedial Action Work Plan (U) (WSRC 1999a). In accordance with the TNX Area Effectiveness Monitoring Strategy, an annual report is required to be submitted on or before June 30th of each year to document groundwater conditions and to evaluate the remedial action effectiveness based on data collected during the second and fourth quarters of the previous calendar year.

1.2 Unit History/Description

The TNX Area is in the southwest portion of the SRS, approximately 0.4 km (0.25 mi) east of the Savannah River (Figure A-1). The TNX Area was a pilot-scale testing and evaluation facility that supported nuclear fuel, target manufacturing chemical process, and the Defense Waste Processing Facility (DWPF). Past operations processes within the TNX Area resulted in contamination of the vadose zone and groundwater. Sources of groundwater contamination included seepage from unlined basins (Old TNX Seepage Basin [OTSB] and New TNX Seepage Basin [NTSB]), leakage from the process sewers, and leachate from other sources at TNX (e.g., temporary storage facility drums and an equipment staging area).

The TNX Area OU consists of four subunits: the TNX Burying Ground (TBG), the OTSB, the NTSB, and the TNX Groundwater beneath the surface units (Figure A-2).

[i] This report was formerly known as the Comprehensive TNX Area Annual Groundwater and Effectiveness Monitoring Strategy Report. The title was modified at a June 10, 2015 scoping meeting between the USDOE, USEPA, and SCDHEC to more accurately represent the contents of the report.

1.2.1 TNX Burying Ground (TBG)

The TBG was created in 1953 to dispose of debris that resulted from the explosion of an experimental separation process (Purex) in the TNX Area earlier that year. The separation process used nitric acid, organic solvents, and an evaporator to concentrate uranium. The debris included conduit, drums, tin, and structural steel contaminated with uranyl nitrate and depleted uranium. Between 1980 and 1984, most of the waste buried at the TBG was excavated and sent to the Radioactive Waste Burial Ground (643-7E). The remaining waste remains beneath the asphalt, building, and transformer pads. An estimated 27 kg (60 lbs) of uranyl nitrate are thought to remain buried at the TBG.

1.2.2 Old TNX Seepage Basin (OTSB)

The OTSB was an unlined excavation designed to contain wastewater until it could seep into the underlying sediments that were believed to act as a natural ion-exchange media. The OTSB received process wastewater between 1956 and 1980 from pilot-scale tests conducted in the TNX Area for the DWPF and the General Separations Area. The waste discharged to the basin included large quantities of mercury, primarily in the form of mercuric nitrate, other heavy metals, sodium compounds, uranium, and other radionuclides. During periods of high flow, the OTSB periodically overflowed downhill into the Savannah River floodplain adjacent to the TNX facility. In 1980, area wastewater was re-routed from the OTSB to the NTSB. During closure of the OTSB in 1981, the remaining liquid was drained to the nearby floodplain. As result of draining the remaining liquid and overflow events, erosion occurred in the hillside forming a Discharge Gully (DG).

1.2.3 New TNX Seepage Basin (NTSB)

The NTSB was an unlined excavation (constructed to replace the OTSB) that operated between 1980 and 1988. While in operation, the basin received waste from pilot-scale chemical processing tests for DWPF and chemical separation. The waste discharged to the basin included simulated, non-radioactive DWPF sludge; simulated, non-radioactive salt supernate; glass frit; other processing chemicals; and laboratory sink wastewater. No

hazardous waste was discharged to the basin. During periods of unusually high discharge, the seepage section of the basin overflowed to Outfall X-013A which in turn discharged to a local surface depression.

1.2.4 TNX Groundwater

Shallow groundwater beneath the TNX Area has been contaminated with chlorinated volatile organic compounds (VOCs), such as trichloroethylene (TCE), tetrachloroethylene (PCE), and carbon tetrachloride (CCl_4). All sources of groundwater contamination were assessed and remediated as part of the TNX Area OU Record of Decision (ROD) (WSRC 2003) or the T-Area OU (TAOU) ROD (WSRC 2005a). Specific remedial actions are listed in Section 1.3 of this document.

The TNX Groundwater consists of the groundwater beneath the TNX Area subunits described above extending to the Savannah River. Groundwater at TNX is divided into two main aquifer systems, the Lower Aquifer Zone (LAZ) of the Upper Three Runs Aquifer Unit (UTRAU) and the underlying Gordon Aquifer Unit (GAU) system. The LAZ of the UTRA is an unconfined water table aquifer present at the northeastern portion of TNX Area that pinches out as water elevations decline to the southwest. The GAU is a semi-confined aquifer approximately 6 to 12 m (20 to 40 ft) thick. Groundwater flows progressively from deep to shallow aquifers (i.e., upward hydraulic gradient) and to the Savannah River (WSRC 1998).

1.3 Regulatory and Operational History

In November 1994, an Interim ROD (IROD) was approved by the United States Department of Energy (USDOE), United States Environmental Protection Agency (USEPA), and South Carolina Department of Health and Environmental Control (SCDHEC) (WSRC 1994). The IROD required installation of a hybrid groundwater corrective action (HGCA) for the VOC groundwater plume. The HGCA consisted of 1) a pump and treat system (recovery well network and low-profile air stripper) to treat and inhibit further migration of the 500 μg/L TCE plume; and 2) an airlift recirculation well located at the heart of the plume to expedite remediation. Figure A-2 shows the location

of the TNX well system for the interim remedial action during startup and initial operations. The recirculation well system was determined to be ineffective at the TNX Area, due to both geological factors and the nature of the contamination. Consequently, an Explanation of Significant Difference (ESD) (WSRC 1997b) to the IROD was issued in accordance with Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) regulations to remove the recirculation well from the HGCA. In 2002, a multi-well soil vapor extraction (SVE) system was added to the interim remedial action as part of a vadose zone source term remedy, via an ESD to the IROD (WSRC 2001).

In 2003, the TNX Area OU ROD was issued and outlined the selected remedy for the vadose zone and groundwater (WSRC 2003). The selected remedy was Extraction in High Chlorinated VOC Areas with Monitoring/Mixing Zone and Institutional Controls. This remedy entailed SVE at high VOC concentration areas and operation of the existing T-1 pump and treat system until monitoring determined that passive remediation (mixing zone) and continued monitoring and institutional controls (i.e., land use controls) would be appropriate.

Between 2004 and 2006, the final remedial and removal action for the TNX Area OU and T-Area OU were completed. In 2005, the *Explanation of Significant Differences to the Record of Decision for the TNX Area Operable Unit* (WSRC 2005c) was issued to address principal threat source material in the soil associated with the Old TNX Seepage Basin/Inactive Process Sewer Line/Discharge Gully subunit and selected sumps and a small area of contamination on the western exterior of Building 678-T. This change to the remedy increased the volume of material to be excavated for offsite disposal. The remedial action for the OTSB and the NTSB subunits is detailed in the *Post-Construction Report (PCR) for the TNX Area Operable Unit (U)* (WRSC 2005b). The remedial action for the T-Area OU, including the TNX Outfall Delta (TNX OD), is detailed in the *Post-Construction Report (PCR) for T Area Operable Unit (TAOU) (U)* (WSRC 2006). The removal action for the TNX OD, Lower DG, and Swamp is detailed in the *Removal Site Evaluation Report/Engineering Evaluation and Cost Analysis for the TNX Outfall Delta,*

Lower Discharge Gully, and Swamp Operable Unit (U) (WSRC 2004c). A summary of the remedial actions and removal action is provided below.

- Remedial action for the OTSB started in April 2005 and was completed in February 2006. Remedial action included excavation of contaminated soil, confirmation sampling, backfilling the basin and backfilling the DG.

- Remedial action for the NTSB started in August 2004 and was completed in December 2004. Remedial action included drainage of the basin, backfilling the basin, and grouting the process sewer line.

- Removal action to excavate soil from the TNX OD, Lower DG, and Inner Swamp was started in December 2004 and completed in September 2005. This removal action excavated radiologically contaminated soil from three areas within the Inner Swamp.

- Remedial action for the TAOU included a low permeability, geosynthetic cover system (i.e. TAOU cap) and a soil amendment. Construction of the TAOU cap was started in January 2006 and completed in November 2006. The soil amendment included application of apatite to the Inner Swamp and the TNX OD to attenuate the leachability of the radiological contaminants in the soil. The soil amendment application was completed in March 2006.

During 2005, the TNX Area OU was incorporated into an area-based remedial strategy for the TAOU, as documented in the TAOU ROD (WSRC 2005a). The TAOU is an area-based OU that incorporates most of the T-Area footprint and the TNX OD.

After completion of the TAOU cap, the T-1 Air Stripper was operated from January to December 2007. In December 2007, the T-1 Air Stripper was placed in standby mode to accommodate a pilot treatability study for the deployment of EO onto the water table surface and into the water table aquifer to reduce VOC concentrations. The SVE system remained operational. The treatability study was initiated in February 2008 and completed in May 2010 (SRNS 2009). Per agreement with USEPA and SCDHEC, the pump and treat

system and T-1 Air Stripper were not returned to service during the subsequent groundwater sampling period in order to evaluate the overall effectiveness of the EO injections.

In 2013, the second ESD to the TNX Area OU ROD was approved which modified the groundwater remedy to add EO treatments as needed and remove the air stripper from service (SRNS 2012a). Modifications to the remedy via the ESD did not impact any other components of the selected remedy as described in the TNX Area OU ROD including operations of the passive SVE system, groundwater monitoring, and institutional controls (i.e., land use controls).

Although the rebound conditions to trigger the additional EO injections did not occur, SRS observed TCE increases in some monitoring wells that correlated with an increase in water elevation due to increased precipitation and associated recharge (SRNS 2015a). To prevent future rebound, additional EO treatment was applied to the VOC source area as detailed in the *Second Corrective Measures Implementation/Remedial Action Implementation Plan (CMI/RAIP) for the TNX Area Operable Unit (U)* (SRNS 2015b). The additional EO injections were completed in 2015.

2.0 SITE HYDROGEOLOGY

The Floridan aquifer system is the aquifer system of concern within the TNX Area between Upper Three Runs Creek and the southern boundary of SRS. The Floridan aquifer system is divided into two aquifer units separated by a confining unit. From top to bottom, they are known as the LAZ of the UTRAU, the Gordon confining unit (GCU), and the GAU (Figures A-3, A-4, and A-5). The unsaturated zone within the TNX Area includes fluvial terrace sediments and the sediments of the LAZ of the UTRAU, which lie atop the water bearing units of the Floridan aquifer system.

The LAZ of the UTRAU is barely represented in the hydrostratigraphic section beneath the TNX Area. From east to west, the water table elevation drops from approximately 33 m (108 ft) above mean sea level (amsl) near TNX 24D to less than 26 m (85 ft) amsl in the TNX Swamp. Beneath the TNX Area, the clayey silt to silty clay beds of the GCU are

sporadic, and the confining unit does not represent an effective aquitard. However, clayey silt to silty clay beds that occur in the GAU locally retard vertical groundwater movement within the aquifer. These beds represent a semi-confining zone that divides the GAU. The water table aquifer includes the unconfined portion of the LAZ of the UTRA in the northeast and the semi-confining zone of the GAU southwest of TNX 24D.

The water table receives recharge from infiltrating precipitation and from the GAU through the semi-confining zone of the GAU. The GAU is at a higher pressure than the overlying water table aquifer. This is evident by looking at average values for water level data collected between first quarter 1995 and fourth quarter 2017 from wells P 26A, P 26B, and P 26D. The average hydraulic head measured in the semi-confined GAU at P 26A is 35.4 m (116.1 ft) amsl which is approximately 3.1 m (10.2 ft) greater than the average hydraulic head measured in the unconfined GAU at P 26B (32.3 m [106.2 ft] amsl). The average hydraulic head measured in the LAZ of the UTRAU at P 26D is 35.1 m (115.3 ft) amsl which is 2.8 m (9.2 ft) less than the average hydraulic head measured in the semi-confined GAU. Water level data collected since the first quarter 1995 from wells P 26A, P 26B, and P 26D indicate that the hydraulic gradient is consistently upward from the confined GAU and downward from the LAZ of the UTRAU (Appendix D, Hydrograph for Station P 26). The hydraulic conductivity of the water table varies from 6 to 18 m/day (20 to 60 ft/day) (WSRC 1997c), which is consistent with groundwater modeling analyses showing calibrated horizontal hydraulic conductivities in the range of 1.8 to 22.5 m/day (6 to 75 ft/day) (WSRC 2000).

The Savannah River is the major discharge point for the Floridan aquifer system and thus exerts control on the direction and rate of horizontal and vertical groundwater movement. Particle tracking from the groundwater model (WSRC 2000) illustrates westerly flow from TNX source areas to the Savannah River with some water discharging to the X-08 Ditch and wetlands (Figures A-6 and A-7). Particle tracking from the groundwater model was based on potentiometric data from 1990 to 1996 and are provided in this report to support the hydrogeologic conceptual model for the TNX OU.

3.0 REMEDIAL ACTION

The groundwater remedy selected in the 2003 TNX Area OU ROD (WSRC 2003) entailed SVE in high VOC concentration areas, operation of the existing T-1 pump and treat system and continued monitoring and land use controls. In 2013, an ESD to the TNX Area OU ROD was issued which modified the groundwater remedy to permanently remove the T-1 Air Stripper system from service and add EO treatments as needed. Figure A-8 is a schematic of the TNX Area OUs and the current remedial actions.

3.1 Objectives

The overall objectives of the groundwater remedial action are as follows:

- Protect future industrial workers from exposure to contaminated groundwater;
- Return groundwater to beneficial uses;
- Prevent, minimize, or eliminate discharge of contaminated groundwater to surface water that would result in unacceptable risk to human or ecological receptors; and
- Minimize adverse impact to the wetland ecosystem of the TNX Area floodplain.

The EO remedial action has altered the natural state of the aquifer to allow for the reductive dichlorination and biological degradation of the TCE groundwater plume. Beneficial reuse of the groundwater will not be achieved until active remediation of the groundwater is complete.

3.2 Soil Vapor Extraction

Two SVE treatability studies were performed in the vadose zone near the TBG, Phase I in 1997 (WSRC 1997d) and Phase II in 1999 (WSRC 1999b). Phase I and II utilized the recirculation well (i.e., TVR 1A) and associated monitoring wells (i.e., TVM series, ‘V’ and ‘U’ horizons). Based on the results from these treatability studies, SVE was shown to be an effective and cost-efficient approach at reducing the mass of VOCs at TNX (i.e., removing vadose zone secondary source VOCs near the plume core) and minimizing future VOC groundwater concentrations in the TNX floodplain.

In October 2001, an ESD to the IROD (WSRC 2001) was approved to add SVE to the HGCA system and to modify the effectiveness monitoring reporting requirements from two semiannual reports to one annual report. In 2002, a portable SVE unit and twelve additional SVE wells (i.e., TVX series) were installed at the TNX Area OU. In 2006, the SVE wells were shut down to accommodate the placement of theTAOU cap. After completion of the TAOU cap, the conventional active SVE unit was replaced with five 24-volt passive (MicroBlower™) SVE systems. The five Microblowers™ are rotated between any of the SVE wells to optimize VOC vapor removal. Location of the current SVE well network is presented in Figure A-9. The SVE wells not equipped with a MicroBlower™ have been equipped with BaroBalls™ which allow for venting of subsurface vapors based on changes in the barometric pressure of the atmosphere.

There are twenty SVE wells associated with the TNX OU SVE well network (Figure A-9). The TVM series have 'V' and 'U' screen horizons in the unsaturated zone and are viable SVE wells. TVM 2L and TVM 4L will remain on Table 7-1 because these wells were connected to the MicroBlowers™ between 2010 to 2014.

3.3 Edible Oil Treatment

In December 2007, the T-1 Air Stripper was temporarily placed in standby mode to accommodate an EO treatability study (SRNL 2012). Most of the SVE system remained operational during the treatability study, except three SVE wells (i.e., TVX 3L, TVX 5L and TVX 6L) with screens near the top of the water table that were used to deploy neat (pure) vegetable oil.

The two-phase EO treatability study (February to April 2008) was conducted to determine how effective EO deployment was on treating VOCs and reducing the cost and the time associated with treatment. The EO treatment consisted of 1) deployment of neat (pure) vegetable oil at the top of the water table in the residual source area (vicinity of the smear zone); and 2) deployment of emulsified oil substrate (EOS®) in the core of the groundwater VOC plume (Figure A-8). Table 3-1 lists the construction details of the injection wells as

well as the volumes of the neat and emulsified oil injected at each location. Figure A-10 provides the location of the injection wells associated with the 2008 and 2010 injects.

The EO treatments have significantly reduced VOC concentrations in the groundwater. In 2013, an ESD to the TNX Area OU ROD was approved which modified the remedial action to add EO treatments as needed and remove the pump and treat system from service. A trigger to inject additional EO was defined in the *Second Explanation of Significant Differences (ESD) for the Revision 1 TNX Area Operable Unit Record of Decision (U)* (SRNS 2012a). This document states that additional EO treatment will be applied if a sustained rebound lasting over one (1) year in excess of 75 µg/L (ppb) of TCE, PCE, or CCl_4 in any well if determined appropriate by the USDOE, USEPA, and SCDHEC.

In 2015, a third amendment of EO was applied to a larger area outside of the originally targeted treatment zone. This injection was initiated based on TCE results at TBG 3 and TVM 1M that came close to exceeding the trigger criteria identified in the ESD to the TNX Area OU ROD (i.e., >75 ppb increase sustained for one year). The rebound in TCE concentration at TBG 3 was correlated to an increase in water table elevation (Figure A-25). The elevated water table likely came in contact with residual VOC mass present in the smear zone or capillary fringe. Although the trigger criteria were not exceeded, SRS proceeded with the injections to take advantage of the high-water table and to prevent future rebounds. On April 28, 2015, the SRS met with the USDOE, USEPA and SCDHEC and an agreement was reached to inject neat and emulsified oils at 10 existing monitoring wells during the third quarter 2015. These events are documented in an Underground Injection Control Application (SRNS 2015a) and a CMI/RAIP for the TNX Area OU (SRNS 2015b).

The 2015 injection campaign injected EO inside and outside of the original treatment zone (Figure A-11) at monitoring wells (i.e., TBG 3, TRW 3, and TVM 1M) and SVE wells (i.e., TVX002L, TVX003L, TVX004L, and TVX005L), as well as, re-injecting into the original treatment zone (i.e., TBG 4, TBG 5, and TRW 4R). Table 3-1 lists the construction details of the injection wells and the volumes of the neat and/or emulsified oil injected at each location.

3.4 Recovery Well/Air Stripper System

The recovery well system was designed to capture the migration of contaminated groundwater containing >500 μg/L TCE and to remove TCE from the groundwater. The recovery wells were positioned at the downgradient edge of the initial >500 μg/L TCE plume, and groundwater was pumped to the T-1 Air Stripper for removal of VOCs. Recovery wells TRW 1, 2, 3 and 4 were installed to pump contaminated water from the unconfined portion of the UTRA/GAU (WSRC 1997a) (Figure A-4). The recovery well network and T-1 Air Stripper began operation on September 16, 1996. During 2005 the T-1 Air Stripper was temporarily shut down to accommodate the remedial action activities occurring at the TNX Area OU and the T-Area OU. During the shutdown, recovery well TRW 4 was abandoned and replaced by TRW 4R. The T-1 Air Stripper was restarted in January 2007 and operated until December 2007.

The system proved to be effective in capturing and treating VOCs, resulting in depletion of the VOCs in the groundwater near the source area. SRS determined that the recovery well/air stripper system would have to be operated for an extended period of time to manage the secondary source term in the groundwater near the source area (in the capillary fringe of the water table and within the water table). In December 2007, the T-1 Air Stripper and associated recovery wells were placed in stand-by to allow for the deployment of EO in the source area. After a successful EO demonstration, the T-1 Air Stripper was removed as the remedial action as documented in an ESD to the ROD and issued on June 12, 2013. The T-1 Air Stripper was permanently removed from service in 2013.

3.5 Radiologically Contaminated Groundwater

The radiologically contaminated source areas were excavated during previous remedial actions associated with both the TAOU and TNX Area OU. Excavation activities occurred at the TBG, OTSB, and in the wetlands (WSRC 2005b and WSRC 2006). Institutional controls (i.e., land use controls) are the agreed to remedial action for the radionuclide contaminated groundwater for the TNX OU. There are two localized areas where the groundwater monitoring wells exceed the MCLs for the respective radionuclide constituents. The two areas are downgradient of the TBG and in the wetlands

downgradient of the OTSB, near the TNX OD. Based on the monitoring data and historical trends, the exceedances are sporadic or one-time occurrences. TCM 5 is the only well with persistent gross alpha and uranium concentrations that exceed the respective MCLs. There are no discernible and consistent groundwater plumes present and therefore no remedial action is recommended at this time. However, new well, XSB006R, was installed in April 2019 downgradient of the OTSB and will be sampled during 2019 for both radiological and VOC constituents. The radiological results from the new well will be evaluated and discussed in the2019 annual report and subsequent annual reports.

Table 3–1. Injection Well Elevations and Injection Volumes

Well ID	Injection Date	Type of Oil	Volume of Oil (gal)	Top Screen Elevation (ft msl)	Bottom Screen Elevation (ft msl)	Ground Elevation (ft msl)	Well Diameter (in)
TBG 3	August 2015	EOS®	550	49.77	69.77	158.67	4
TBG 4	August 2015	EOS®	550	50.66	70.66	159.96	4
TBG 5	August 2015	EOS®	550	42.65	62.65	155.05	4
TRW 3	August 2015	EOS®	1100	49.88	84.78	162.18	6
TRW 4R	August 2015	EOS®	2200	50	80	157.61	6
TVM 1M	August 2015	EOS®	550	71.08	72.08	157.28	2
TVX002L	August 2015	EOS®	550	44.38	64.38	156.64	2
TVX002L	August 2015	Neat Oil	550	44.38	64.38	156.64	2
TVX003L	August 2015	Neat Oil	550	41.8	56.8	154.1	2
TVX004L	August 2015	EOS®	550	43.85	55.85	152.95	2
TVX004L	August 2015	Neat Oil	550	43.85	55.85	152.95	2
TVX005L	July 2015	Neat Oil	550	46.92	56.92	155.16	2
TBG 4	May 2010	EOS®	55	109.30	89.30	159.96	4
TBG 5	Feb 2008	EOS®	960	112.40	92.40	155.05	4
TNX 3D	March 2008	EOS®	1,250	104.90	84.90	162.97	4
TRW 4R	March 2008	EOS®	1,250	107.45	77.45	157.45	6
TVX003 L	April 2008	Neat Oil	300	112.30	97.30	154.1	2
TVX005 L	April 2008	Neat Oil	900	108.24	98.24	155.16	2
TVX006 L	April 2008	Neat Oil	1,500	107.49	92.49	155.18	2

This page intentionally left blank.

4.0 MONITORING NETWORK

Figure A-2 shows the T-Area monitoring well network and locations that were in place during the start-up and initial operation of the remedial action system. Monitoring wells were abandoned between 2004 and 2006, due to their location on and outside of the final TAOU cap (WSRC 2005b and WSRC 2006). The TNX Area monitoring well network currently consists of 42 wells (Table 4-1 and Figure A-12). Table 4-2 provides a summary of the sampling analysis plan for the monitoring well network at the TNX Area OU. The monitoring wells associated with the EO remedial action receive additional analysis to monitor the effects of the EO (Table 4-2).

A new monitoring well, XSB006R, was installed on April 22, 2019 downgradient of the OTSB. XSB006R was constructed with two-inch diameter PVC casing and a PVC slotted screen with a screen interval from 2.9 to 5.9 m (9.5 to 19.5 ft) below ground surface (Table 4-1). This well will be sampled during 2019 and the results reported in the 2019 annual report and subsequent annual reports.

1,4-Dixoane analysis was initiated at all monitoring wells in the fourth quarter 2013 in response to comments provided by the USEPA and SCDHEC during review of the *Fourth Five-Year Remedy Review Report for the Savannah River Site* (SRNS 2012b).

In the fourth quarter 2015, volatile fatty acids (VFA) were added to the list of constituents monitored for at the EO monitoring well network (Table 4-2) in accordance with the sampling requirements identified in the *Second Corrective Measures Implementation /Remedial Action Implementation Plan (CMI/RAIP) for the TNX Operable Unit (U)* (SRNS 2015b). EO, (i.e., soybean oil), is composed almost entirely of fatty acids (saturated, mono-unsaturated, poly-unsaturated, and oleic). VFAs are a series of acids present in EO and are theorized to be produced as microbes consume the EO or fatty acids. VFAs can be used to indicate the general presence and longevity of EO in the subsurface. The change in VFA composition might be an indicator of microbial de-polymerization of the EO.

The VFA analytical method measures the concentration of up to five individual VFAs. The individual concentrations are presented in Appendix B along with the total VFA, which is the sum of VFA analyzed. Time series graphs of total VFA are presented in Appendix E.

4.1 Sampling Events

The 2018 TNX groundwater sampling program included a 42 monitoring well network to be sampled in the second and fourth quarters of the calendar year (Table 4-1 and Figure A-12). During the 2Q2018, samples from 41 of the 42 wells were collected. During the 4Q2018, samples from 36 of the 42 wells were collected.

4.1.1 Sampling Issues

During the 2Q2018 sampling event, water elevations were collected from TNX 72S, but there was an insufficient amount of water to collect a sample. TNX 72D pumped dry during sampling; therefore, not all of samples were collected due to insufficient water volume and analysis was only completed for organic compounds.

During the 4Q2018 sampling event, 6 out of 42 wells (i.e., TNX 72D, TNX 72M, TNX 72S, TNX073, TNX074, and TNX075) were inaccessible for the samplers due to high water in the wetlands. The accessibility of these wells was periodically checked between December 2018 to March 2019, but they could not be sampled because of high water levels. These wells were scheduled to be sampled during the 2Q2019.

Table 4–1. TNX Monitoring Well Network

Well Name	Screen Zone	Well Category	Top of Screen Depth (ft bgs)	Bottom of Screen Depth (ft bgs)	Total Well Depth (ft bgs)	Well Diameter (in)	Ground Elevation (ft msl)
P 26A	Semi-confined GAU	Background/EO Monitoring Well	119.8	129.8	132	4	151.8
P 26B	Unconfined UTRAU/GAU	Background/EO Monitoring Well	69.5	80	82.2	4	151.9
P 26D	Unconfined UTRAU/GAU	Background/EO Monitoring Well	29.9	50	52.1	4	151.8
TBG 3	Unconfined UTRAU/GAU	Primary/EO Monitoring Well	49.77	69.77	79.77	4	158.67
TBG 4	Unconfined UTRAU/GAU	Primary/EO Monitoring Well	50.66	70.66	80.66	4	159.96
TBG 5	Unconfined UTRAU/GAU	Primary/EO Monitoring Well	42.65	62.65	77.65	4	155.05
TCM 5	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells	2.25	17.25	20	2	97.11
TIR 1L	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells	32	34.01	40	2	99.72
TIR 1M	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells	13	14.97	22.65	2	99.56
TIR 1U	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells	7.5	9.47	13	2	99.48
TNX 1D	Unconfined UTRAU/GAU	Secondary	54.5	74.5	76.9	4	154.1
TNX 3D	Unconfined UTRAU/GAU	Primary/EO Monitoring Well	58.07	78.07	89.07	4	162.97
TNX 5D	Unconfined UTRAU/GAU	Secondary	38.5	58.5	60.8	4	147
TNX 8D	Unconfined UTRAU/GAU	Primary	4	24	26.3	4	98
TNX 9D	Unconfined UTRAU/GAU	Secondary	4	24	26.3	4	99.4
TNX 11D	Unconfined UTRAU/GAU	Primary	4.5	24.5	26.6	4	97.7
TNX 12D	Unconfined UTRAU/GAU	Secondary	4	24	26.1	4	97.1
TNX 13D	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells	3.5	5.5	6	2	93.4
TNX 15D	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells	4.6	6.6	7.08	2	92.5
TNX 16D	Unconfined UTRAU/GAU	Primary	4.6	6.6	7.08	2	92.7
TNX 20D	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells	3.2	5.2	5.7	2	91.4
TNX 22D	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells	2.7	4.7	5.2	2	90.5
TNX 24D	Unconfined UTRAU/GAU	Secondary	26	40.96	45	2	139.7
TNX 27D	Unconfined UTRAU/GAU	Primary/EO Monitoring Well	7	27	35	2	108.27
TNX 28D	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells	4.8	14.8	15.1	2	97.4
TNX 30D	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells	4.7	14.7	15	2	100.3
TNX 35D	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells	4.9	14.9	15.2	2	97.4
TNX 37D	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells	4.7	14.7	15	2	98.2
TNX 72D	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells	12.3	14.8	15.58	2	92.8
TNX 72M	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells	6.4	8.9	2.57	2	92.8
TNX 72S	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells	3.4	5.9	2.62	2	92.8
TNX073D	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells	12.08	17	18	2	95.4
TNX074D	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells	12.75	17.78	18	2	93.3
TNX075D	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells	12.71	17.7	18	2	92
TRW 1	Unconfined UTRAU/GAU	Recovery/EO Monitoring Well	53.5	78.5	84	6	159.9
TRW 2	Unconfined UTRAU/GAU	Recovery/EO Monitoring Well	40.3	75.3	82.3	6	152.56
TRW 3	Unconfined UTRAU/GAU	Recovery/EO Monitoring Well	49.88	84.78	90.28	6	162.18
TRW 4R	Unconfined UTRAU/GAU	Recovery/EO Monitoring Well	50	80	83	6	156.6
TVM 1M	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells/EO Monitoring Well	71.08	72.08	73.68	2	157.28
TVM 2M	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells/EO Monitoring Well	71.29	72.29	73.79	2	159.39
TVM 4M	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells/EO Monitoring Well	71.75	73.75	76.47	2	158.87
TVR 1A	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells/EO Monitoring Well	15	40	80.6	8	148.2
TVR 1A	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells/EO Monitoring Well	65	75	80.6	8	148.2
XSB006R	Unconfined UTRAU/GAU	Auxiliary TNX Area Wells	9.5	19.5	19.5	2	99.1

Table 4–2. Summary of the Groundwater Sampling and Analyses Plan at TNX (2nd and 4th Quarters)

Requested Analyses	Hydrocarbons	Organic Compounds	Mercury	Nitrate	Nitrate-Nitrite as Nitrogen	Sulfate	Total Organic Carbon	Uranium, Total	Gross Alpha	Nonvolatile Beta	Radium-226 & Radium 228	Total Volatile Fatty Acids	Field Parameters
Background Wells													
P 26A (EO)	2	1	x	x	x	x	x	x	x	x	x	x	3
P 26B (EO)	2	1	x	x	x	x	x	x	x	x	x	x	3
P 26D (EO)	2	1	x	x	x	x	x	x	x	x	x	x	3
Primary Wells													
TBG 3 (EO)	2	1	x	x	x	x	x	x	x	x	x	x	3
TBG 4 (EO)	2	1	x	x	x	x	x	x	x	x	x	x	3
TBG 5 (EO)	2	1	x	x	x	x	x	x	x	x	x	x	3
TNX 3D (EO)	2	1	x	x	x	x	x	x	x	x	x	x	3
TNX 8D		1	x		x			x	x	x	x		3
TNX 11D		1	x		x			x	x	x	x		3
TNX 16D		1	x		x			x	x	x	x		3
TNX 27D (EO)	2	1	x	x	x	x	x	x	x	x	x	x	3
Recovery Wells													
TRW 1 (EO)	2	1	x	x	x	x	x	x	x	x	x	x	3
TRW 2 (EO)	2	1	x	x	x	x	x	x	x	x	x	x	3
TRW 3 (EO)	2	1	x	x	x	x	x	x	x	x	x	x	3
TRW 4R (EO)	2	1	x	x	x	x	x	x	x	x	x	x	3
Secondary Wells													
TNX 1D		1	x		x			x	x	x	x		3
TNX 5D		1	x		x			x	x	x	x		3
TNX 9D		1	x		x			x	x	x	x		3
TNX 12D		1	x		x			x	x	x	x		3
TNX 24D		1	x		x			x	x	x	x		3
Auxiliary Wells													
TCM 5		1	x		x			x	x	x	x		3
TIR 1L		1	x		x			x	x	x	x		3
Auxiliary Wells (continued)													
TIR 1M		1	x		x			x	x	x	x		3
TIR 1U		1	x		x			x	x	x	x		3
TNX 13D		1	x		x			x	x	x	x		3
TNX 15D		1	x		x			x	x	x	x		3
TNX 20D		1	x		x			x	x	x	x		3
TNX 22D		1	x		x			x	x	x	x		3
TNX 28D		1	x		x			x	x	x	x		3
TNX 30D		1	x		x			x	x	x	x		3
TNX 35D		1	x		x			x	x	x	x		3
TNX 37D		1	x		x			x	x	x	x		3
TNX 72D		1	x		x			x	x	x	x		3
TNX 72M		1	x		x			x	x	x	x		3
TNX 72S		1	x		x			x	x	x	x		3
TNX073D		1	x		x			x	x	x	x		3
TNX074D		1	x		x			x	x	x	x		3
TNX075D		1	x		x			x	x	x	x		3
TVM 1M (EO)	2	1		x		x	x					x	3
TVM 2M (EO)	2	1		x		x	x					x	3
TVM 4M (EO)	2	1		x		x	x					x	3
TVR 1A (EO)	2	1		x		x	x					x	3
XSB006R[4]		1	x		x			x	x	x	x		3

NOTES:
1 Organic compounds include; trichloroethylene, cis-1,2-dichloroethylene, vinyl chloride, carbon tetrachloride, tetrachloroethylene, and 1,4-dioxane
2 Hydrocarbons include; methane, ethylene, nitrogen, and carbon dioxide
3 Field parameters include; pH, specific conductivity, dissolved oxygen, oxidation reduction potential, turbidity, total alkalinity, water elevation, and water temperature
4 XSB006R will be sampled for the first time in 2019.
x Sample to be obtained
(EO) Edible oil monitoring well network

5.0 FIELD AND ANALYTICAL RESULTS

The following sections summarize the results of the field and analytical data. Field and analytical data are shown in Appendix B, Tables B-1, and B-2. Historic data trends are presented as hydrographs in Appendix D and analytical time series graphs in Appendix E. Table 5-2 summarizes the constituents that exceeded an MCL during 2018. Appendix C includes the Data Review Key.

5.1 Precipitation Measurements

Precipitation measurements are collected at a meteorological station located approximately 4.0 km (2.5 mi) southeast of TNX Area at D Area (Figure A-1). Monthly precipitation measurements for D Area since 1973 are shown in Table 5-1. During 2018, precipitation data was collected at regular intervals (24-hr period) at the D-Area meteorological station and 2018 results are presented on Table 5-1. Rainfall in D-Area totaled 140.72 cm (55.40 in) in 2018 which is approximately 23.50 cm (9.25 in) above the historic average.

5.2 Water-Level Measurements

The water table map showing current conditions (Figure A-13) was constructed from water-level measurements collected during the 4Q2018. Appendix D includes the hydrographs showing water elevations for the period of record.

The horizontal groundwater flow in the TNX Area is to the southwest toward the Savannah River Swamp. Horizontal flow rate calculations provide estimates of the transport rate of constituents originating from the TNX Area. Flow rates are estimated using the following equation:

$$Flow\ \left(\frac{ft}{day}\right) = \frac{Hydraulic\ Conductivity\ Kh\ \left(\frac{ft}{day}\right)}{Effective\ Porosity\ (unitless)} x \frac{dh\ (ft)}{dl\ (ft)}$$

Where the hydraulic conductivity (*Kh*) constant is 10 ft/day, the effective porosity value is 20 percent, the change in head is *dh*, and the horizontal distance along each flow direction arrow is *dl*. Flow path length is calculated to the nearest five feet. Flow rate per day is

calculated to two significant figures, then multiplied by 365 and rounded to two significant figures for the flow rate per year. Flow rate estimates vary depending upon the vertical gradient between wells, the size of the area under consideration, the number of data points, and the length and location of the flow path. Because these are inferred or estimated parameters, flow rate estimates should be considered accurate to an order of magnitude only.

In the 4Q2018, horizontal flow rates in the unconfined portion of the UTRAU/GAU range from approximately 101 m per year (332 ft/yr) in the northeast beneath the TAOU cap (Flow path A-A', Figure A-13) to approximately 10 m per year (34 ft/yr) near the OTSB and in the swamp (Flow path B-B', Figure A-13). As shown on Figure A-13, the gradient flattens on the southern end of the TAOU cap and into the wetlands.

5.3 pH

Field pH values measured during 2018 ranged from 4.4 to 6.9 with the average being 5.7 during this sample period. There were no monitoring wells that had a pH less than 5 in the 2Q2018. During the 4Q2018, two monitoring wells (i.e., TIR 1U and TNX 16D) had a pH less than 5 (Figure A-14).

5.4 Analytical Results

Analytical results for 2018 are included on Tables B-1 and B-2. Appendix E includes time series plots for selected constituents and monitoring wells. Interpretations for the analytical results reported in this section are provided in the Evaluation of Field and Analytical Results section (i.e., Section 6.0).

Tetrachloroethylene (PCE). During 2018, PCE was not detected at any of the monitoring wells.

Trichloroethylene (TCE). TCE was detected in 17 wells in 2Q2018. Concentrations of TCE exceeded the MCL (5 µg/L) in four monitoring wells: TRW 2 (52.7 µg/L), TCM 5 (6.13 µg/L), TIR 1U (6.32 µg/L) and TNX 28D (12.2 µg/L). TRW 2 and TCM 5 have a

history of exceeding the MCL (5 µg/L) for TCE. TNX 28D has a history of detectable concentrations of TCE that periodically exceed the MCL since 2016.

TCE was detected in 14 wells during 4Q2018. Concentrations of TCE did not exceed the MCL (5 µg/L) at any monitoring wells.

Cis-1,2-Dichloroethylene (cis-1,2 DCE). Cis-1,2-DCE was detected in nine wells during 2Q2018 and the concentrations did not exceed the MCL (70 µg/L).

During the 4Q2018, cis-1,2-DCE was detected in eight wells. Concentrations did not exceed the MCL (70 µg/L) during the 4Q2018.

Vinyl Chloride (VC). VC was detected in one well during 2Q2018 and 4Q2018 and concentration did not exceed the MCL (2 µg/L).

Ethylene. Ethylene was detected in three monitoring wells during 2Q2018 and 4Q2018. The detections ranged from 0.38 to 0.76 µg/L.

Carbon Tetrachloride (CCl_4). During the 2Q2018 and 4Q2018, CCl_4 was not detected at any of the monitoring wells.

Gross Alpha. Gross alpha was detected in eight monitoring wells during 2Q2018. The gross alpha activity at TCM 5 (23 pCi/L) was the only well to exceed the MCL (15 pCi/L).

During the 4Q2018, gross alpha was detected in ten monitoring wells. The gross alpha activity exceeded the MCL (15 pCi/L) in one well, TCM 5 (31.8 pCi/L).

Uranium. During the 2Q2018 and 4Q2018, total recoverable uranium was detected in eight wells. The uranium concentrations exceeded the MCL (30 µg/L) at TCM 5 (43.7 and 60.9 µg/L, respectively).

Radium-226 and Radium 228. During the 2Q2018, the combined radium (sum of radium-226 and radium-228) was detected in 33 wells. There were no exceedances over the MCL (5 ρCi/L) for combined radium.

During the 4Q2018, combined radium (radium-226 and radium-228) was detected in 26 wells. There were no exceedances over the MCL (5 ρCi/L) for combined radium.

Mercury. During the 2Q2018, mercury was detected in eight wells. All of the detections were below the MCL (2 µg/L) for mercury.

During the 4Q2018, mercury was detected in thirteen wells. All detections were below the MCL (2 µg/L) for mercury.

Nitrate-Nitrite as Nitrogen (NO_3/NO_2 as N). During the 2Q2018, NO_3/NO_2 as N was detected in 37 wells in the 2Q2018 and in 34 wells in the 4Q2018, and all the results were below the MCL (10 mg/L).

1,4-Dioxane. During the 2Q2018, 1,4-dioxane was detected at TNX 13D. The 1,4-dioxane concentration at TNX 13D exceeded the regional screening level (RSL) for tap water (0.46 µg/L) with concentrations of 3.4 µg/L.

During the 4Q2018, 1,4-dioxane was detected at TBG 5 and exceeded the regional screening level for tap water (0.46 µg/L) with concentrations of 4.7 µg/L.

1,4-Dioxane samples were analyzed using SCDHEC certified method EPA8260SIM. However, method EPA8260SIM cannot achieve detection limits less than the RSL for tap water (0.46 µg/L). In 2019, SRS acquired a laboratory that can achieve the RSL using analytical method EPA 522. For future sampling events, both EPA 522 and EPA 8260BSIM will be used to analyze 1,4-dioxane in all wells, and the results reported in the 2019 annual report and subsequent annual reports.

Edible Oil Parameters. The EO parameters are analyzed near the treatment zone to identify the reductive conditions created after injection of the EO in the groundwater. These parameters include DO, total organic carbon (TOC), oxidation/reduction potential (ORP), sulfate, methane, nitrate, and VFA, and are compared to concentrations measured prior to or during the EO injections (Appendix A, Figures A-32 through A-41). These parameters are also presented in Appendix E on time series graphs. It should be noted that

the results for DO, ORP, sulfate, nitrate, and TOC from 2008 to 2014 are not present in the database; therefore, the program used to create the time series graphs could not be used. The graphs for these constituents were created manually. Although the data is presented accurately, the graph formatting looks different than the other time series graphs.

DO decreased at injection wells in the treatment zone after the 2008, 2010, and 2015 EO injections. (i.e., TBG 3, TRW 3, and TVM 1M) DO concentrations at TBG 3, TRW 3, and TVM 1M have been variable since the 2015 EO injection.

- The DO concentration at TBG 3 decreased from 8.16 mg/L in the 2Q2014 to 2.1 mg/L in the 4Q2015. Since 4Q2015, DO concentrations at TBG 3 continued to be low through the 4Q2017, but increased during 2018 with a concentration of 3.2 mg/L in the 2Q2018 and 12.1 mg/L in the 4Q2018. The 4Q2018 DO concentration is the highest concentration ever recorded at TBG 3, is above background concentrations, and will be considered suspect until it can be confirmed during future sampling events.

- At TRW 3, the DO concentration was 4.1 mg/L in the 2Q2014 and decreased to 1.3 mg/L in 4Q2015. From 2016 to 2017, DO concentrations have increased back to pre-injection concentrations (i.e. 3-4 mg/L). In 2018, DO concentrations at TRW 3 decreased to 0.79 and 1.8 mg/L in the 2Q2018 and 4Q2018, respectively.

- At TVM 1M, DO concentrations have fluctuated in a decreasing trend since the 2015 EO injections. In the 4Q2018, DO concentrations were 0.93 mg/L.

At the original EO injection wells (i.e., TBG 4, TBG 5, TNX 3D and TRW 4R), DO concentrations started to return to background concentrations.

- The DO concentrations at TBG 4 have been increasing from 1.2 mg/L in the 4Q2015 to 6.5 mg/L in the 4Q2018.

- The DO concentration at TBG 5 was 6.9 mg/L in the first quarter 2008 and was 7.3 mg/L during the fourth quarter 2018.

- The DO concentration at TNX 3D was 7.8 mg/L in the first quarter 2008 and decreased to less than 1.0 mg/L from 2009 to 2014. After the 2015 EO injections, DO concentrations at TNX 3D have increased with DO concentrations at 4.3 mg/L during the 4Q2018.

- The DO concentration at TRW 4R decreased to less than 1.0 mg/L after the initial EO injection in 2008. After the 2015 injection, DO concentrations at TRW 4R were 2.9 mg/L and were 2.6 mg/L in the 4Q2018, which is still less than background concentrations.

The TOC concentrations increased at injection wells immediately after each injection occurred. After the 2015 injections, TOC concentrations increased at the injection wells (i.e., TBG 3, TGB 4, TBG 5, TRW 3, TRW 4R, and TVM 1M) and one monitoring well (i.e., TVR 1A). Since the 2015 injections, TOC concentrations at all of these wells have steadily decreased with time. The TOC concentrations at TBG 4 have decreased the least since 2015, from 8 million µg/L in the second quarter 2016 to 2.4 million µg/L in the 4Q2018. The TOC concentration at TNX 3D, one of the original EO injection wells, has also steadily declined since 2008 with a TOC concentration of 4,670 µg/L in the 4Q2018.

The ORP results have decreased at most of the injection wells after the EO injections. Injection wells TBG 4, TBG 5, and TNX 3D have sustained low ORP results since EO was injected in 2008 and 2010.

- Since the 2015 injection, the ORP result at TBG 4 have continued to decrease with ORP results of -69 millivolts (mV) in the 4Q2018.

- The ORP result at TBG 5 was -90 mV during the 4Q2018.

- The ORP result at TNX 3D was -45 mV during the 4Q2018.

- The ORP results at TRW 4R have been variable with time. After the 2015 EO injection, ORP results at TRW 4R decreased in the fourth quarter 2015 to -65 mV

while decreasing to -117 mV in the 2Q2018. The 4Q2018 ORP result at TRW 4R increased to 60 mV.

- The ORP results at TBG 3 have steadily declined since the 2015 injections with fourth quarter 2018 ORP results measuring negative of (-61 mV) for the first time.

- ORP results have also declined at some monitoring wells (i.e., TVM 2M, TVM 4M, and TVR 1A) after the 2008 injections. Since the 2008 injections, ORP results at the monitoring wells have steadily increased.

- After the 2015 injections, changes in ORP results were observed in TRW 2 declining from 263 mV in the 2Q2014 to 22 mV in the 2Q2018. The ORP results at TRW 2 increased to 160 mV in the 4Q2018.

Sulfate concentrations were variable after the 2008 and 2010 injections. After the 2015 injections, sulfate concentrations decreased at some of the injection wells (i.e., TBG 3, TBG 5, TRW 4R). TRW 4R had the most extreme decline in sulfate concentrations averaging 7.7 mg/L between 2008 and 2014 and decreasing to an average of 1.1 mg/L from 2015 to 2017. The sulfate concentration at TRW 4R was 1.39 mg/L during the 4Q2018. The sulfate concentrations at TBG 3 and TBG 5 declined gradually from 2015 to 2017. TBG 3 had sulfate concentrations decline from 3.2 mg/L in the second quarter 2015 to 0.62 mg/L in the 4Q2018. Sulfate concentrations at TBG 5 were variable but averaged 8.6 mg/L between 2012 and 2014 and have declined to average 1.4 mg/L between 2015 and 2018. The sulfate concentration at TBG 5 was 0.69 mg/L during the 4Q2018.

Methane concentrations at injection and monitoring wells near the treatment zone increased to greater than 1,000 µg/L after the 2008 and 2010 injections. Methane concentrations at TBG 3 and TRW 3 had increased to greater than 1,000 µg/L after the 2015 injections. The methane concentration at TBG 3 was 9,700 µg/L during the 4Q2018, while the methane concentration at TRW 3 was 13,000 µg/L during the 4Q2018. Previous injections wells (i.e., TBG 4, TBG 5, TNX 3D, and TRW 4R) continue to have elevated methane concentrations. The methane concentrations during the 4Q2018 at TBG 4, TBG 5, TNX

3D, and TRW 4R were 12,000, 12,000, 15,000, and 16,000 µg/L, respectively. Outside of the treatment zone, TRW 2 experienced increased methane concentrations starting in 2014. The methane concentration at TRW 2 have since decreased to 190 µg/L during the 4Q2018.

Nitrate concentrations decreased in the treatment zone at injection wells (i.e., TBG 4, TBG 5, and TNX 3D) after the 2008 and 2010 injections. After the 2015 injections, nitrate concentrations decreased at injection wells, TBG 3, TRW 3, and TVM 1M. The nitrate concentrations in TBG 3, TRW 3, and TVM 1M continue to remain low during 2018.

Total Volatile Fatty Acids. The total VFA concentrations were elevated immediately after the 2015 EO injection in the injection wells. Most of the injection wells had total VFA concentrations greater than 100,000 µg/L except for TBG 4 and TBG 5 which had total VFA concentrations of greater than one million µg/L. Since 2015, a decrease in total VFA concentrations has been observed at TBG 3, TBG 5, TRW 3, TRW 4R, and TVM 1M. TBG 3 and TRW 3 experienced rebounds in total VFA concentrations during 2018. The total VFA concentrations at TBG 4 have only slightly decreased between 2015 and 2018 with concentrations averaging 4.7 million µg/L. At the monitoring wells (i.e., TRW 1, TRW 2, TVM 2M and TVR 1A), total VFA concentrations have been detected at concentrations less than 100,000 µg/L, but detections have not been consistent with time. Total VFA concentration was not detected in these monitoring wells during 2018.

Table 5–1. Rainfall (inches) at 400-D, 1973 to 2018

Year	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Annual Total
1973	5.19	4.52	6.54	5.03	3.05	7.7	4.3	2.74	4.07	0.87	0.32	3.99	48.32
1974	2.15	6.78	2.28	1.69	4.82	3.31	2.43	6.06	2.92	0	1.9	4.09	38.43
1975	3.42	6.04	6.05	4.38	6.46	4.72	10.91	1.37	7.06	0.74	3.15	4.03	58.33
1976	3.89	1.07	3.52	2.3	10.23	6.95	1.81	1.46	6.41	5.02	3.44	4.7	50.8
1977	3.33	3.25	7.6	1.3	1.23	2.91	1.47	7.1	3.06	4	2.46	4.15	41.86
1978	8.41	1.5	3.12	3.75	3.96	1.77	1.99	5.08	4.96	0.75	3.37	1.72	40.38
1979	3.48	9.49	3.06	4.54	7.45	1.37	5.57	7.14	6.13	0.82	6.38	2.35	57.78
1980	4.23	3.05	11.1	2.45	4.15	4.5	0.97	1.65	7.51	2.05	1.73	2.71	46.1
1981	0.72	3.8	4.16	2.64	3.7	4.96	4.56	6.18	0.06	3.04	0.66	8.86	43.34
1982	4.48	4.89	3.17	4.98	3.64	5.82	3.36	3.12	3.2	3.71	1.68	6.08	48.13
1983	4.09	7.12	5.36	5.43	2.4	3.44	1.63	5.32	2.54	2.42	4.35	4.03	48.13
1984	3.22	5.65	5.3	4.91	5.39	6.07	8.81	1.97	0.73	0.38	1.15	1.34	44.92
1985	2.64	5.71	1.01	1.53	1.79	6.25	8.9	4.15	0.2	5.53	7.16	2.7	47.57
1986	1.14	2.8	3.07	0.48	2.48	5.01	1.66	8.13	0.52	2.52	4.7	3.96	36.47
1987	6.49	6.65	3.85	0.28	1.39	4.69	2.45	1.73	4.64	0.19	2.34	1.27	35.97
1988	3.55	5.3	2.04	6.18	1.56	6.94	1.76	5.04	5.06	2.45	1.81	1.15	42.84
1989	1.78	3.17	4.56	4.72	2.42	5.73	7.39	0.23	5.11	4.57	2.61	2.37	44.66
1990	2.05	3.51	3.19	0.29	1.1	1.22	4.8	5.23	0.44	17.12	1.26	1.67	41.88
1991	7.49	2	7.15	4.9	3.09	2.58	9.11	8.59	1.52	0.53	1.01	3.34	51.31
1992	3.59	4.86	3.27	2.48	2.15	7.55	7.29	6.27	3.58	3.91	6.64	1.95	53.54
1993	7.92	2.55	9.7	1.3	2.24	8.65	1.85	3.06	6.42	0.87	1.84	2.25	48.65
1994	4.71	4.49	6.72	1.29	1.66	7.33	6.08	3.62	2.33	8.98	2.86	4.71	54.78
1995	5.28	6.06	2.47	0.17	2.28	7.24	4.2	6.86	3.95	2.11	2.49	4.47	47.58
1996	2.6	2.05	6.26	1.69	1.6	3.65	4.89	7.93	3.72	1.98	1.5	2.74	40.61
1997	4.14	5.1	1.98	3.42	1.69	6.82	6.54	1.37	5.41	4.74	4.29	7.93	53.43
1998	7.76	6.26	7.86	7.14	4.2	2.86	7.53	2.98	6.33	0.65	0.57	1.89	56.03
1999	6.9	2.26	2.98	2.12	2.59	7.37	6.36	5.46	3.45	2.18	0.65	0.91	43.23
2000	5.11	0.77	4.26	1.62	0.21	5.85	3.86	4.15	9.11	0.06	3.33	1.61	39.94
2001	2.69	3.05	7.28	1.43	3.24	6.54	2.19	3.14	3.31	0.18	1.12	0.57	34.74
2002	2.04	2.23	4	1.59	1.63	3.9	4.41	4.55	3.72	4.57	3.94	3.86	40.44
2003	2.07	5.31	8.07	8.64	6.81	9.18	10.14	3.96	2.63	3.39	1.19	2.26	63.65
2004	2.7	7.11	0.86	1.28	2.79	7.83	2.91	1.96	7.05	0.59	2.74	2.54	40.36
2005	2.35	4.43	6.07	1.26	4.12	9.57	5.19	4.64	2.07	2.95	2.53	6.4	51.58
2006	3.19	2.61	1.35	2.29	2.34	6	5.26	1.59	2.81	1.77	3.76	4.4	37.37
2007	3.18	2.87	1.7	2.48	1.23	5.42	4.97	3.04	0.91	1.47	0.14	9.67	37.08
2008	4	5.89	4.66	2.35	2.42	0.27	6.82	6.86	0.57	4.47	2.93	5.13	46.37
2009	2.03	0.8	4.25	5.86	8.21	1.72	4.47	7.67	5.74	2.89	4.56	9.75	57.95

Table 5–1. Rainfall (inches) at 400-D, 1973 to 2018 (*Continued/Ended*)

Year	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Annual Total
2010	4.9	2.62	2.5	1.71	1.34	7.29	2.39	7.04	2.51	0.48	1.45	1.41	35.64
2011	2.2	4.95	5.67	3.53	1.17	2.81	2.5	2.54	2.38	1.86	2.68	1.91	34.2
2012	1.91	1.59	3.07	1.43	6.96	3	5.27	9.85	1.55	0.54			35.17
2013*			1.75	1.05		5.64	4.99			0.08	1.64	4.64	19.79
2013**	0.68	13.5	4.44	4.09	2.6	7.15	13.29	6.69	0.6	2.45	0.83	4.84	61.16
2014	2.77	5.22	3.15	3.69	4.08	5.2	6.1	3.8	4.46	1.13	3.88	5.17	48.65
2015	3.47	5.09	4.12	7.08	0.35	6.03	4.33	2.81	4.64	4.99	7.25	5.36	55.52
2016	2.8	4.8	3.45	3.51	5.58	6.87	4.06	5	6	4.8	0.26	5.54	52.67
2017	4.5	1.43	1.57	7.23	3.41	6.53	3.26	3.27	6.12	1.27	1.58	4.9	45.07
2018	2.4	1.96	4.04	4.08	8.39	5.25	5.32	1.77	3.45	3.92	7.58	7.24	55.40
Average	**3.75**	**4.06**	**4.39**	**3.17**	**3.40**	**5.26**	**4.71**	**4.39**	**3.79**	**2.74**	**2.80**	**3.84**	**46.15**
Max	**8.41**	**9.49**	**11.1**	**8.64**	**10.23**	**9.57**	**10.91**	**9.85**	**9.11**	**17.12**	**7.58**	**9.75**	**63.65**
Min	**0.72**	**0.77**	**0.86**	**0.17**	**0.21**	**0.27**	**0.97**	**0.23**	**0.06**	**0**	**0.14**	**0.57**	**34.2**

*Incomplete 2013 precipitation data from the D-Area meteorological station (400-D).
**Precipitation data from the K-Area meteorological station.

Table 5–2. Constituents Exceeding USEPA NPDWS MCLs in T-Area Wells During 2018

Aquifer	Monitoring Category	TAOU Groundwater Monitoring Constituents		
		Trichloroethylene (TCE)	Uranium (total recoverable)	Gross alpha
Unconfined UTRAU/GAU	Background			
	Primary			
	Secondary			
	Auxiliary	X	X	X
	Recovery	X		

NOTES:
X = Constituents Exceeding USEPA NPDWS MCLs
UTRAU/GAU = Upper Three Runs Aquifer Unit/ Gordon Aquifer Unit
USEPA NPDWS MCLs = USEPA National Primary Drinking Water Standards MCLs (USEPA 2001)

6.0 EVALUATION OF FIELD AND ANALYTICAL RESULTS

Analytical results and field parameters for the second and 4Q2018 are included in Tables B-1 and B-2. Two dimensional planar and cross section maps displaying 4Q2018 results for selected constituents are shown in Figures A-13 through A-24. Figures A-32 through A-41 provide a comparison of pre-EO injection parameters with 4Q2018 results. Hydrographs and time series plots of selected constituents are provided in Appendix D and Appendix E, respectively.

6.1 Potentiometric Surface

The water table was initially drawn down during the operation of the four extraction wells between 1996 and 2007. The termination of extraction in 2007 allowed the water table to rebound. In response to the rebound, the water table elevation increased significantly in TRW 1, TRW 2, TRW 3 and TRW 4R, and to a lesser extent in most of the other wells. The EO injections are thought to have only temporarily affected the water table elevation during injection. There is no evidence of long-term impacts to the water table elevation.

Between 2012 and 2013, above average precipitation totals caused most wells to experience a 2 to 5 ft increase in water elevation. The elevated water elevations were sustained at most monitoring wells during 2016 and into the first half of 2017. During the second half of 2017 and the first half of 2018, water elevations decreased at most monitoring wells, likely caused by below average precipitation totals in 2017. In 2018, the annual precipitation was 55.40 inches, which is higher than the 40-year average of 46.15 inches. The higher than average precipitation during 2018 caused water elevations to increase at monitoring wells located in the wetlands during the second half of 2018. The increase in water elevation during the second half of 2018 was not observed at monitoring wells located on the TAOU cap. The changes in water elevation did not have a significant effect on groundwater flow directions with the predominant flow direction continuing to be in the southwest toward the Savannah River.

6.2 pH

Low pH conditions have previously been observed in the groundwater at discrete locations in the TNX Area OU. The low pH conditions beneath the TAOU cap are likely the result of groundwater in contact with nitric acid and the uranyl nitrate that was associated with the TBG. Low pH conditions observed in the wetlands may be a combination of naturally occurring low pH conditions as wells as disposal of acids at the OTSB and TNX OD.

During the 4Q2018, there were no wells with a pH of less than 5 (Figure A-14). TBG 3 has had a history of pH fluctuating above and below 5. There appears to be a correlation to increased water elevation and lower pH (< 5) at TBG 3 (Figure A-28). On a similar note, nitrate/nitrite as nitrogen concentrations at TBG 3 also correlate to changes in water elevation (Figure A-29). As water elevation increases so does the concentration of nitrate/nitrite as nitrogen. This could indicate that there is source material (i.e. nitrates) in the capillary fringe near TBG 3 and as the water table rises and contacts source material the pH decreases.

The EO injections added a basic solution to buffer the lower pH of the groundwater to a pH of between 6 to 8 to promote bacterial activity. After the 2008 and 2010 injections, elevated pH was observed in three of the injection wells, TBG 4, TBG 5, and TNX 3D. A basic solution was also added during the 2015 EO injections; however, it does not appear to have buffered the aquifer as much as the 2008 and 2010 injections. Additional sampling results will continue to provide insight on the effects of pH on the EO treatment at the TNX Area OU.

6.3 VOC Constituents (i.e., PCE, TCE, Cis-1,2-DCE, VC, Ethylene, and CCl_4)

The T-1 Air Stripper and associated recovery wells removed a significant amount of VOC mass from the groundwater at TNX Area OU. Monitoring wells located in the source area (i.e., TBG 3, TBG 4, and TBG 5) as well as the downgradient monitoring wells (i.e., TNX 3D, TNX 11D, and TNX 27D) experienced decreasing TCE and PCE concentrations during operation of the T-1 Air Stripper (i.e., 1996 to 2007). When the T-1 Air Stripper was temporarily shut down (i.e., 2005 to 2007) during the installation of the TAOU cap,

TCE and PCE concentrations rebounded revealing a residual source was still present in the source area. The EO treatability study was designed to target the residual source and further reduce VOC mass in the groundwater. Since the 2015 EO injections, the TCE concentrations at TBG 3, TRW 3, and TVM 1M have been less than the MCL (5 µg/L). In 2018, all of the injection and monitoring wells within the treatment area had TCE concentrations less than the MCL.

The removal of TCE mass at the source has had a direct effect on the TCE concentrations observed in the wetland wells. As source TCE concentrations have declined, distal TCE concentrations have concurrently declined (Figure A-27). Figure A-27 provides a comparison of the average annual TCE concentrations for eight monitoring wells (i.e., TBG 3, TBG 4, TBG 5, TNX 3D, TRW 1, TRW 2, TRW 3, and TRW 4R) located on the TAOU cap in the source plume and seven wells (i.e., TCM 5, TIR 1U, TNX 15D, TNX 16D, TNX 27D, TNX 28D, and TNX 30D) located in the wetlands or distal plume. Since 2015, the average TCE concentrations has fluctuated above and below the MCL (5 µg/L). In 2018, both averages were less than the MCL (5 µg/L).

During the 4Q2018, all monitoring wells had TCE concentrations that were less than MCL (5 µg/L) so there is no TCE plume depicted on Figure A-15. The lower than expected TCE concentrations might be the result of dilution caused by the above average precipitation that occurred during April, May, July, October, November, and December 2018. The high precipitation during the 4Q2018 correspond to a 1 to 3 ft increase in water elevation at some monitoring wells. The increase in water elevation affected the monitoring wells located in the wetland more than the wells located on the TAOU cap. During the 2Q2018, TCE concentrations at four monitoring wells (i.e., TCM 5, TIR 1U, TNX 28D and TRW 2) exceeded the MCL. Three of those four wells (i.e., TCM 5, TIR 1U, and TNX 28D) are located in the wetlands making it more likely the high precipitation and infiltration had a direct impact on aquifer contamination. TRW 2 is located on the TAOU cap where infiltration is restricted. The water elevation at TRW 2 did not increase during the 4Q2018 and cannot be attributed to the decrease in TCE concentration. The decrease in TCE concentration at TRW 2 could be an indication that the TCE source has been significantly

reduced by the EO treatment and clean upgradient water migrating under the TAOU cap are causing the lower TCE concentrations. Evidence of upgradient water moving into the EO treatment zone may be observed as an increase in DO and ORP results, see Section 6.4 for further discussion. The actual cause of the decreased TCE concentration at TRW 2 is unknown at this time. The TCE concentrations at all monitoring wells will continue to be monitored and results reported.

Cis-1,2-DCE was observed at the monitoring wells in the source area (i.e., TBG 3, TBG 4, TGB 5, TNX 3D, and TRW 1) prior to the injection of EO. Similar to TCE and PCE, cis-1,2-DCE concentrations decreased as VOC mass was removed by the operation of the recovery wells and T-1 Air Stripper. After the 2008 and 2010 EO injections, cis-1,2-DCE concentrations began to increase at wells near the treatment area indicating TCE degradation is likely occurring. After the 2015 EO injections, cis-1,2-DCE concentrations increased at TRW 2, TRW 4R, and TVM 1M indicating the degradation of TCE is likely occurring. In 2018, no monitoring wells exceeded the MCL (i.e., 70 µ/L) for cis-1,2-DCE. In the wetlands, cis-1,2-DCE concentrations have been below the detection limit since the 2015 EO injections and continue to be below detection limits in 2018.

There were no VC concentrations that exceeded the MCL (2 µg/L) during 2018. In 2018, TBG 5 was the only well with VC concentrations above the detection limit.

Elevated ethylene concentrations were observed immediately after the 2008 and 2010 EO injections at injection wells TBG 4, TBG 5, and TNX 3D. After the 2015 EO injections, ethylene concentrations increased at TBG 3, TBG 4, TBG 5, TRW 3, and TVM 1M. Since the increase in ethylene concentrations in 2015, ethylene concentrations have steadily decreased but remain at detectable concentrations into 2018 at TBG 3, TBG 4, and TBG 5. The presence of ethylene indicates the complete degradation of TCE and daughters.

CCl_4 concentrations declined to below the detection limit at TBG 3 since the 2015 EO injections and continue to be less than the detection limit in 2018. It is uncertain what process is causing the decline in CCl_4 concentrations at TBG 3, but it appears the same processes degrading the TCE are also degrading the CCl_4.

6.4 Edible Oil Parameters

The injection of EO into the groundwater during 2008, 2010, and 2015 converted the aerobic aquifer to a reducing environment. The EO parameters monitor for methane, DO, ORP, TOC, sulfate, and nitrate to identify areas that have become anaerobic and potentially where reductive dechlorination is occurring. The reductive environment created in the EO treatment area is illustrated in Figures A-32 through A-37 which compares pre-injection groundwater parameters to post-injection parameters collected during the 4Q2018. Time series trends for these parameters are presented in Appendix E. Evidence of a reductive environment in the treatment area includes:

- TOC is elevated in the treatment area.
- DO has decreased in the treatment area.
- ORP results indicate more reductive conditions in the treatment area.
- Sulfate concentrations indicate a sulfate reduction in the treatment area.
- Methane concentrations increased at injection wells.
- Denitrification (decreasing nitrate concentrations) occurred in the treatment area.

After the EO injections, TOC concentrations increased from approximately 1,000 µg/L to greater than 100,000 µg/L. This is evident at all of the injection wells including 2015 injection wells, TBG 3 and TRW 3. An increase in TOC reflects the introduction of carbon associated with the EO injections. After each of the injections, TOC concentrations spiked and generally began to decline at the injection wells. The decrease in TOC is an indication that some of the carbon introduced into the aquifer has been dispersed into the aquifer or utilized by microbial activity. In 2018, TOC concentrations continue to be elevated at the 2015 injection wells.

The DO at all the injection wells have decreased after the injection of EO indicating that the aquifer has become anaerobic. As the oxygen in the aquifer is consumed, reductive conditions will become more prevalent and eventually lead to conditions favorable for reductive dechlorination. Since the 2015 EO injections, DO concentrations have remained below pre-injection concentrations (i.e., < 6 mg/L) at the injection and monitoring wells.

Although DO concentrations are low after the 2015 injections (i.e., 1 mg/L > DO < 4 mg/L), DO concentrations were less than 1 mg/L after the 2008 and 2010 injections. The slightly higher DO concentrations since the 2015 injections do not appear to be causing any negative effects on the reductive environment created by the degradation of the EO. In 2018, DO concentrations generally increased at injection and monitoring wells within the treatment area. The increase in DO concentration was more pronounced in the 4Q2018 than the 2Q2018. The DO concentration of 12 mg/L at TBG 3 during the 4Q2018 is higher than background DO concentrations (i.e., 6-8 mg/L) and is considered to be a suspect measurement. The increase in DO concentrations could be the result of clean upgradient water migrating under the TAOU cap. This water would have background DO concentrations causing the lower EO induced DO concentrations to increase. Although precipitation was high during the 4Q2018, the wells within the treatment area did not experience significant changes in water elevation; therefore, it's unlikely the higher than average precipitation influenced the DO concentrations. At this time, it is not apparently clear why DO concentrations increased at these wells.

The ORP results at the injection wells have decreased after each injection of EO. The ORP results at TBG 3 have steadily decreased since the 2015 injections, measuring negative (i.e., -61 mv) for the first time in the 4Q2018. TRW 4R is the only injection well that had ORP measurements increase after the 2008 EO injection. TRW 4R is a larger diameter well with a 30 ft continuous screen, and only the upper portion of the screen was injected into during 2008 injection. The mixing of aerobic groundwater from the deeper portion of the aquifer likely influenced the change in ORP at TRW 4R. Since the 2015 EO injection, ORP has decreased at TRW 4R. Monitoring wells TRW 2, TVM 2M, TVM 4M, and TVR 1A have also experienced a decrease in ORP results after EO injections. The ORP results at TVM 4M have been increasing since 2014 indicating reductive conditions are returning to background conditions at this monitoring well. In 2018, ORP results increased during the 4Q2018. The increase in ORP results could be the result of clean upgradient water migrating under the TAOU cap. This water would have higher ORP results, indicative of oxygenated water, causing the lower EO induced ORP results to increase. Although precipitation was high during the 4Q2018, the wells within the treatment area did not

experience significant changes in water elevation; therefore, it's unlikely the higher than average precipitation influenced the ORP results. At this time, it is not apparently clear why ORP results increased at these wells.

Denitrification, changes in sulfate, and increased methane are further indicators for the presence of a reducing environment and suggest reductive dechlorination could be occurring. Decreasing nitrate concentrations is evidence that reductive conditions have progressed enough to allow dechlorination of VOCs. Denitrification is most noticeable at injection wells (i.e., TBG 3, TBG 4, TRW 3, and TVM 1M) and monitoring wells (i.e., TRW 1, and TRW 2). Evidence of sulfate reduction is the most apparent at injections wells (i.e., TRW 4R and TVM 1M) with decreasing sulfate concentrations occurring after the 2015 EO injections. In comparison to 2007 sulfate concentrations, 2018 sulfate concentrations have been reduced in the treatment area (Figure A-35). Methane concentrations increased immediately after each injection at the injection wells and are also elevated at surrounding monitoring well. The presence of methane is an indication that highly reductive conditions are present in the aquifer and that reductive dechlorination of VOCs is likely occurring.

VFAs indicate the general presence and longevity of EO in the subsurface. EO is composed of long chain fatty acids, and as these fatty acids are consumed, they are broken into short chain fatty acids or VFA. After the 2015 injections, total VFA concentrations were the highest at the injection wells and were not detected in the monitoring wells. Since 2015, the concentration of VFA have decreased sharply at some of the injection wells (i.e., TBG 5, TRW 4R, and TVM 1M) while only decreasing slightly at other injection wells (i.e., TBG 3, TBG 4, and TRW 3). VFA concentrations have also been detected in the monitoring wells (i.e., TRW 1, TRW 2, and TVR 1A) suggesting that EO has been distributed out into the aquifer. The concentration of VFAs observed at the monitoring wells are an order of magnitude lower than those concentrations observed at the injection wells. VFA will continue to be sampled for at injection and monitoring wells located in and near the treatment area to continue to monitor the longevity of the EO.

6.5 Combined Radium, Uranium, Gross Alpha, and Adjusted Gross Alpha

These constituents are being discussed together because uranium, radium-226, and radium-228 contribute along with other alpha emitters to the gross alpha concentration. The adjusted gross alpha concentration is calculated to exclude naturally occurring uranium 234, 235, and 238. A description of the calculations is provided in Appendix C, page C-6. The combined radium activity concentration is the sum of radium-226 and radium-228.

Detections of combined radium and uranium are sparse, do not define a discernible groundwater plume, and associated with the TBG, OTSB, DG, OD, and naturally occurring uranium in the fluvial sediments of the wetlands. Uranium isotope data collected between 1998 and 2004 was evaluated in the *Addendum to the CERCLA Facility Investigation/Remedial Investigation/Baseline Risk Assessment (RFI/RI/BRA) Report for the TNX Area Operable Unit, Groundwater Radiological Characterization* (WSRC-RP-2001-4180). Figure A-30 graphs the mass of the three uranium isotopes (i.e. uranium-238, -235, and -233/234) with the total uranium mass. In Figure A-30, the percent mass of the uranium isotopes is comparable to naturally occurring uranium (i.e., uranium-238 [99%], uranium-235 [0.7%], and uranium -234 [0.005%]). It has also been observed that a combination of increasing water elevation, oxidizing and reducing environments, and high and low pH influences the solubility of uranium and radium, and ultimately the gross alpha, in a particular groundwater sample.

Groundwater in the TNX Area OU monitoring wells exceed the MCLs for the respective radionuclide near the TBG (area under the TAOU cap) and in the wetlands near the OTSB and TNX OD. The area under the TAOU cap has been further altered by the EO injections. In the wetlands, in addition to being sourced by the OTSB, naturally occurring radionuclides are present in the organic rich fluvial sediments which are entrained within the aquifer sediments.

TBG (Area under the TAOU Cap). Uranium concentrations beneath the TBG have exceeded the MCL (30 µg/L) at TBG 4. The uranium concentration at TBG 4 has exceeded the MCL on and off since 2013 with the most recent exceedance occurring in the second

quarter 2017. During 2018, uranium concentrations were detected but less than the MCL. The exceedances at TBG 4 may be associated with the increased solubility of uranium caused by high pH, a reductive environment, and possibly a rising water table. The reductive environment and elevated pH conditions (i.e., sodium bicarbonate buffer added during EO injections) at TBG 4 were initiated after the EO injections in 2008 and 2010. During this same time (i.e., 2013 to 2017), an increase in water elevation may have brought the groundwater in contact with residual mass in the vadose zone. Either of these conditions or any combination may have resulted in the elevated uranium concentrations observed at TBG 4.

Although radium-226 is the potential contaminant of concern, the MCL is measured for combined radium-226 and radium-228 (thorium decay series). Combined radium has historically exceeded the MCL (5 ρCi/L) at monitoring wells TBG 3 and TBG 4. The exceedances at these monitoring wells appear to be associated with lower pH created from nitric acid releases from the TBG. The solubility of radium increases with decreasing pH. This relationship is presented on time series graphs in Appendix E. Combined radium concentrations at TBG 3 and TBG 4 exceeded the MCL before the 2008 and 2010 EO injections. The pH at TBG 4 increased in 2010 due to the EO injections and the addition of a pH buffer causing combined radium concentrations to decrease to less than the MCL. The pH at TBG 3 was not directly impacted by the 2008 and 2010 EO injections. In 2015, EO and buffer was injected into TBG 3 and combined radium concentrations decreased to less than the MCL. There were no exceedances for combined radium at TBG 3 and TBG 4 during 2018.

Gross Alpha exceedances under the TAOU cap directly correspond to the combined radium and uranium exceedances observed at TBG 3 and TBG 4. At TBG 3, gross alpha and combined radium exceedances appear to be directly related. At TBG 4, the gross alpha concentrations appear to correlate with combined radium concentrations before 2010 and correlate to uranium concentrations after 2010.

Wetlands. The OTSB and fluvial sediments are two potential sources of radiological constituents in the wetlands. The exceedances of radiological constituents in the wetlands have been sporadic and there appears to not be a discernible groundwater plume present.

Most of the occurrences of combined radium in the wetland are sporadic or one-time occurrences. The sporadic nature of the combined radium exceedances is likely due to naturally occurring radium in the fluvial sediments beneath the wetlands.

Uranium concentrations are mostly sporadic with one exception (i.e., TCM 5). Uranium concentrations have regularly exceeded the MCL at TCM 5 since 2003 with a couple of concentrations between 2014 and 2016 that were less than the MCL. It is not apparently clear if the uranium observed at TCM 5 is sourced from TNX processes or is naturally occurring. TCM 5 is located downgradient of the OD which received overflow from the OTSB.

Gross alpha exceedances in the wetlands directly correspond to the uranium exceedances observed at TCM 5. Adjusted gross alpha concentrations at TCM 5 suggest uranium is the primary alpha emitter contributing to the gross alpha concentrations.

6.6 Mercury and NO_3/NO_2 as N

The graphs for mercury are presented with pH and NO_3/NO_2 as N (Appendix E) and convey the relationship that mercury increases as pH decreases. Mercury is graphed for TBG 4 which is the only well that has previously experienced mercury concentrations above the MCL (2 µg/L). Since pH increased after the 2008 and 2010 EO injections, mercury concentrations have been less than the MCL.

The NO_3/NO_2 as N graph is also presented with pH to show the relationship that pH decreases with increases in NO_3/NO_2 as N concentrations. Uranyl nitrate was disposed of at the TBG and as water infiltrated the burial ground nitric acid was produced; therefore, the NO_3/NO_2 as N concentrations are presented for TBG 3, TBG 4, and TBG 5. Since pH increased after the EO injections, NO_3/NO_2 as N concentrations have been less than the MCL to date.

6.7 1,4-Dioxane

1,4-Dioxane was initially sampled at all TNX Area OU monitoring wells during the fourth quarter 2013 and 30 of the 38 monitoring wells had a detection of 1,4-dioxane. The detections were scattered across the TNX Area OU including the background wells and monitoring wells upgradient of the source areas. It is not apparent why 1,4-dioxane concentrations were detected in almost every monitoring well. Since 2014, 1,4-dioxane concentrations at TBG 5 are consistently detected while most of the other monitoring wells have been less than the detection limit. At TBG 5, 1,4-dioxane concentrations have exceeded the RSL for drinking water (0.46 µg/L) during six of the ten sampling events from fourth quarter 2013 through 2018. The 1,4-dioxane concentrations are likely associated with debris buried at the TBG. 1,4-Dioxane was detected at TNX 13D during the 2Q2018. This is the first detection at TNX 13D since the initial sampling in 2013.

The analytical method (i.e., EPA 8260BSIM) used to determine the 1,4-dioxane concentrations cannot achieve detection limits less than the RSL for drinking water (0.46 µg/L). This prevents SRS from comparing 1,4-dioxane concentrations at to the regional screening level. In 2019, SRS acquired a laboratory that can analyze for 1,4-dioxane results using analytical method EPA 522. This method can achieve detection limits that are less than the RSL. For future sampling events, both EPA 522 and EPA 8260BSIM will be used to analyze 1,4-dioxane in all wells, and the results reported in the 2019 annual report and subsequent annual reports.

7.0 SYSTEM PERFORMANCE

7.1 Soil Vapor Extraction (SVE) Operations

During 2018, the MicroBlowers™ were connected to TVM 1V, TVM 3V, TVM 4U, TVX 4U, and TVX 7U.

Table 7-1 provides details of construction, history, and duration each SVE well has been connected to a MicroBlower™. Vapor concentrations, flow rates, and the estimated time of operation for each SVE well are presented in Table 7-2. The data presented in Table 7-2 was used to determine the contaminant mass removed by each MicroBlower™. The contaminant mass removed at the MicroBlower™ is determined using vapor concentrations and the volume of air (ft^3) that passes through the MicroBlower™. The vapor concentration is multiplied by the volume of air that passes through the MicroBlower™ during a given month. Unit conversions are integrated into these calculations. The product provides the total mass removed from the MicroBlower™ for a given month. The MicroBlowers™ are sampled quarterly, so vapor concentrations and flow rates are assumed to be constant during the quarter. Table 7-3 summarizes the total VOCs removal per month, during 2018.

In 2018, approximately 0.34 kg (0.74 lb) of VOCs (i.e., 0.21 kg [0.47 lb] of TCE, 0.12 kg [0.27 lb] of PCE, and 0.001 kg [0.0022 lb] of CCl_4) were removed from the TNX vadose zone.

7.2 Edible Oil Injections

EO treatment was selected as the remedial action for the remaining TCE groundwater plume in 2013. EO amendments were injected into the aquifer during 2008, 2010, and 2015. After 2008 injections, aquifer conditions within the treatment area were changed to a reductive environment capable of degrading TCE and its daughter products. The 2010 and 2015 injections added additional EO expanding the treatment area or replenishing the original treatment area. TCE concentrations in the treatment area have continued to decrease and are currently less than the MCL (5 µg/L). The reduced TCE concentrations in the source area have also corresponded to decreasing TCE concentrations at most of the

wetland wells. Some wetland wells (i.e., TCM 5, TIR 1U, and TNX 28D) have experienced elevated TCE concentrations which may indicate the TCE groundwater plume has been redistributed with the most recent 2015 EO injections. To assess the effectiveness of the EO injections, the change in mass of the TCE groundwater plume was quantified and plotted with time from 2007 to 2018 (Figure A-31). Figure A-31 shows the exponential decline of the estimated VOC mass with time. The estimated annual mass of TCE in the plume is usually calculated based on the area of the TCE plume during the fourth quarter for a given year, the average concentration of the plume during that year, assuming a plume thickness of 20 ft, and a porosity of 0.3. The following equation was used to calculate the mass of TCE in the plume for each year between 2007 and 2018;

Average TCE Concentration x Plume Volume x Porosity = TCE Mass

Table 7-4 provides all of the values used in the mass calculations. From 2007 to 2018 it is estimated that the mass of TCE in the plume has been reduced by 100%. In the 4Q2018, there were no monitoring wells with TCE concentrations that exceeded the MCL and therefore no TCE plume depicted on Figure A-15. The mass of the TCE plume in 2018 was assumed to be zero. It should be noted that during the 2Q2018 TCE concentrations exceeded the MCL at four monitoring wells. As discussed in section 6.3, reduction in the TCE source and changes in water elevation may have influenced TCE concentrations in the wetland monitoring wells, reducing TCE concentrations. With TCE concentrations being less than the MCL for only one sampling event, SRS will defer to future sampling events for confirmation that TCE concentrations are less than the MCL and further evaluation of the cause of the low TCE concentrations.

Table 7–1. Well Construction and Operation for TNX SVE Wells

STATION ID	Date Installed	Ground Elevation (ft msl)	Total Depth (ft)	Screen Length (ft)	MicroBlower™ Operation (yr)
TVM 1U	10/6/1995	157.7	51.8	10	2011, 2013, 2014, 2015, 2016, 2017
TVM 1V	10/18/1995	157.3	63	2	2009, 2010, 2018
TVM 2L*	10/17/1995	159.5	91.5	1	2013, 2014
TVM 2U	10/17/1995	159.5	60.7	10	2011, 2015, 2016, 2017
TVM 2V	10/19/1995	159.4	46.8	2	
TVM 3U	10/13/1995	158.9	67.6	10	2009, 2010, 2011, 2012
TVM 3V	10/20/1995	159	46	2	2009, 2010, 2018
TVM 4L*	11/22/1995	158.9	92.4	2	2010
TVM 4U	11/22/1995	158.9	63.4	10	2009, 2011, 2015, 2016, 2017, 2018
TVM 4V	11/22/1995	158.9	46.9	1	2011, 2013, 2014, 2015, 2016, 2017
TVX 1L	7/2/2002	153.2	58.4	15	2009, 2012
TVX002 L	6/27/2002	156.6	67.4	20	2011
TVX002 U	6/27/2002	156.5	42.5	10	2013, 2014
TVX003 L	7/3/2002	154.1	59.3	15	2012
TVX004 L	7/8/2002	153	56	12	2010, 2011
TVX004 U	7/8/2002	153.1	42.1	15	2009, 2010, 2018
TVX005 L	7/9/2002	155.2	57.5	10	2013, 2014
TVX005 U	7/9/2002	155.2	48.4	15	2010, 2011
TVX006 L	7/2/2002	155.2	68.3	15	2011, 2012, 2015, 2016, 2017
TVX006 U	6/27/2002	155.2	58.4	15	
TVX007 L	6/27/2002	159	64.1	15	2009, 2010
TVX007 U	6/27/2002	158.9	44.6	10	2009, 2010, 2012, 2018

* TVM 2L and TVM 4L are screened in the saturated zone and are no longer used as viable SVE wells.

This page intentionally left blank.

Table 7–2. Monthly SVE Well VOC Mass Removal (2018)

TVM-1V	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Total	Average
Operating Time (hours)	312	336	372	312	372	360	372	372	360	372	360	372	4272	356
Downtime (hours)	432	336	372	408	372	360	372	372	360	372	360	372	4488	374
Total Solvent Removed (lbs)	0.0052	0.0056	0.0061	0.0018	0.0021	0.0021	0.0000	0.0000	0.0000	0.0136	0.0132	0.0136	0.0633	0.005276
Average Vapor Flow Rate (scfm)	4.5	4.5	4.5	9.7	9.7	9.7	8.2	8.2	8.2	8.2	8.2	8.2	NA	7.65
Average Concentration Influent (ppmv)	0.168	0.168	0.168	0.031	0.031	0.031	ND	ND	ND	0.1823	0.1823	0.1823	NA	0.095325

TVM-3V	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Total	Average
Operating Time (hours)	312	216	324	360	372	348	360	372	360	372	360	372	4128	344
Downtime (hours)	432	456	420	360	372	372	384	372	360	372	360	372	4632	386
Total Solvent Removed (lbs)	0.0066	0.0046	0.0069	0.0052	0.0054	0.0051	0.0000	0.0000	0.0000	0.0504	0.0488	0.0504	0.1835	0.015288
Average Vapor Flow Rate (scfm)	18.3	18.3	18.3	34.5	34.5	34.5	34.5	34.5	34.5	34.5	34.5	34.5	NA	30.45
Average Concentration Influent (ppmv)	0.057	0.057	0.057	0.021	0.021	0.021	ND	ND	ND	0.1736	0.1736	0.1736	NA	0.0629

TVM-4U	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Total	Average
Operating Time (hours)	312	336	372	360	372	360	372	372	312	372	360	372	4272	356
Downtime (hours)	432	336	372	360	372	360	372	372	408	372	360	372	4488	374
Total Solvent Removed (lbs)	0.0258	0.0278	0.0308	0.0332	0.0343	0.0332	0.0191	0.0191	0.0160	0.0354	0.0343	0.0354	0.3445	0.028704
Average Vapor Flow Rate (scfm)	17	17	17	25.3	25.3	25.3	15.4	15.4	15.4	15.4	15.4	15.4	NA	18.275
Average Concentration Influent (ppmv)	0.24	0.24	0.24	0.185	0.185	0.185	0.1656	0.1656	0.1656	0.296	0.296	0.296	NA	0.22165

TVX-4U	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Total	Average
Operating Time (hours)	312	336	360	360	372	360	372	372	360	372	360	372	4308	359
Downtime (hours)	432	336	384	360	372	360	372	372	360	372	360	372	4452	371
Total Solvent Removed (lbs)	0.0025	0.0026	0.0028	0.0021	0.0022	0.0021	0.0000	0.0000	0.0000	0.0058	0.0056	0.0058	0.0316	0.002636
Average Vapor Flow Rate (scfm)	5.4	5.4	5.4	5.4	5.4	5.4	5.4	5.4	5.4	5.4	5.4	5.4	NA	5.4
Average Concentration Influent (ppmv)	0.056	0.056	0.056	0.054	0.054	0.054	ND	ND	ND	0.1244	0.1244	0.1244	NA	0.0586

Table 7–3. Monthly SVE Well VOC Mass Removal (2018, continued)

TVX-7U	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Total	Average
Operating Time (hours)	252	336	372	360	372	360	372	372	360	372	360	372	4260	355
Downtime (hours)	492	336	372	360	372	360	372	372	360	0	360	372	4128	344
Total Solvent Removed (lbs)	0.0087	0.0116	0.0128	0.0165	0.0170	0.0165	0.0069	0.0069	0.0067	0.0043	0.0041	0.0043	0.1161	0.009679
Average Vapor Flow Rate (scfm)	9.5	9.5	9.5	16.1	16.1	16.1	11.7	11.7	11.7	11.7	11.7	11.7	NA	12.25
Average Concentration Influent (ppmv)	0.166	0.166	0.166	0.132	0.132	0.132	0.0708	0.0708	0.0708	0.0487	0.0487	0.0487	NA	0.104375

Table 7–4. VOC Mass Removed by SVE (2018)

Month	TCE (lbs)	PCE (lbs)	CC14 (lbs)
January	0.0319	0.0165	0.0003
February	0.0327	0.0191	0.0003
March	0.0378	0.0212	0.0004
April	0.0417	0.0167	0.0004
May	0.0434	0.0173	0.0004
June	0.0418	0.0168	0.0004
July	0.0225	0.0034	0.0000
August	0.0225	0.0034	0.0000
September	0.0193	0.0033	0.0000
October	0.0599	0.0497	0.0000
November	0.0579	0.0481	0.0000
December	0.0599	0.0497	0.0000
Average Monthly Removed in 2018	0.0393	0.0221	0.0002
Totals	0.4713	0.2654	0.0022

Table 7–5. Estimated TCE Plume Mass

Year	Plume Area (ft^2)	Aquifer thickness (ft)	Plume Volume (ft^3)	Average concentration of >5ppb TCE Plume (ug/L)	Number of wells used in the average	Porosity	TCE Mass (kg)
2007	441,695	20	8,833,899	71.15	13	0.3	5.34
2008	326,697	20	6,533,949	37.20	9	0.3	2.06
2009	318,857	20	6,377,134	46.75	11	0.3	2.53
2010	292,721	20	5,854,418	14.08	9	0.3	0.70
2011	277,039	20	5,540,789	27.78	8	0.3	1.31
2012	301,433	20	6,028,657	22.15	11	0.3	1.13
2013	226,946	20	4,538,917	34.08	7	0.3	1.31
2014	309,274	20	6,185,472	12.92	9	0.3	0.68
2015	155,508	20	3,110,160	13.20	4	0.3	0.35
2016	141,569	20	2,831,378	12.07	2	0.3	0.29
2017	192,098	20	3,841,962	13.8	3	0.3	0.45
2018	0	20	0	1.47***	13	0.3	0

***Fourth quarter data was utilized when determining the plume area and average TCE concentrations.**
****Unit conversions used in the TCE mass calculation: 28.32 L/ft^3; 1x10^9 µg/kg**
*****This average was created using all detect and estimated (J) TCE concentrations, since all TCE results were < 5 µg/L**

8.0 SUMMARY/RECOMMENDATIONS

8.1 Summary

The TNX Area OU monitoring well network is sampled semi-annually and consists of 42 monitoring wells. Constituents exceeding MCLs during 2018 include gross alpha, TCE, and uranium.

Monitoring data indicate that EO injection fluids were placed into the aquifer successfully, trichloroethylene concentrations are less than the MCL at all wells in the treatment area, and reductive conditions are present in the EO treatment area. Reduced TCE concentrations were already established at injection wells used during the 2008 and 2010 injections (TBG 4, TBG 5, TNX 3D, and TRW 4R) and continued after the 2015 injections. TCE concentrations were less than the MCL at all the 2015 injection wells (i.e., TBG 3, TRW 3, and TVM 1M). Evidence of reductive conditions is present at all the wells in the EO treatment area. The TCE plume and source has been significantly reduced in the treatment area in response to the injection of edible oil. TCE concentrations exceeding the MCL are located at monitoring wells (i.e., TCM 5, TIR 1U, TNX 28D, and TRW 2) downgradient of the EO treatment area. These four wells only exceeded the MCL for TCE during the 2Q2018. All TCE concentrations were less than the MCL during the 4Q2018. The remedial actions (i.e., EO and SVE) continue to provide effective treatment and source reduction of the groundwater at TNX Area OU. Future sampling events will be used to determine the longevity of the low TCE concentrations.

There does not appear to a discernible and consistent groundwater plume with respect to gross alpha and uranium at TNX. Gross alpha and uranium detections exceeding the MCL are associated with some monitoring wells near the TBG (i.e., TBG 4) and in the wetland (i.e., TCM 5).

There does not appear to be a discernible and consistent groundwater plume with respect to 1,4-dioxane at TNX. The detections of 1,4-dioxane appear to be localized to TBG 5 with only sporadic detections at the other monitoring wells.

8.2 Recommendations

SRS recommends continued monitoring of the existing well network with the current sampling and analysis schedule (Table 4-2).

The new monitoring well XSB006R was installed downgradient of the OTSB in April 2019. XSB006R will be added to the 2019 sampling schedule and the data will be reported in the 2019 annual report and subsequent annual reports.

Analytical method EPA 522 will be added for the low-level detection of 1,4-dioxane at all monitoring wells. This new method will be used to analyze 1,4-dioxane in addition to the SCDHEC certified method EPA 8260BSIM. Results using method EPA 522 and method EPA 8260BSIM will be reported in the 2019 annual report and subsequent annual reports.

SCDHEC recommended adding a new monitoring well between TNX 28D and the TNX 72 well cluster, based on the recent history of TCE concentrations exceeding the MCL at TNX 28D since the fourth quarter 2016. This recommendation was provided to SRS as a comment on the 2017 Annual Comprehensive TNX Area Groundwater Monitoring and Remedial Action Effectiveness Interim Report (U). SRS's response to this comment suggested evaluating the TCE concentrations at TNX 28D for three consecutive years before deciding on installing a new monitoring well. After three consecutive years (i.e., 2019), SRS would initiate a meeting with the USDOE, USEPA, and SCDHEC to discuss the possible installation of a new monitoring well.

9.0 REFERENCES

DOE, 2013. Letter, Brian T. Hennessey (DOE) to Van Keisler (SCDHEC) and Robert H. Pope (EPA), Submittal of the 2012 Comprehensive TNX Area Annual Groundwater and Effectiveness Monitoring Strategy Report (SRNS-RP-2013-00286, Revision 0, June 2013) and Savannah River Site Responses to the U. S. Environmental Protection Agency's Request for Additional Data (EPA Letter Dated February 27, 2013), CERCLIS Numbers: 21, 29, ACP-13-179, dated June 26, 2013, United States Department of Energy, Savannah River Operations Office, Aiken, SC

SRNL, 2012. *Treatability Study for Edible Oil Deployment for Enhanced cVOC Attenuation for T-Area, Savannah River Site*, SRNL-STI-2012-00290, May 2012, Savannah River Nuclear Solutions, LLC, Savannah River Site, Aiken, SC

SRNS, 2009. *2008 Comprehensive TNX Area Annual Groundwater and Effectiveness Monitoring Strategy Report*, SRNS-RP-2009-00593, June 2009, Savannah River Nuclear Solutions, LLC, Savannah River Site, Aiken, SC

SRNS, 2012a. *Second Explanation of Significant Differences (ESD) for the Revision 1 TNX Area Operable Unit Record of Decision (U)*, SRNS-RP-2012-00205, February 2013, Savannah River Nuclear Solutions, LLC, Savannah River Site, Aiken, SC

SRNS, 2012b. *Fourth Five-Year Remedy Review Report for the Savannah River Site*, SRNS-RP-2012-00011, Revision 1 (Redline), August 2013, Savannah River Nuclear Solutions, LLC, Savannah River Site, Aiken, SC

SRNS 2015a. Underground Injection Control Permit Application for the Continued Edible Oil Deployment for Enhanced CVOC Attenuation at the SRS TNX Operable Unit (U), SRNS-RP-2015-00180, Revision 0, June 2015, Savannah River Nuclear Solutions, LLC, Savannah River Site, Aiken, SC

SRNS 2015b. *Second Corrective Measures Implementation/Remedial Action Implementation Plan (CMI/RAIP) for the TNX Area Operable Unit (U)*, SRNS-RP-2015-

00266, Revision 0, June 2015, CERCLIS Number 21, 29, Savannah River Nuclear Solutions, LLC, Savannah River Site, Aiken, SC

USEPA (U.S. Environmental Protection Agency, Office of Water), 2001. National Primary Drinking Water Regulations – EPA's Drinking Water Standards; http://www.epa.gov/safewater/mcl.html. This web page was updated Thursday, May 31, 2001. For copies of the complete regulations regarding these contaminants, follow the links to the National Primary Drinking Water Regulations

WSRC, 1994. *Interim Action Record of Decision, Remedial Alternative Selection - TNX Area Groundwater Operable Unit (U)*, WSRC-TR-94-0375, Rev. 1, October 1994, Westinghouse Savannah River Company, Savannah River Site, Aiken, SC

WSRC, 1997a. *Post-Construction Report for the TNX Groundwater Operable Unit Interim Remedial Action (U)*, WSRC-RP-96-0826, Rev. 1, January 1997, Westinghouse Savannah River Company, Savannah River Site, Aiken, SC

WSRC, 1997b. *Explanation of Significant Differences for the TNX Area Groundwater Operable Unit (U)*, WSRC-RP-97-169, Rev. 1, September 1997, Westinghouse Savannah River Company, Savannah River Site, Aiken, SC

WSRC, 1997c. *Addendum to the TNX Shallow Groundwater Characterization Report (U)*, WSRC-TR-97-0337, Rev. 0, October 1997, Westinghouse Savannah River Company, Savannah River Site, Aiken, SC

WSRC, 1997d. *TNX Area Soil Vapor Extraction Test Treatability Study Report (U)*, WSRC-TR-97-336, Rev. 0, October 1997, Westinghouse Savannah River Company, Savannah River Site, Aiken, SC

WSRC, 1998. *TNX Geosiphon Cell (TGSC-1) Phase I Treatability Study Report*, WSRC-TR-98-00048, Rev. 0, February 1998, Westinghouse Savannah River Company, Savannah River Site, Aiken, SC

WSRC, 1999a. TNX Groundwater Operable Unit Remedial Design Report/Remedial Action Work Plan (U), Addendum: TNX Effectiveness Monitoring Strategy, WSRC-TR-95-0284, Rev. 1.5, May 1999, Westinghouse Savannah River Company, Savannah River Site, Aiken, SC

WSRC, 1999b. *TNX Area Phase II Soil Vapor Extraction Test Treatability Study Report*, WSRC-TR-99-00051, Rev. 0, Westinghouse Savannah River Company, Savannah River Site, Aiken, SC

WSRC, 2000. *Fate & Transport Modeling in Support of TNX Operable Unit Groundwater Remediation Alternatives (U)*, WSRC-TR-99-00186, Rev. 0, September 2000, Westinghouse Savannah River Company, Savannah River Site, Aiken, SC

WSRC, 2001. Explanation of Significant Differences (ESD) to the Revision 1 Interim Record of Decision (IROD) for the TNX Area Operable Unit Groundwater (U), WSRC-RP-2001-00764, Rev. 0, October 2001, Westinghouse Savannah River Company, Savannah River Site, Aiken, SC

WSRC, 2003a. *Record of Decision Remedial Alternative Selection for the TNX Area Operable Unit (U)*, WSRC-RP-2003-4017, Rev. 1, August 2003, Westinghouse Savannah River Company, Savannah River Site, Aiken, SC.

WSRC, 2004a. *2003 Comprehensive TNX Area Annual Groundwater and Effectiveness Monitoring Strategy Report (U)*, WSRC-RP-2004-00335, June 2004, Westinghouse Savannah River Company, Savannah River Site, Aiken, SC

WSRC, 2004b. *Recommended SVE System for the TNX Operable Unit (U)*, WSRC-TR-2004-00452, Rev. 0, August 2004, Westinghouse Savannah River Company, Savannah River Site, Aiken, SC.

WSRC 2004c. Removal Site Evaluation Report/Engineering Evaluation and Cost Analysis for the TNX Outfall Delta, Lower Discharge Gully, and Swamp Operable Unit (U),

WSRC-RP-2004-4055, Revision 1, August 2004, Westinghouse Savannah River Company, Savannah River Site, Aiken, SC

WSRC, 2005a. *Record of Decision Remedial Alternative Selection for the T-Area Operable Unit*, WSRC-RP-2004-4070, Rev. 1., September 2005, Westinghouse Savannah River Company, Savannah River Site, Aiken, SC

WSRC, 2005b. *Post-Construction Report (PCR) for the TNX Area Operable Unit (U)*, WSRC-RP-2005-4007, Rev. 1, April 2007, Washington Savannah River Company, LLC, Savannah River Site, Aiken, SC

WSRC, 2005c. *The Explanation of Significant Differences to the Record of Decision for the TNX Area Operable Unit*, WSRC-RP-2005-4030, Revision 1, June 2005, Washington Savannah River Company, LLC, Savannah River Site, Aiken, SC

WSRC, 2006. *Post-Construction Report (PCR) for T Area Operable Unit (TAOU) (U)*, WSRC-RP-2006-4005, Rev 1, November 2006, Washington Savannah River Company, LLC, Savannah River Site, Aiken, SC

APPENDIX A

FIGURES

This page intentionally left blank.

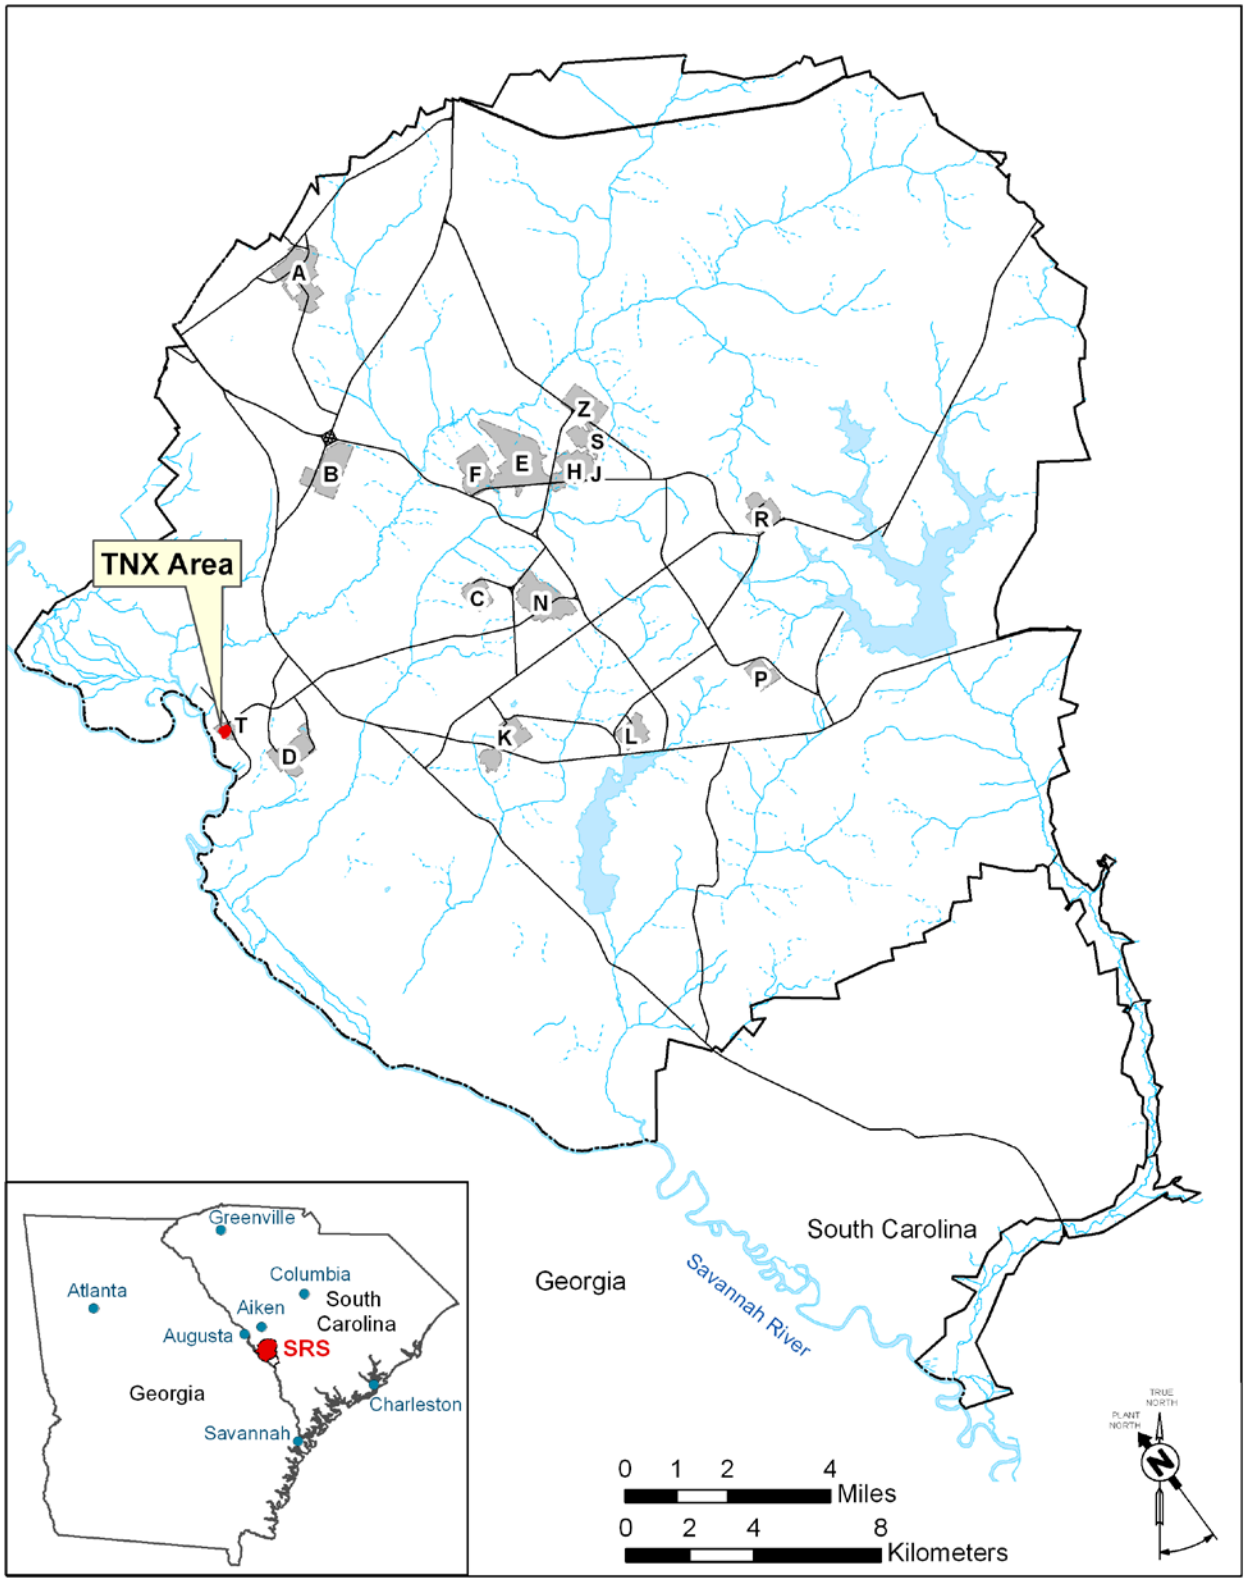

Figure A-1. Location of the TNX Area at the Savannah River

This page intentionally left blank.

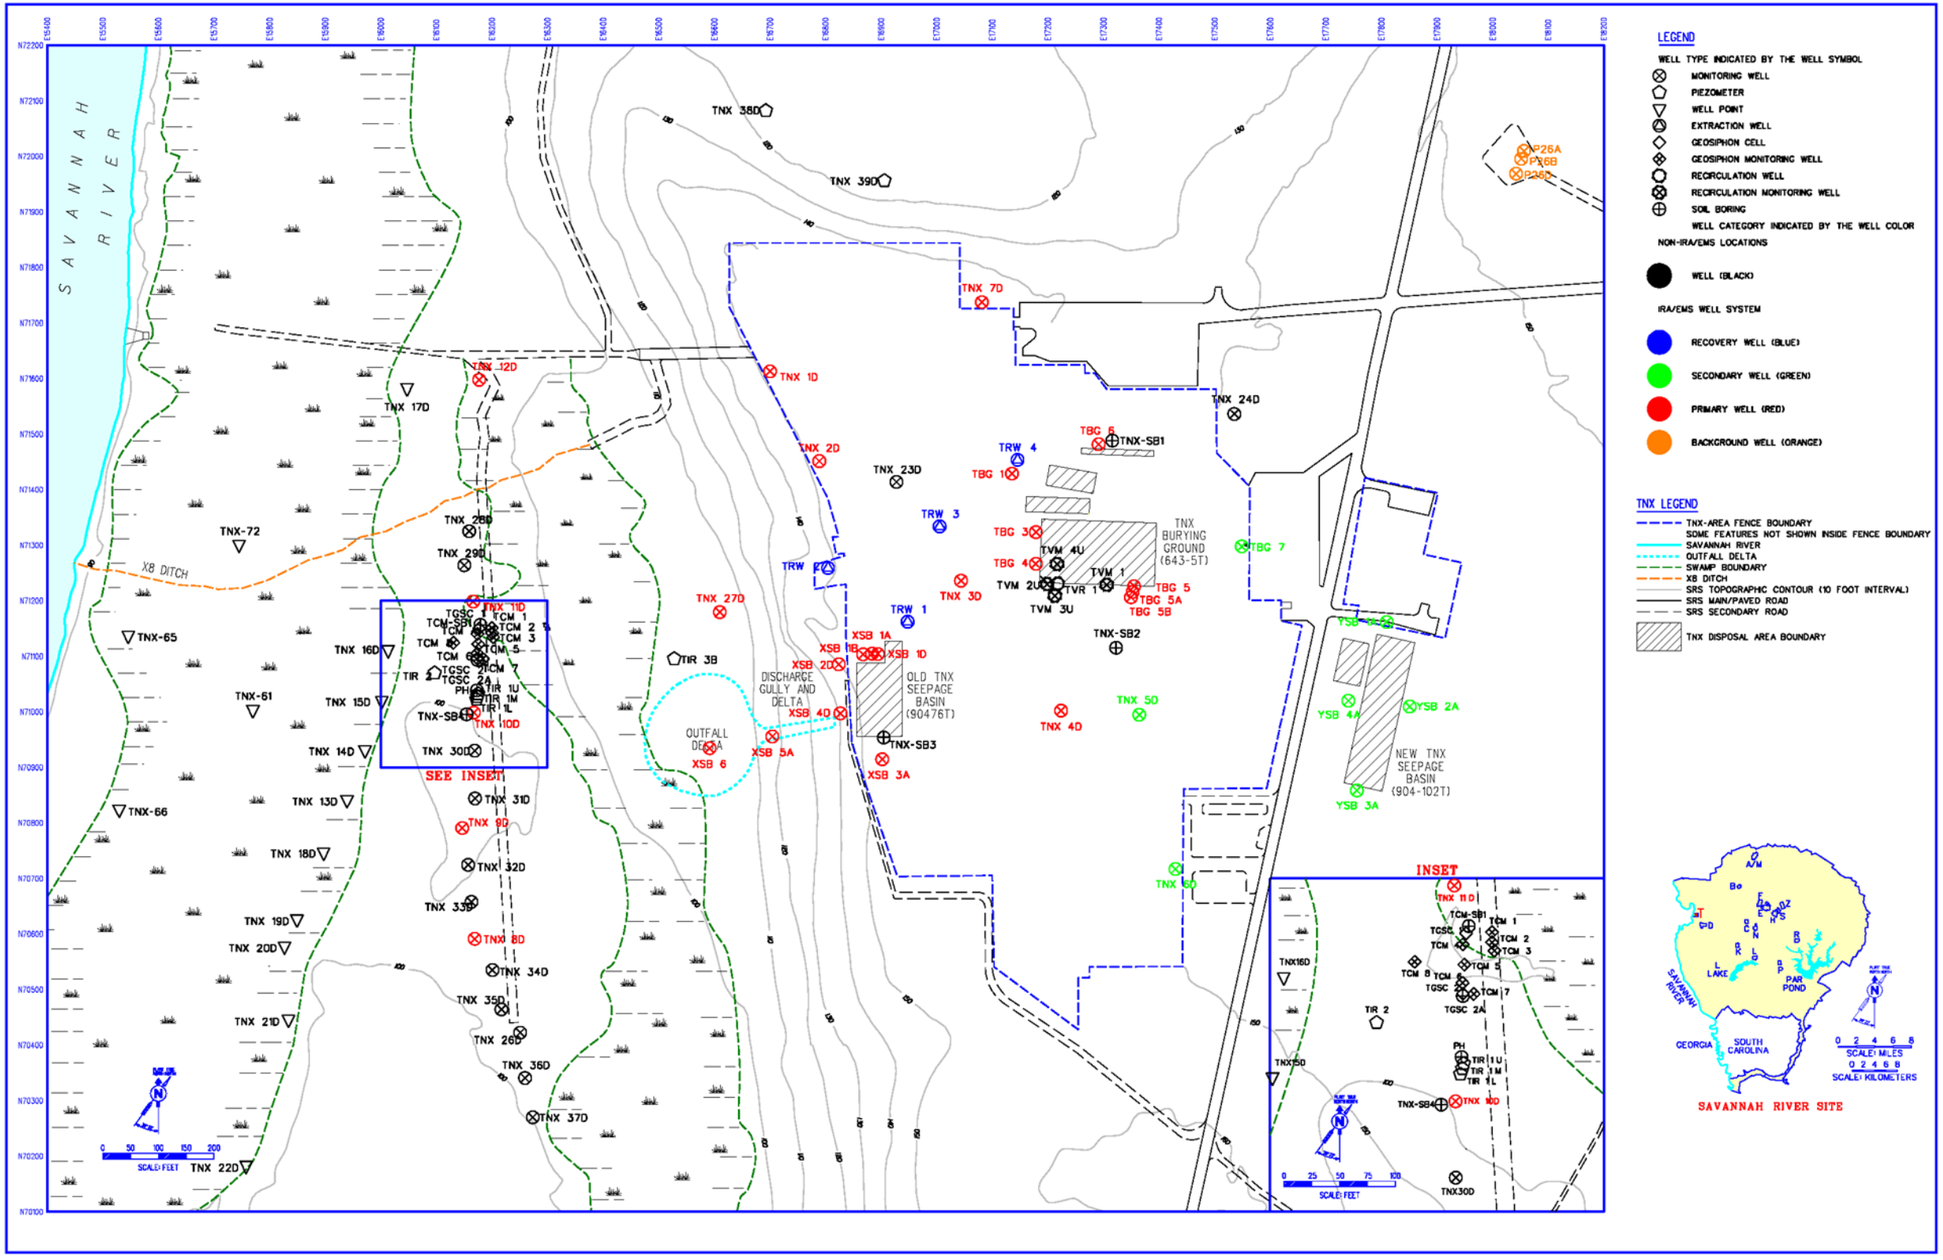

Figure A-2. Location of TNX Area Interim Remedial Action / Effectiveness Monitoring Strategy Well System during Startup and Initial Operations

This page intentionally left blank.

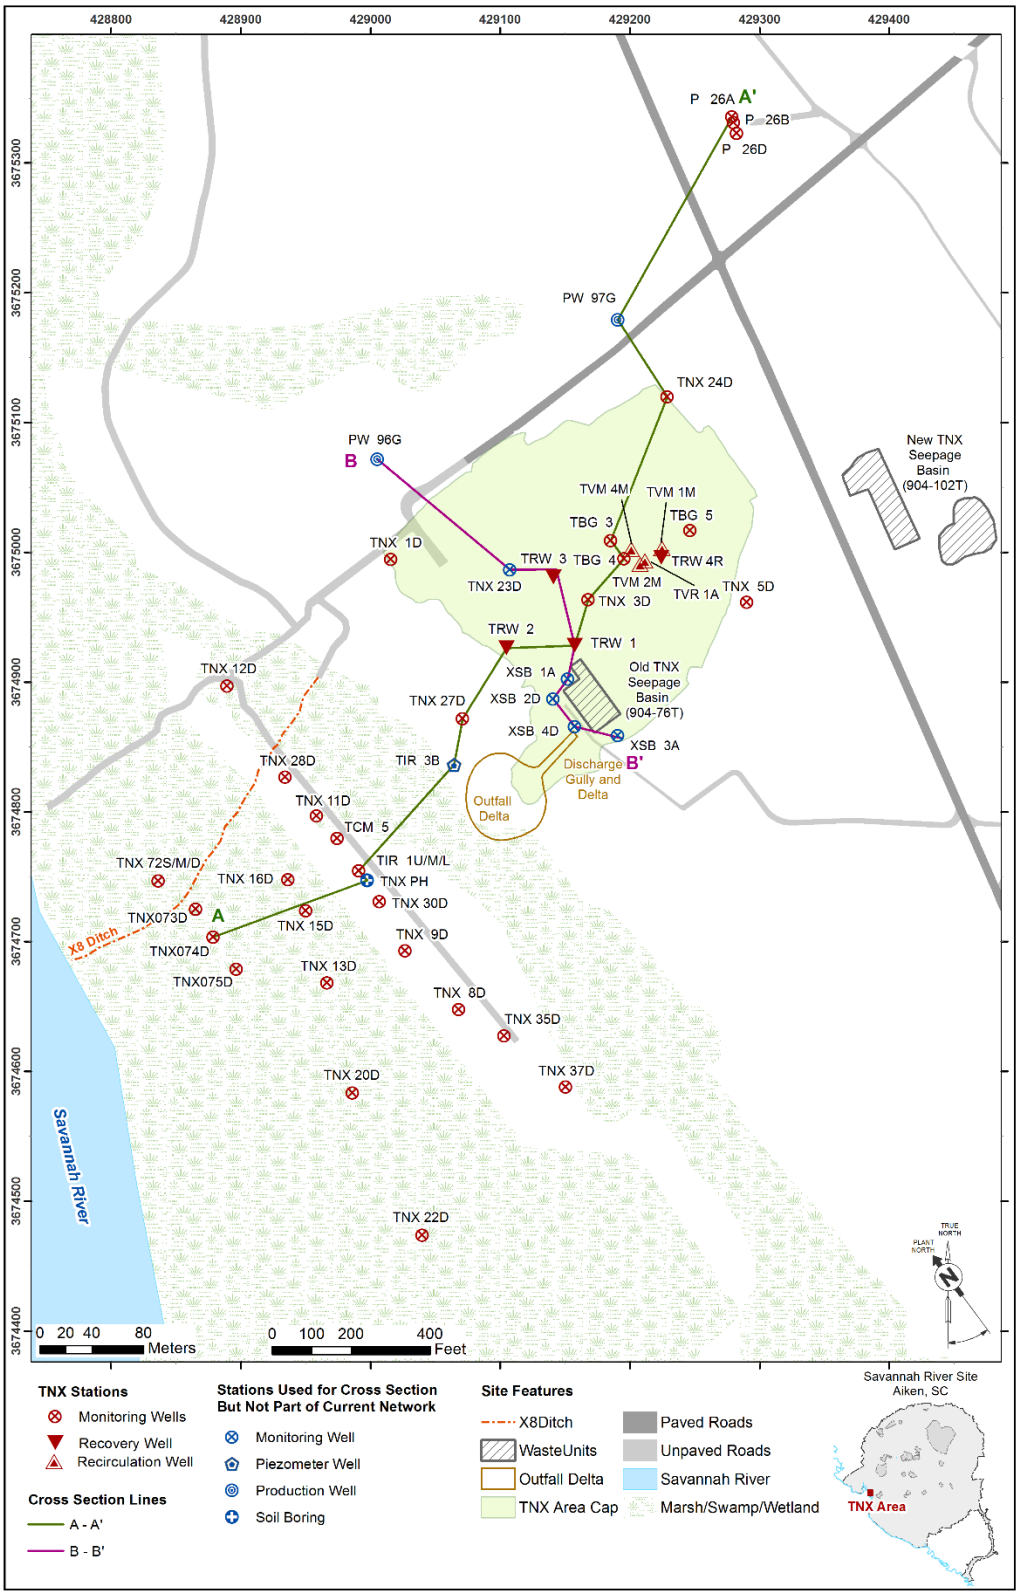

Figure A-3. TNX Area Cross Section Location Plan

This page intentionally left blank.

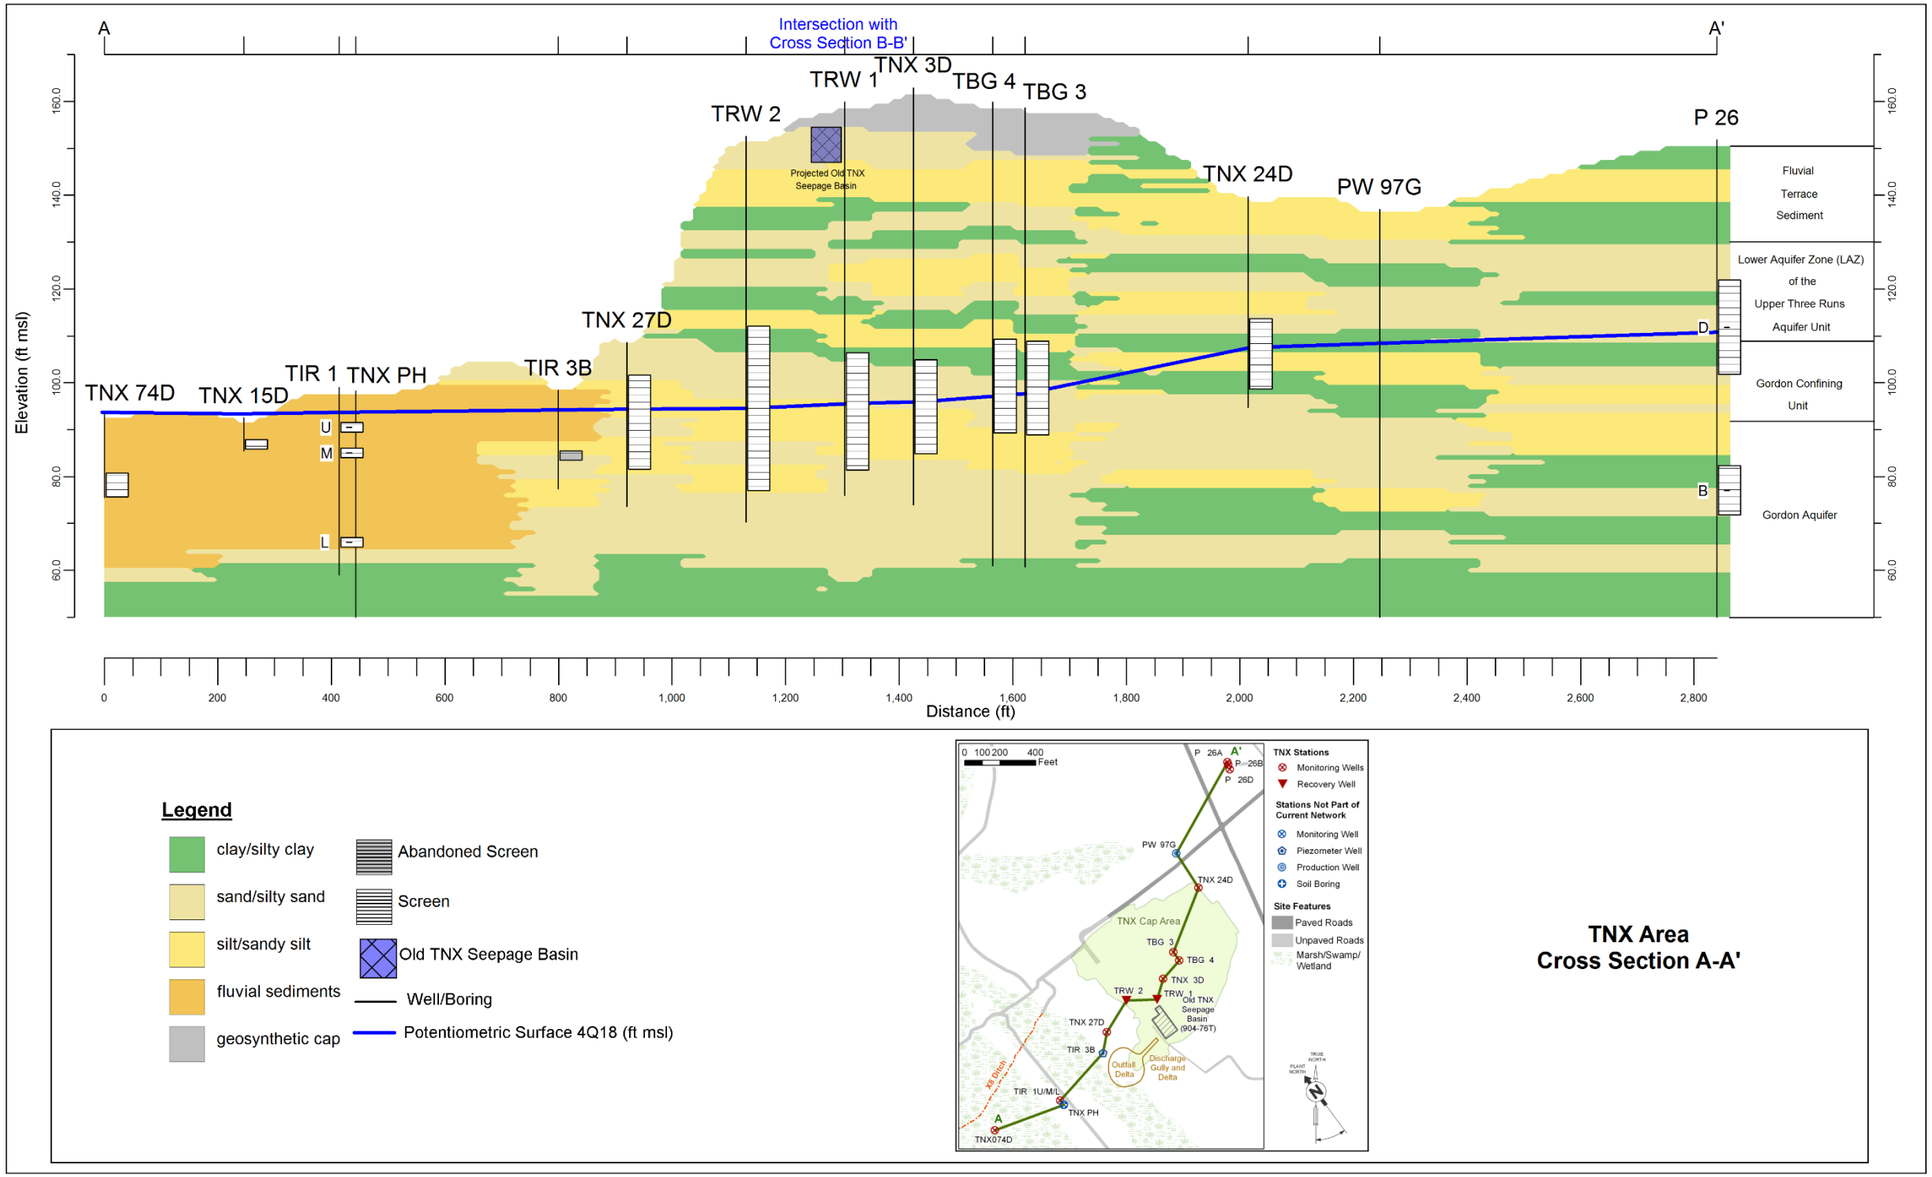

Figure A-4. TNX Area Cross Section A-A'

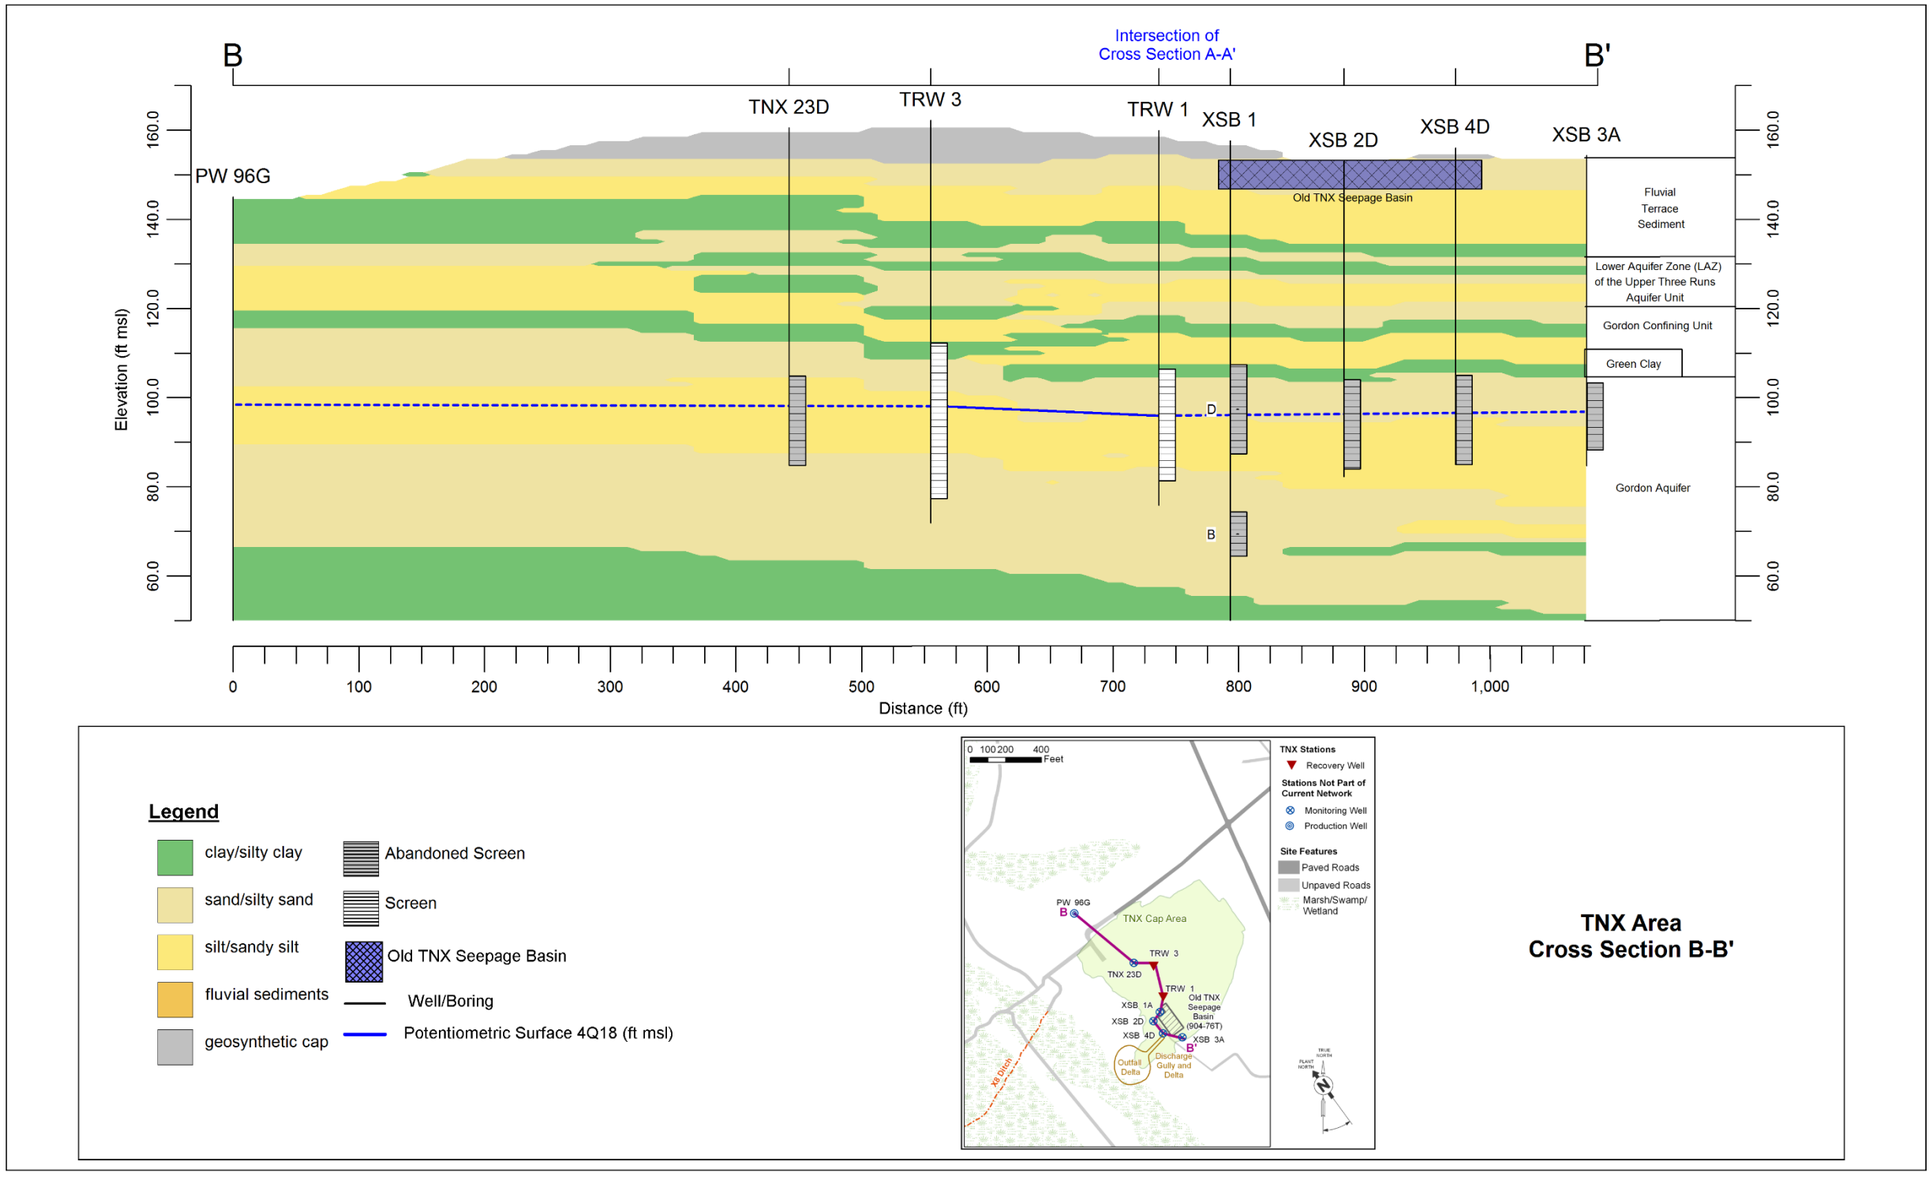

Figure A-5. TNX Area Cross Section B-B'

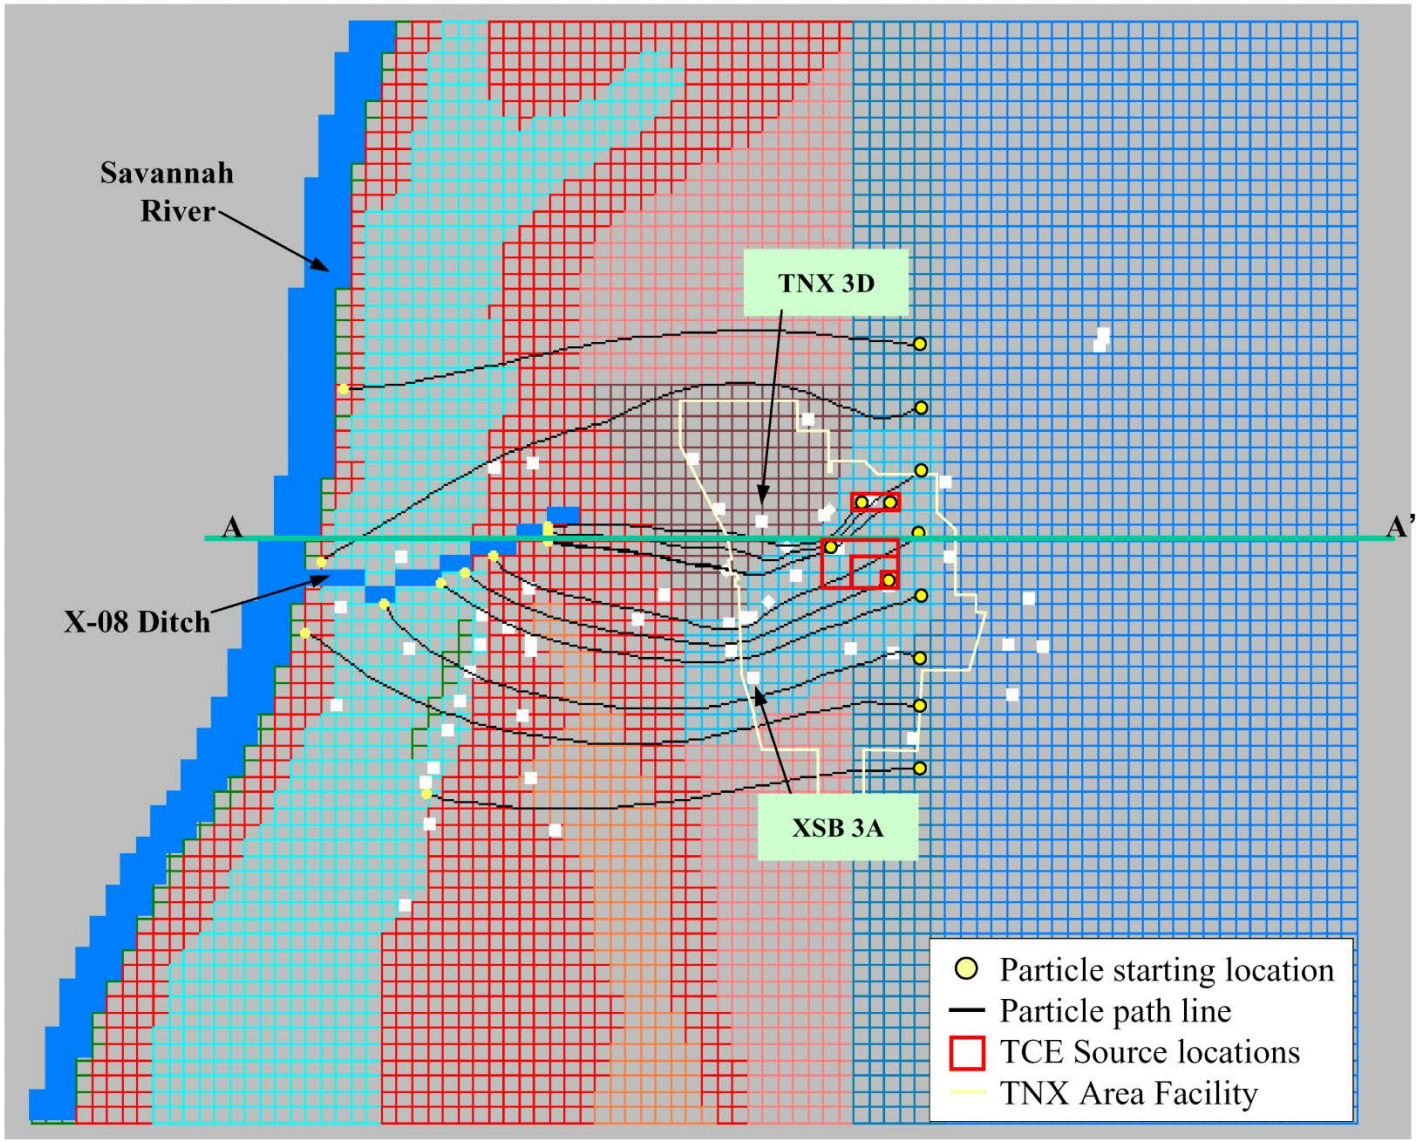

Figure A-6. Plan View of the TNX Area OU Showing Particle Starting Locations and Path Lines Towards the X-008 Ditch and the Savannah River

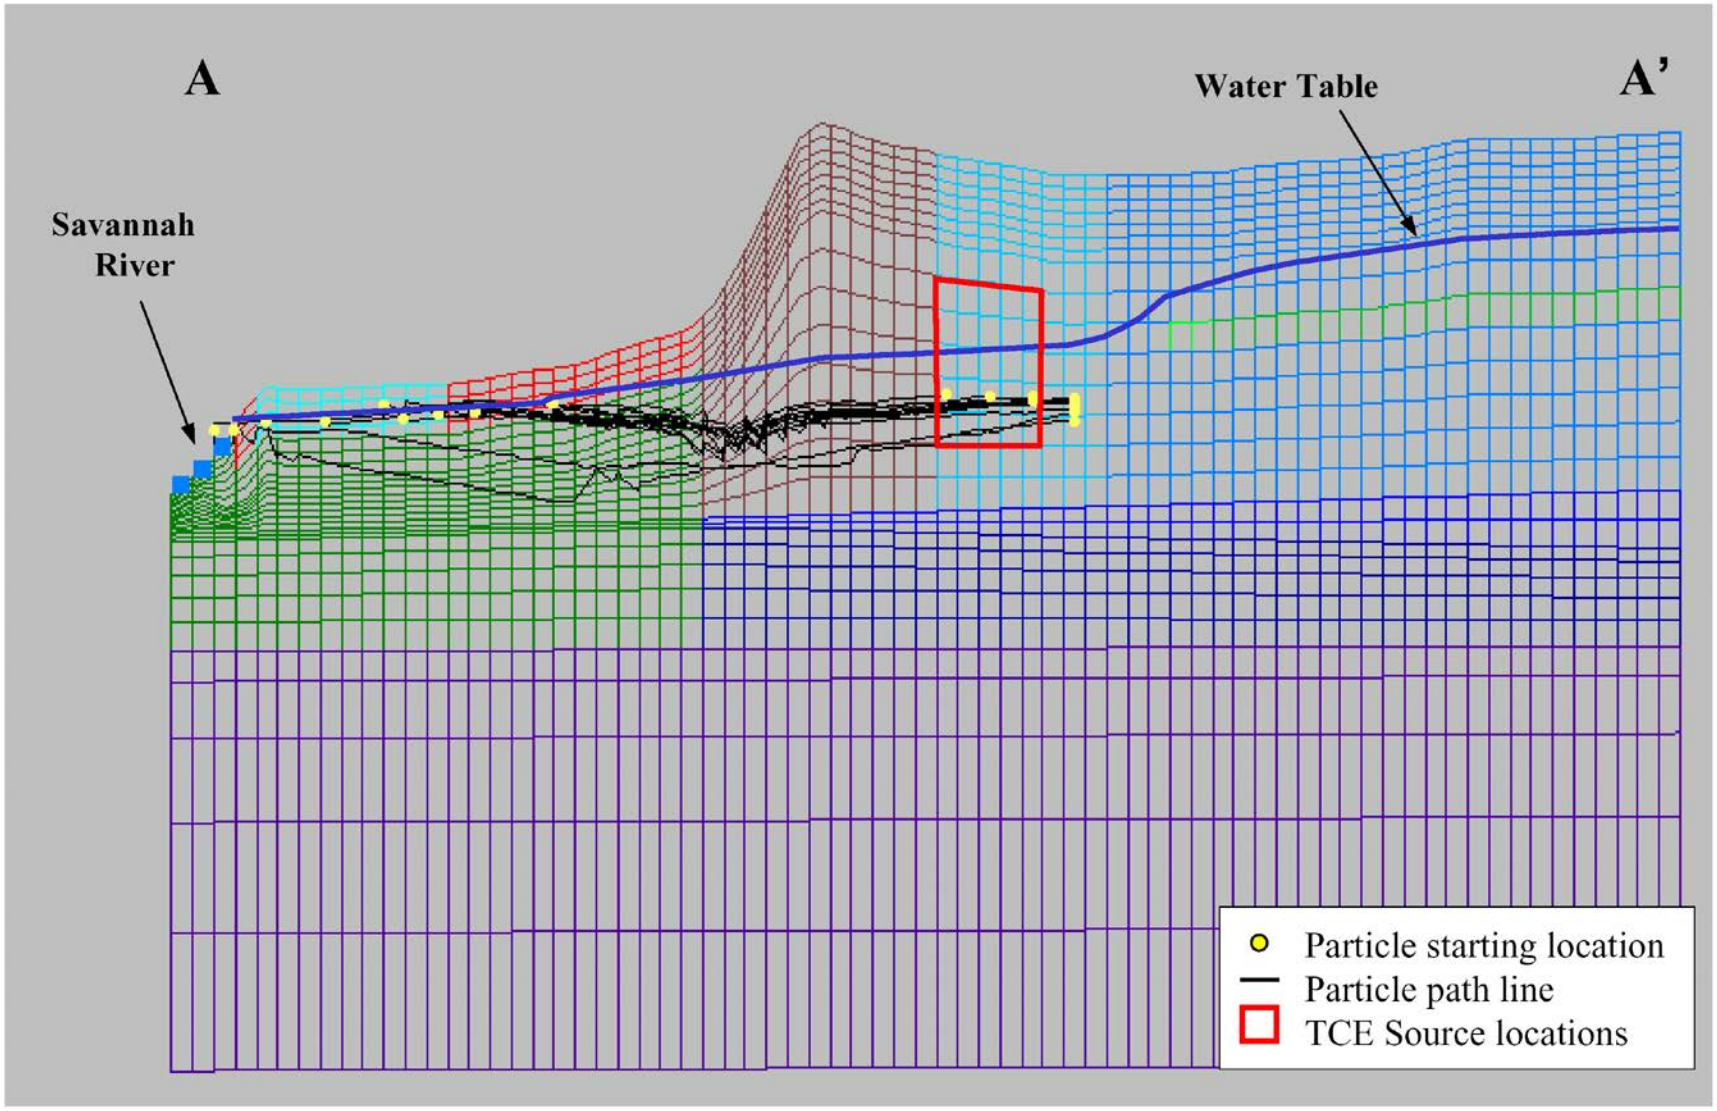

Figure A-7. Cross-sectional View along Section A-A' Showing the Vertical Locations and Particle Path Lines

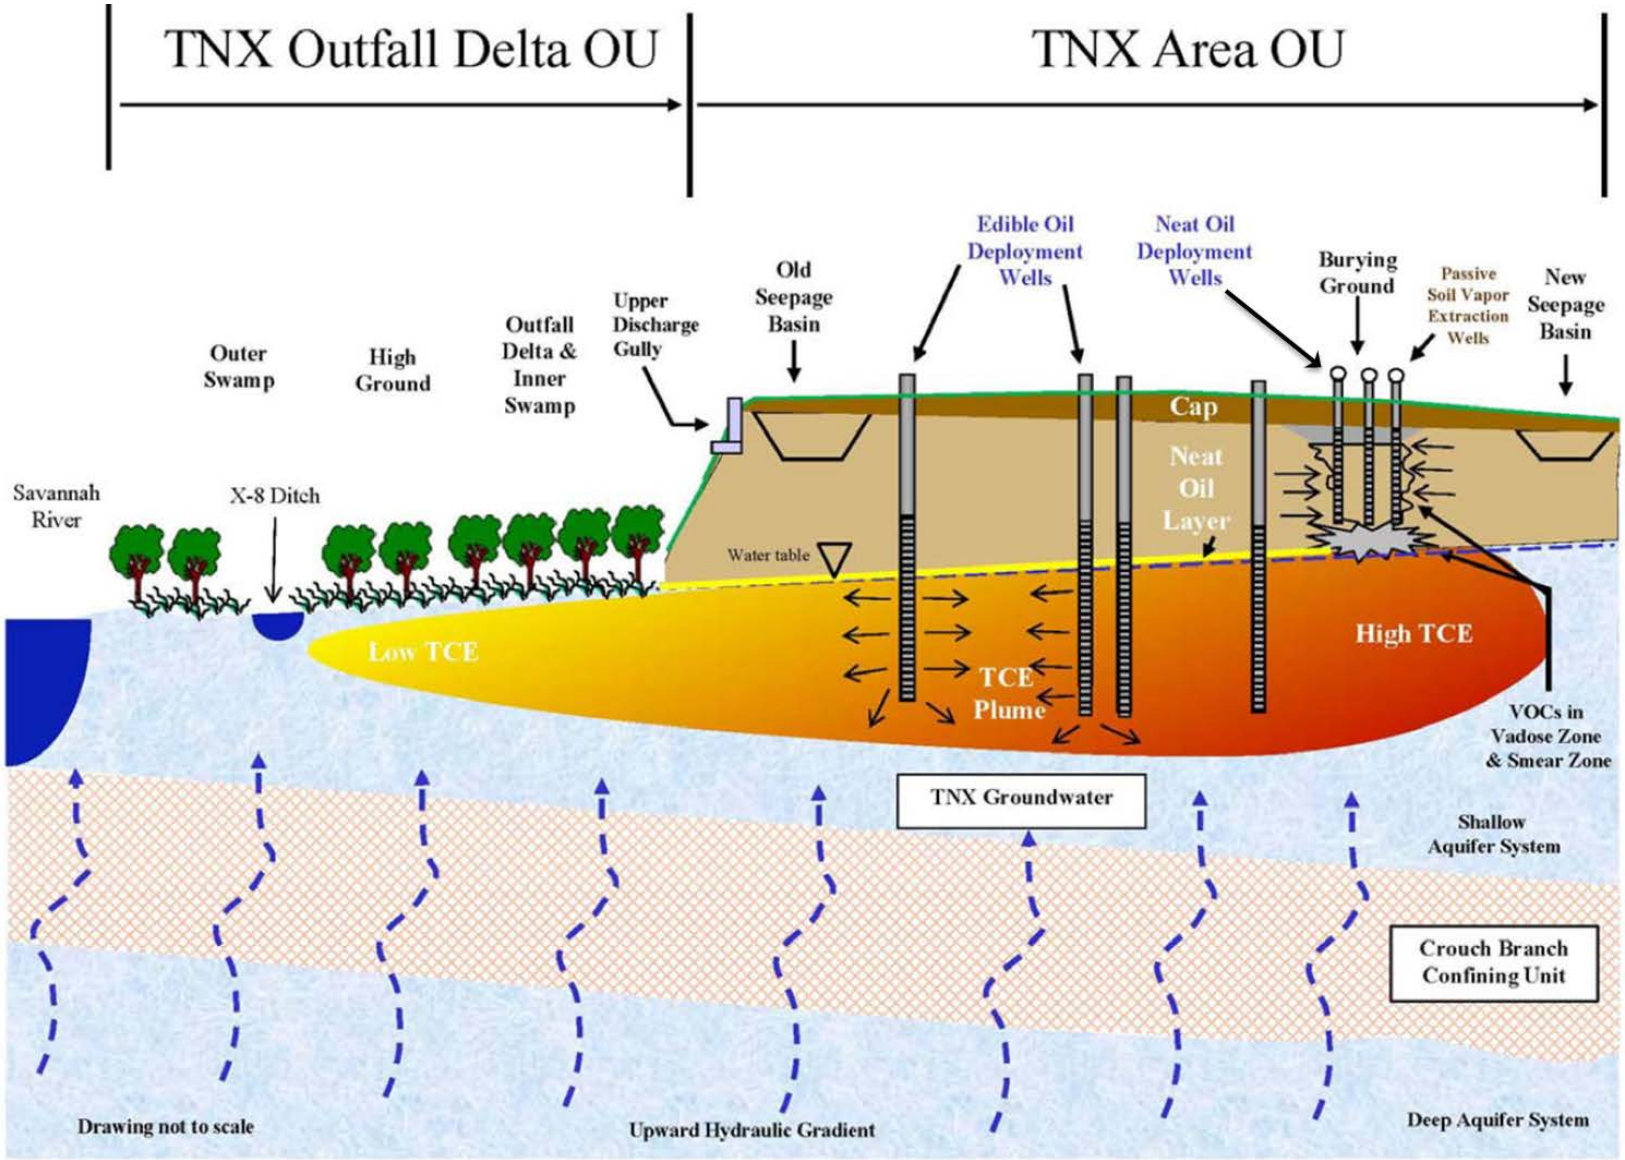

Figure A-8. Schematic Cross Section of TNX Operable Units and Remedial Action

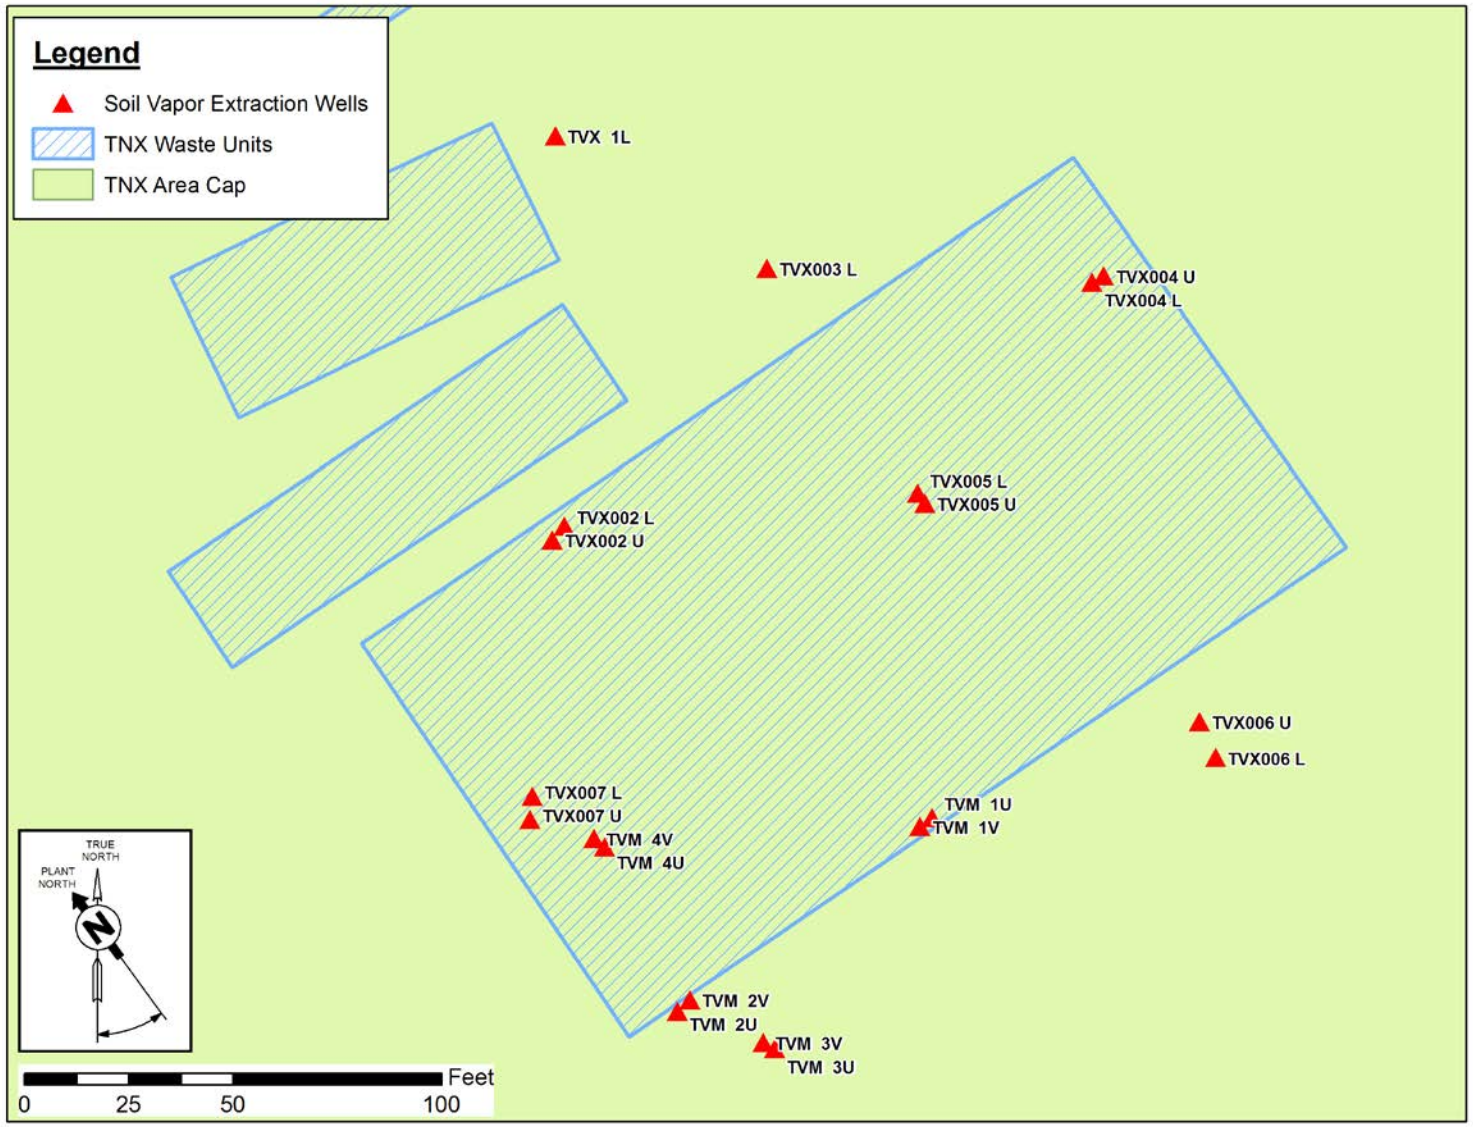

Figure A-9. Location of TNX Area SVE Monitoring Well System

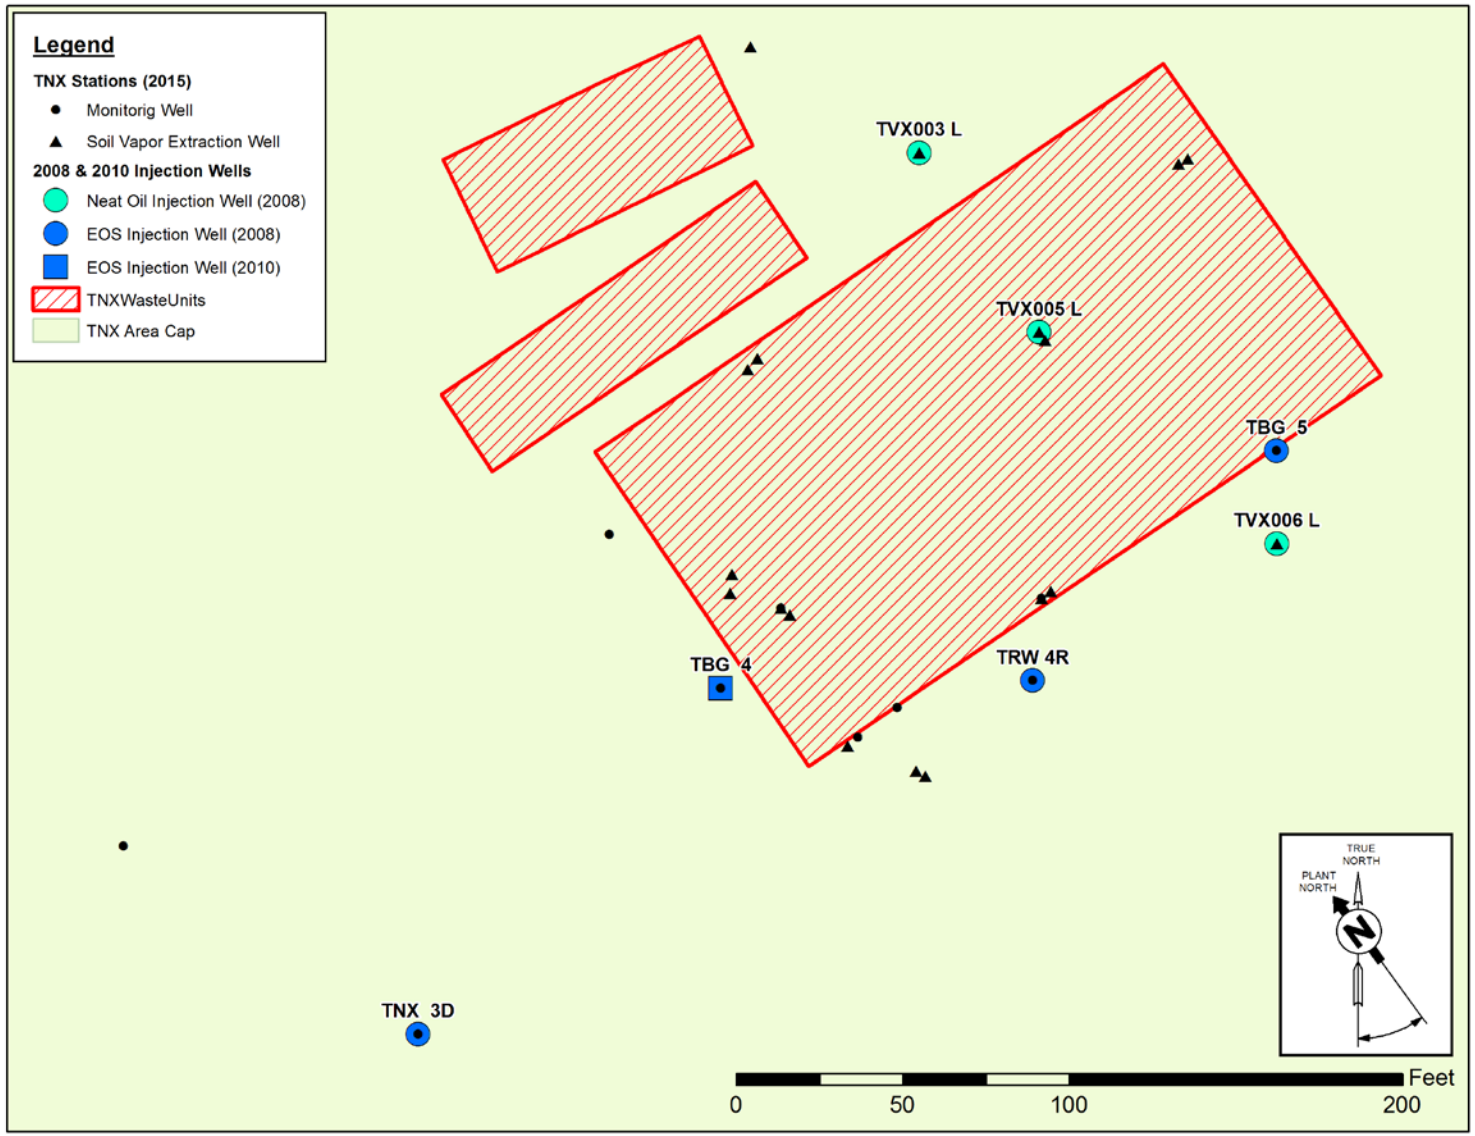

Figure A-10. Location of Edible Oil Injection Wells (2008 and 2010 Injections)

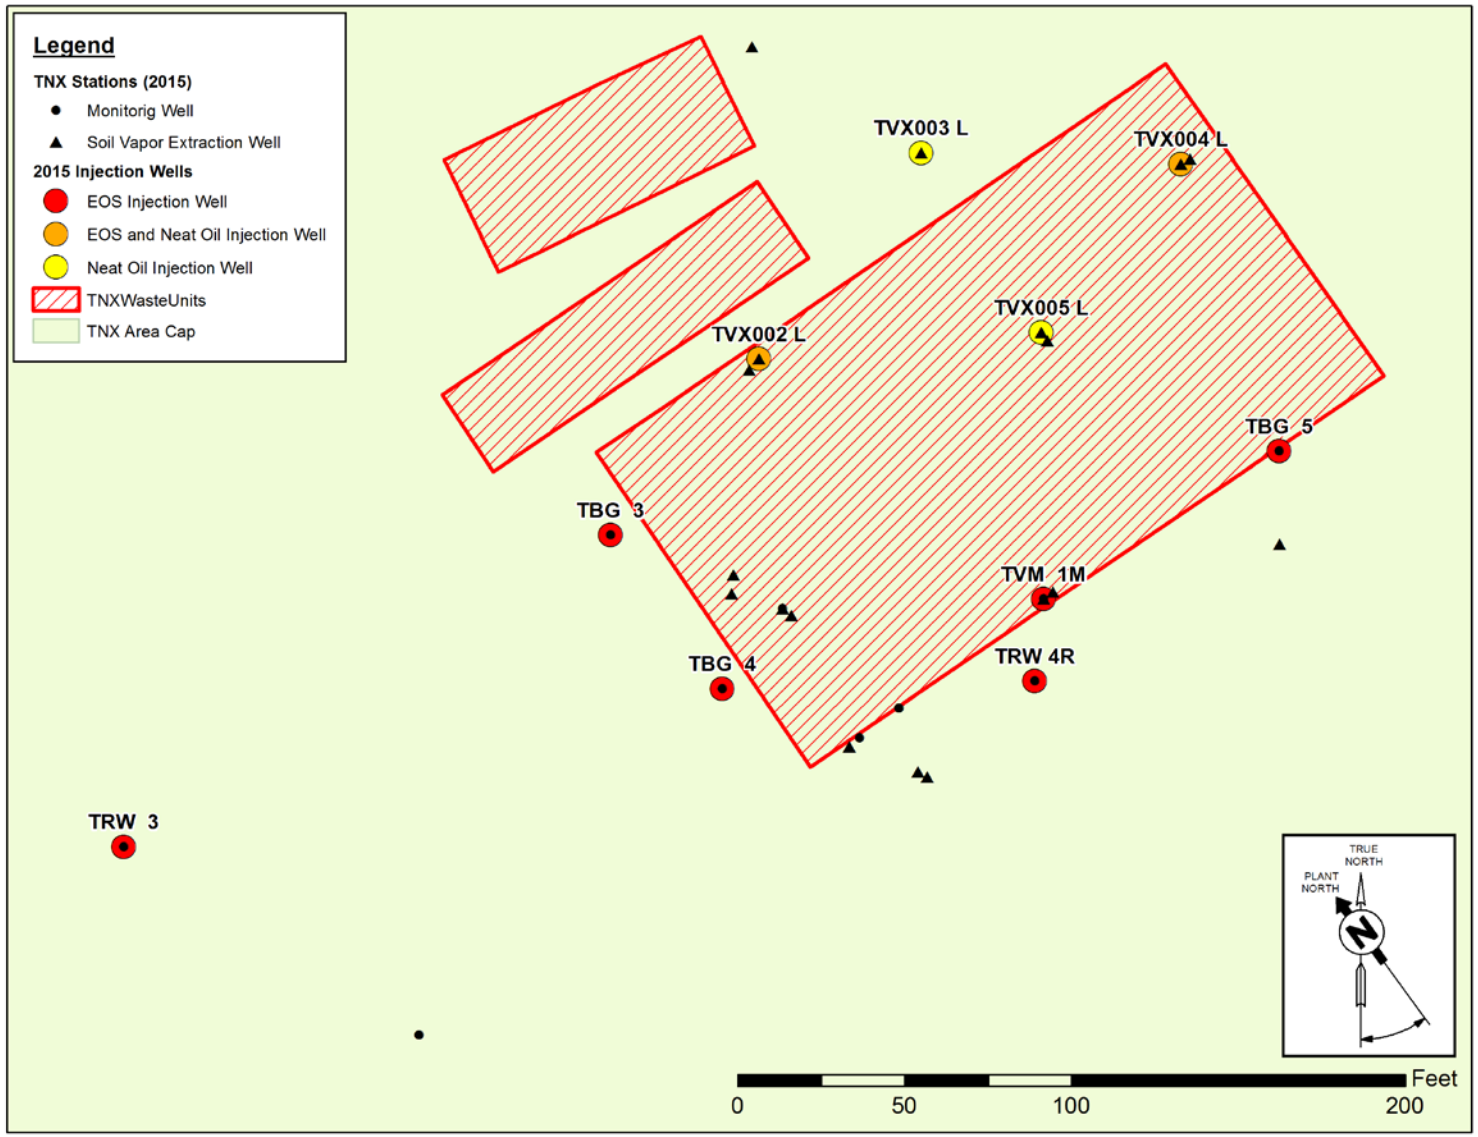

Figure A-11. Location of Edible Oil Injection Wells (2015 Injection)

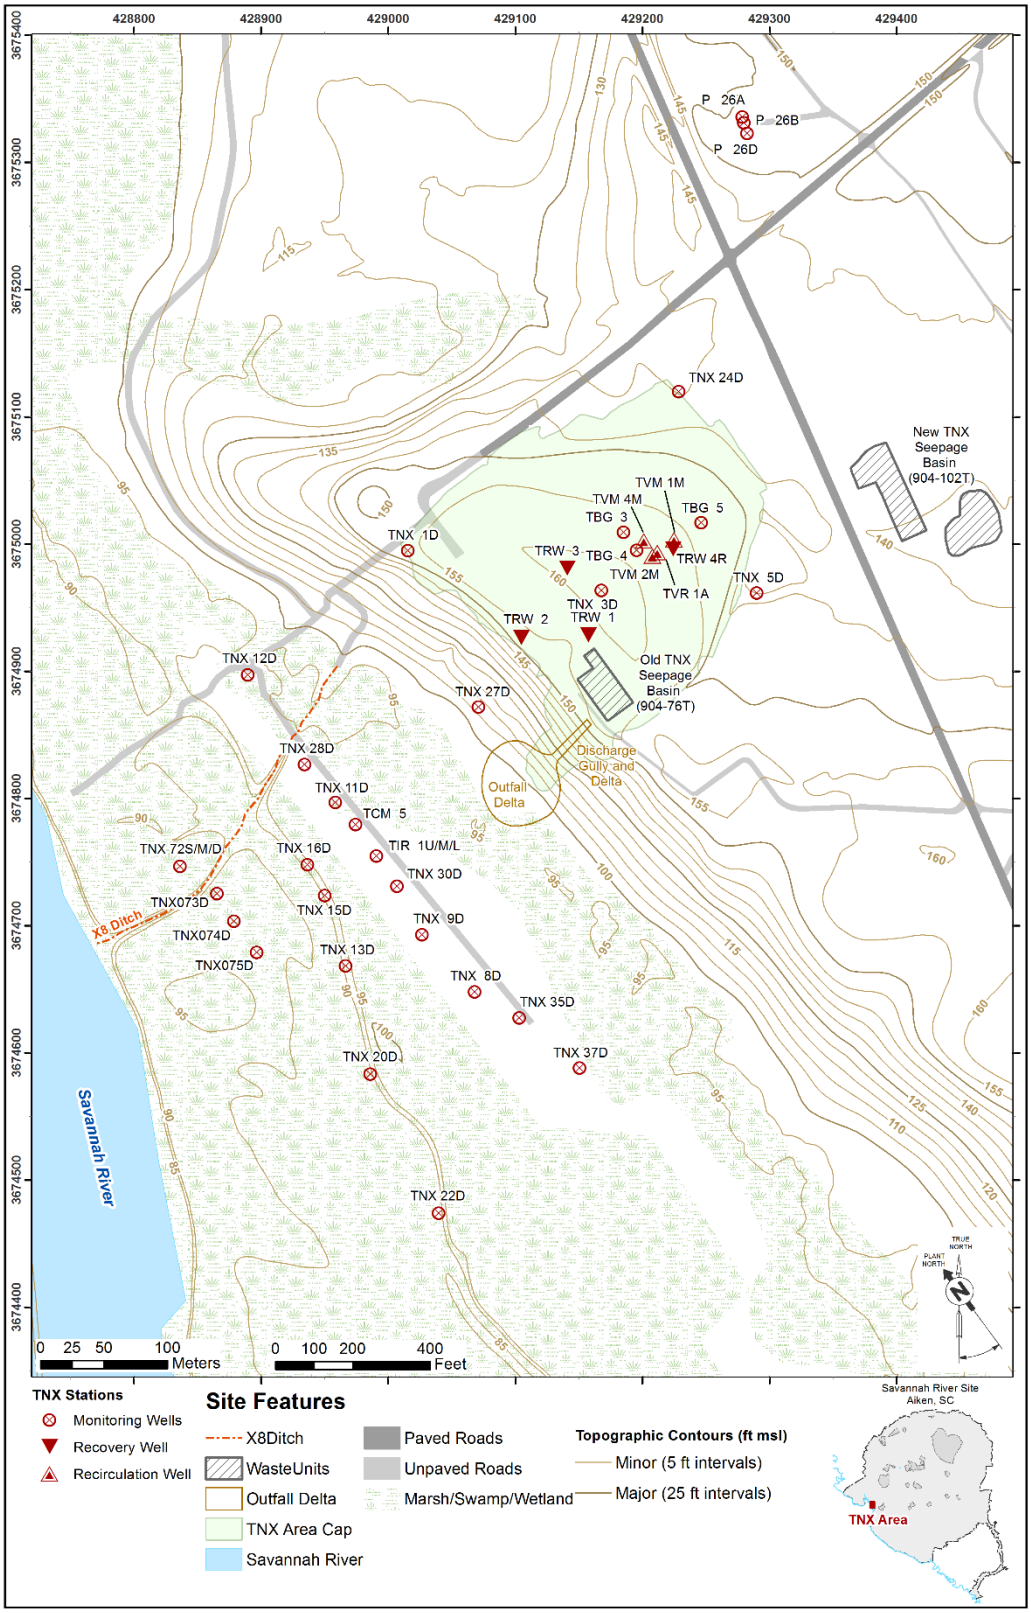

Figure A-12. TNX Area Well Locations

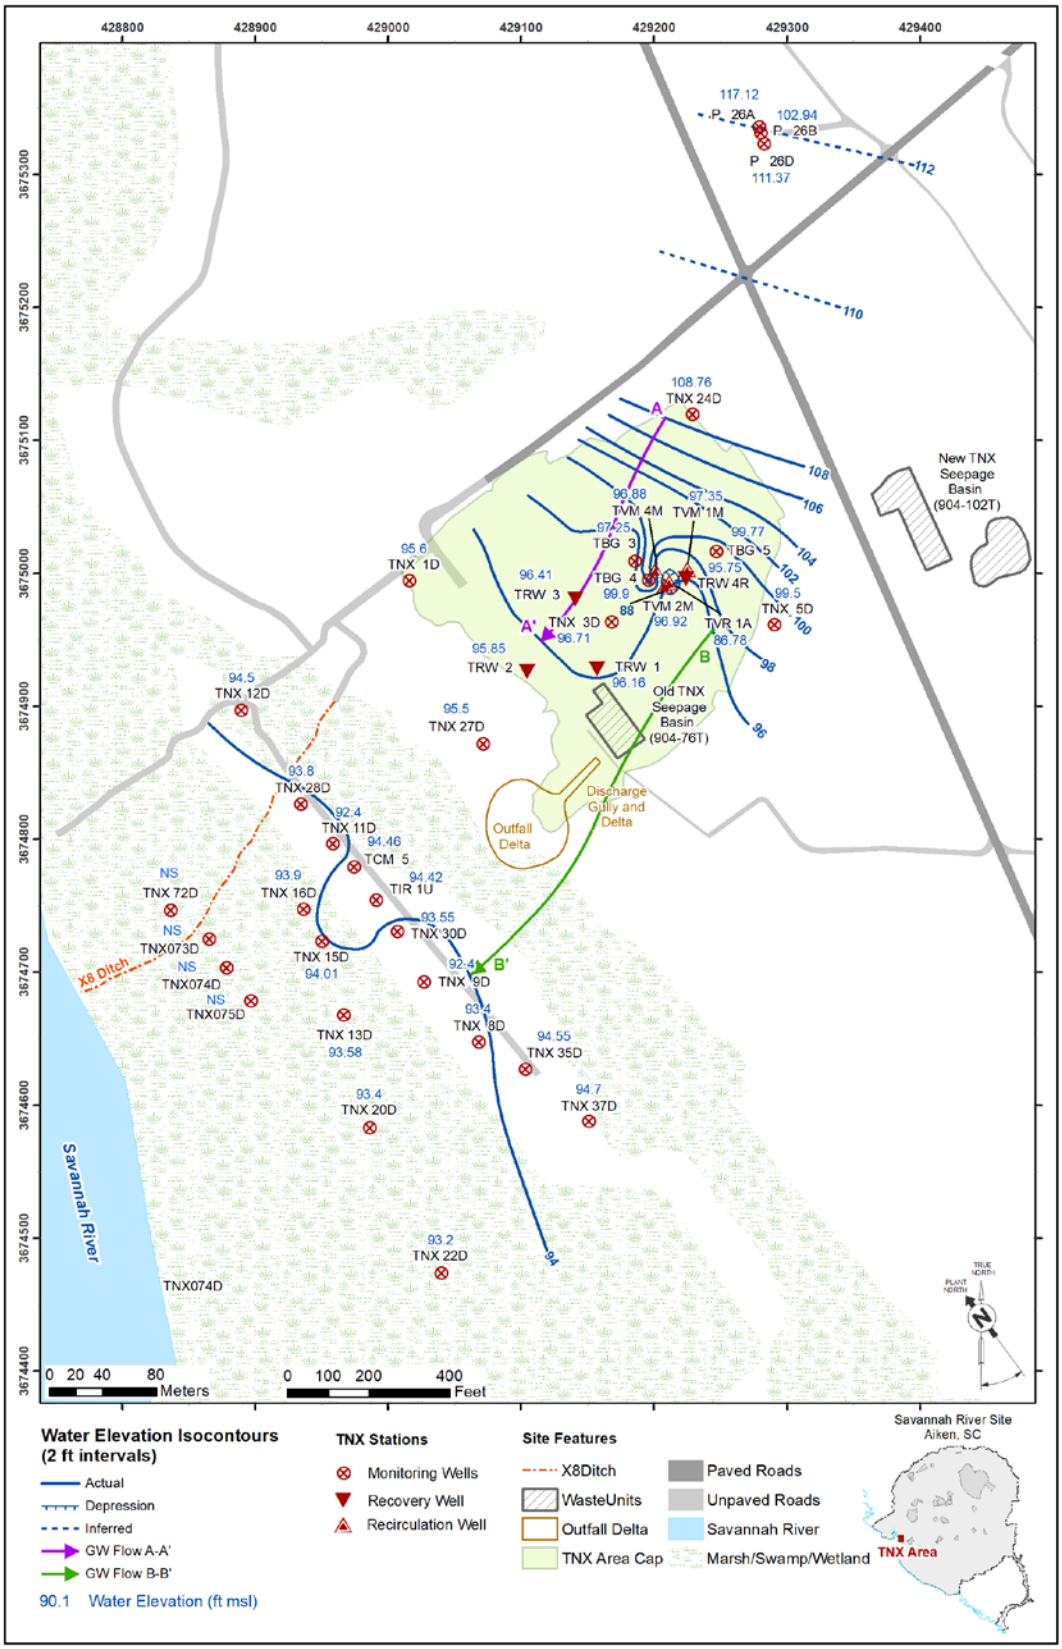

Figure A-13. TNX Area Water Table Elevation 4Q2018

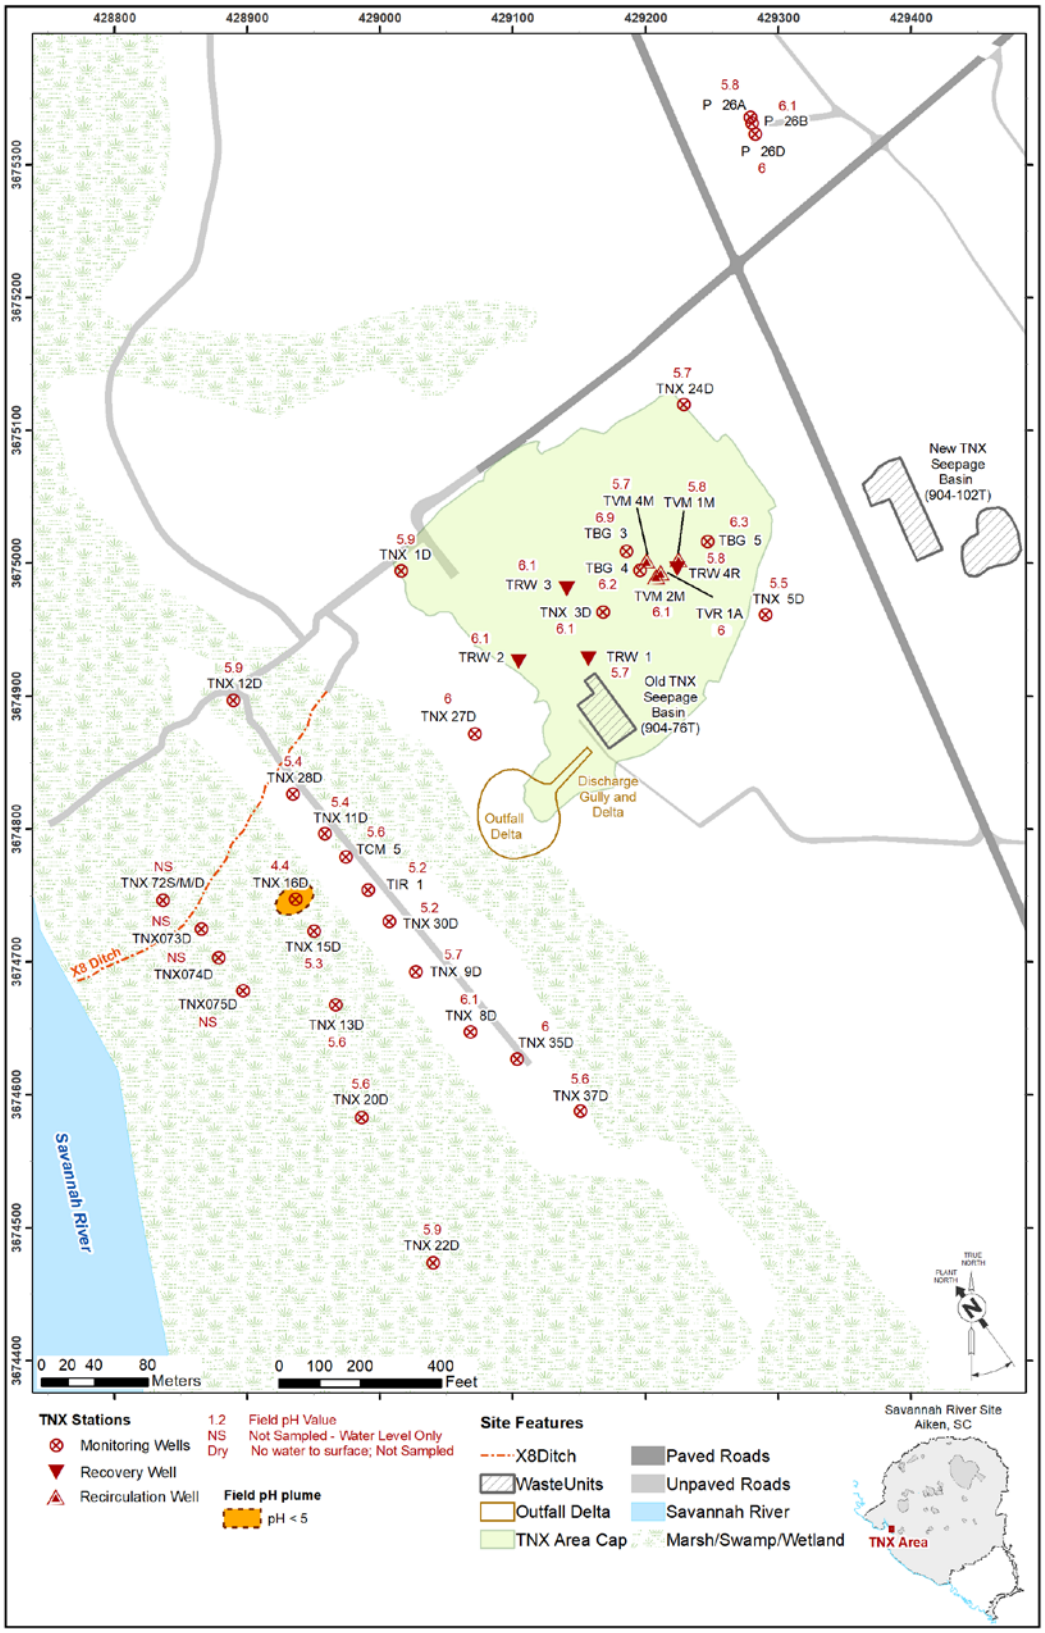

Figure A-14. TNX Area Field pH of Groundwater, 4Q2018

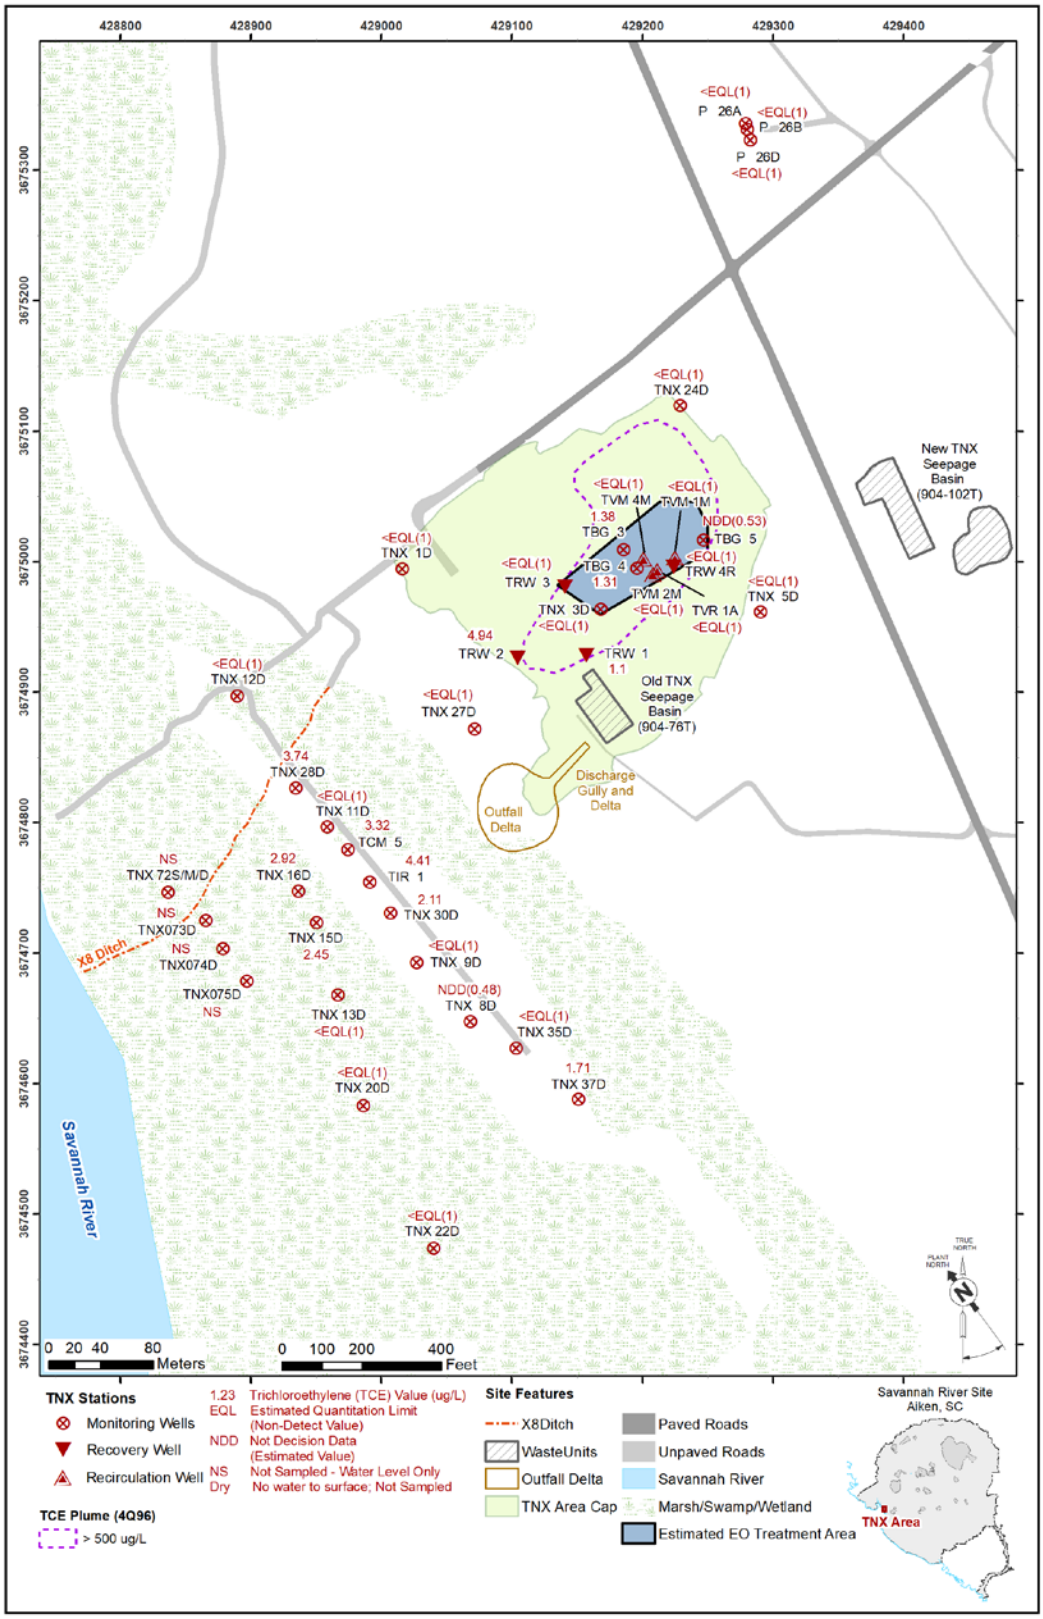

Figure A-15. TNX Area Trichloroethylene (TCE) Concentration in Groundwater, 4Q2018 with >500 µg/L TCE Plume from 4Q1996 Superimposed

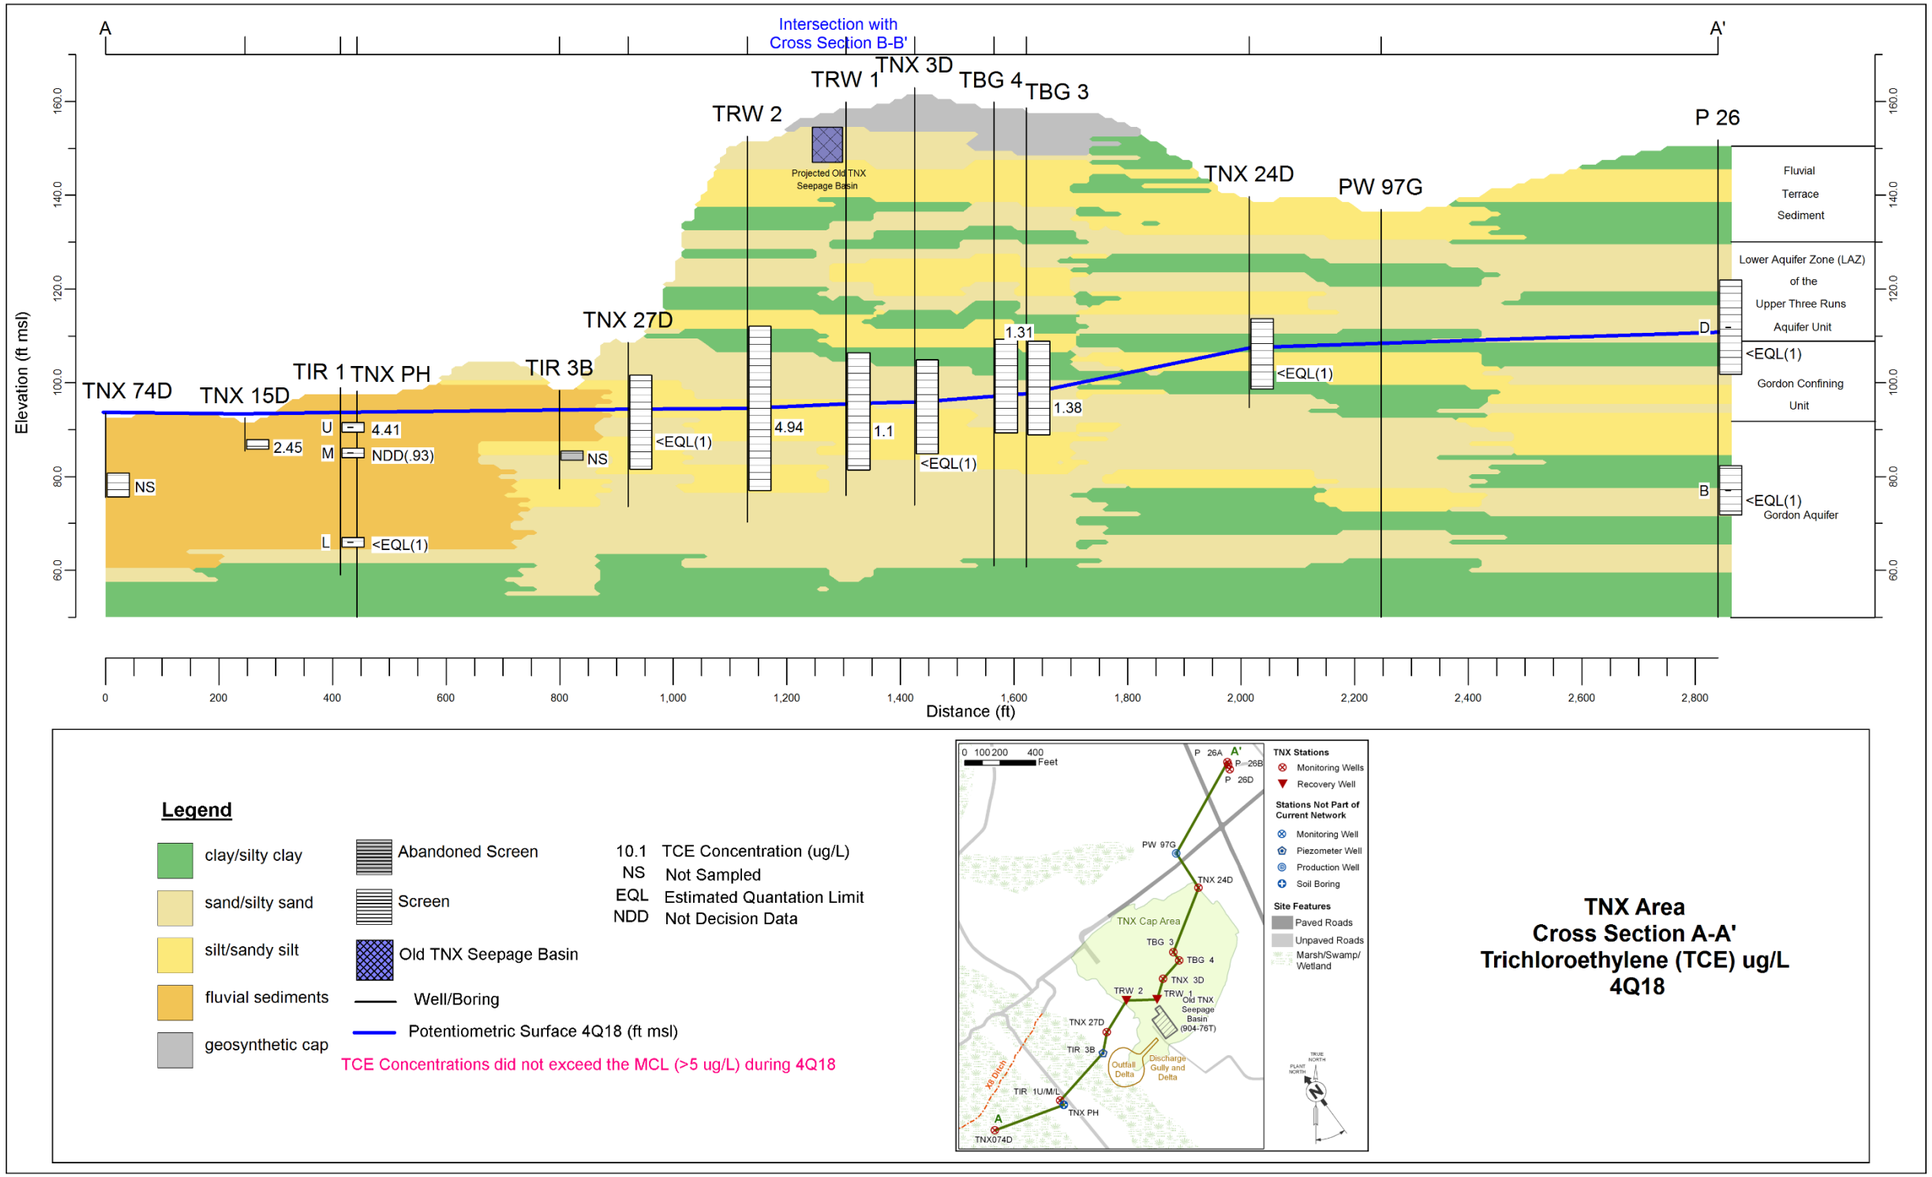

Figure A-16. TNX Area Cross Section A-A' Trichloroethylene (TCE) Concentration in Groundwater, 4Q2018

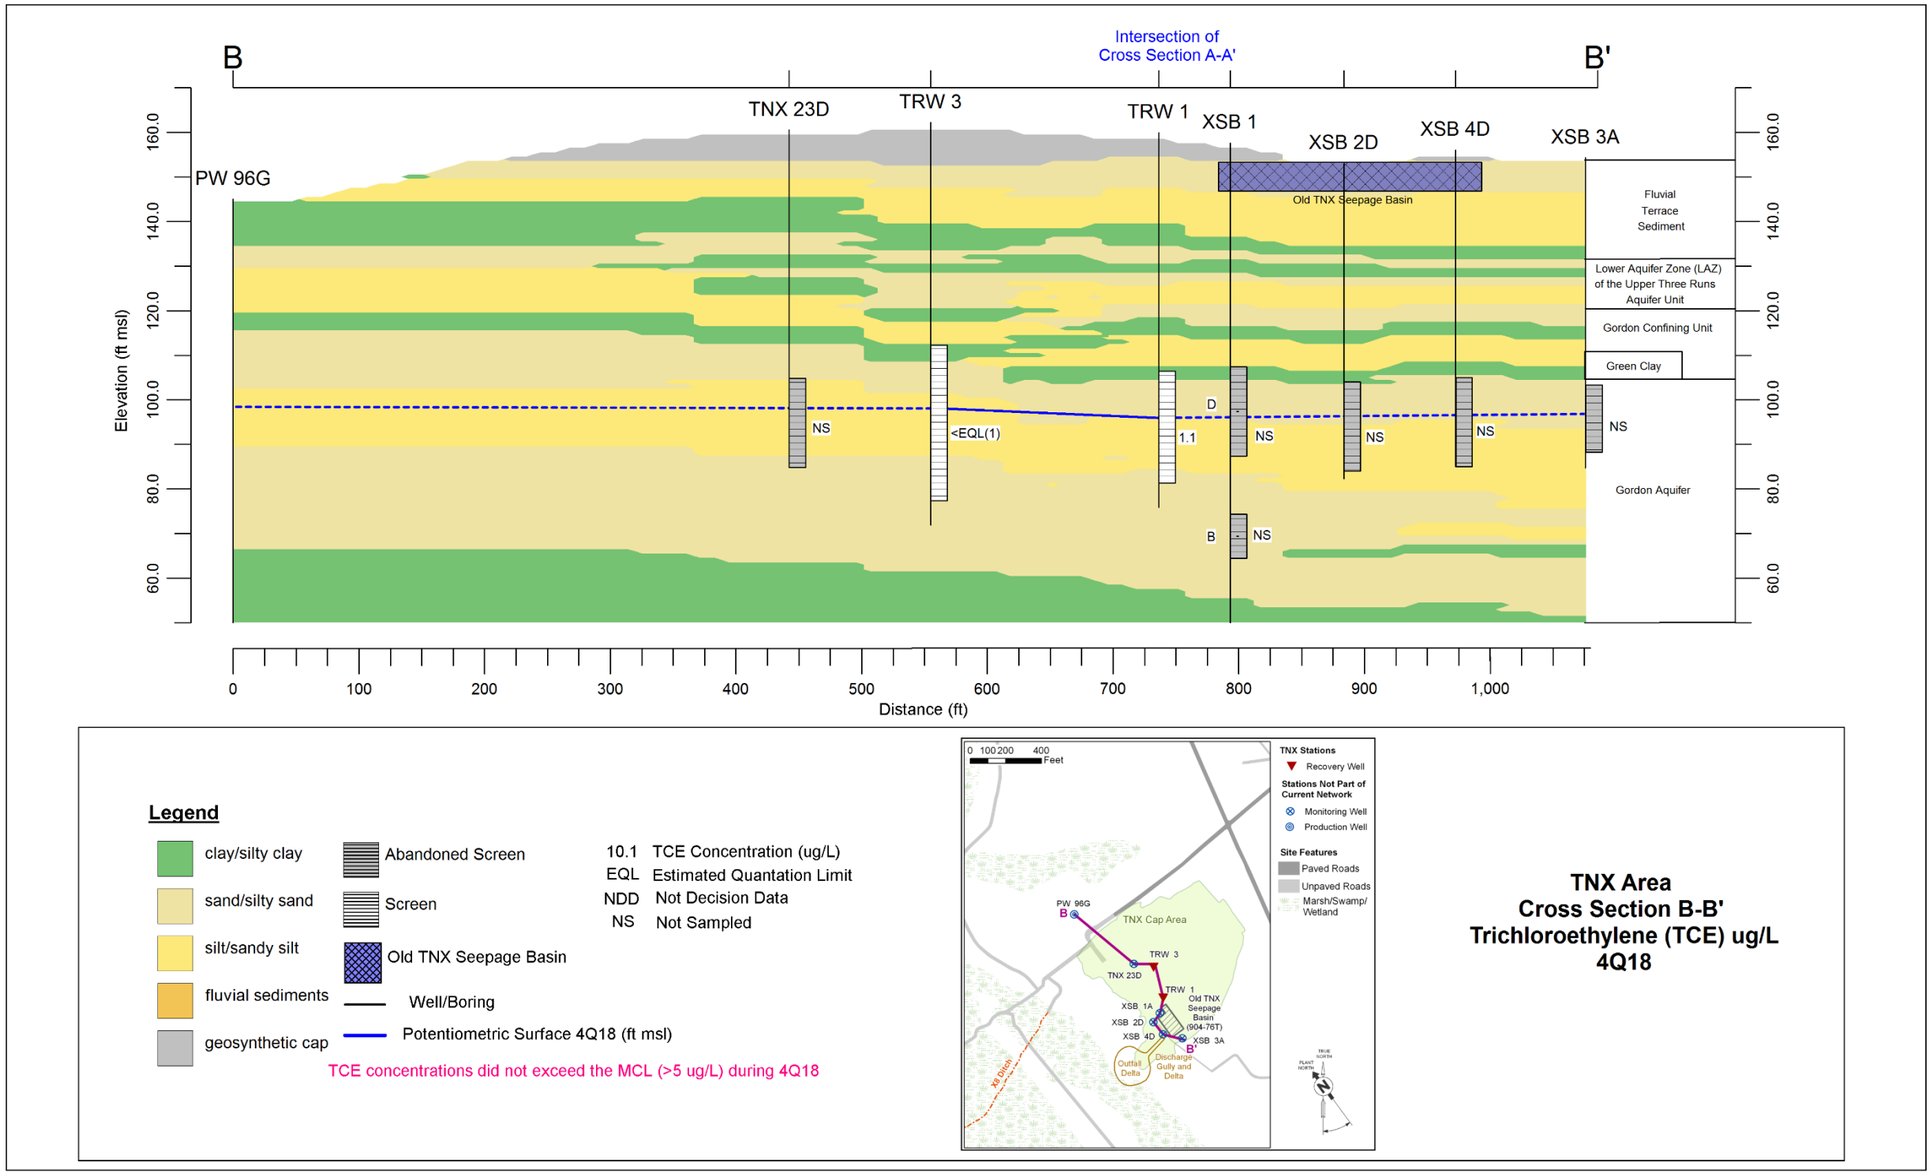

Figure A-17. TNX Area Cross Section B-B' Trichloroethylene (TCE) Concentration in Groundwater, 4Q2018

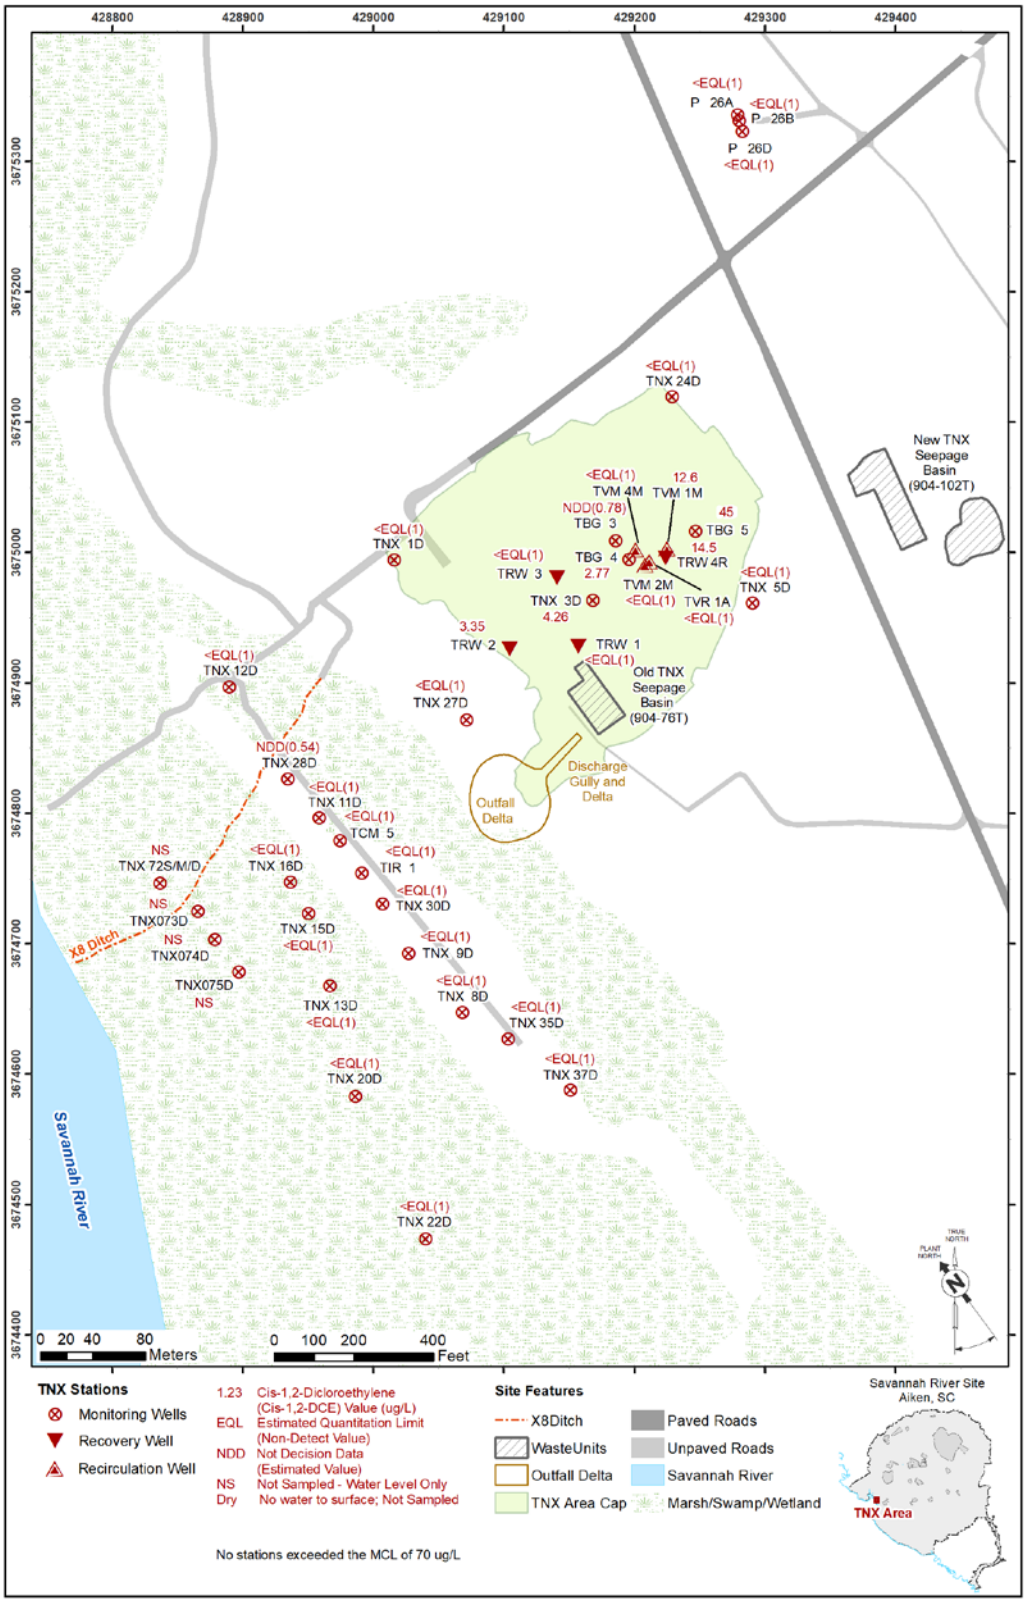

Figure A-18. TNX Area Cis-1,2-Dichloroethylene Concentration in Groundwater, 4Q2018

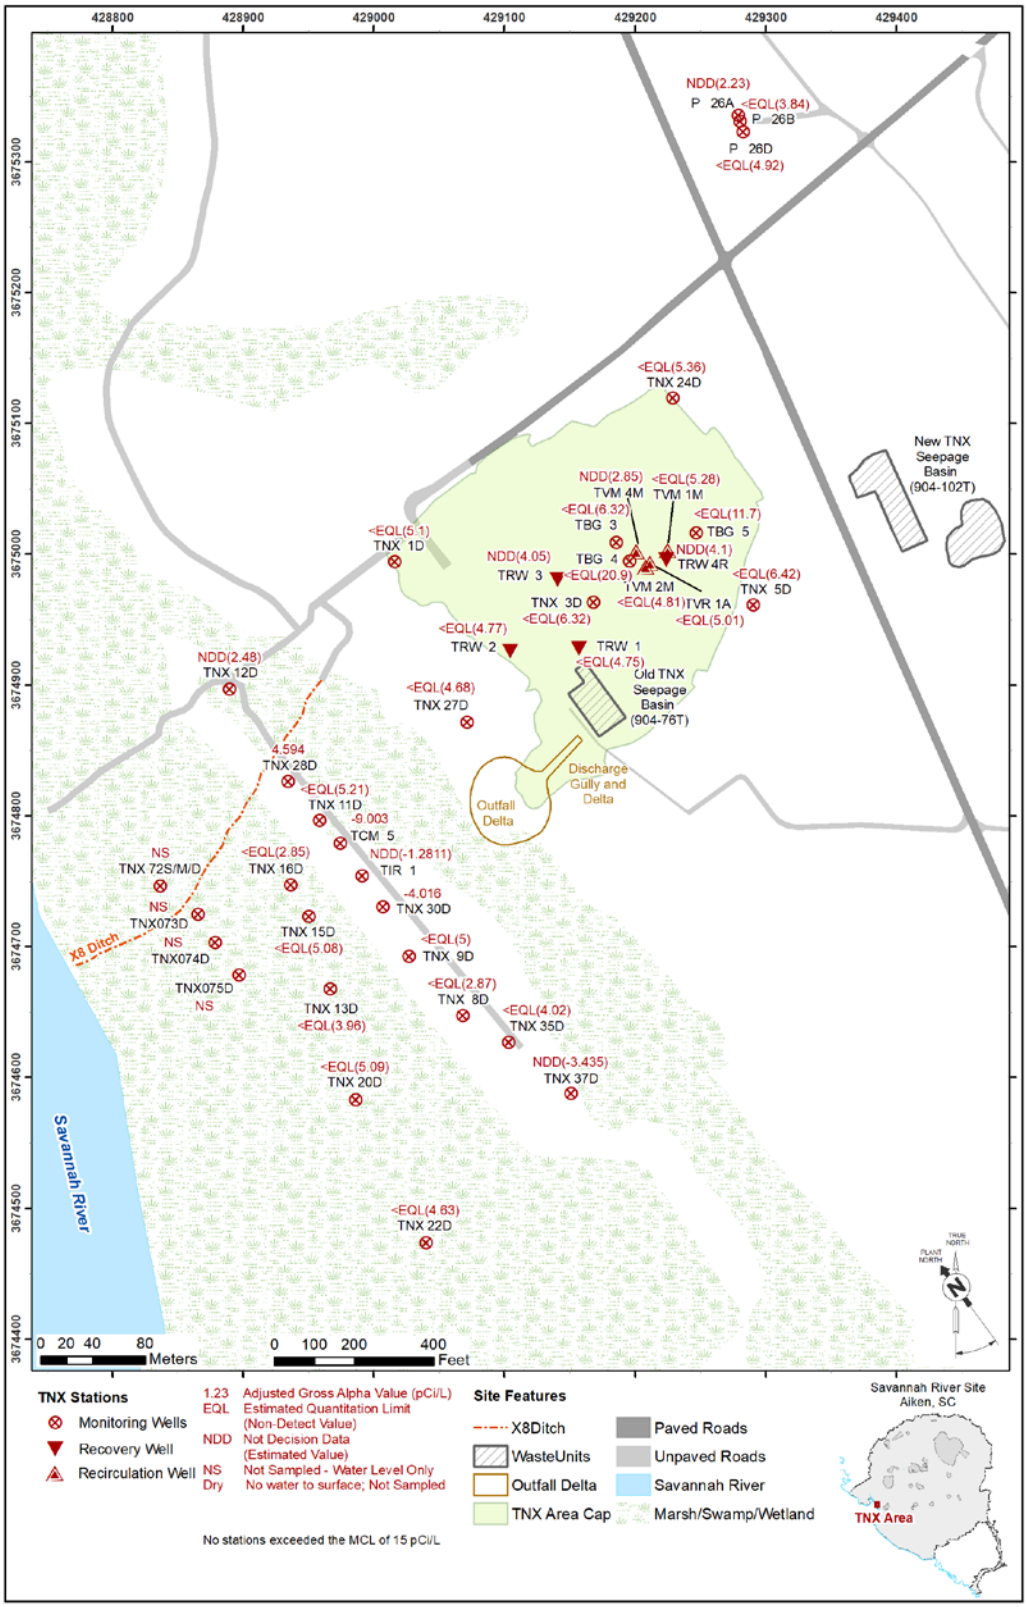

Figure A-19. TNX Area Adjusted Gross Alpha Activity in Groundwater, 4Q2018

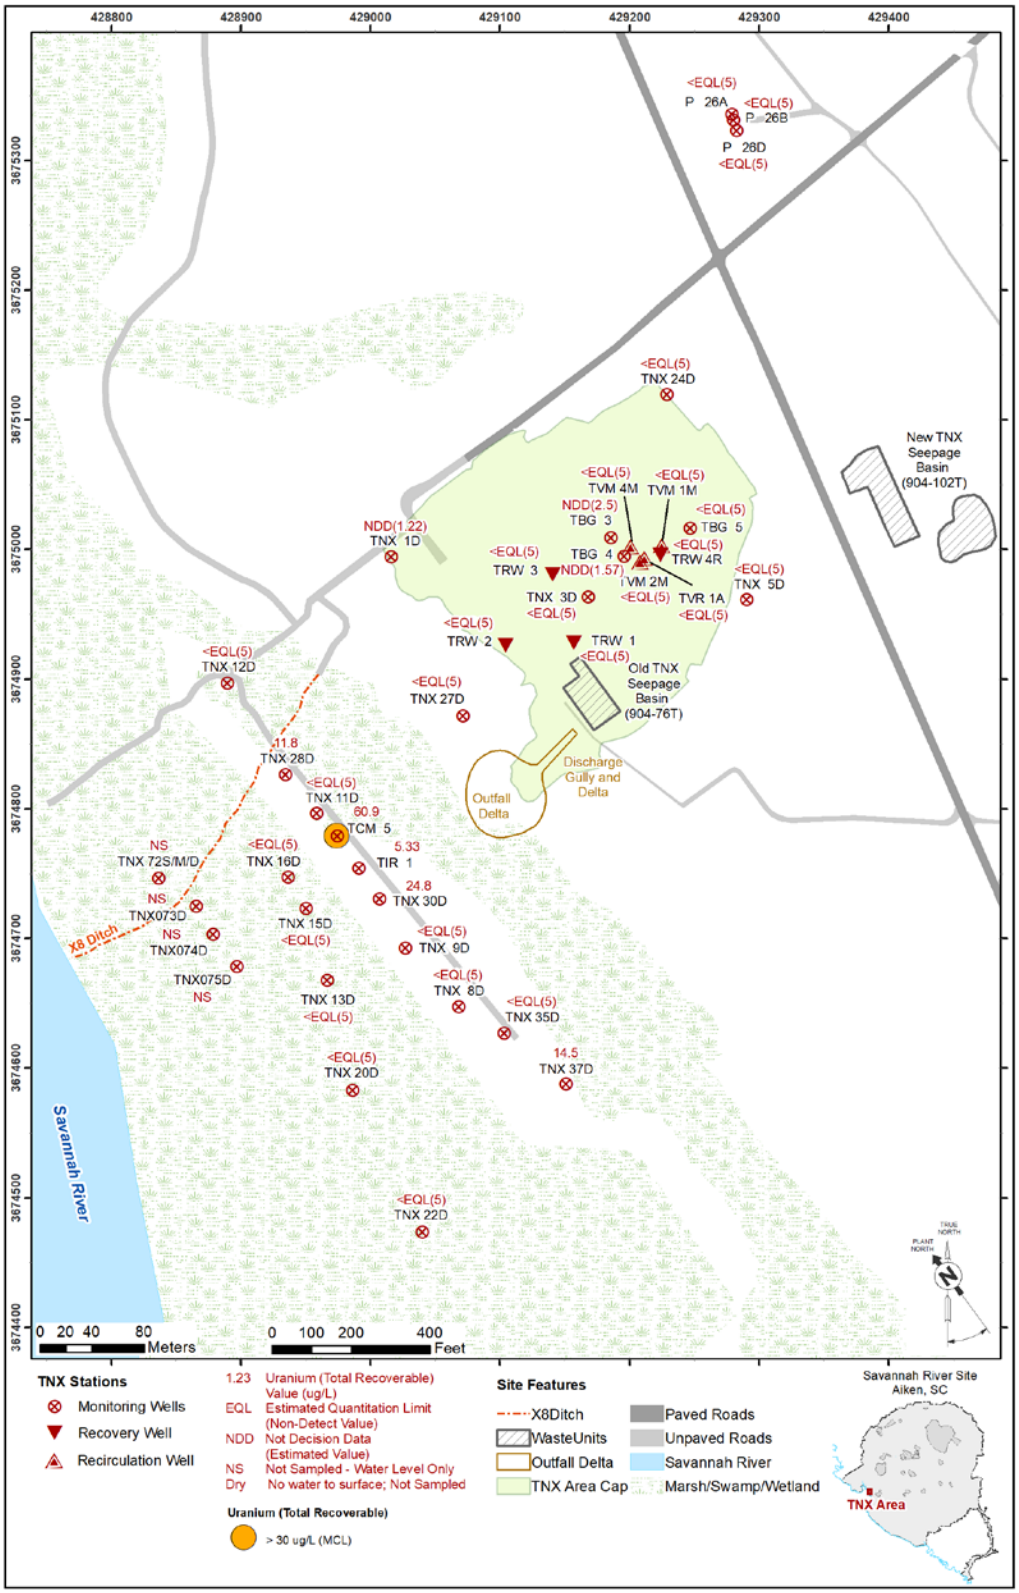

Figure A-20. TNX Area Uranium, Total Recoverable Concentration in Groundwater, 4Q2018

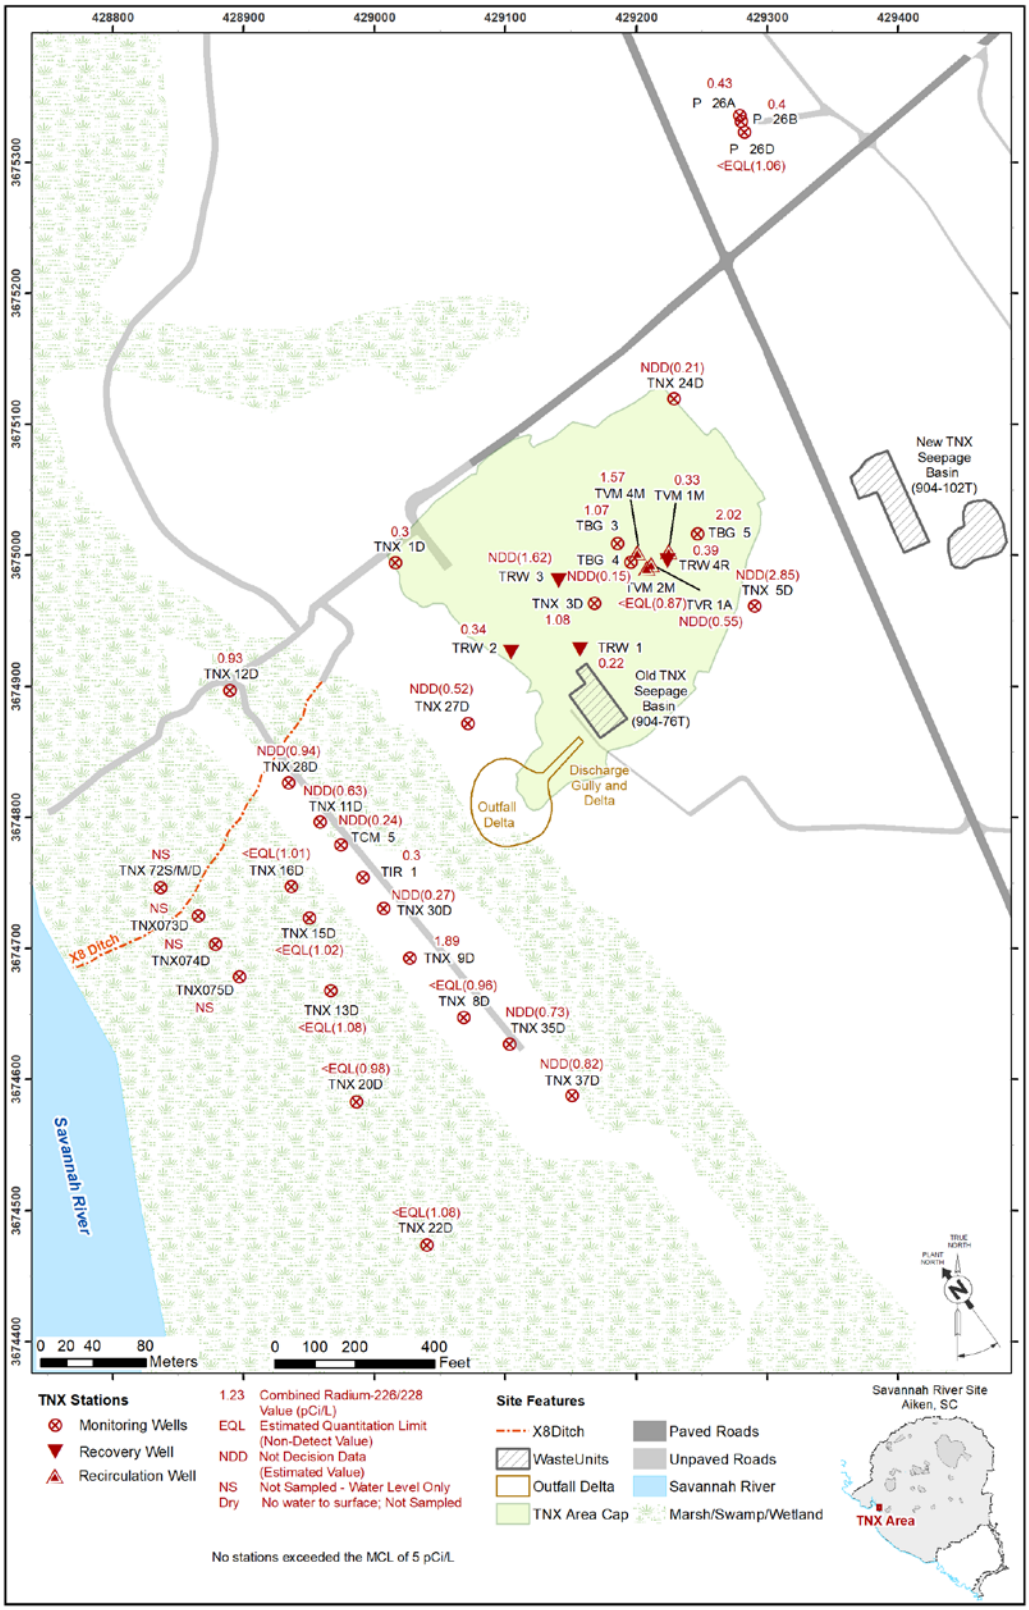

Figure A-21. TNX Area Combined Ra-226/228 Activity in Groundwater, 4Q2018

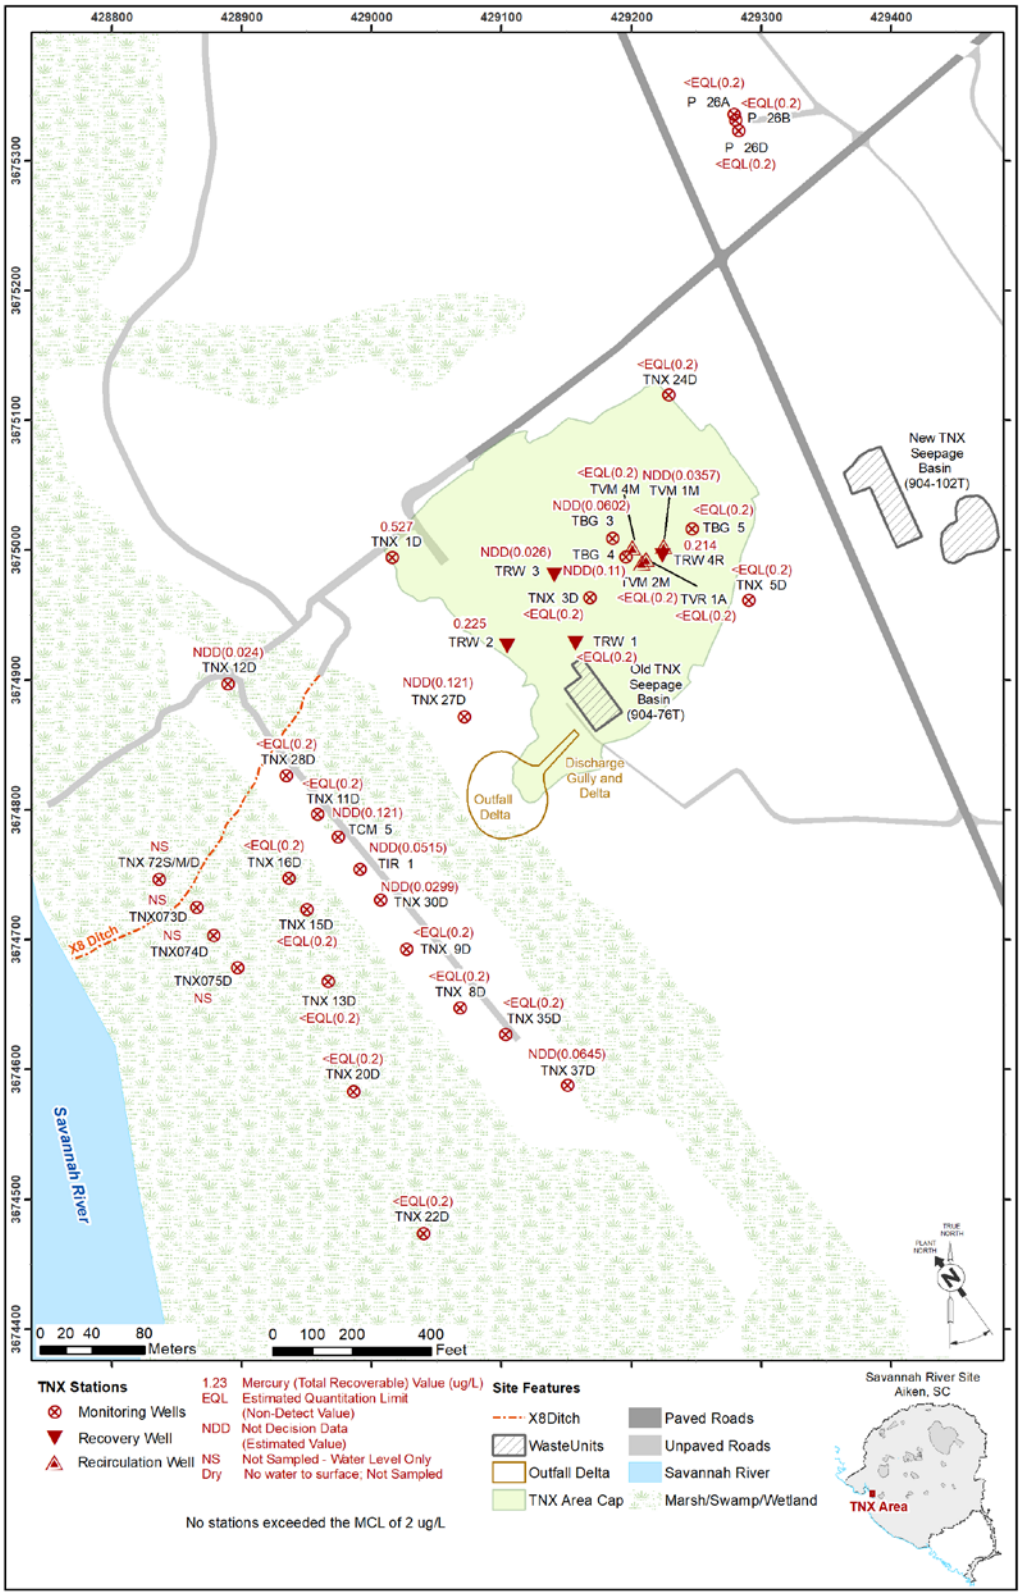

Figure A-22. TNX Area Mercury, Total Recoverable Concentration in Groundwater, 4Q2018

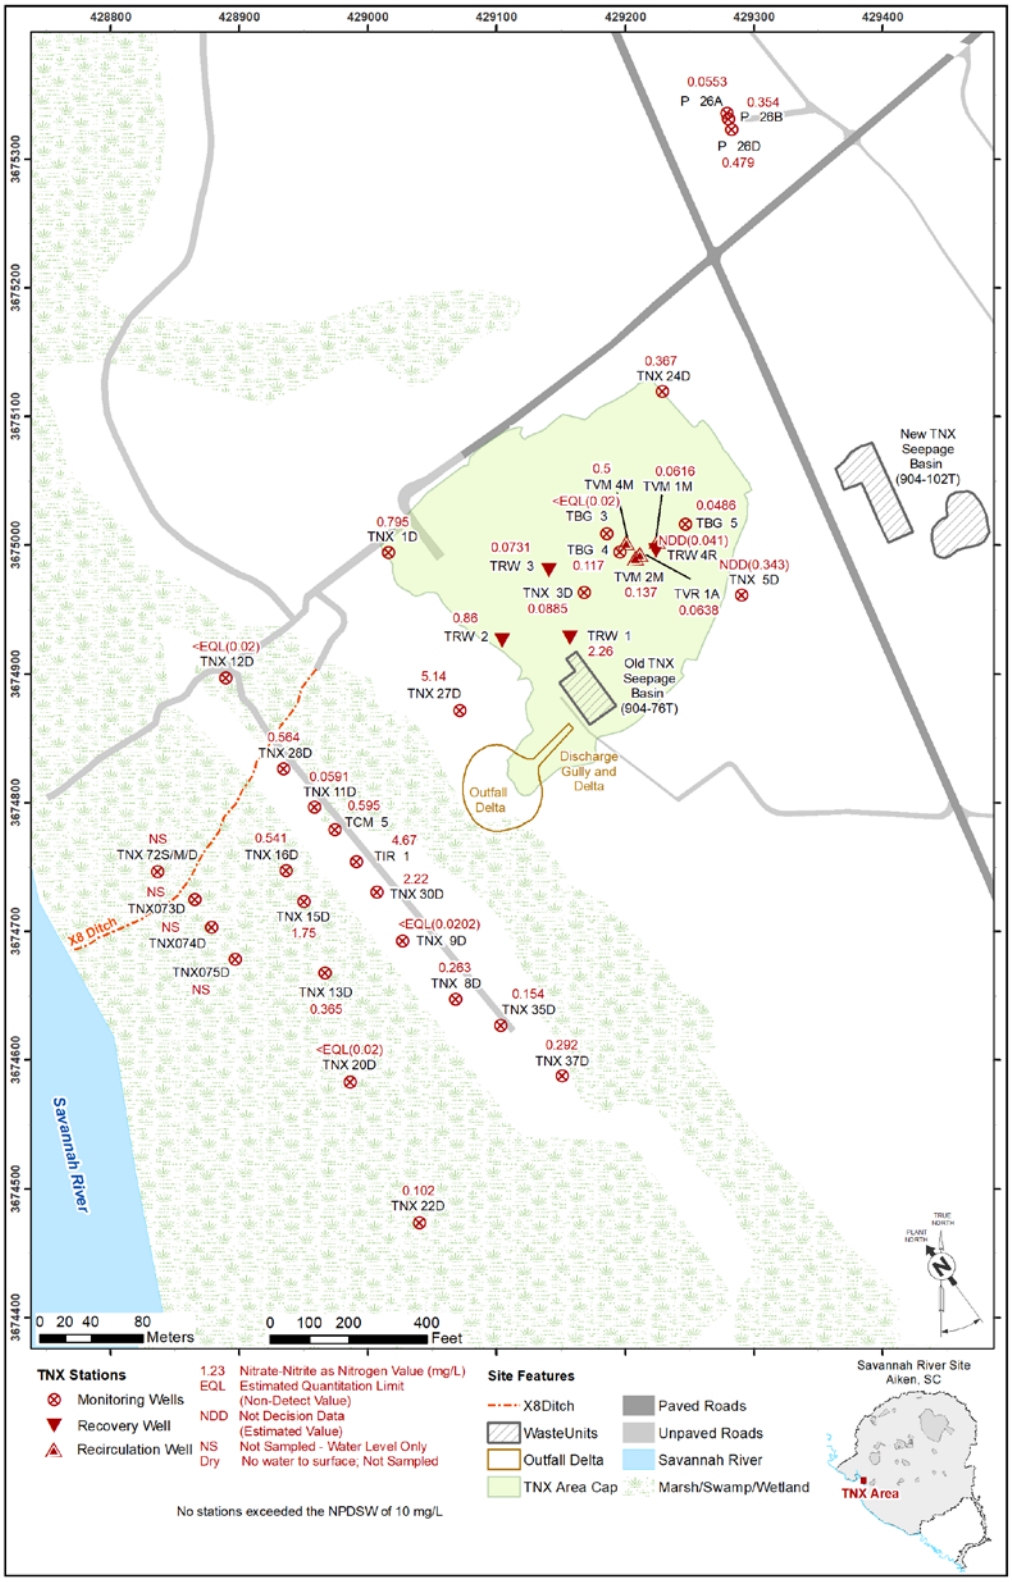

Figure A-23. TNX Area Nitrate-Nitrite as Nitrogen Concentration in Groundwater 4Q2018

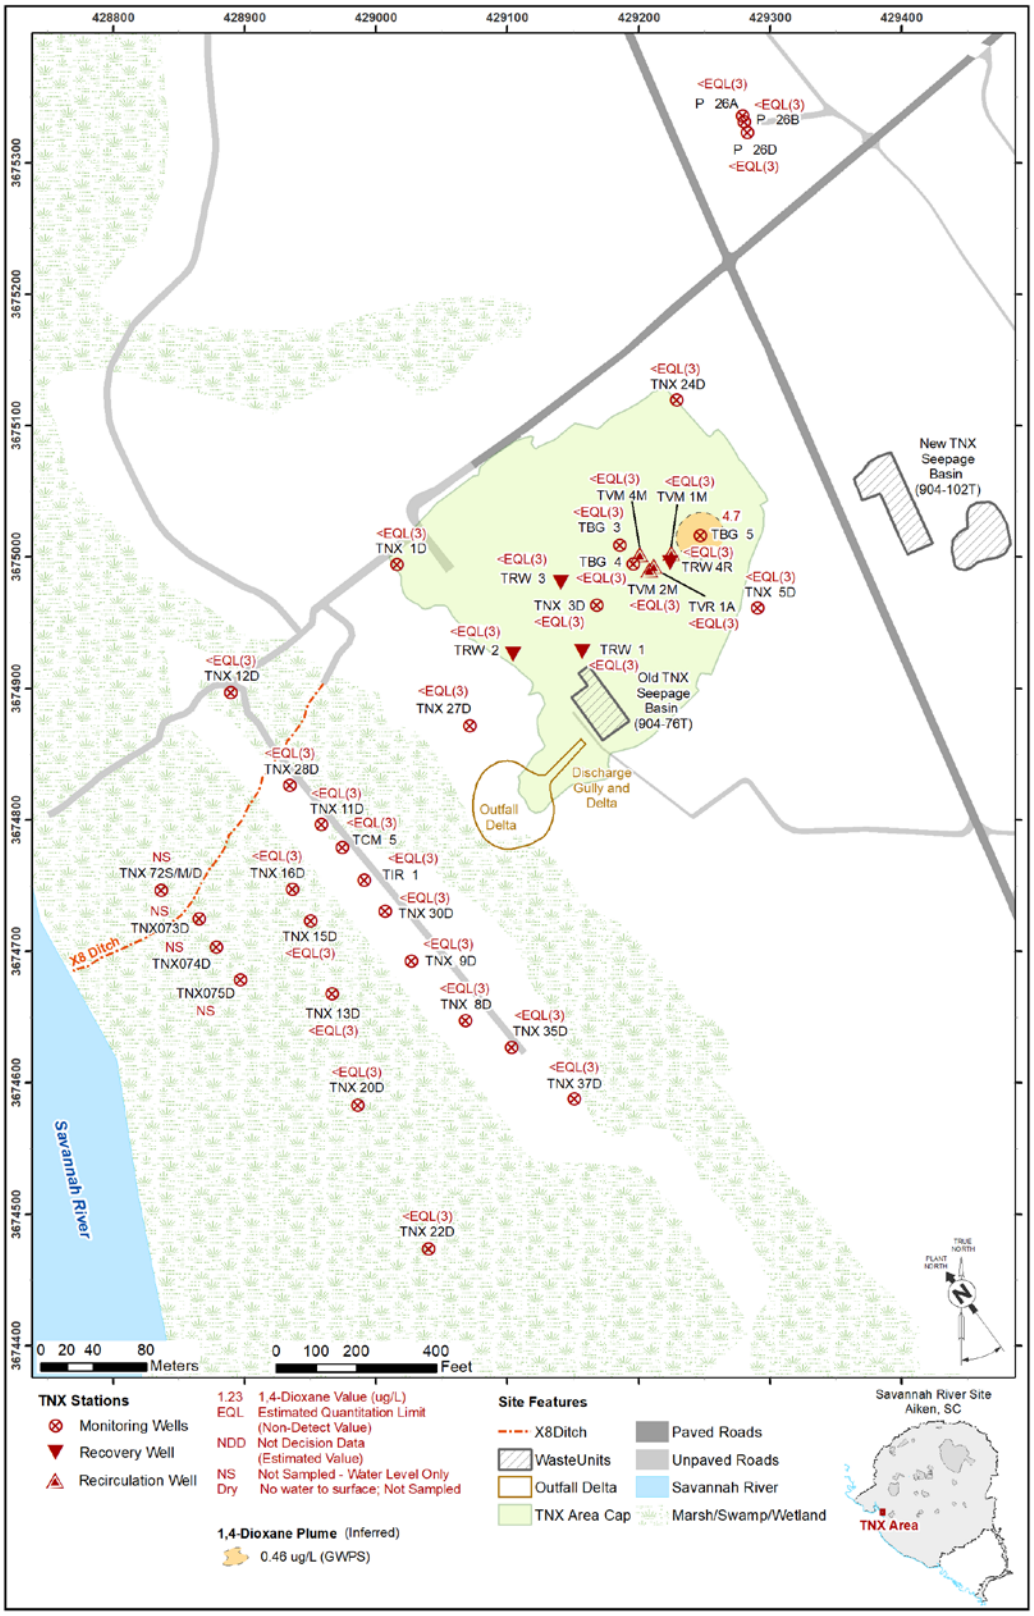

Figure A-24. TNX Area 1,4-Dioxane Concentration in Groundwater, 4Q2018

This page intentionally left blank.

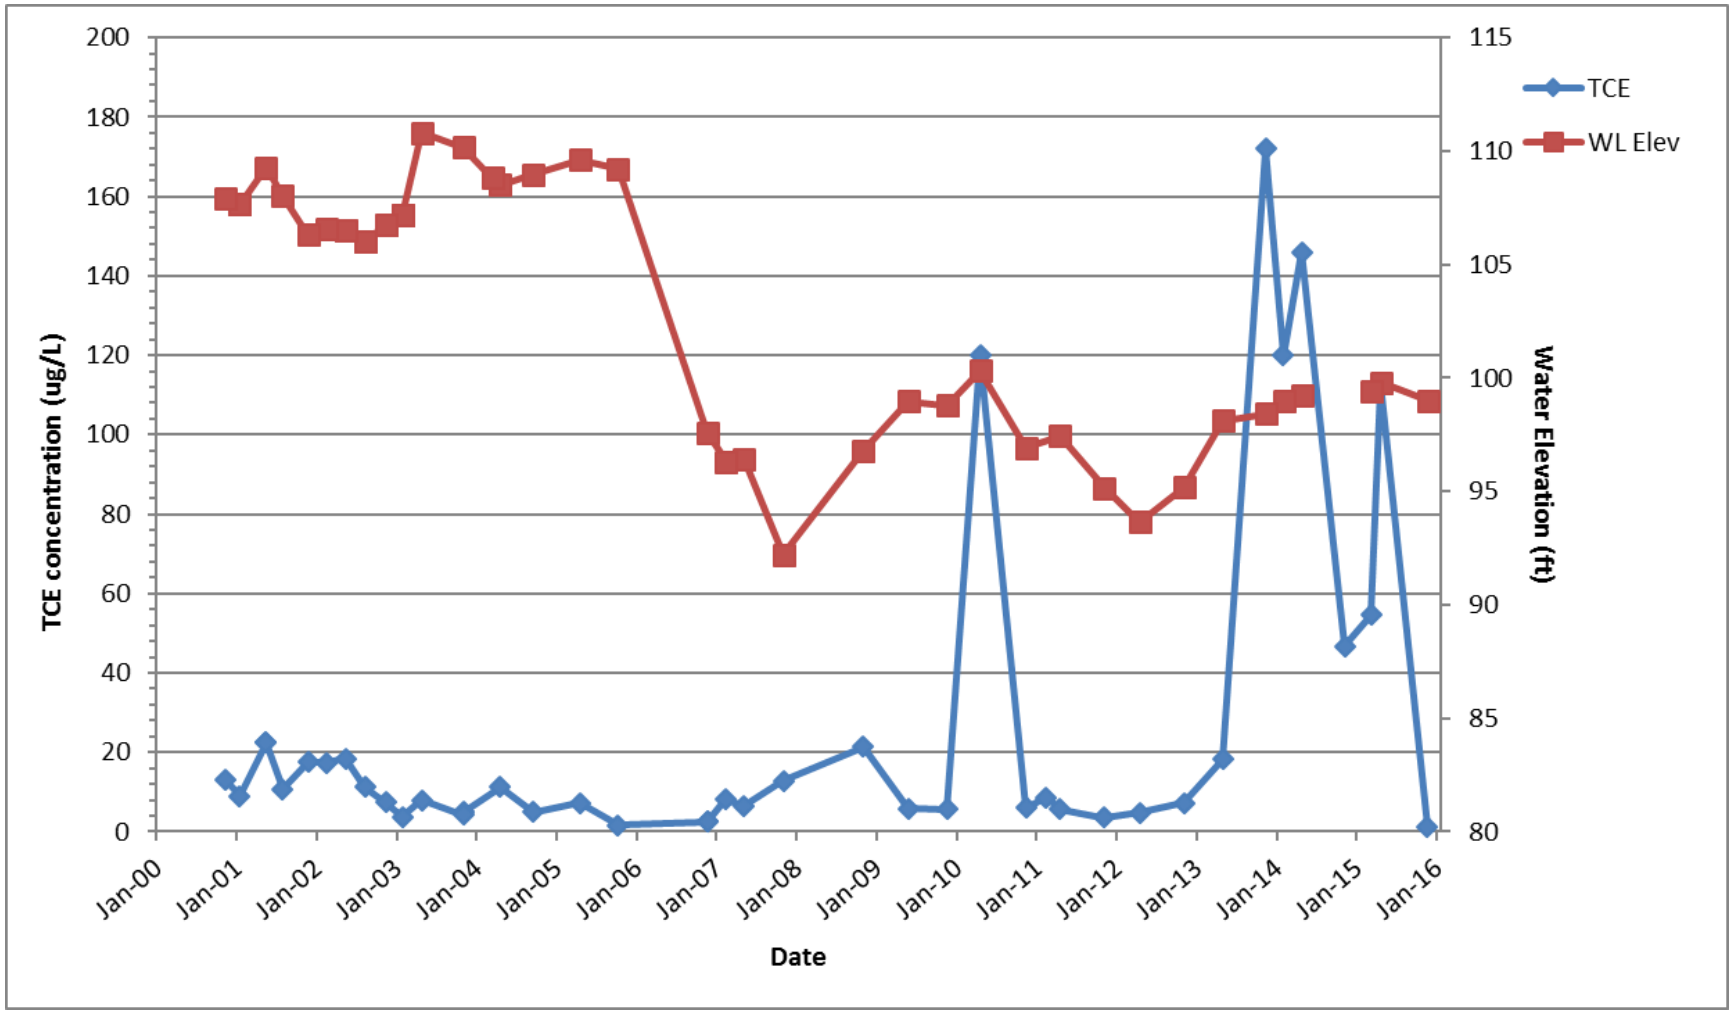

Figure A-25. Comparison of TCE Concentration and Water Elevation at TBG 3

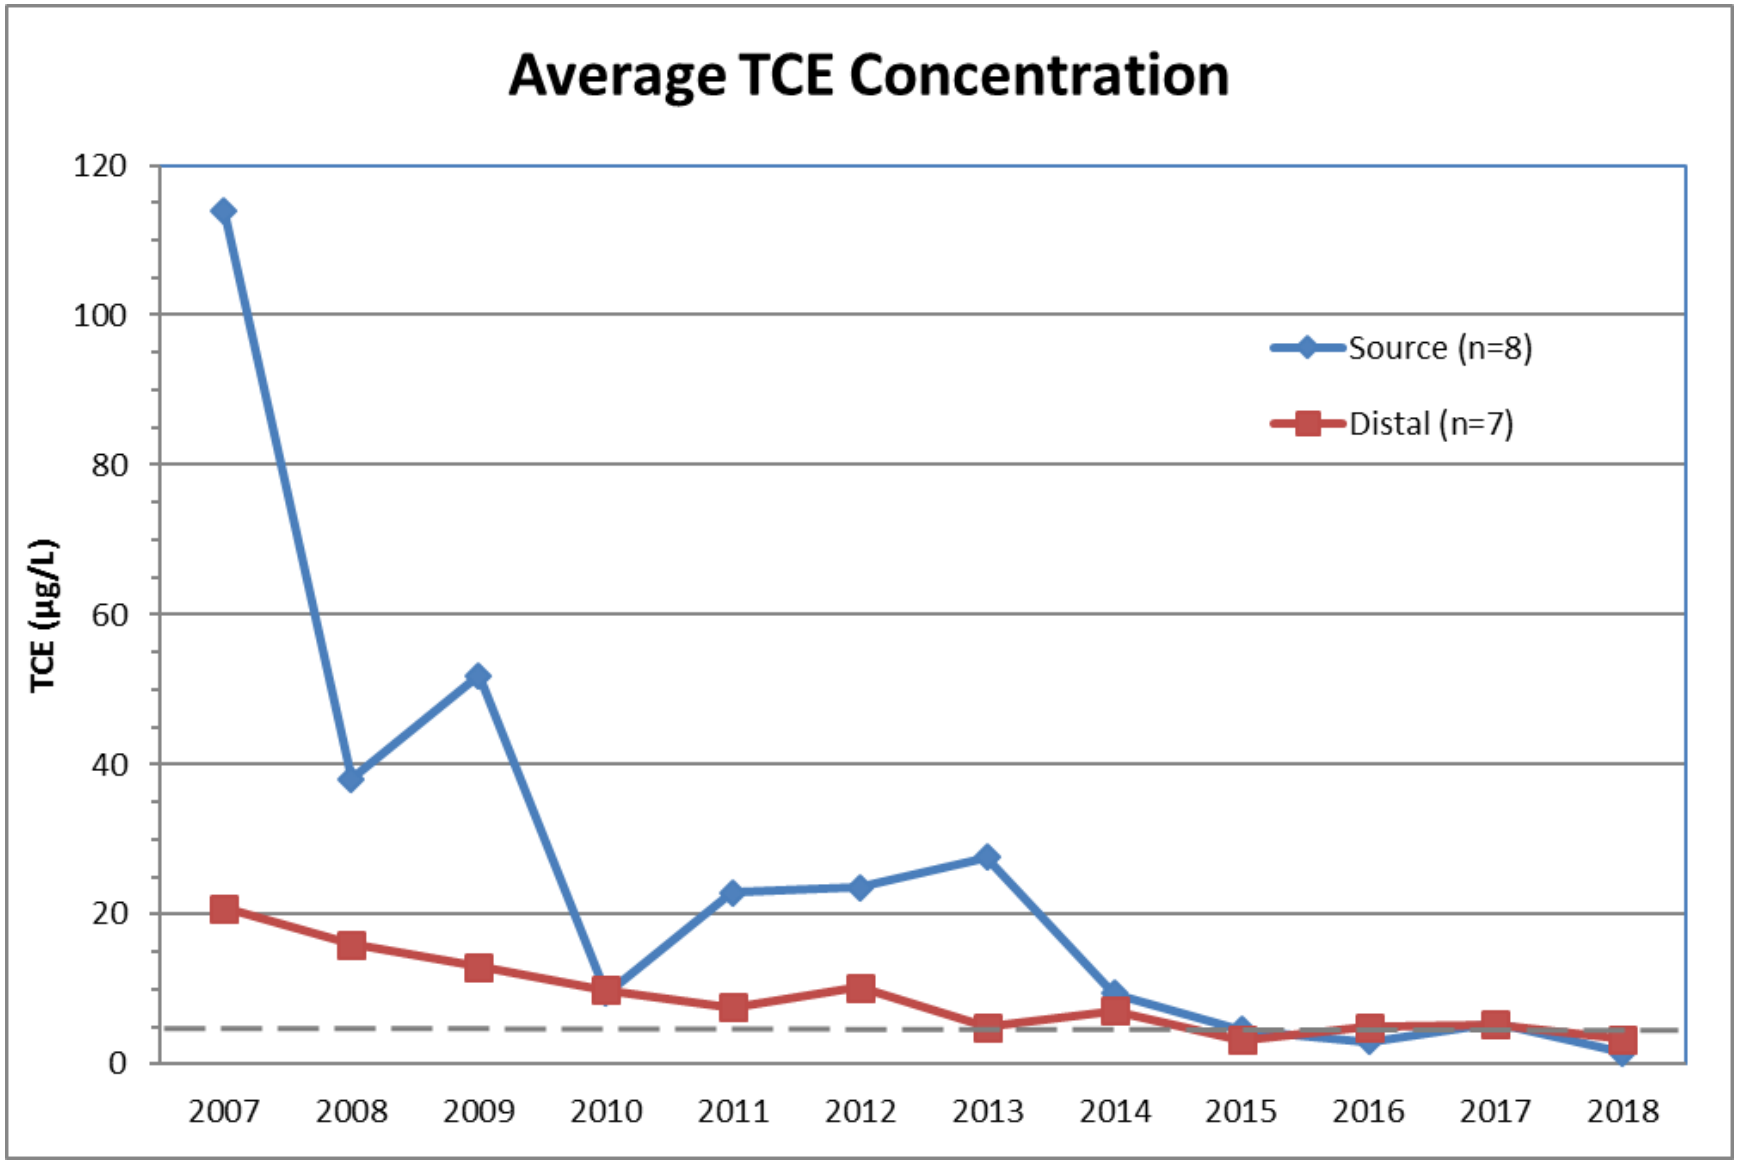

Figure A-27. Average TCE Concentrations of Monitoring Wells in the Treatment Zone and the Distal Plume

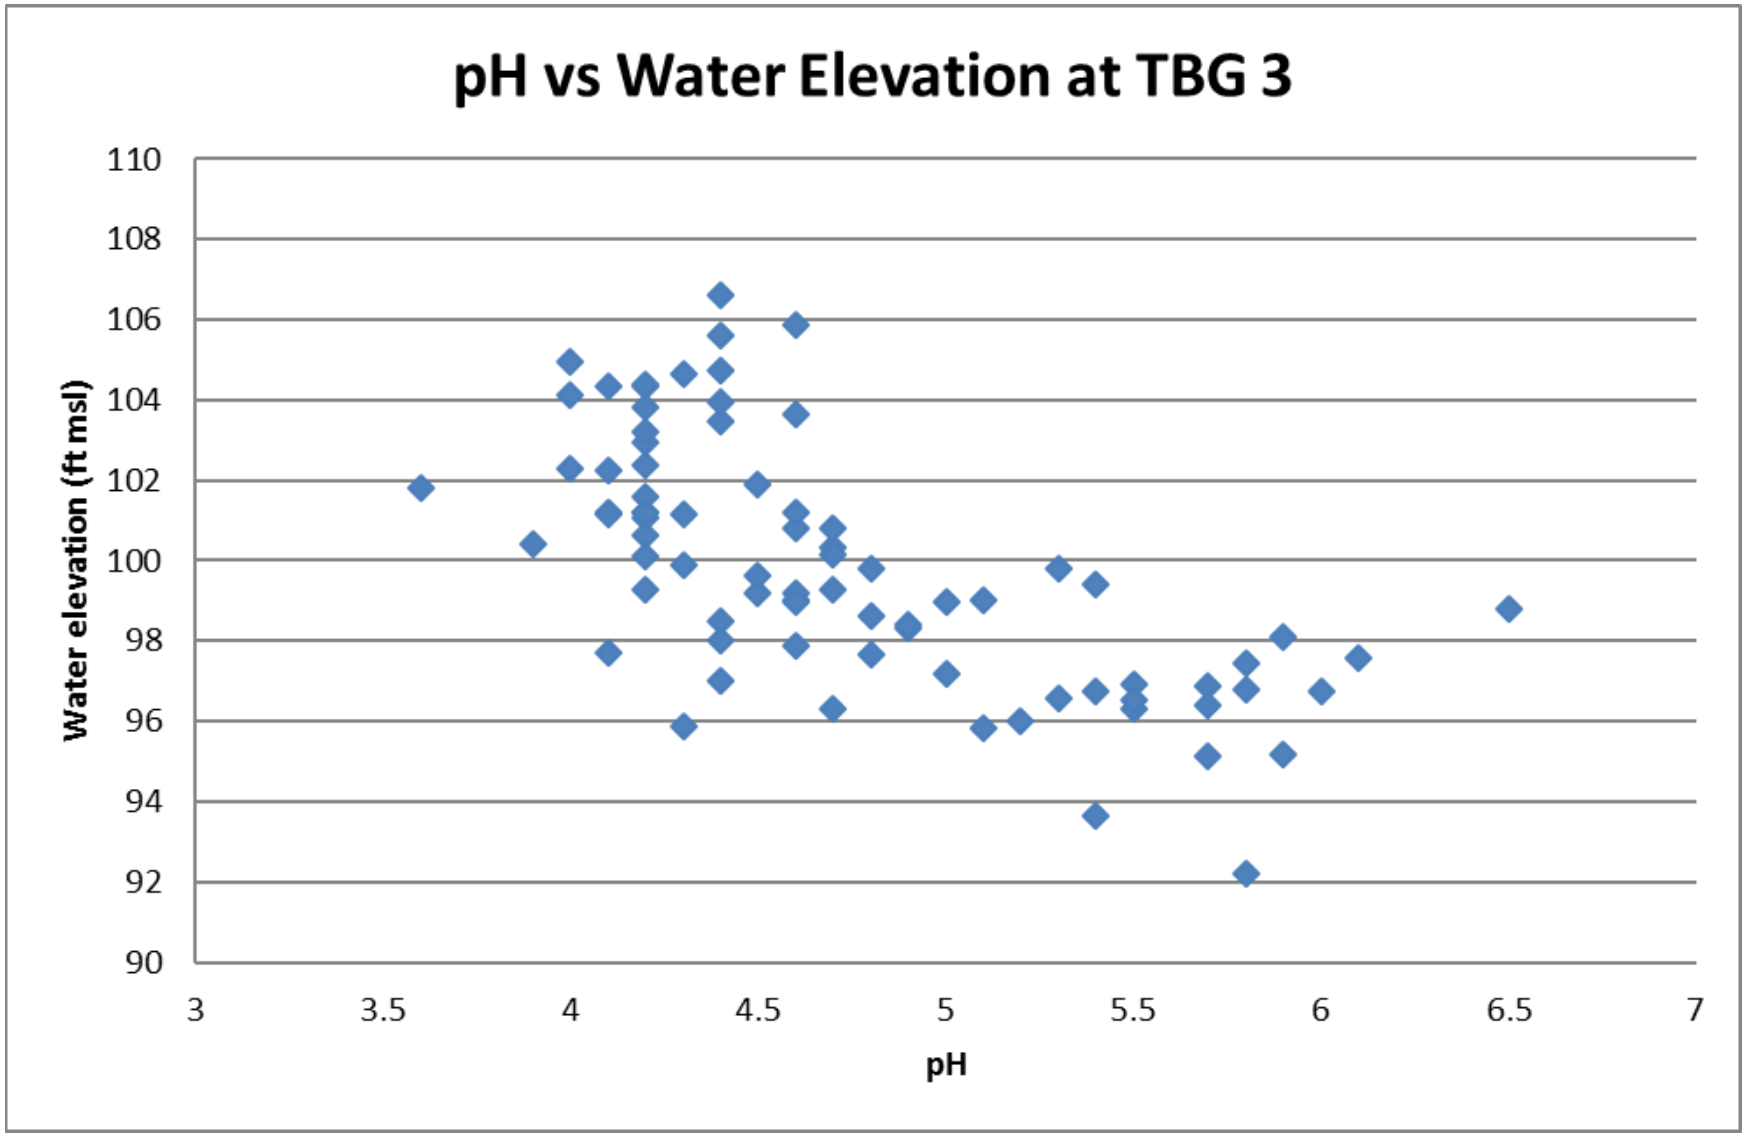

Figure A-28. Graphical Relationship of pH and Water Elevation at TBG 3

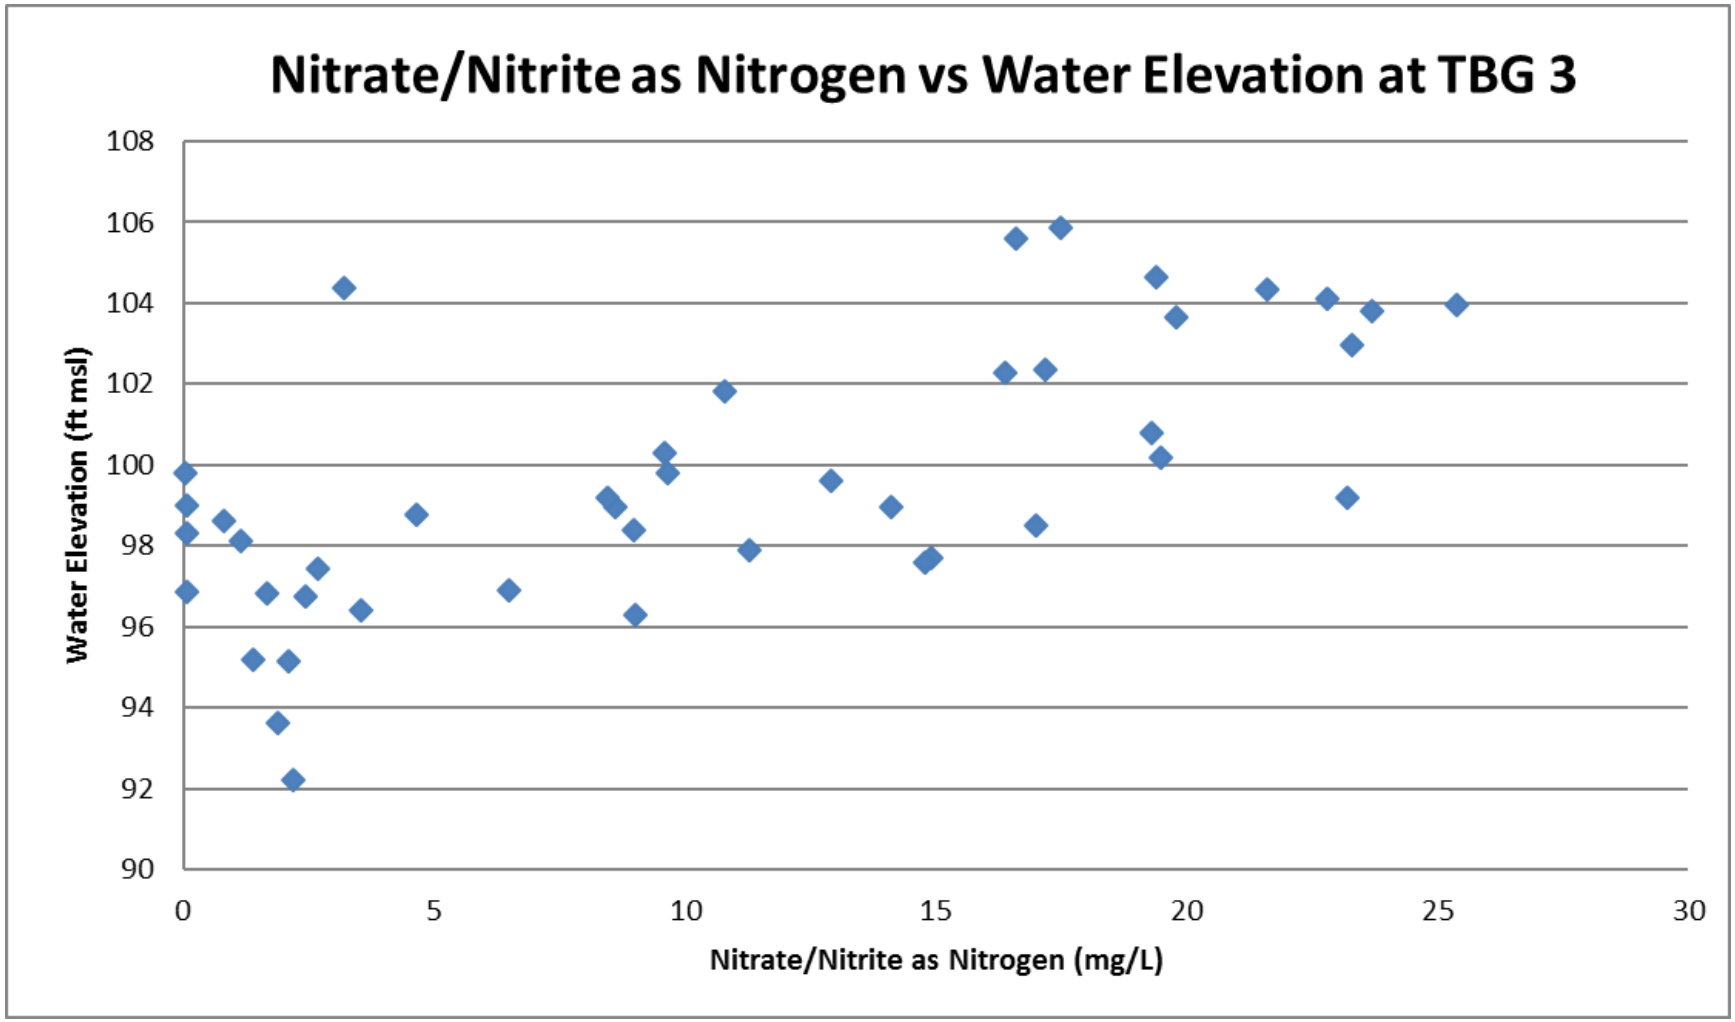

Figure A-29. Graphical Relationship of Nitrate/Nitrite as Nitrogen Concentration and Water Elevation at TBG 3

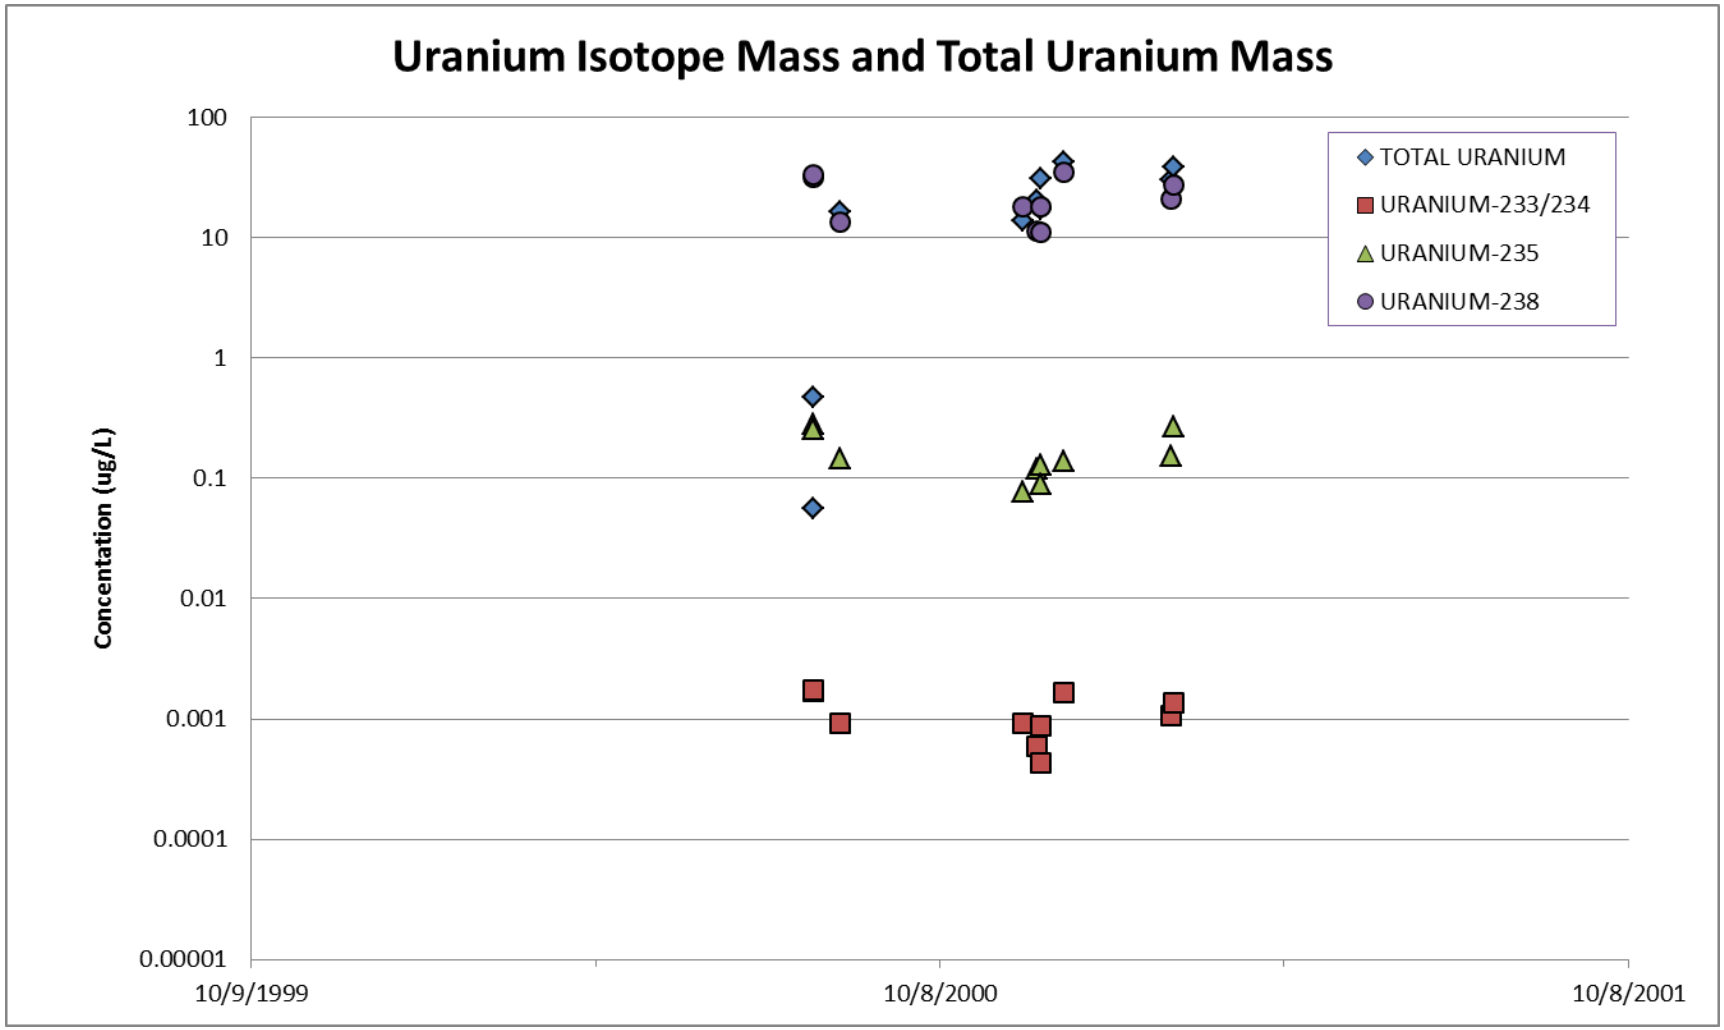

Figure A-30. Uranium Isotope Mass compared to Total Uranium Mass

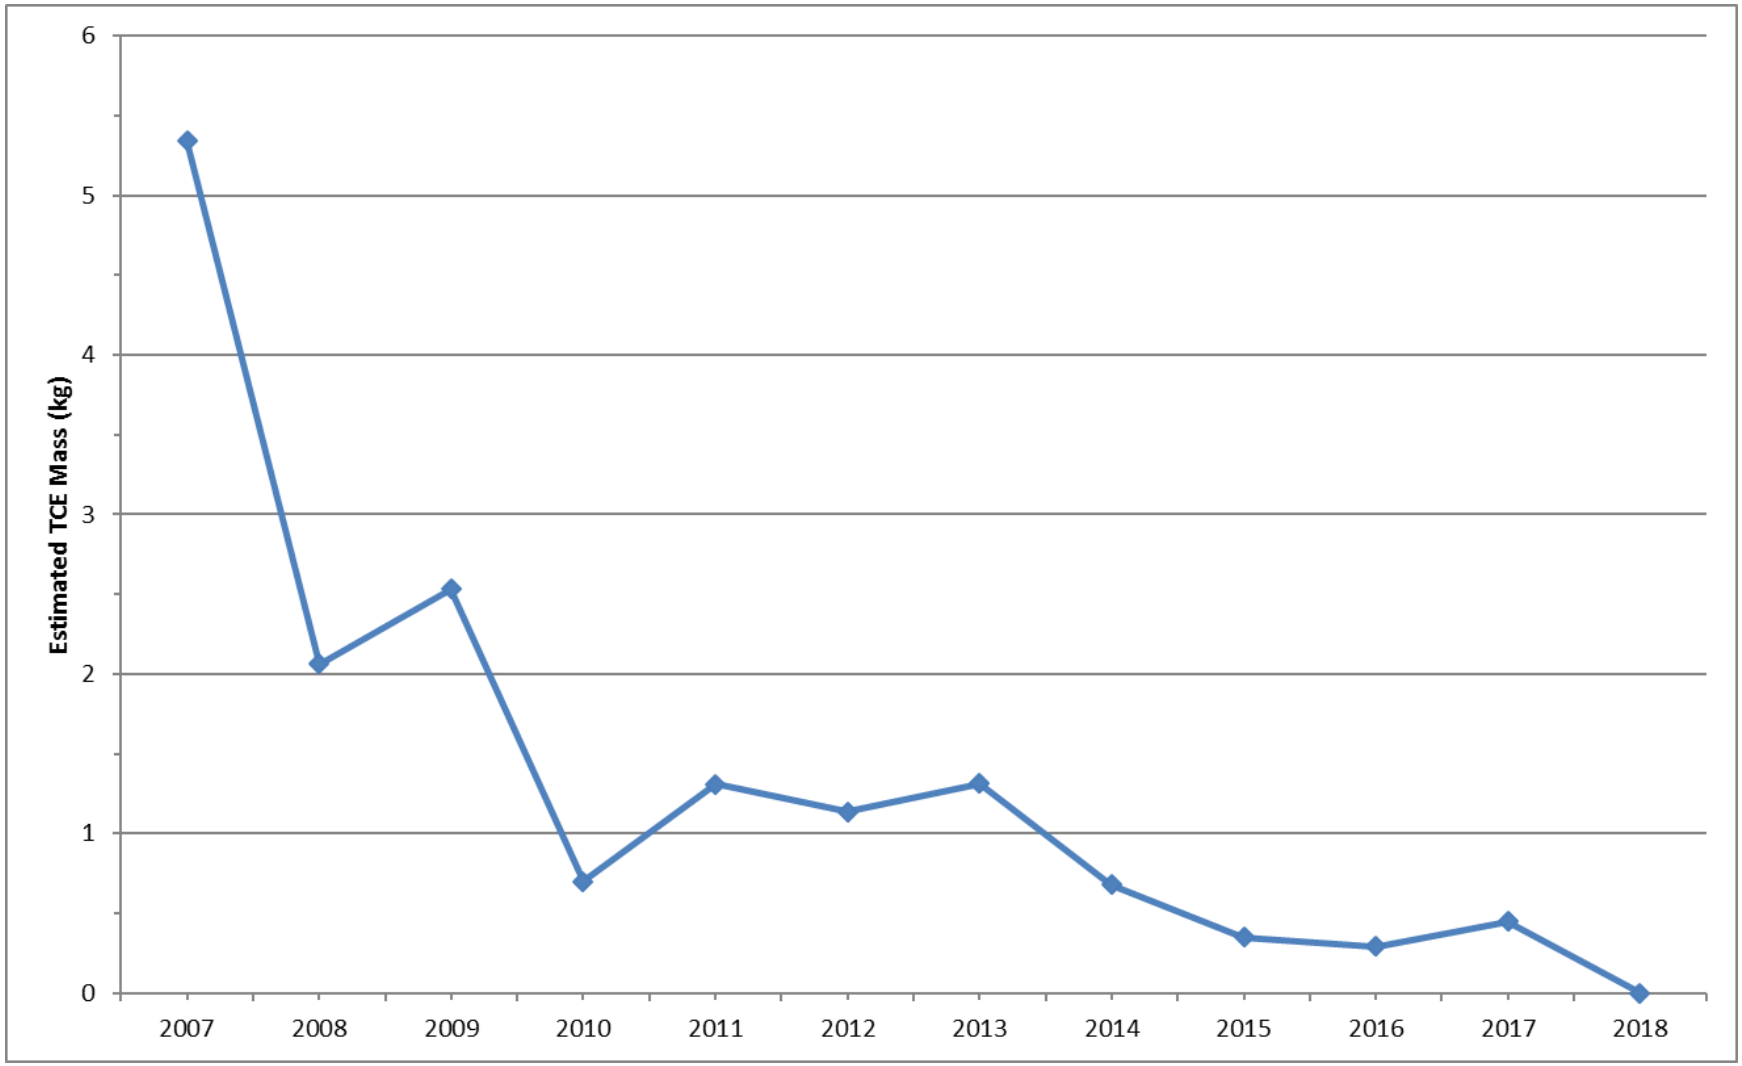

Figure A-31. Estimate of TCE Mass Reduction since Edible Oil Injections

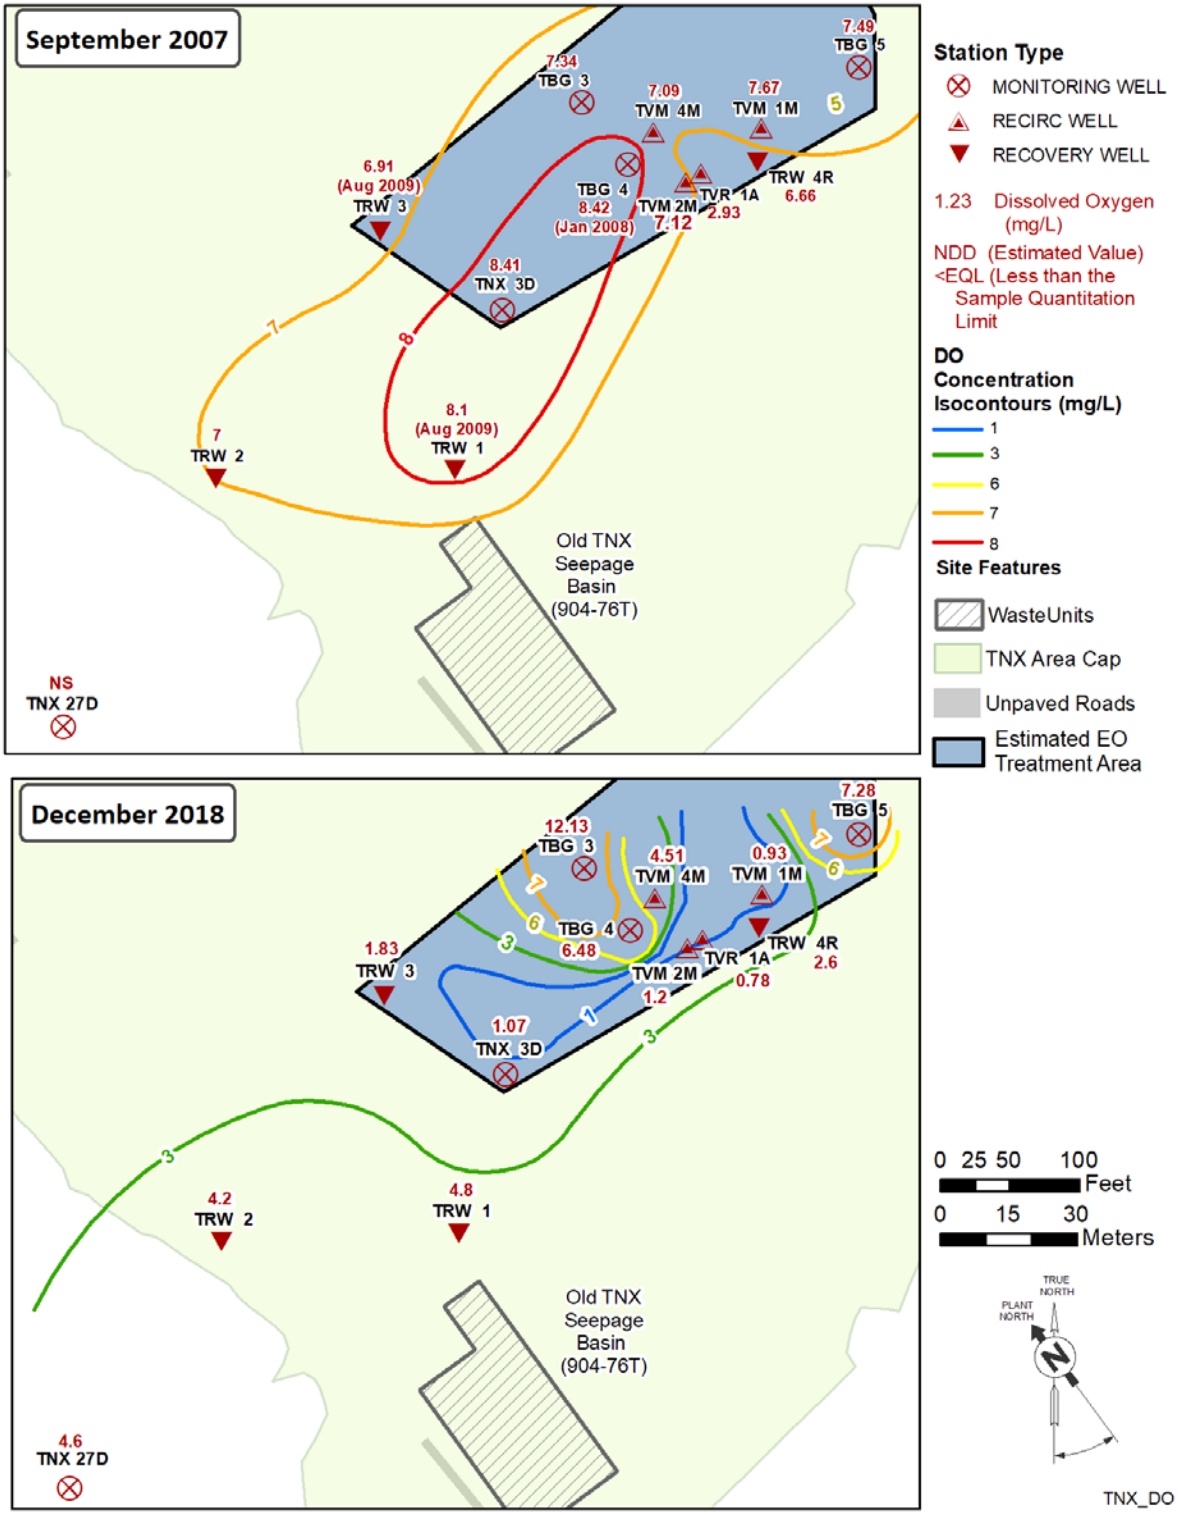

Figure A-32. Comparison of Dissolved Oxygen Concentration in the Treatment Zone in 2007 and 2018

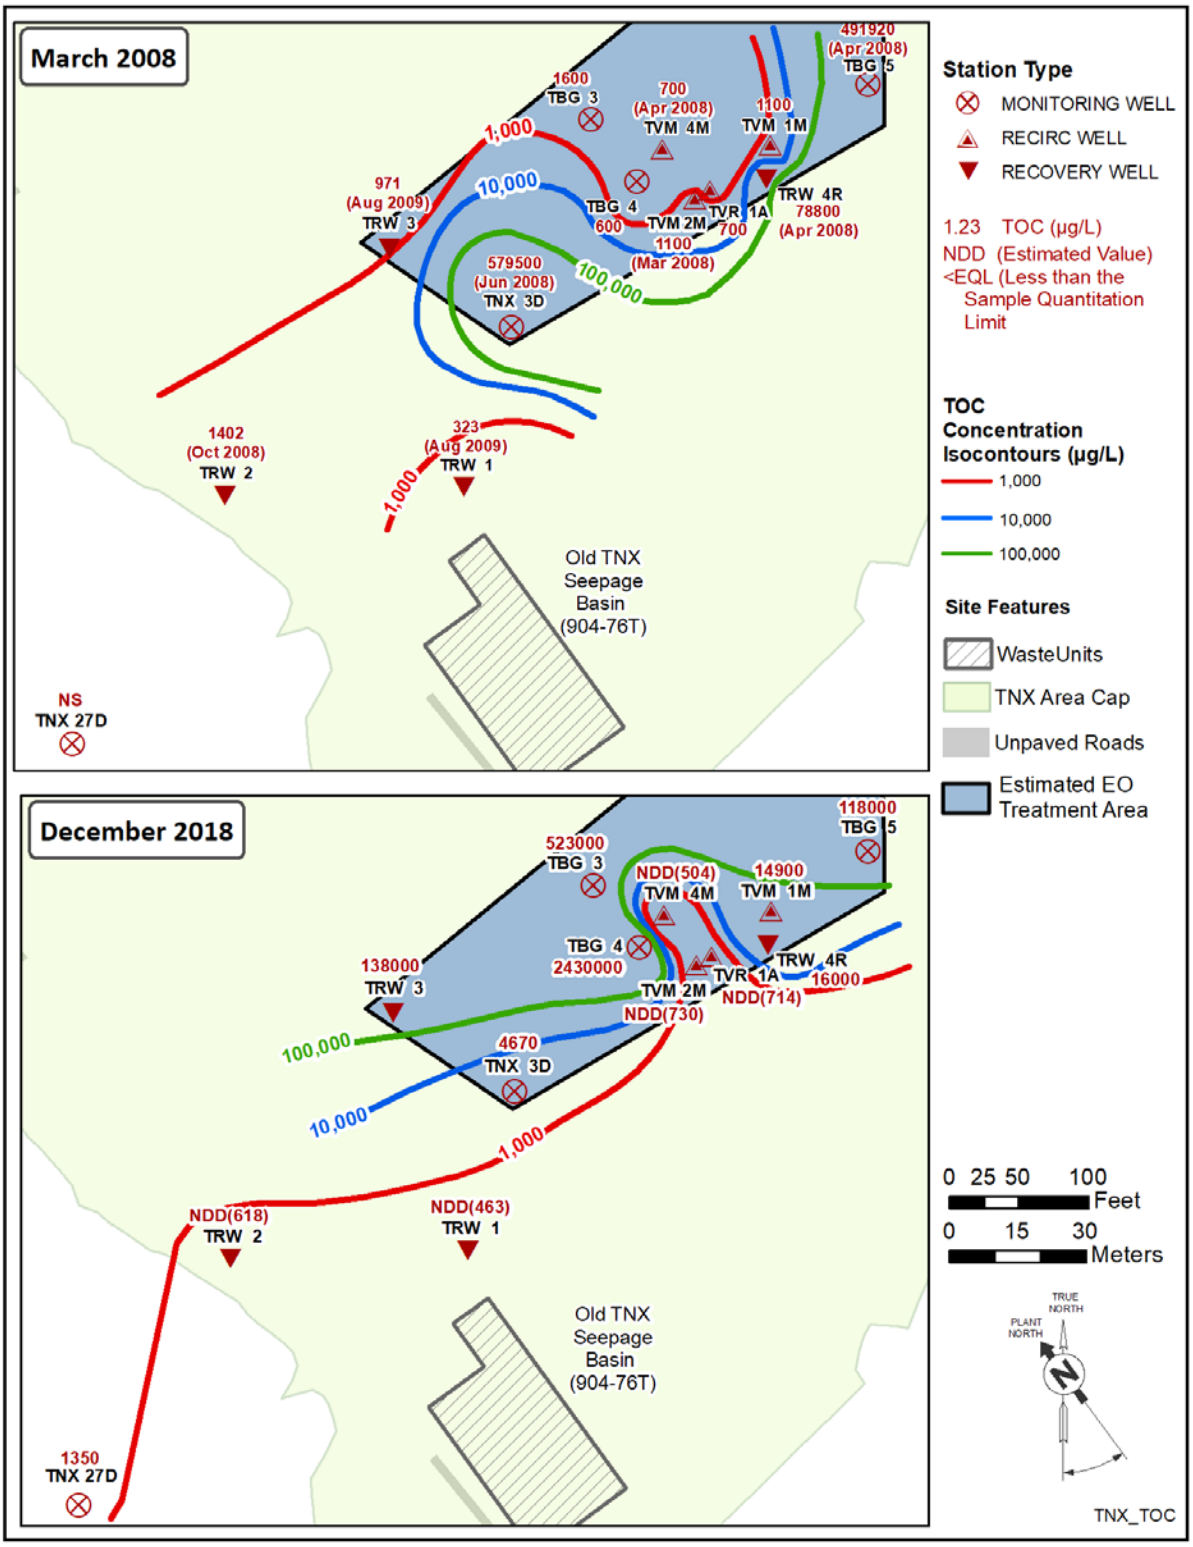

Figure A-33. Comparison of Total Organic Carbon Concentration in the Treatment Zone in 2008 and 2018

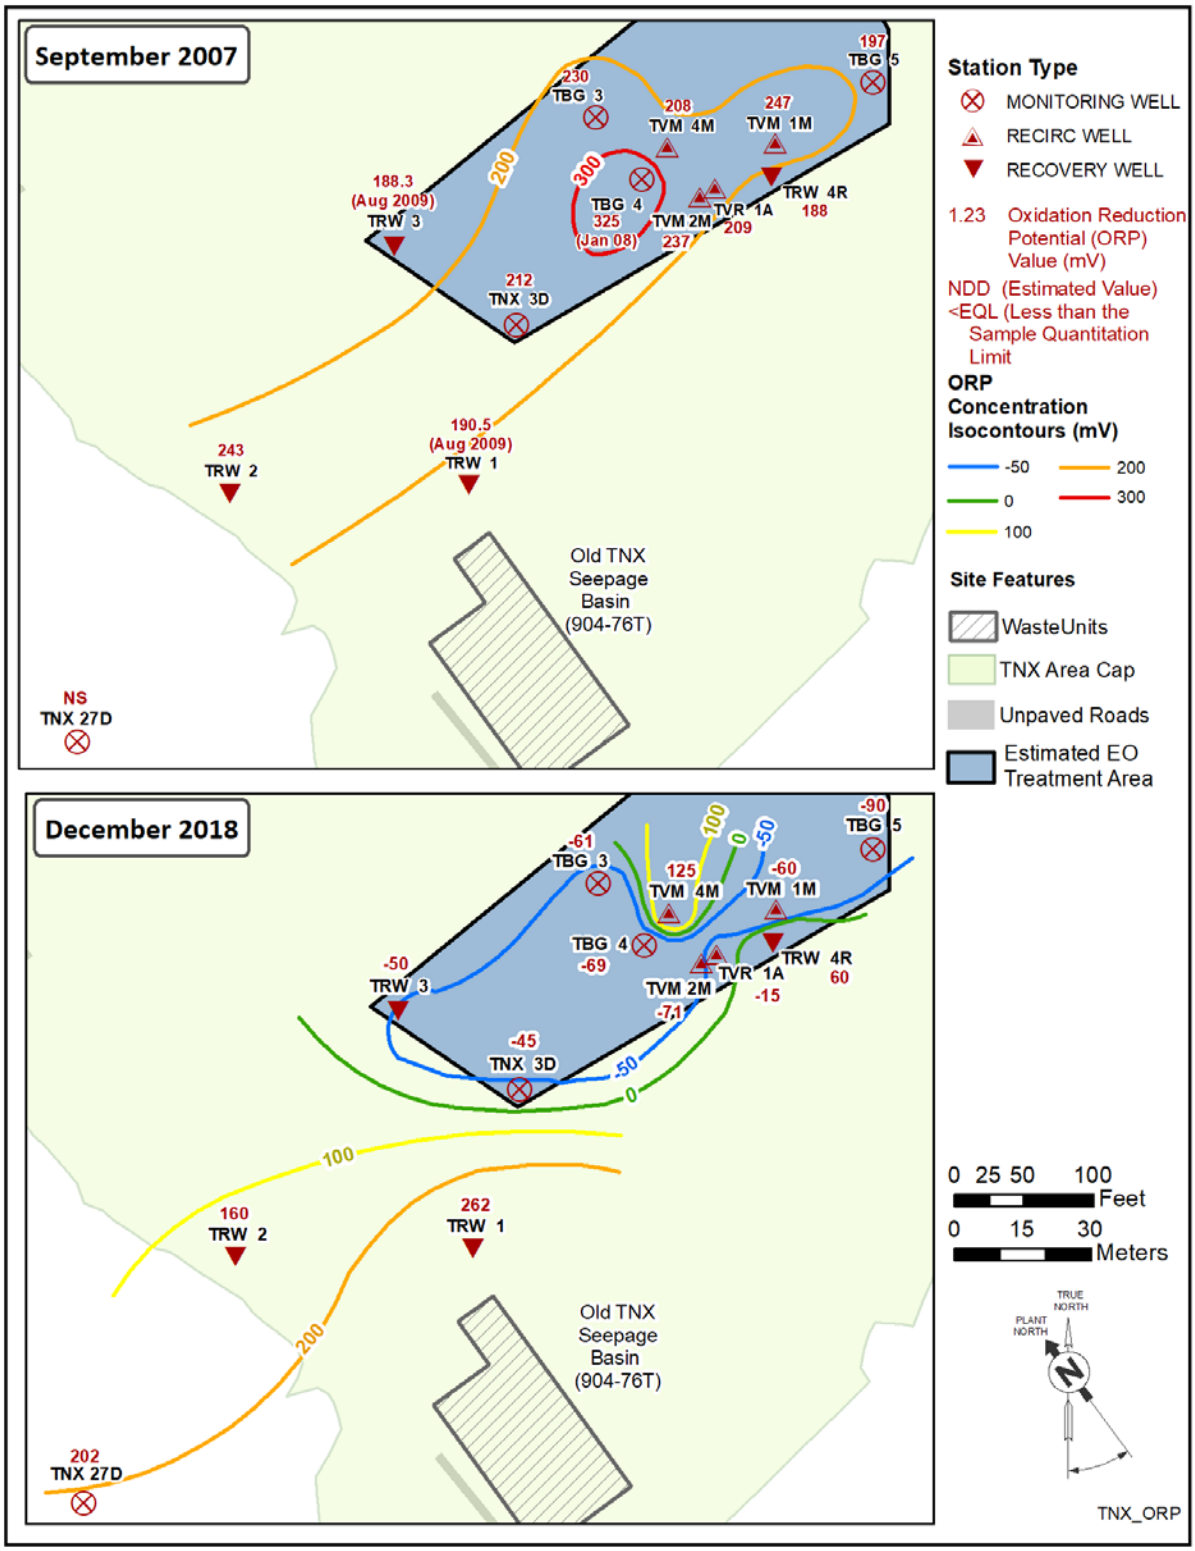

Figure A-34. Comparison of Oxidation Reduction Potential Concentration in the Treatment Zone in 2007 and 2018

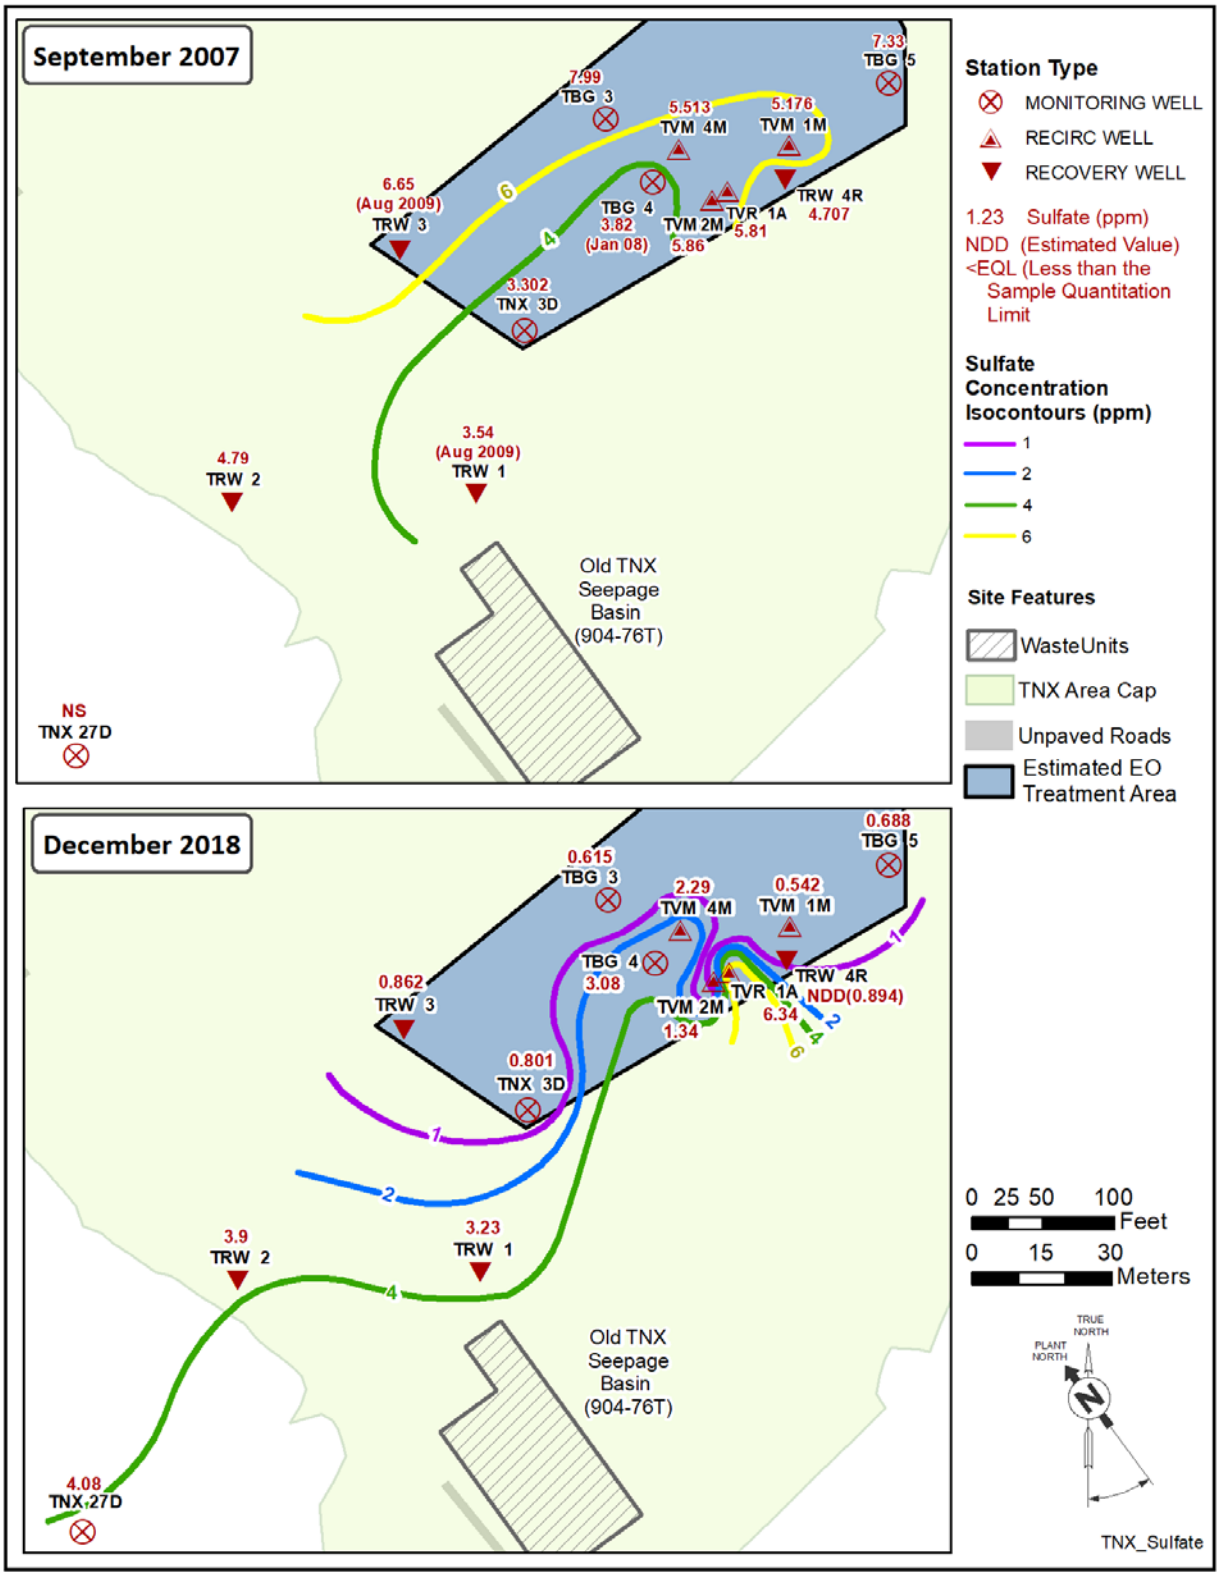

Figure A-35. Comparison of Sulfate Concentration in the Treatment Zone in 2007 and 2018

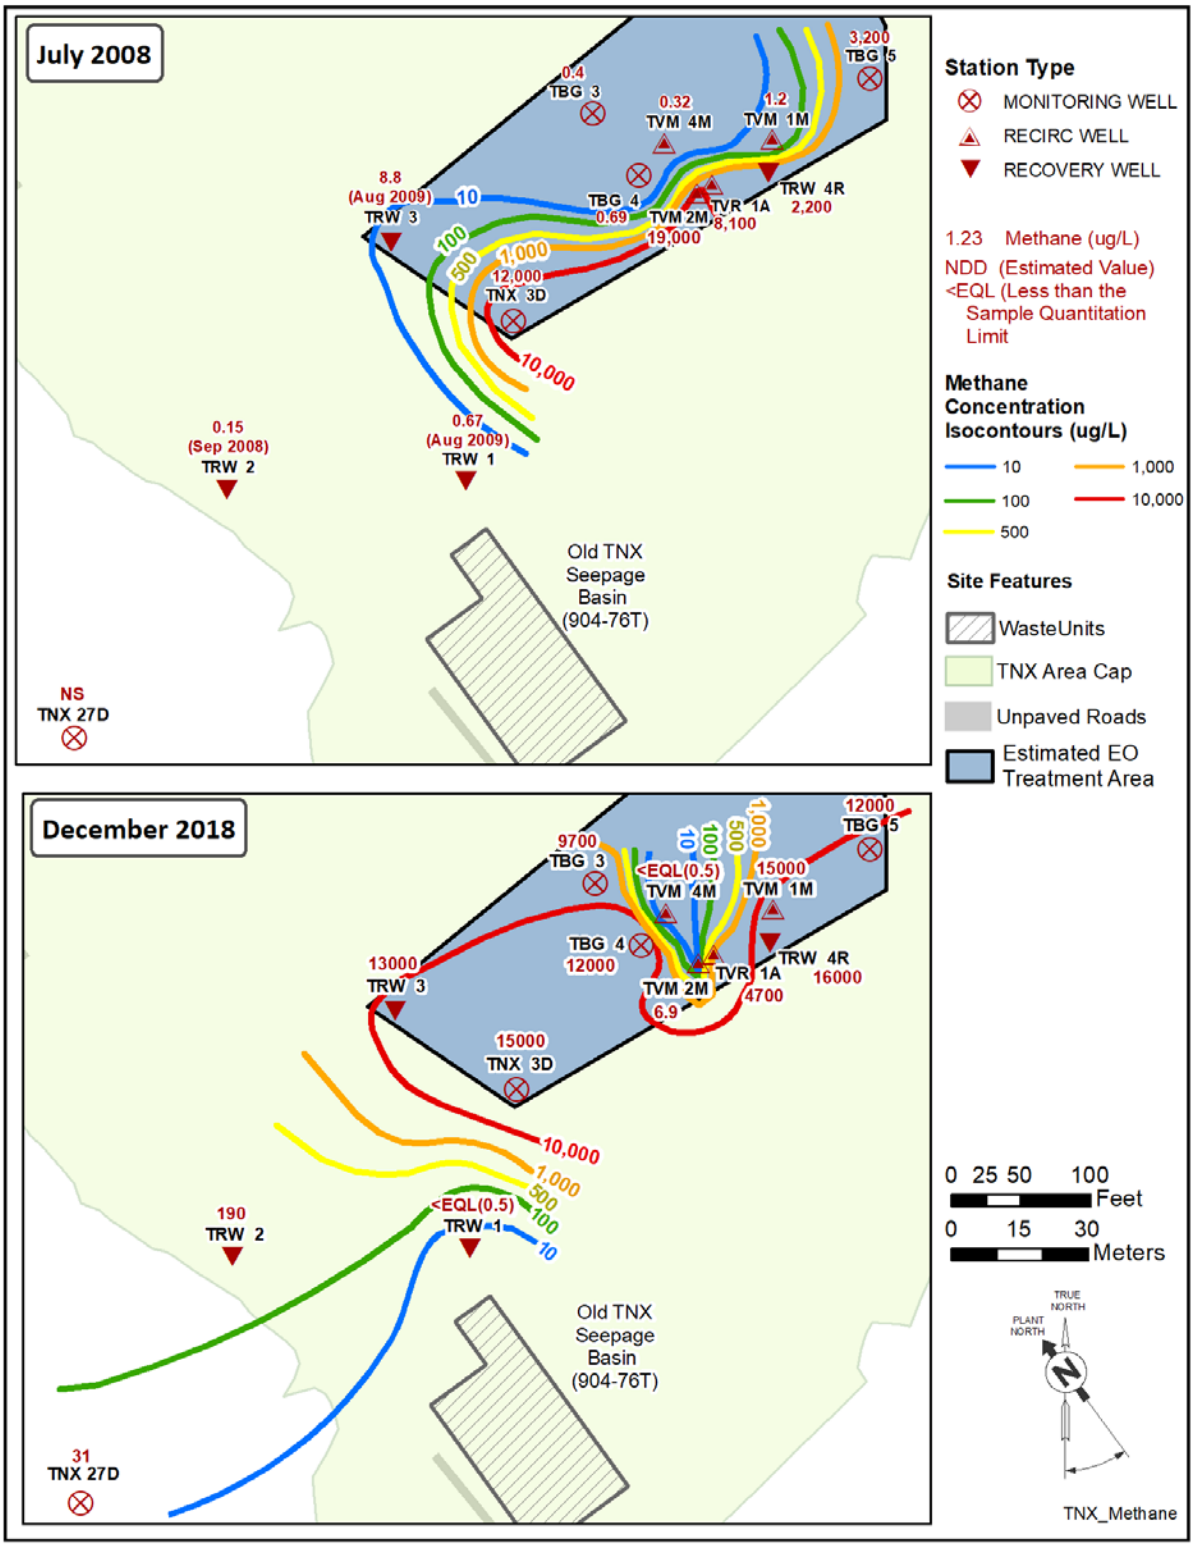

Figure A-36. Comparison of Methane Concentration in the Treatment Zone in 2008 and 2018

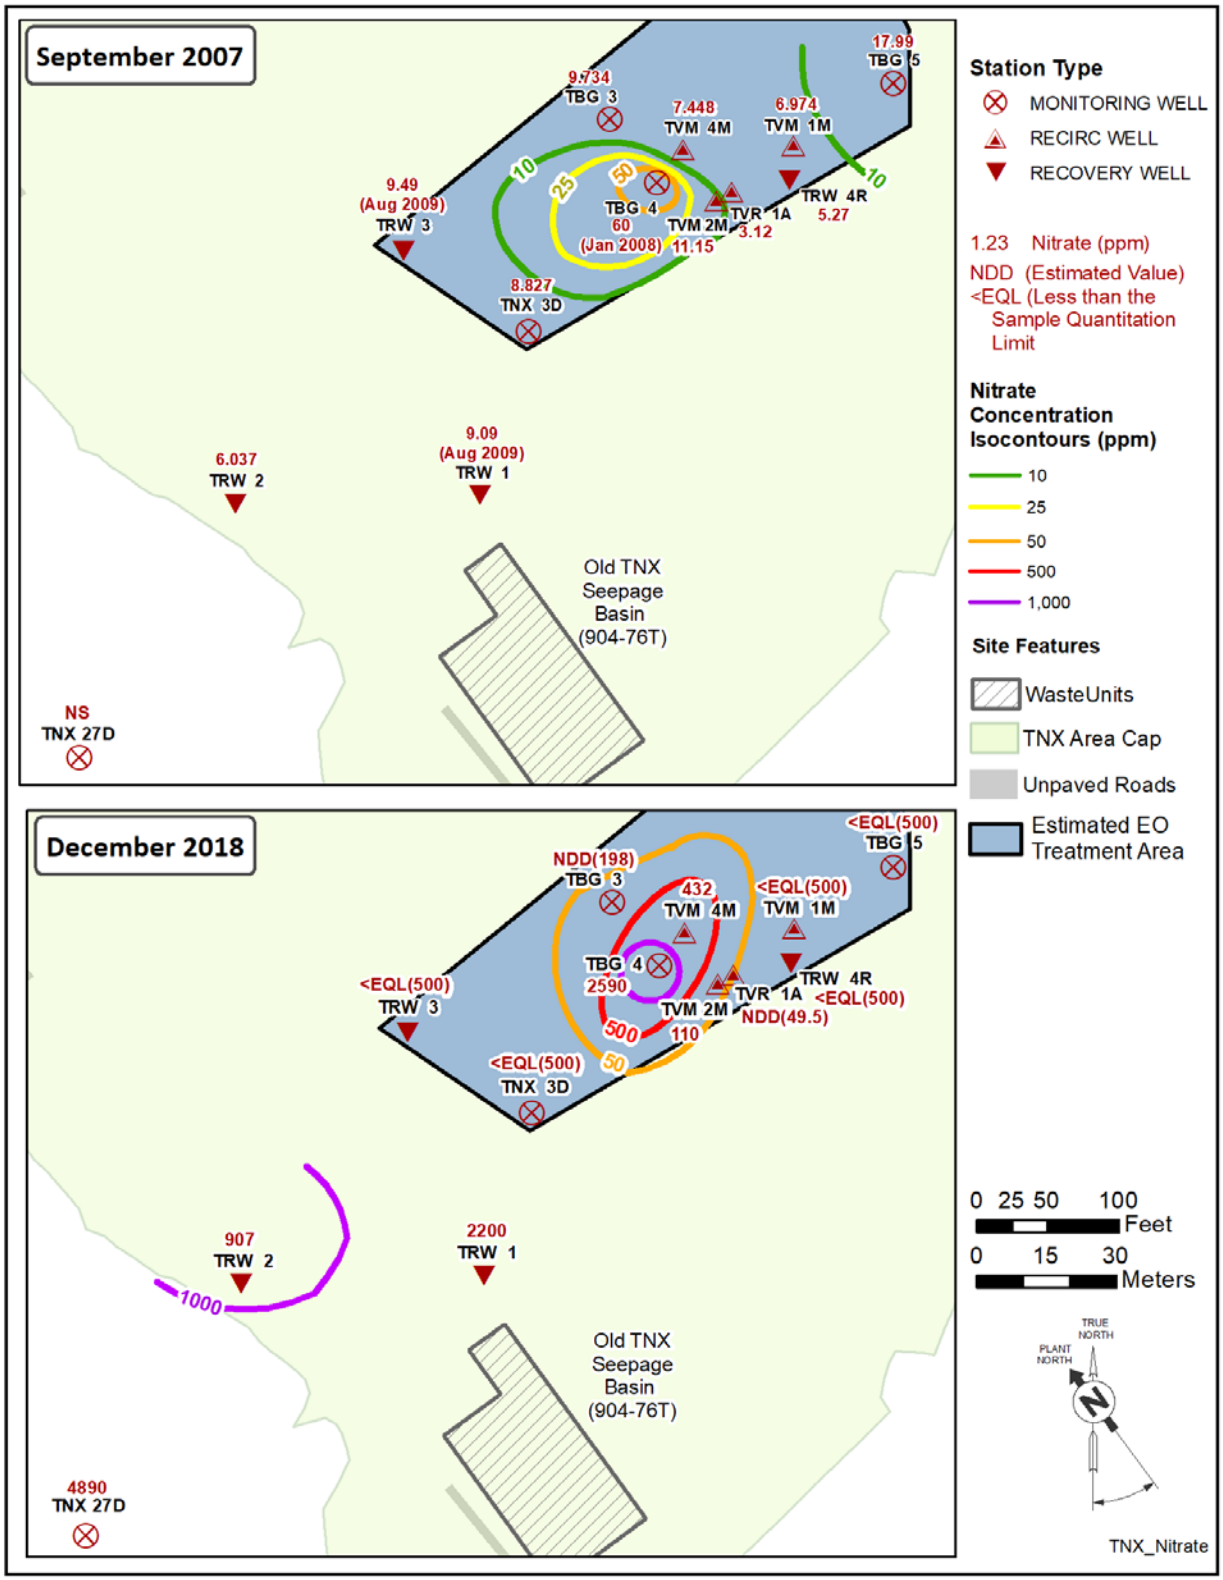

Figure A-37. Comparison of Nitrate Concentration in the Treatment Zone in 2007 and 2018

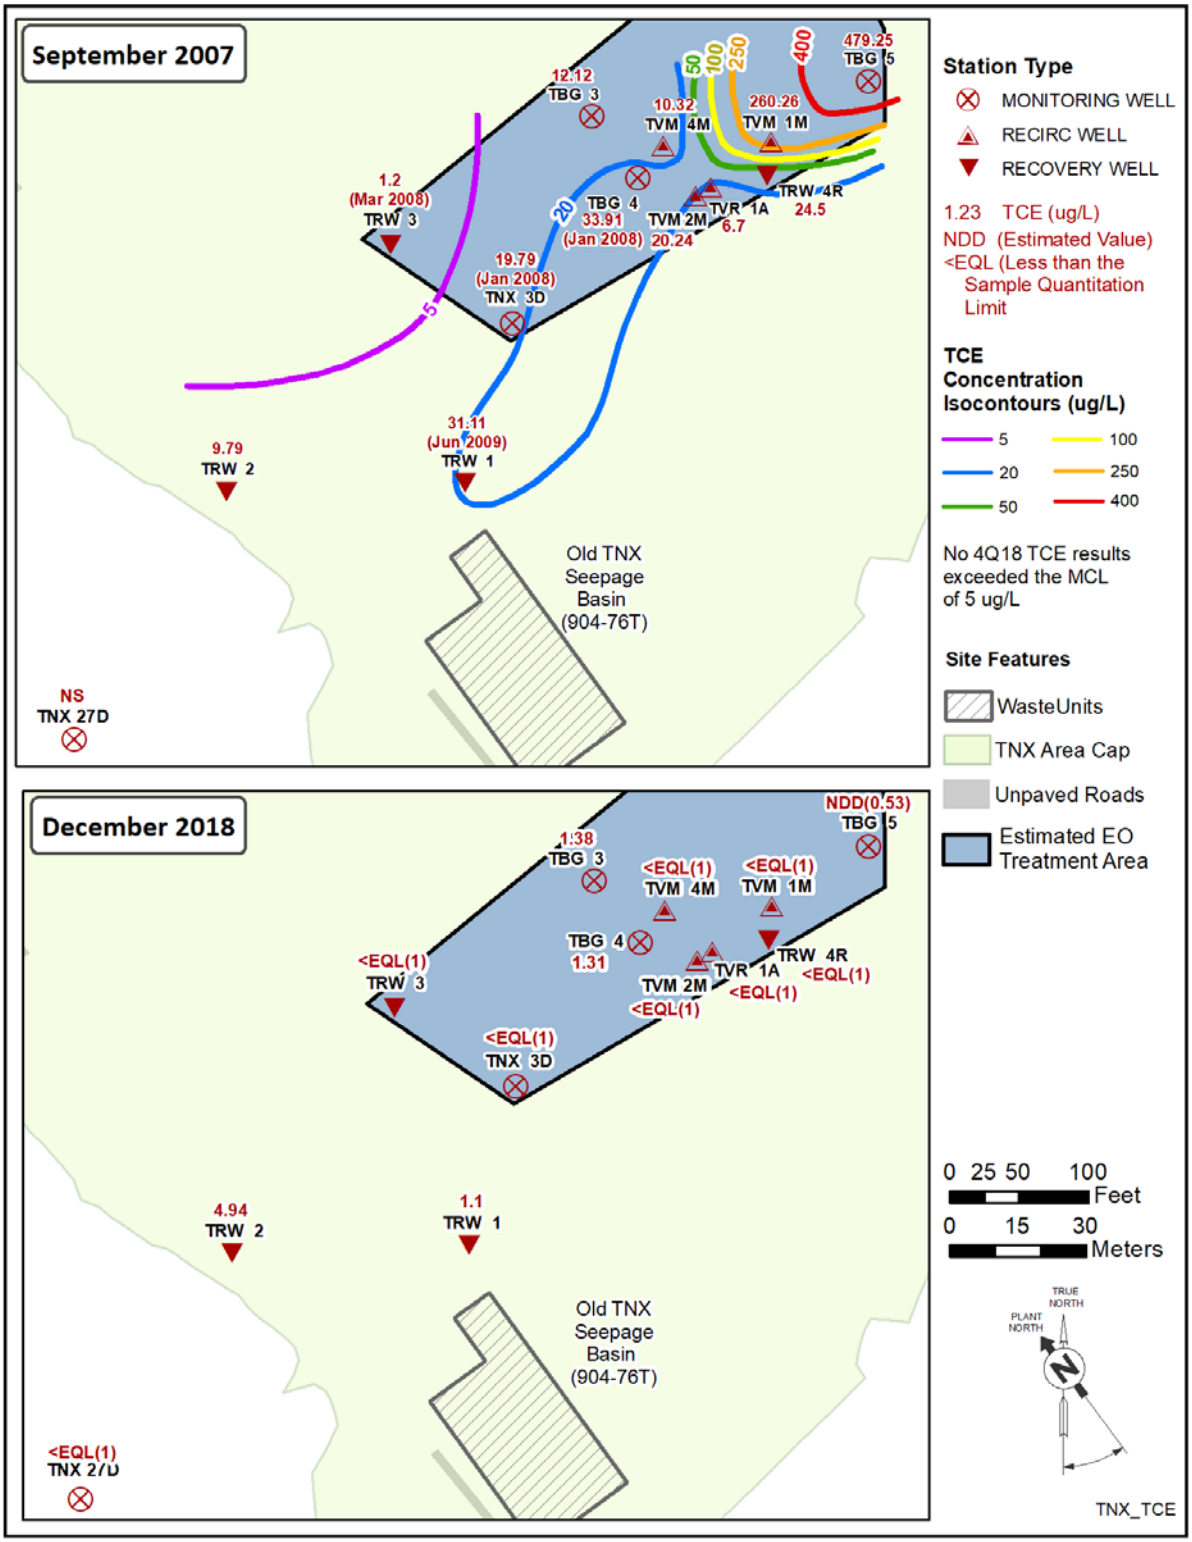

Figure A-38. Comparison of Trichloroethylene Concentration in the Treatment Zone in 2007 and 2018

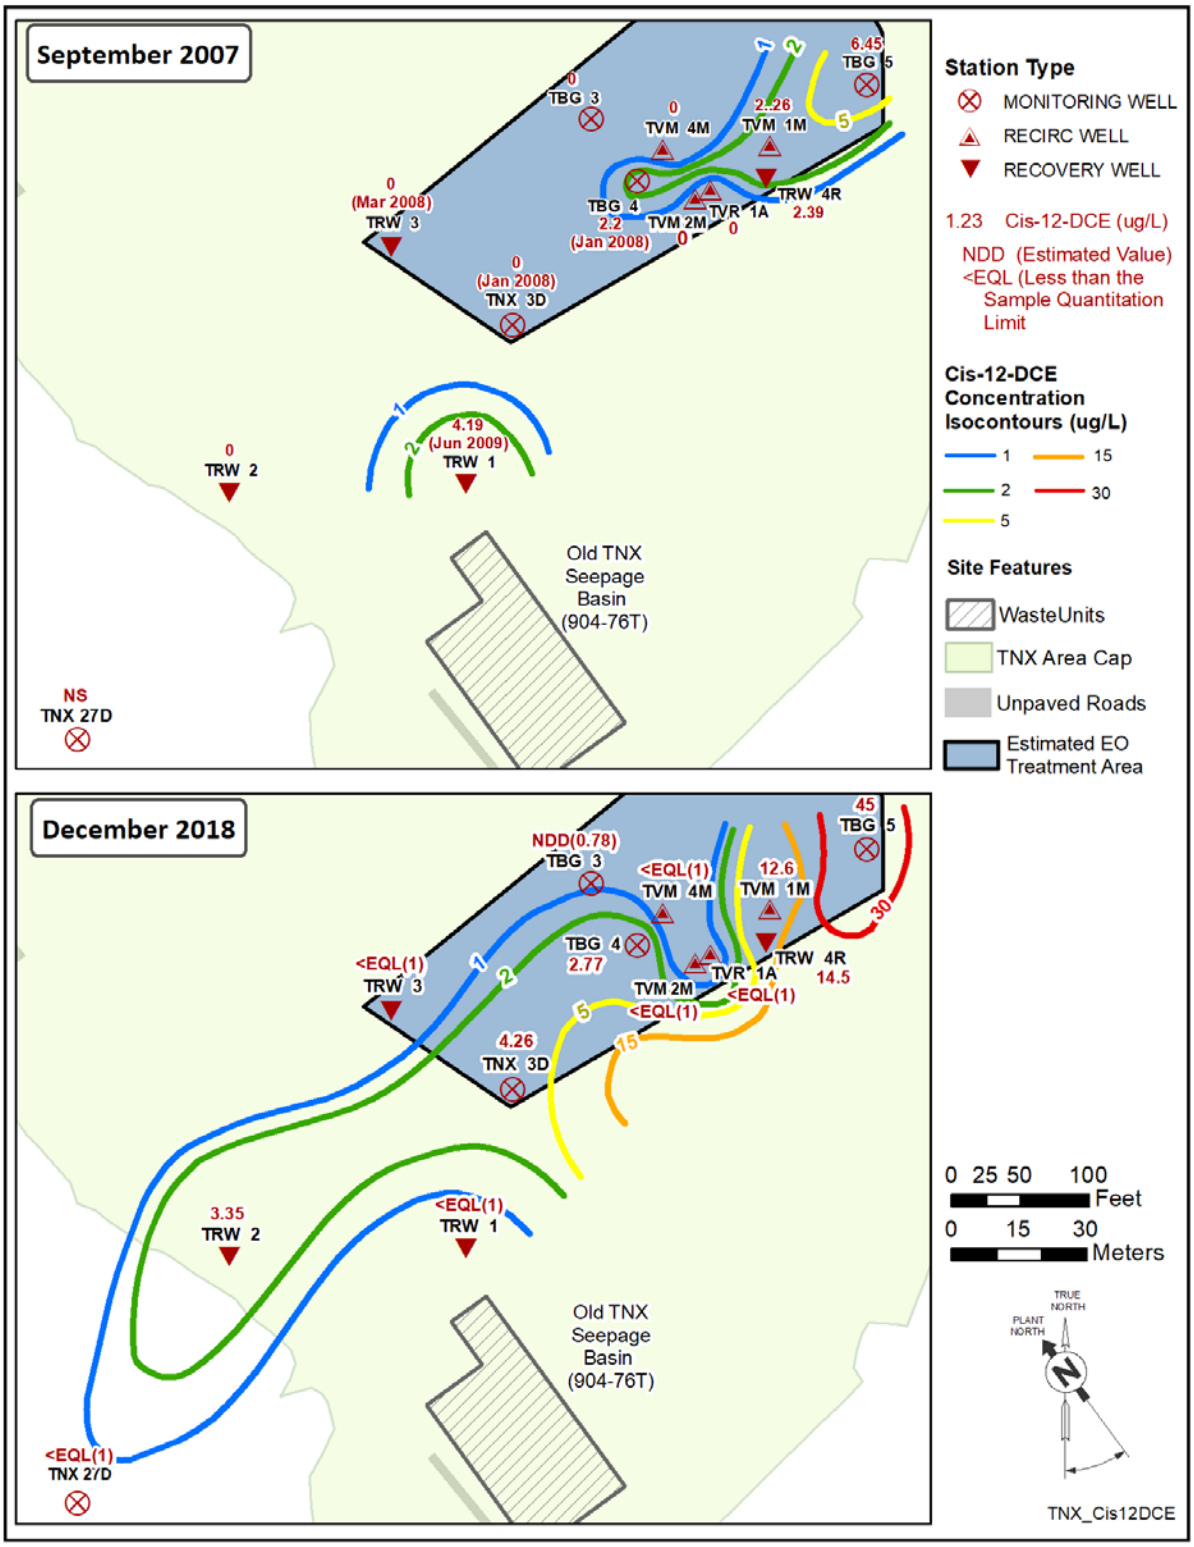

Figure A-39. Comparison of Cis-1,2-Dichloroethylene Concentration in the Treatment Zone in 2007 and 2018

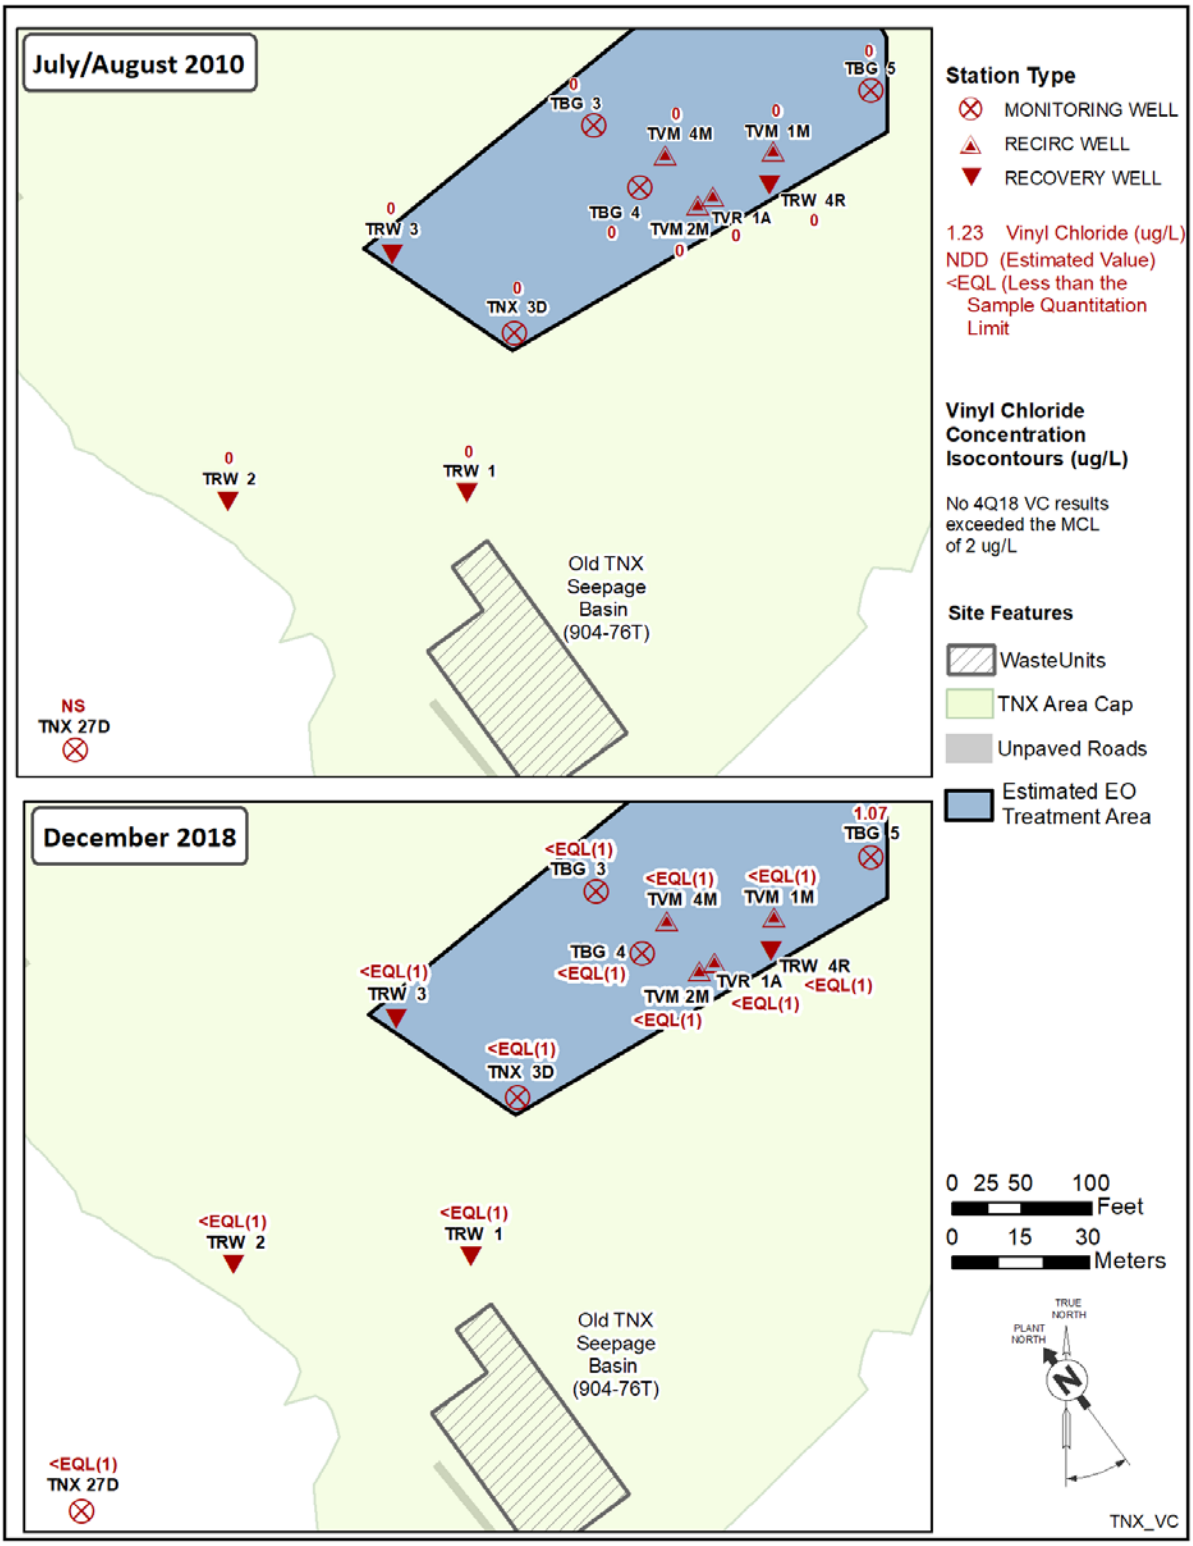

Figure A-40. Comparison of Vinyl Chloride Concentration in the Treatment Zone in 2010 and 2018

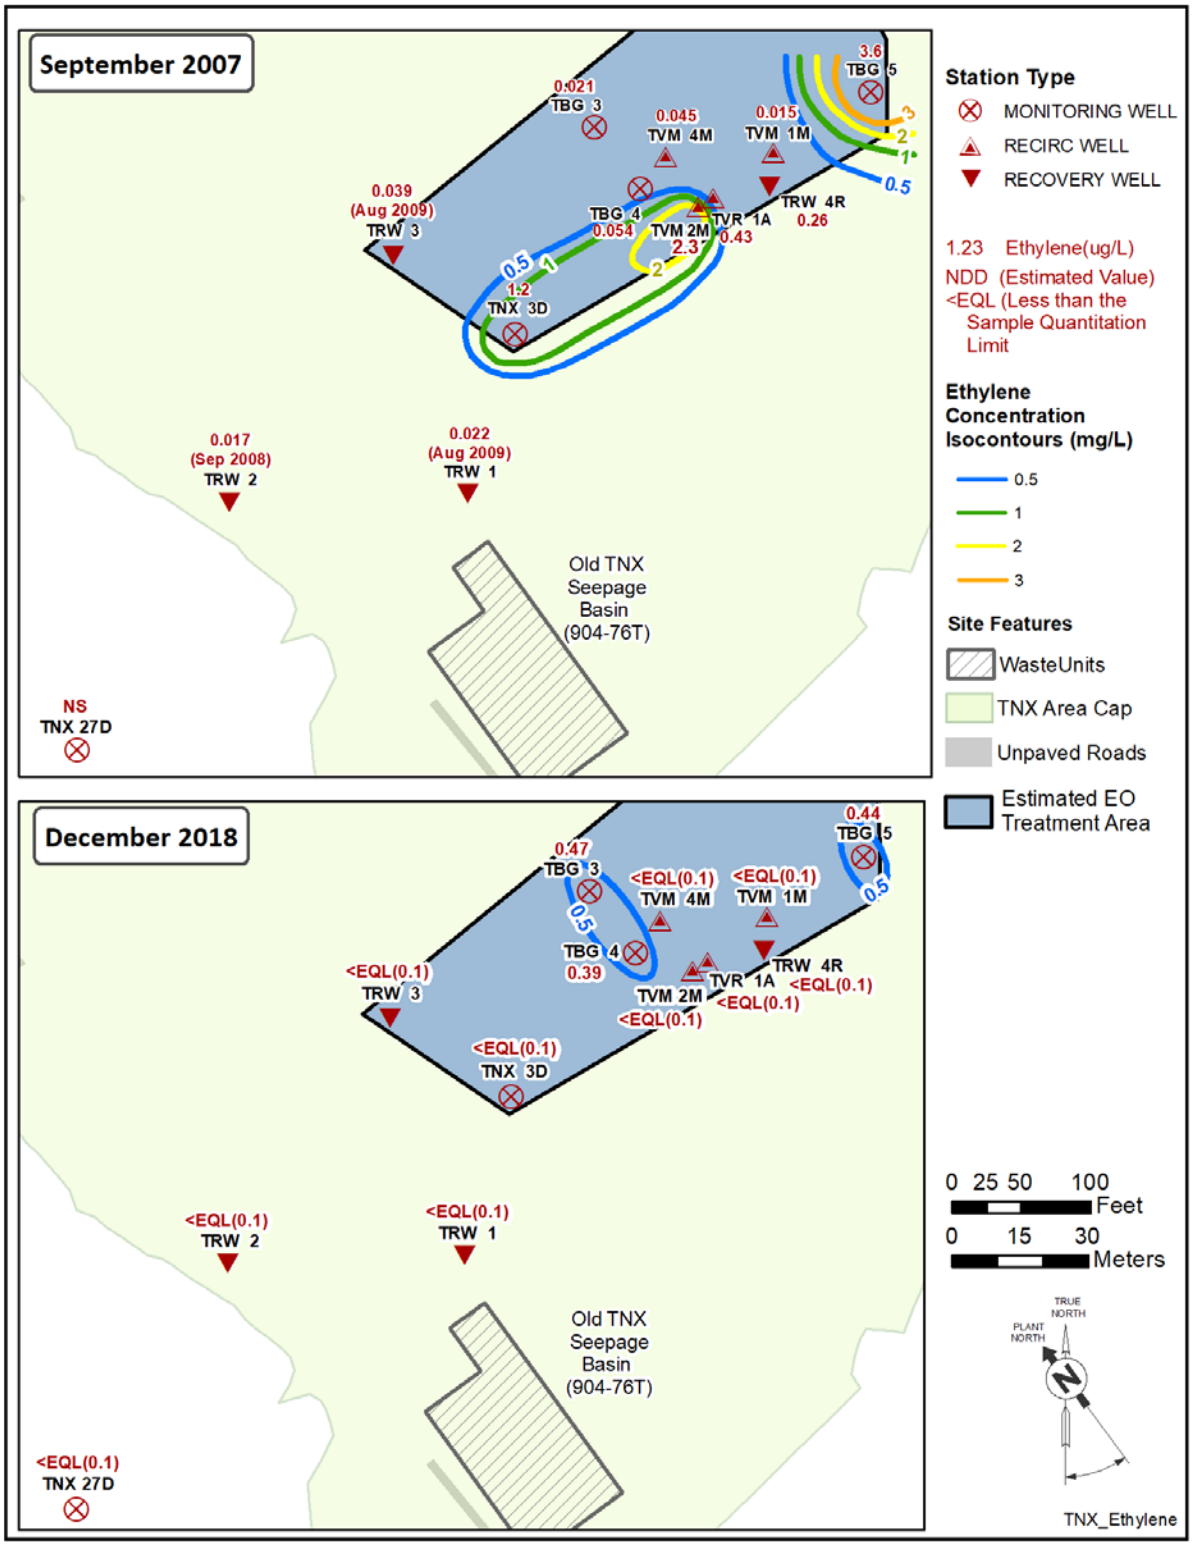

Figure A-41. Comparison of Ethylene Concentration in the Treatment Zone in 2008 and 2018

APPENDIX B

GROUNDWATER MONITORING RESULTS
(MATRIX TABLES)

This page intentionally left blank.

Table B-1. Groundwater Monitoring Results for TNX Area Wells, Second Quarter, 2018

| Table B-1 2Q 2018 TNX Annual Groundwater and Monitoring Report | | |

Table B-2. Groundwater Monitoring Results for TNX Area Wells, Fourth Quarter, 2018

Table B-2 4Q 2018 TNX Annual Groundwater and Monitoring Report			Field Data														TNX Monitoring Constituents																												
																	Fatty Acid						Hydrocarbons									Inorganics					Organics					Radionuclides					
			SAMPLE COLLECTION DATE	DEPTH TO WATER	OXIDATION/REDUCTION POTENTIAL	OXYGEN	PH	PHENOLPHTHALEIN ALKALINITY (AS CACO3)	SAMPLING EVENT WATER ELEVATION	SPECIFIC CONDUCTANCE	TOTAL ALKALINITY (AS CACO3)	TURBIDITY	VOLUME PURGED	WATER TEMPERATURE	FIELD CONDITIONS	Constituent	ACETIC ACID	BUTYRIC ACID	LACTIC ACID	PROPIONIC ACID	PYRUVIC ACID	Total Volatile Fatty Acids	BUTANE	CARBON DIOXIDE	ETHANE	ETHYLENE	ISOBUTANE	METHANE	NITROGEN	PROPANE	PROPYLENE	IRON	MERCURY	NITRATE	NITRATE-NITRITE AS NITROGEN	SULFATE	TOTAL ORGANIC CARBON	URANIUM	1,4-DIOXANE	CARBON TETRACHLORIDE	CHLOROETHENE (VINYL CHLORIDE)	CIS-1,2-DICHLOROETHYLENE	TETRACHLOROETHYLENE (PCE)	TRICHLOROETHYLENE (TCE)	ADJUSTED GROSS ALPHA	COMBINED RADIUM (226 AND 228)	CONVERTED URANIUM ACTIVITY	GROSS ALPHA	NONVOLATILE BETA	RADIUM-226	RADIUM-228
			day-month-year	ft	mV	mg/L	pH	mg/L	ft	uS/cm	mg/L	NTU	gal	degC		NPDWS Unit	ug/L	ug/L	N/A	ug/L	N/A		ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	mg/L	mg/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	ug/L	pCi/L	pCi/L	ug/L	pCi/L	pCi/L	pCi/L	pCi/L
Station	Well Use	Aquifer Zone																																														
P 26A	Background Well	Semi-Confined, GAU	06-Dec-2018	37.38	171	5.12	5.8	0	117.12	39	8	0.6	126	18.3	No Comments		<EQL(1000)	<EQL(1000)	NS	<EQL(1000)	NS	0	<EQL(0.2)	28000	<EQL(0.1)	<EQL(0.1)	<EQL(0.2)	<EQL(0.5)	16000	<EQL(0.1)	<EQL(0.1)	82.7	<EQL(0.2)	[44.1]	10 0.0553	8.19	[988]	<EQL(5)	80	0.46 <EQL(3)	<EQL(1)	5	5 <EQL(1)	70 <EQL(1)	5 <EQL(1)	15 [2.23]	5 0.43	<EQL(3.35)	[2.23]	15	<EQL(8.98)	5 0.43	<EQL(1.1)
P 26B	Background Well	Unconfined UTRAU/GAU	06-Dec-2018	51.56	154	4.91	6.1	0	102.94	69	12	1.8	42	18.6	No Comments		<EQL(1000)	<EQL(1000)	NS	<EQL(1000)	NS	0	<EQL(0.2)	35000	<EQL(0.1)	<EQL(0.1)	<EQL(0.2)	<EQL(0.5)	16000	<EQL(0.1)	<EQL(0.1)	20.7	<EQL(0.2)	309	0.354	3.03	[675]	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(3.84)	0.4	<EQL(3.35)	<EQL(3.84)	<EQL(8.84)	0.396	<EQL(0.944)
P 26D	Background Well	Unconfined UTRAU/GAU	06-Dec-2018	43.13	185	5.27	6	0	111.37	55	10	0.7	13	17.1	No Comments		<EQL(1000)	<EQL(1000)	NS	<EQL(1000)	NS	0	<EQL(0.2)	44000	<EQL(0.1)	<EQL(0.1)	<EQL(0.2)	<EQL(0.5)	15000	<EQL(0.1)	<EQL(0.1)	25.8	<EQL(0.2)	480	0.479	1.43	5560	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(4.92)	<EQL(1.06)	<EQL(3.35)	<EQL(4.92)	[4.29]	<EQL(0.155)	<EQL(1.06)
TRW 1	Recovery Well	Unconfined UTRAU/GAU	04-Dec-2018	66.7	262	4.8	5.7	0	96.16	56	6	0.5	30	20.5	No Comments		<EQL(1000)	<EQL(1000)	NS	<EQL(1000)	NS	0	<EQL(0.2)	29000	<EQL(0.1)	<EQL(0.1)	<EQL(0.2)	<EQL(0.5)	14000	<EQL(0.1)	<EQL(0.1)	<EQL(100)	<EQL(0.2)	2200	2.26	3.23	[463]	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	1.1	<EQL(4.75)	0.22	<EQL(3.35)	<EQL(4.75)	<EQL(9.19)	0.221	<EQL(0.939)
TRW 2	Recovery Well	Unconfined UTRAU/GAU	04-Dec-2018	59.1	160	4.2	6.1	0	95.85	109	22	0.6	55	20.8	No Comments		<EQL(1000)	<EQL(1000)	NS	<EQL(1000)	NS	0	<EQL(0.2)	25000	<EQL(0.1)	<EQL(0.1)	<EQL(0.2)	190	15000	<EQL(0.1)	<EQL(0.1)	21.6	0.225	907	0.86	3.9	[618]	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	3.3	<EQL(1)	4.94	<EQL(4.77)	0.34	<EQL(3.35)	<EQL(4.77)	<EQL(9.19)	0.342	<EQL(0.998)
TRW 3	Recovery Well	Unconfined UTRAU/GAU	04-Dec-2018	68.8	-50	1.83	6.1	0	96.41	688	175	14.9	58	21.8	No Comments		220000	34000	NS	1600	NS	270000	<EQL(0.2)	260000	<EQL(0.1)	<EQL(0.1)	<EQL(0.2)	13000	5400	<EQL(0.1)	<EQL(0.1)	211000	0.026	<EQL(500)	0.0731	0.862	13800	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	[4.05]	[1.62]	<EQL(3.35)	[4.05]	[5.93]	1.03	[0.592]
TRW 4R	Recovery Well	Unconfined UTRAU/GAU	04-Dec-2018	61.7	60	2.6	5.8	0	95.75	80	25	95.4	32	21	X		1200	<EQL(1000)	NS	<EQL(1000)	NS	1200	<EQL(0.2)	260000	<EQL(0.1)	<EQL(0.1)	<EQL(0.2)	16000	5300	<EQL(0.1)	<EQL(0.1)	<EQL(100)	0.214	<EQL(500)	[0.041]	0.894	16000	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	14.5	<EQL(1)	<EQL(1)	[4.1]	0.39	<EQL(3.35)	[4.1]	<EQL(9.29)	0.386	<EQL(0.992)
TCM 5	TNX Auxiliary	Unconfined UTRAU/GAU	03-Dec-2018	5.4	281	3.07	5.6	0	94.46	14	2	17.9	6	18.1	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	764	[0.121]	NS	0.595	NS	NS	600	<EQL(3)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	3.32	-9.003	[0.24]	40.8	31.6	28.3	[0.237]	<EQL(1.01)
TIR 1L	TNX Auxiliary	Unconfined UTRAU/GAU	03-Dec-2018	7.3	305	3.06	5.2	0	94.42	68	0	0.9	11	19	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	[127]	<EQL(0.2)	NS	0.0746	NS	NS	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(5.04)	<EQL(0.94)	<EQL(3.35)	<EQL(5.04)	<EQL(8.61)	<EQL(0.215)	<EQL(0.937)
TIR 1M	TNX Auxiliary	Unconfined UTRAU/GAU	03-Dec-2018	7.6	380	4.83	5	0	94.06	67	0	0.5	3	18.5	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	<EQL(100)	[0.0515]	NS	3.17	NS	NS	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	[0.93]	<EQL(2.85)	<EQL(0.98)	<EQL(3.35)	<EQL(2.85)	<EQL(8.29)	<EQL(0.219)	<EQL(0.985)
TIR 1U	TNX Auxiliary	Unconfined UTRAU/GAU	03-Dec-2018	7.5	367	3.91	4.7	0	94.11	84	2	1.6	2	18.1	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	[185]	<EQL(0.2)	NS	4.67	NS	NS	5.33	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	4.41	<1.2811]	0.3	3.57	[2.29]	<EQL(9.08)	0.3	<EQL(0.864)
TNX 13D	TNX Auxiliary	Unconfined UTRAU/GAU	10-Dec-2018	5	238	4.64	5.6	0	93.58	65	5	6.1	2	15	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	100	<EQL(0.2)	NS	0.365	NS	NS	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(3.96)	<EQL(1.08)	<EQL(3.35)	<EQL(3.96)	<EQL(8.68)	<EQL(0.135)	<EQL(1.08)
TNX 15D	TNX Auxiliary	Unconfined UTRAU/GAU	10-Dec-2018	4.96	295	6.67	5.3	0	94.01	69	2	1.9	2	15.2	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	[80]	<EQL(0.2)	NS	1.75	NS	NS	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	2.45	<EQL(5.08)	<EQL(1.02)	<EQL(3.35)	<EQL(5.08)	<EQL(8.79)	<EQL(0.12)	<EQL(1.02)
TNX 20D	TNX Auxiliary	Unconfined UTRAU/GAU	10-Dec-2018	3.82	104	2.53	5.6	0	93.4	88	14	0.6	6	15	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	212	<EQL(0.2)	NS	<EQL(0.02)	NS	NS	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(5.09)	<EQL(0.98)	<EQL(3.35)	<EQL(5.09)	<EQL(7.49)	<EQL(0.176)	<EQL(0.981)
TNX 22D	TNX Auxiliary	Unconfined UTRAU/GAU	10-Dec-2018	4.3	162	4.44	5.9	0	93.2	63	10	4	6	13.4	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	260	<EQL(0.2)	NS	0.102	NS	NS	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(4.63)	<EQL(1.08)	<EQL(3.35)	<EQL(4.63)	<EQL(8.52)	<EQL(0.142)	<EQL(1.08)
TNX 28D	TNX Auxiliary	Unconfined UTRAU/GAU	10-Dec-2018	6	180	4.68	5.4	0	93.8	55	4	1.6	5	16.9	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	220	<EQL(0.2)	NS	0.564	NS	NS	11.8	<EQL(3)	<EQL(1)	<EQL(1)	[0.54]	<EQL(1)	3.74	4.59	[0.94]	7.91	12.5	[11.7]	[0.27]	[0.667]
TNX 30D	TNX Auxiliary	Unconfined UTRAU/GAU	10-Dec-2018	9.45	272	4.19	5.2	0	93.55	66	2	7.3	4	16.4	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	53	[0.0299]	NS	2.22	NS	NS	24.8	<EQL(3)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	2.11	-4.010	[0.27]	16.62	12.6	[11]	[0.274]	<EQL(1.17)
TNX 35D	TNX Auxiliary	Unconfined UTRAU/GAU	13-Dec-2018	5.35	220	5.87	6	0	94.55	86	21	16.2	11	18	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	662	<EQL(0.2)	NS	0.154	NS	NS	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(4.02)	[0.73]	<EQL(3.35)	<EQL(4.02)	[4.81]	0.241	[0.493]
TNX 37D	TNX Auxiliary	Unconfined UTRAU/GAU	13-Dec-2018	6	210	6.13	5.6	0	94.7	109	7	44	5	14.5	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	1740	[0.0645]	NS	0.292	NS	NS	14.5	<EQL(3)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	1.71	<3.435]	[0.82]	9.72	[6.28]	[8.78]	[0.231]	[0.591]
TNX 72D	TNX Auxiliary	Unconfined UTRAU/GAU	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
TNX 72M	TNX Auxiliary	Unconfined UTRAU/GAU	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
TNX 72S	TNX Auxiliary	Unconfined UTRAU/GAU	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
TNX073D	TNX Auxiliary	Unconfined UTRAU/GAU	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
TNX074D	TNX Auxiliary	Unconfined UTRAU/GAU	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
TNX075D	TNX Auxiliary	Unconfined UTRAU/GAU	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
TVM 1M	TNX Auxiliary	Unconfined UTRAU/GAU	04-Dec-2018	62.34	-60	0.93	5.8	0	97.35	288	119	5.9	6	22.8	No Comments			12000 <EQL(1000)	NS	<EQL(1000)	NS	12000	<EQL(0.2)	240000	<EQL(0.1)	<EQL(0.1)	<EQL(0.2)	15000	2900	<EQL(0.1)	<EQL(0.1)	784	0.0357]	<EQL(500)	0.0616	0.542	14900	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	12.6	<EQL(1)	<EQL(1)	<EQL(5.28)	0.33	<EQL(3.35)	<EQL(5.28)	<EQL(9.46)	0.332	<EQL(0.877)
TVM 2M	TNX Auxiliary	Unconfined UTRAU/GAU	04-Dec-2018	64.96	-71	1.2	6.1	0	96.92	84	26	2.8	4	21.1	No Comments		<EQL(1000)	<EQL(1000)	NS	<EQL(1000)	NS	0	<EQL(0.2)	28000	<EQL(0.1)	<EQL(0.1)	<EQL(0.2)	6.9	16000	<EQL(0.1)	<EQL(0.1)	1880	<EQL(0.2)	110	0.137	1.34	[730]	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(4.81)	<EQL(0.87)	<EQL(3.35)	<EQL(4.81)	<EQL(9.2)	<EQL(0.208)	<EQL(0.87)
TVM 4M	TNX Auxiliary	Unconfined UTRAU/GAU	04-Dec-2018	64.49	125	4.51	5.7	0	96.88	37	7	2	5	22	No Comments		<EQL(1000)	<EQL(1000)	NS	<EQL(1000)	NS	0	<EQL(0.2)	34000	<EQL(0.1)	<EQL(0.1)	<EQL(0.2)	<EQL(0.5)	17000	<EQL(0.1)	<EQL(0.1)	[4450]	<EQL(0.2)	432	0.5	2.29	[504]	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	[2.85]	1.57	<EQL(3.35)	[2.85]	<EQL(9.98)	1.57	<EQL(0.994)
TVR 1A	TNX Auxiliary	Unconfined UTRAU/GAU	06-Dec-2018	63.32	-15	0.78	6	0	86.78	80	24	4.7	104	20.8	No Comments		<EQL(1000)	<EQL(1000)	NS	<EQL(1000)	NS	0	<EQL(0.2)	47000	<EQL(0.1)	<EQL(0.1)	<EQL(0.2)	470	15000	<EQL(0.1)	<EQL(0.1)	1260	<EQL(0.2)	[49.5]	0.0636	6.34	[714]	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(5.01)	[0.55]	<EQL(3.35)	<EQL(5.01)	[8.69]	0.545	<EQL(0.995)
TBG 3	TNX Primary	Unconfined UTRAU/GAU	13-Dec-2018	64.06	-61	12.13	6.9	0	97.25	592	229	86.8	2	17.4	X		99000	51000	NS	22000	NS	172000	<EQL(0.2)	300000	<EQL(0.1)	0.47	<EQL(0.2)	9700	6100	<EQL(0.1)	<EQL(0.1)	108000	[0.0602]	[198]	<EQL(0.02)	0.615	52300	[2.5]	<EQL(3)	<EQL(1)	<EQL(1)	[0.78]	<EQL(1)	1.38	<EQL(6.32)	1.07	[1.68]	<EQL(6.32)	20.5	1.07	<EQL(0.943)
TBG 4	TNX Primary	Unconfined UTRAU/GAU	11-Dec-2018	62.68	-69	6.48	6.2	0	99.9	4343	997	13.4	8	20	X		1600000	380000	NS	870000	NS	2850000	<EQL(0.2)	360000	0.21	0.39	<EQL(0.2)	12000	6700	<EQL(0.1)	<EQL(0.1)	133000	[0.11]	2590	0.117	3.08	2430000	[1.57]	<EQL(3)	<EQL(1)	<EQL(1)	2.77	<EQL(1)	1.31	<EQL(20.9)	[0.15]	[1.05]	<EQL(20.9)	[29.2]	[0.15]	2.02	<EQL(0.984)
TBG 5	TNX Primary	Unconfined UTRAU/GAU	11-Dec-2018	57.98	-90	7.28	6.3	0	99.77	1020	523	10.2	5	20.6	X		1300	<EQL(1000)	NS	<EQL(1000)	NS	1300	<EQL(0.2)	370000	<EQL(0.1)	0.44	<EQL(0.2)	12000	5800	<EQL(0.1)	<EQL(0.1)	129000	<EQL(0.2)	<EQL(500)	0.0486	0.688	118000	<EQL(5)	[4.2]	<EQL(1)	1.07	45	<EQL(1)	[0.53]	<EQL(11.7)	2.02	<EQL(3.35)	<EQL(11.7)	[11.2]		2.02	<EQL(0.984)
TNX 3D	TNX Primary	Unconfined UTRAU/GAU	06-Dec-2018	68.92	-45	1.07	6.1	0	96.71	263	113	5.5	16	22.2	No Comments		<EQL(1000)	<EQL(1000)	NS	<EQL(1000)	NS	0	<EQL(0.2)	150000	<EQL(0.1)	<EQL(0.1)	<EQL(0.2)	15000	3800	<EQL(0.1)	<EQL(0.1)	51400	<EQL(0.2)	<EQL(500)	0.0885	0.801	4670	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	4.26	<EQL(1)	<EQL(1)	<EQL(6.32)	1.08	<EQL(3.35)	<EQL(6.32)	<EQL(8.11)		1.08	<EQL(0.895)
TNX 8D	TNX Primary	Unconfined UTRAU/GAU	03-Dec-2018	7.1	181	2.79	6.1	0	93.4	112	28	5.3	28	18.4	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	706	<EQL(0.2)	NS	0.262	NS	NS	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	[0.48]	<EQL(2.87)	<EQL(0.96)	<EQL(3.35)	<EQL(2.87)	<EQL(8.2)	<EQL(0.222)	<EQL(0.963)
TNX 11D	TNX Primary	Unconfined UTRAU/GAU	04-Dec-2018	7.9	175	2.72	5.4	0	92.4	46	2	2.3	28	20	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	836	<EQL(0.2)	NS	0.0591	NS	NS	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(5.21)	[0.63]	<EQL(3.35)	<EQL(5.21)	<EQL(9.61)	[0.0801]	[0.547]
TNX 16D	TNX Primary	Unconfined UTRAU/GAU	10-Dec-2018	6	163	4.01	4.4	0	93.9	61	0	2.4	2	14.3	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	32	<EQL(0.2)	NS	0.541	NS	NS	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	2.92	<EQL(2.85)	<EQL(1.01)	<EQL(3.35)	<EQL(2.85)	<EQL(8.39)	<EQL(0.102)	<EQL(1.01)
TNX 27D	TNX Primary	Unconfined UTRAU/GAU	13-Dec-2018	15.1	202	4.6	6	0	95.5	89	16	14.4	9	19.4	No Comments		<EQL(1000)	<EQL(1000)	NS	<EQL(1000)	NS	0	<EQL(0.2)	30000	<EQL(0.1)	<EQL(0.1)	<EQL(0.2)	31	14000	<EQL(0.1)	<EQL(0.1)	270	[0.121]	4890	5.14	4.08	1350	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(4.68)	[0.52]	<EQL(3.35)	<EQL(4.68)	[7.19]	[0.123]	[0.399]
TNX 1D	TNX Secondary	Unconfined UTRAU/GAU	03-Dec-2018	61.1	304	4.6	5.9	0	95.6	52	10	3.2	24	19.8	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	[6669]	0.527	NS	0.795	NS	NS	[1.22]	<EQL(3)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(5.1)	0.3	[0.82]	<EQL(5.1)	[5.97]	0.305	<EQL(0.863)
TNX 5D	TNX Secondary	Unconfined UTRAU/GAU	04-Dec-2018	50	257	4.7	5.5	0	99.5	81	8	1.6	16	21.6	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	679	<EQL(0.2)	NS	[0.343]	NS	NS	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(6.42)	[2.85]	<EQL(3.35)	<EQL(6.42)	<EQL(9.06)	[2.42]	[0.433]	
TNX 9D	TNX Secondary	Unconfined UTRAU/GAU	03-Dec-2018	9.5	208	3.9	5.7	0	92.4	61	6	2.3	25	20.1	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	1770	<EQL(0.2)	NS	<EQL(0.0202)	NS	NS	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(5)	1.89	<EQL(3.35)	<EQL(5)	<EQL(8.13)	0.337	1.55
TNX 12D	TNX Secondary	Unconfined UTRAU/GAU	04-Dec-2018	4.9	171	3.35	5.9	0	94.5	71	18	7.6	105	18.9	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	[4740]	[0.024]	NS	<EQL(0.02)	NS	NS	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	[2.48]	0.92	<EQL(3.35)	[2.48]	<EQL(9.74)	0.932	<EQL(0.912)
TNX 24D	TNX Secondary	Unconfined UTRAU/GAU	04-Dec-2018	34.5	279	4.8	5.7	0	108.76	75	12	1.3	4	20.3	No Comments		NS	NS	NS	NS	NS		NS	NS	NS	NS	NS	NS	NS	NS	NS	249	<EQL(0.2)	NS	0.367	NS	NS	<EQL(5)	<EQL(3)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(1)	<EQL(5.36)	[0.21]	<EQL(3.35)	<EQL(5.36)	<EQL(9.47)	[0.214]	<EQL(0.858)

Explanation

[##]	EPA Functional Guideline Code of 'J' was applied to the result, indicating an estimated quantity.
<EQL(##)	Constituent was below detection. The sample-specific Estimated Quantitation Limit is in parentheses.
	Result exceeds applicable limit.
REJ	Result Rejected
	Result is less than the applicable limit and without EPA Functional Guidline qualifiers.
NS	Requested to be sampled but was not. See comments as to why not.
Blue Text	Not a required sample analysis.

APPENDIX C

DATA REVIEW KEY

This page intentionally left blank.

Key to Reading the Tables

The following abbreviations may appear in the data tables:

Constituents

CCl_4	Carbon Tetrachloride
VC	Chloroethane (Vinyl Chloride)
cis-1,2-DCE	Cis-1,2-Dichloroethylene
NO_3/NO_2 as N	Nitrate-nitrite as Nitrogen
PCE	Tetrachloroethylene
TCE	Trichloroethylene

Contract Laboratories Available

EBL	Environmental Bioassay Lab
GEL	General Engineering Lab
LVL	Lionville Laboratory
STL	Severn Trent Lab

Nomenclature

AZ		Aquifer Zone
CBAU	CBA	Crouch Branch Aquifer Unit (previously Black Creek)
CBCU	CBC	Crouch Branch Confining Unit
GAU	GAU	Gordon Aquifer Unit
GCCZ	GCU	Green Clay Confining Zone or Gordon Confining Unit
LAZ_UTRA	LAZ	Lower Aquifer Zone-Upper Three Runs Aquifer Unit
LLAZ	LLAZ	Lost Lake Aquifer Zone
LLLAZ	LL	Lower Lost Lake Aquifer Zone (previously Lower Congaree)
MAAZ	M	M-Area Aquifer Zone (previously Water Table)
MSAZ_CBCU	MCBC	Middle Sand Aquifer Zone-CBCU (previously Ellenton Sand)
PZ	PZ	Perched Zone
SPA	SP	Steed Pond Aquifer Unit
UAZ_UTRA	UAZ	Upper Aquifer Zone-Upper Three Runs Aquifer Unit
ULLAZ	UL	Upper Lost Lake Aquifer Zone (previously Upper Congaree)
UNKNOWN	UNK	Unknown

Field Conditions

A	Pump is surging excessively; aerated
B	blank sample was collected
C	well is continuously pumping
D	well is dry-no sample or field data collected
E	equipment blank was collected
I	well went dry during sampling; field data collected but insufficient water to collect all samples
L	well went dry before sampling began; only depth to water can be determined
N	well was not stabilized before sampling began
P	inaccessibility or mechanical failure prevented sample collection and field analysis of the water
S	no water in standpipe; for water level events only
T	samples were collected, but some samples were not sent to the laboratory due to high turbidity
W	unable to sample well because of stabilization or sampling equipment failure; water-level measurements were obtained
X	well went dry during purging; samples collected after well recovered measurements obtained
0	OK
1	Pump Dry
2	Sampled after recovery
3	Gallons purged through sample port
4	DI water taken from 772-7B
5	High turbidity
6	Flow meter leaking
7	Pump failure
8	Flow meter not operating
9	# gallons added
10	Well is inaccessible, well cannot be Sampled
11	Well abandoned
12	No water to surface
13	Field measurements only
14	Not all samples were collected
15	Equipment failure
16	No water in standpipe
17	Bailed well
18	Water level tape not long enough
19	Well not sampled, maintenance required
20	Well sampled, maintenance required

Field Conditions (continued)

21	Measurement Exceeded Criteria

Units

Deg C	degrees Celsius
Deg N	Degrees North
Deg W	Degrees West
E	East
ft	feet
mg/L	milligrams per liter
mV	millivolts
msl	mean sea level
N	North
nM	nanomoles
NTU	nepholometric turbidity unit
pCi/L	picoCuries per liter
pCi/mL	picoCuries per milliliter
pH	pH unit
μg/L	micrograms per liter
μS/cm	microSiemens per centimeter

Other

CLP	USEPA Functional Guideline Codes
E	exponential notation (e.g., 1.1E–09 = 1.1 x 10^{-9} = 0.0000000011)
STORET	USEPA STORET result qualifiers
Filt.	Data results after application of the Data Usability filter
MCL	Maximum Contaminant Level
NDD	"not decision data"
PDWS	primary drinking water standard
USEPA NPDWS	USEPA National Primary Drinking Water Standard
<EQL	less than the sample-specific estimated quantitation limit

Results Below Detection

For radiological analyses, the analytical result field contains the result recorded on the analytical instrument and reported by the laboratory, even if it is negative. For non-radiological analyses, if the analyte is not detected, the sample-specific estimated quantitation limit (EQL) is entered into the result field and is reported with a less than [<] sign. The EQL is defined as the lowest concentration that can be achieved reliably within specified limits of precision and accuracy during routine laboratory operating conditions. The sample-specific EQL is modified for sample concentration or dilution or unusual aliquot size that affects analytical sensitivity.

Calculated Result

The data tables (matrix tables) may include some calculated values of parameters to allow comparison of the sample concentration with the Maximum Contaminant Level (MCL) of the USEPA National Primary Drinking Water Standards. The calculated results have a "C" as the USEPA STORET code, listed in the "EPA" column. If any of the results used in the calculation were assigned a "J" qualifier, the calculated result was also assigned a "J" qualifier. Results for radium 226, radium 228, and uranium (total recoverable) that were <EQL, were treated as "zero" in the calculations.

- Radium-226 and radium-228 are counted as two contaminants, even though their standard is combined. The calculated result for "Radium 226 and Radium 228 (Combined)" is obtained by adding the result for radium 226 to the result for radium 228. If both results were below detection, the greater of the two values was used to represent the "<EQL" result for Radium 226 and Radium 228 (Combined)".

- The MCL for gross alpha particles radioactivity (15 pCi/L) applies to the calculated or "adjusted" gross alpha radioactivity. The "adjusted" gross alpha is defined as the gross alpha particle activity, excluding radon and naturally occurring uranium 234, 235, and 238. The result for "adjusted" gross alpha can also be determined by converting uranium (total recoverable) results from ug/L to pCi/L, using the conversion factor of 0.67 pCi/µg, and then subtracting the uranium activity from the unadjusted gross alpha activity. In some cases, uranium (total recoverable) was detected by the chemical method of analysis, but the gross alpha measurement of radioactivity was below detection. In these cases, since no calculation could be performed, the results for adjusted gross alpha was shown as less than the method detected limit.

- The Radionuclides Rule uses a "sum-of-the-fractions" method to determine whether a sample is in compliance with the MCL for beta particles and photon radioactivity. While the MCL is in "millirems", contaminants are analyzed in "pCi/L". Therefore, to determine compliance, each beta and photon emitter must be concerted from pCi/L to millirems using the conversion factors listed in the MCL column of the data tables (Matrix Tables). The average annual concentration of beta particle and photon radioactivity from man-made radionuclides in drinking water must not produce an annual dose equivalent to the total body or any internal organ greater than 4 millirem/yr (mrem/yr). For each emitter detected in a sample, the result was divided by the value in the MCL column of the data tables (Matrix Tables). This provided a fraction of how much the particular beta or photon emitter is providing towards the maximum of 4 mrem/yr for all of the beta photon emitters. Each fraction was then converted to a dose equivalent of 4 mrem/yr by multiplying the fraction by 4. The results for each emitter were then summed, and the calculated result shown as "beta and photon emitters' for comparison to the MCL of 4 mrem/yr.

Uncertainty and Data Usability

In April 1998, the South Carolina Department of Health and Environmental Control (SCDHEC) accepted guidance proposed by Savannah River Site (SRS) to apply a method for minimizing uncertainty in compliance decisions potentially affecting long-term monitoring or remediation (letter, Taylor to Cook; April 21, 1998). The method is applied by processing or "filtering" the data, using the United States Environmental Protection Agency (USEPA) Functional Guideline Codes (USEPA 1994; USEPA 1999) applied by the laboratories to qualify the analytical results. By removing all data with a result qualifier of "L", "R", "U", and "J" from consideration, groundwater data users can ensure that only quantified numerical results are applied to the decision process. The output of the filtering process populates the "Filt" column as follows:

1) "Null" or "blank" – Data not remarked. The analytical result is acceptable for use as reported, and the result is not greater than an associated concentration limit for the analyte.
   Rationale: The best result would be one without qualifiers, so the preferred choice would be the maximum result that did not have any qualifiers.
2) "J", "L", "N", "NJ", or "JL" – "J" identifies that the analyte was positively identified; the associated numerical value is an estimated concentration of the analyte in the sample. "L" Indicates the sample result is off scale high. "JL" Indicates an estimated quantity of a sample that is off scale high. "N" is used for all TIC (tentatively identified compounds) and indicates the presence of an analyte for which there is presumptive evidence to make a tentative identification. "NJ" means the presence of an analyte that has been tentatively identified and the associated numerical value represents its approximate concentration.
   Rationale: an estimate can still provide useful information. Although there may be a range of uncertainty around the actual value, the value itself may still grossly exceed a regulatory standard. However, a estimated value is less certain than an unqualified result. Therefore, this would be labeled as "NDD" (not decision data).
3) "U" - material analyzed for, but not detected. The analyte concentration is less than the sample specific Estimated Quantitation Limit and labeled "<EQL".

   Rationale: a result above the detection limit would be chosen before a result below detection so that the process is not biased toward false negatives.
4) "UJ" - result is not above the reported sample quantitation limit, but the reported quantitation limit itself is approximate, and may not represent the actual limit of quantitation necessary to accurately and precisely measure the analyte in the sample.

   Rationale: the additional qualifiers make this result less reliable for use than the "U" without qualifiers. These results would be labeled "<EQL".
5) "Rejected" – The sample results are rejected due to serious deficiencies in the ability to analyze the sample and meet quality control criteria. The presence or absence of the analyte cannot be verified.

   Rationale: the only value in providing this result in the report is to indicate that the lab attempted to analyze the sample. If there are any other results available, the result with the "R" qualifier should not be reported. If it is reported, it is definitely "NDD" (not decision data).

Holding Times

Standard analytical methods include a limit, called holding time, on the maximum elapsed time between sample collection and extraction or analysis by the laboratory. In the data tables (matrix tables), the result qualifier Q in the "EPA" column indicates that holding time was exceeded. Analyses performed beyond holding times may not yield valid results.

SCDHEC allows only 15 minutes elapse between sampling and analysis for pH. Thus, only field pH measurements can meet the holding time criterion; laboratory pH analyses always will exceed it.

The laboratory procedure used for the determination of specific conductance allows one day to elapse between sampling and analysis. Thus, laboratory specific conductance measurements may exceed the holding time criterion.

Data Qualification

The contract laboratories submit sample- or batch-specific quality assurance/quality control information either at the same time as analytical results or in a quarterly summary. Properly defined and used, data qualifiers can be a key component in assessing data usability. The USEPA Functional Guideline Codes (USEPA 1994; EPA 1999) used by the analytical laboratories are shown in the CLP result qualifier column are defined below. These modifiers appear in the data tables (matrix tables) under the associated with the "Qual code" in the drop down comment box of the result cell in the data tables (matrix tables). US EPA STORET codes appear in the data tables (matrix tables) associated with the "EPA code" in the drop down comment box of the result cell in the Matrix tables. USEPA STORET codes are defined below.

Concentrations that exceeded the USEPA NPDWS and are not "estimated quantities" (i.e. do not have a USEPA Functional Guideline Code of "J") are identified in the tables by a red background. Results shown in a lavender background are estimated quantities. Blue font indicates that a particular analysis is not required for a given well for the sampling event presented. An "NS" with a yellow background identifies analyses that were required but could not be completed. Results that were rejected by the laboratory are listed in the data tables (matrix tables) as "REJ", with a pink background.

"CLP" Qualifiers - USEPA Functional Guidelines Codes (USEPA 1994 and USEPA 1999)

(Blank)	Data not remarked. The analytical result is acceptable for use as reported.
J	The analyte was positively identified; the associated numerical value is an estimated concentration of the analyte in the sample.
R	The sample results are rejected due to serious deficiencies in the ability to analyze the sample and meet quality control criteria. The presence of absence of the analyte cannot be verified. Assignment of *R* requires approval by the appropriate WSRC data validation coordinator.
U	Material analyzed for but not detected. Analytical result reported is less than the sample quantitation limit.
U J	The analyte was not detected above the reported sample quantitation limit. The reported quantitation limit is approximate, and may not represent the actual limit of quantitation necessary to accurately and precisely measure the analyte in the sample.

Note: These are only some of the qualifiers present in the database. All modifiers associated with the data are published in the official repository of the data.

"EPA" Qualifiers – USEPA STORET Codes

(Blank)	Data not remarked
C	The result is calculated.
I	The result is less than the ssEQL, but equal to or greater than the MDL. Always reported with an associated EPA functional Guideline Code qualifier of *J*.
K	The actual concentration is known to be less than the reported result.
L	The actual concentration is known to be less than the reported result.
N	There is presumptive evidence of the presence of an analyte.
O	Sample received by laboratory, but the analysis was lost or not performed.
Q	Sample was held beyond normal holding time prior to analysis.
V	The analyte was detected in both the method blank and the sample.
Y	The result is from an unpreserved or incorrectly preserved sample; the data may not be accurate.

Note: These are only some of the qualifiers present in the database. All modifiers associated with the data are published in the official repository of the data.

In addition, to the USEPA STORET codes, SRS applies qualifier codes to provide additional information. The SRS codes, also associated with the "EPA code" in the Matrix Tables are defined below.

"SRS" Qualifiers

1 Compound identification criteria were not met.
2 Laboratory control sample (LCS) or blank spike (BS) criteria were not met.
3 Inductively coupled plasma (ICP) serial dilution criteria were not met.
4 Matrix interference is present.
5 Matrix spike concentration was < 0.25× the sample concentration, and the percent recovery cannot be determined.
6 The analyte was detected in both the sample and associated field blank.
7 The analyte was detected in both the sample and associated rinsate.
8 The analyte was detected in both the sample and associated trip blank.
9 The field duplicate RPD was not within control limits.
10 Internal standard (IS) criteria were not met when the IS was used for quantitation.
11 Matrix spike recovery was not within the control limits.
12 A tentatively identified compound is a suspected aldol-condensation product.
13 Initial or continuing calibration criteria were not met.
14 Surrogate or tracer spike recovery is out of specification.
15 Graphite furnace atomic absorption QC: a. Duplicate injection criteria were not met; b. Post-digestion spike recovery was not within control limits and the sample absorbance is > 50% of the post-digestion spike absorbance.
16 The sample was analyzed by the method of standard additions.
17 Graphite furnace atomic absorption QC: the post-digestion spike recovery is not within control limits and the sample absorbance is < 50% of the post-digestion spike absorbance.
18 The laboratory duplicate relative percent difference (RPD) or matrix spike/matrix spike duplicate (MS/MSD) (RPD) was not within control limits.

Note: These are only some of the qualifiers present in the database. All modifiers associated with the data are published in the official repository of the data, the Environmental Restoration Data Management System database.

REFERENCES

SCDHEC, 1998. *RE: Groundwater Data Reporting Change at SRS*, Letter, G. K. Taylor (SCDHEC) to J. W. Cook (EPD/WSRC); April 21, 1998

USEPA, 1994. *USEPA Contract Laboratory Program National Functional Guidelines for Inorganic Data Review*, 9240.1-05-01, PB 94-963502, EPA540/R-94/013, February 1994; U.S. Environmental Protection Agency, Washington, DC

USEPA, 2000. EPA (U.S. Environmental Protection Agency, Office of Water), 2000. Federal Register, Vol. 56, No 236, Thursday, December 7, 2000, Rules and Regulations, 40 CFR Parts 9, 141, and 142; National Primary Drinking Water Regulations; Radionuclides; Final Rule

USEPA, 2002. EPA (U.S. Environmental Protection Agency, Office of Water), 2002. Implementation Guidance for Radionuclides; Appendix I, (beta and photon emitter conversion tables); EPA 816-F-00-002, March 2002. http://www.epa.gov/safewater

USEPA, 2003. EPA (U.S. Environmental Protection Agency, Office of Water), 2003. Alphabetical version in .pdf format of the EPA National Primary Drinking Water Stnars; EPA 816-F-03-016, June 2003. (For copies of the complete regulations regarding these contaminants, follow the links to the National Primary Drinking Water Regulations. http://www.epa.gov/safewater/consumer/pdf/mcl..pdf)

This page intentionally left blank.

APPENDIX D

HYDROGRAPHS

This page intentionally left blank.

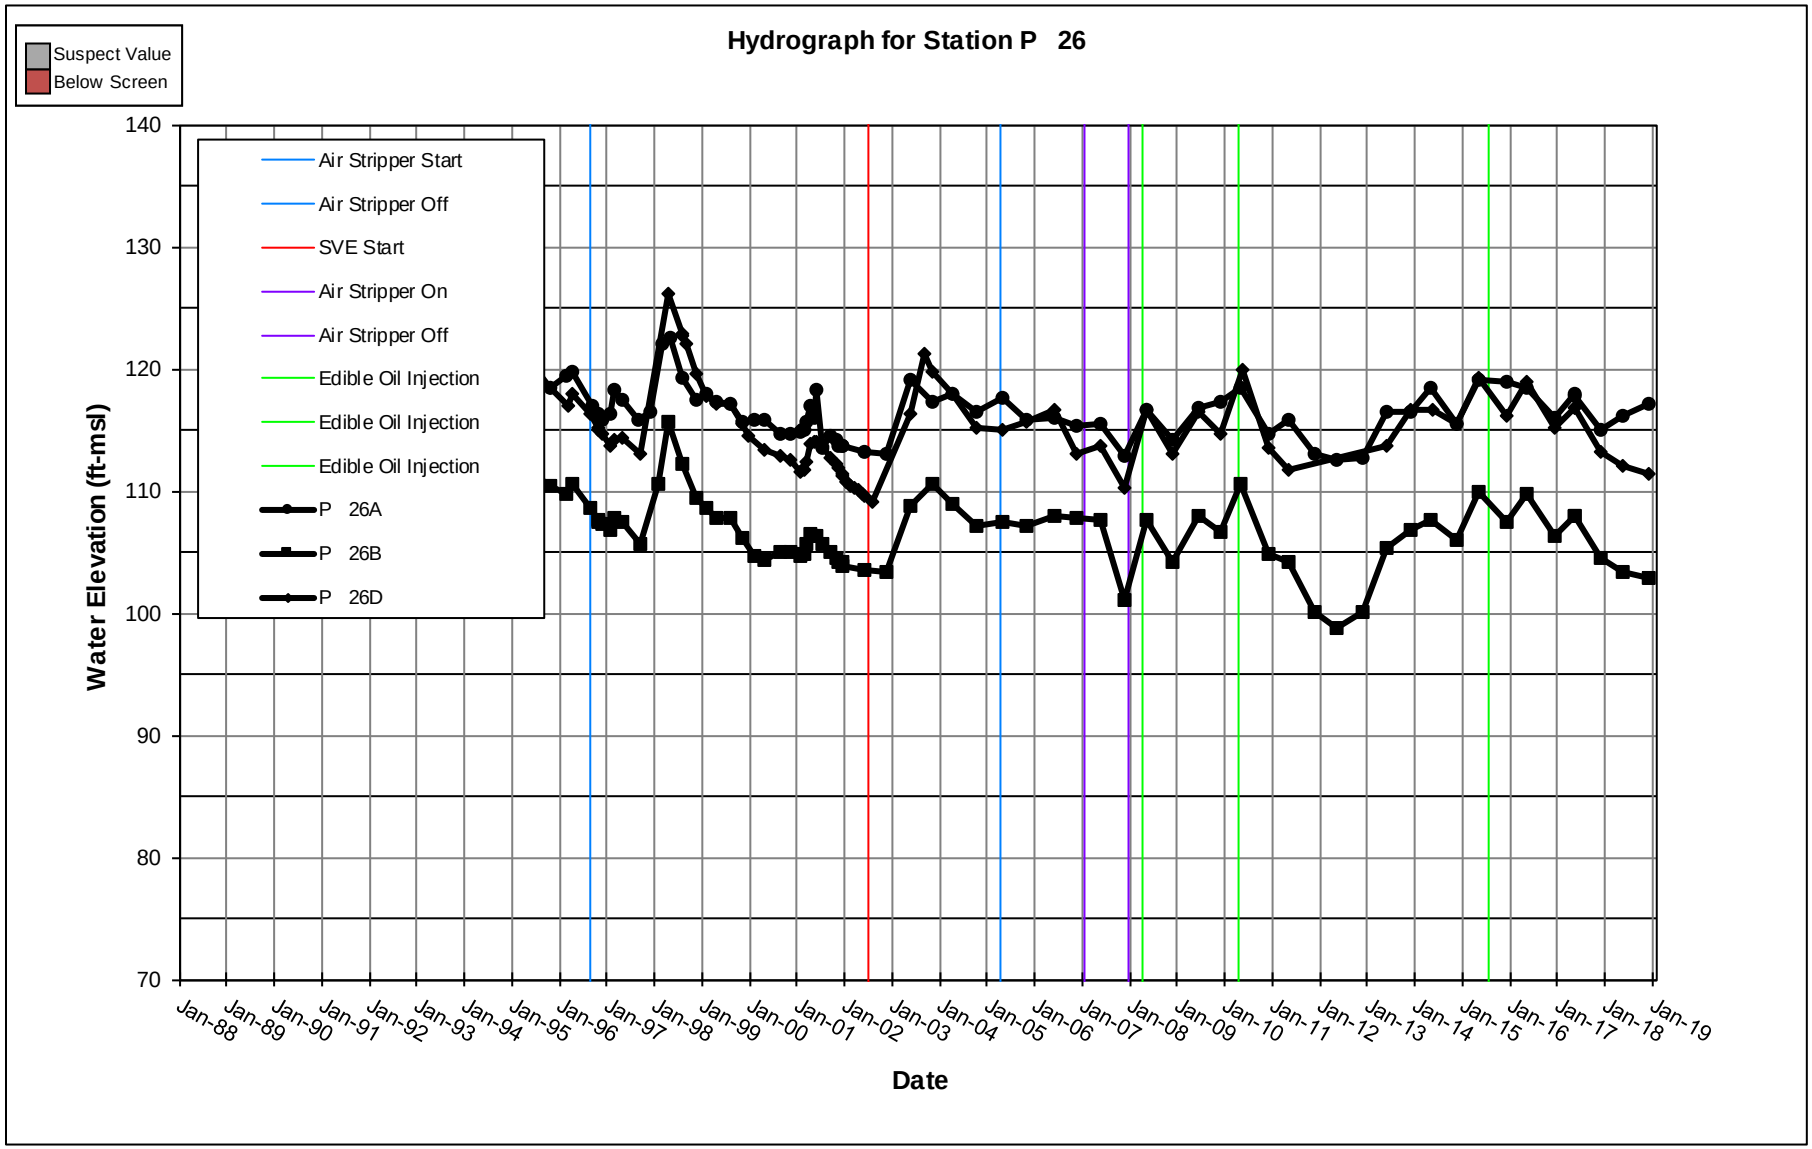
Hydrograph for Station P 26
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
P 26A
P 26B
P 26D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

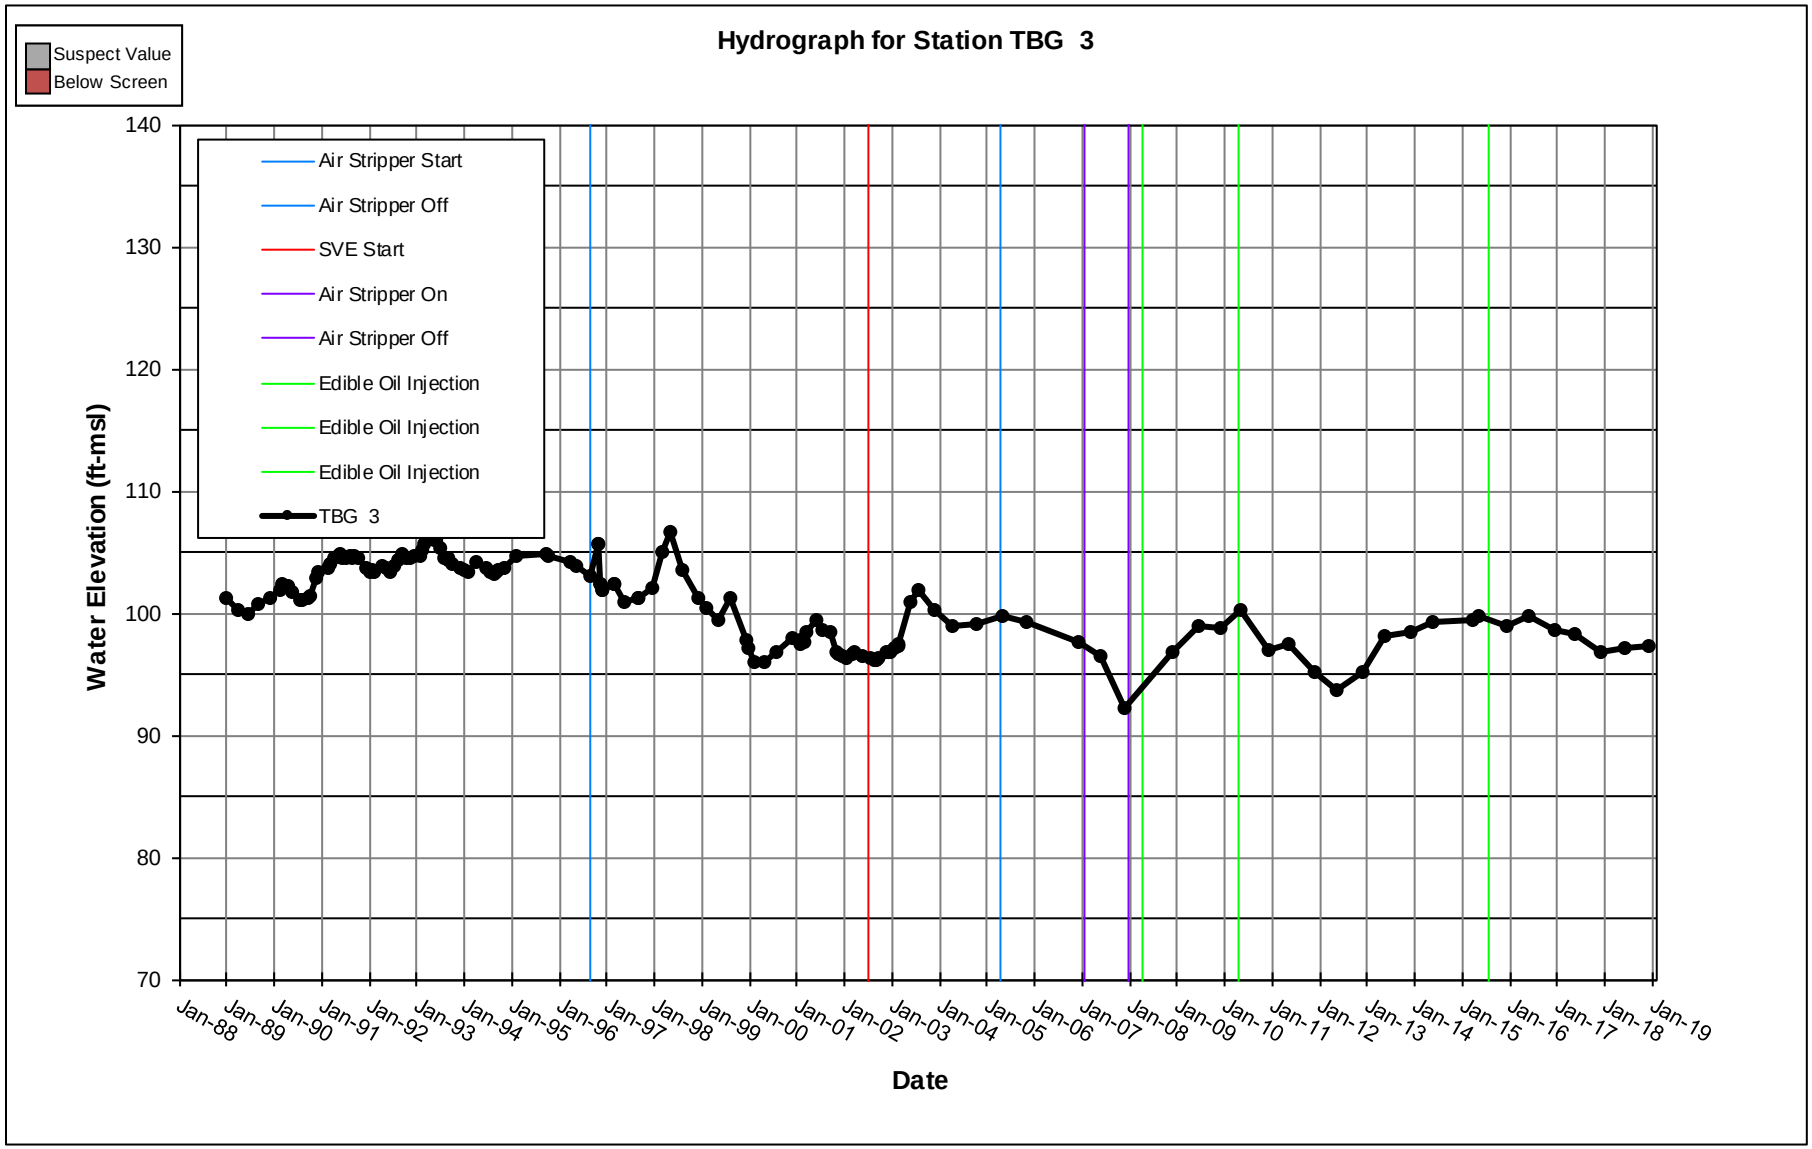
Hydrograph for Station TBG 3
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TBG 3
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

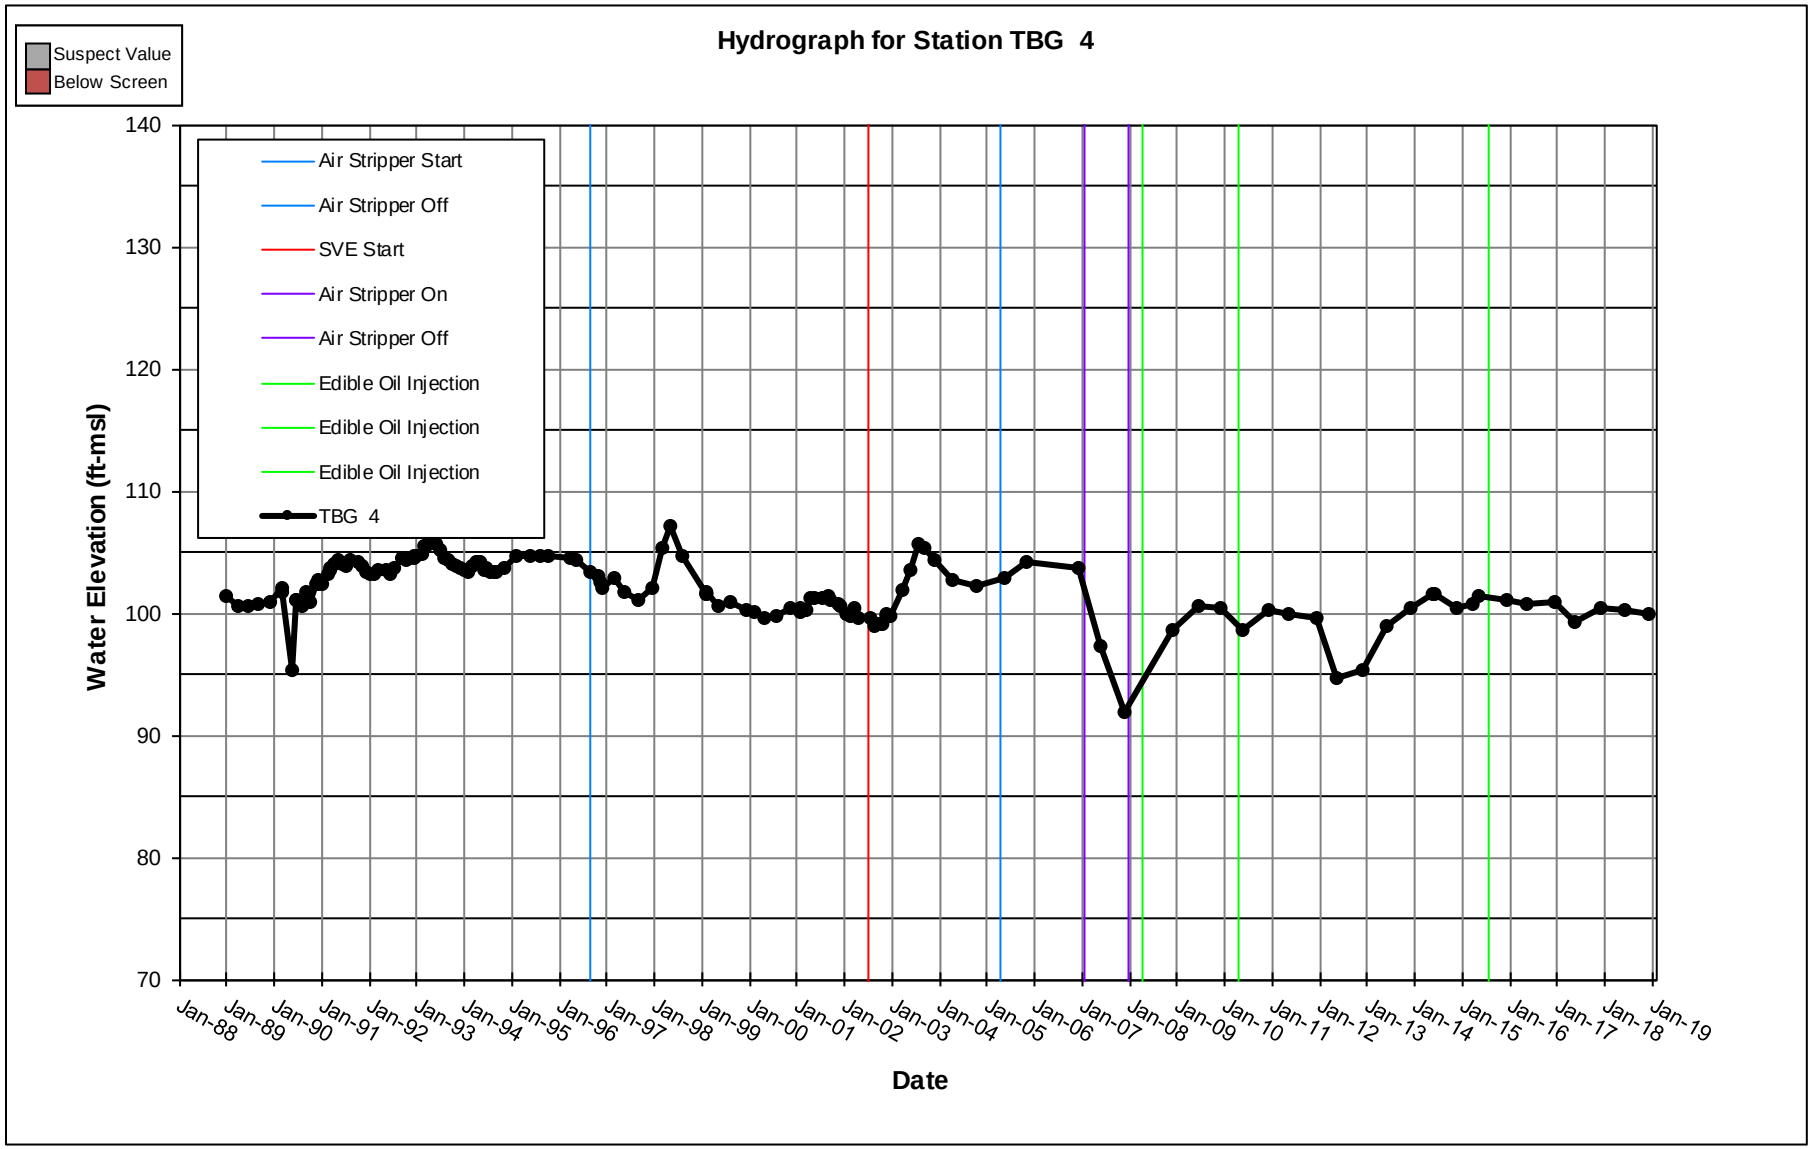
Hydrograph for Station TBG 4
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TBG 4
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

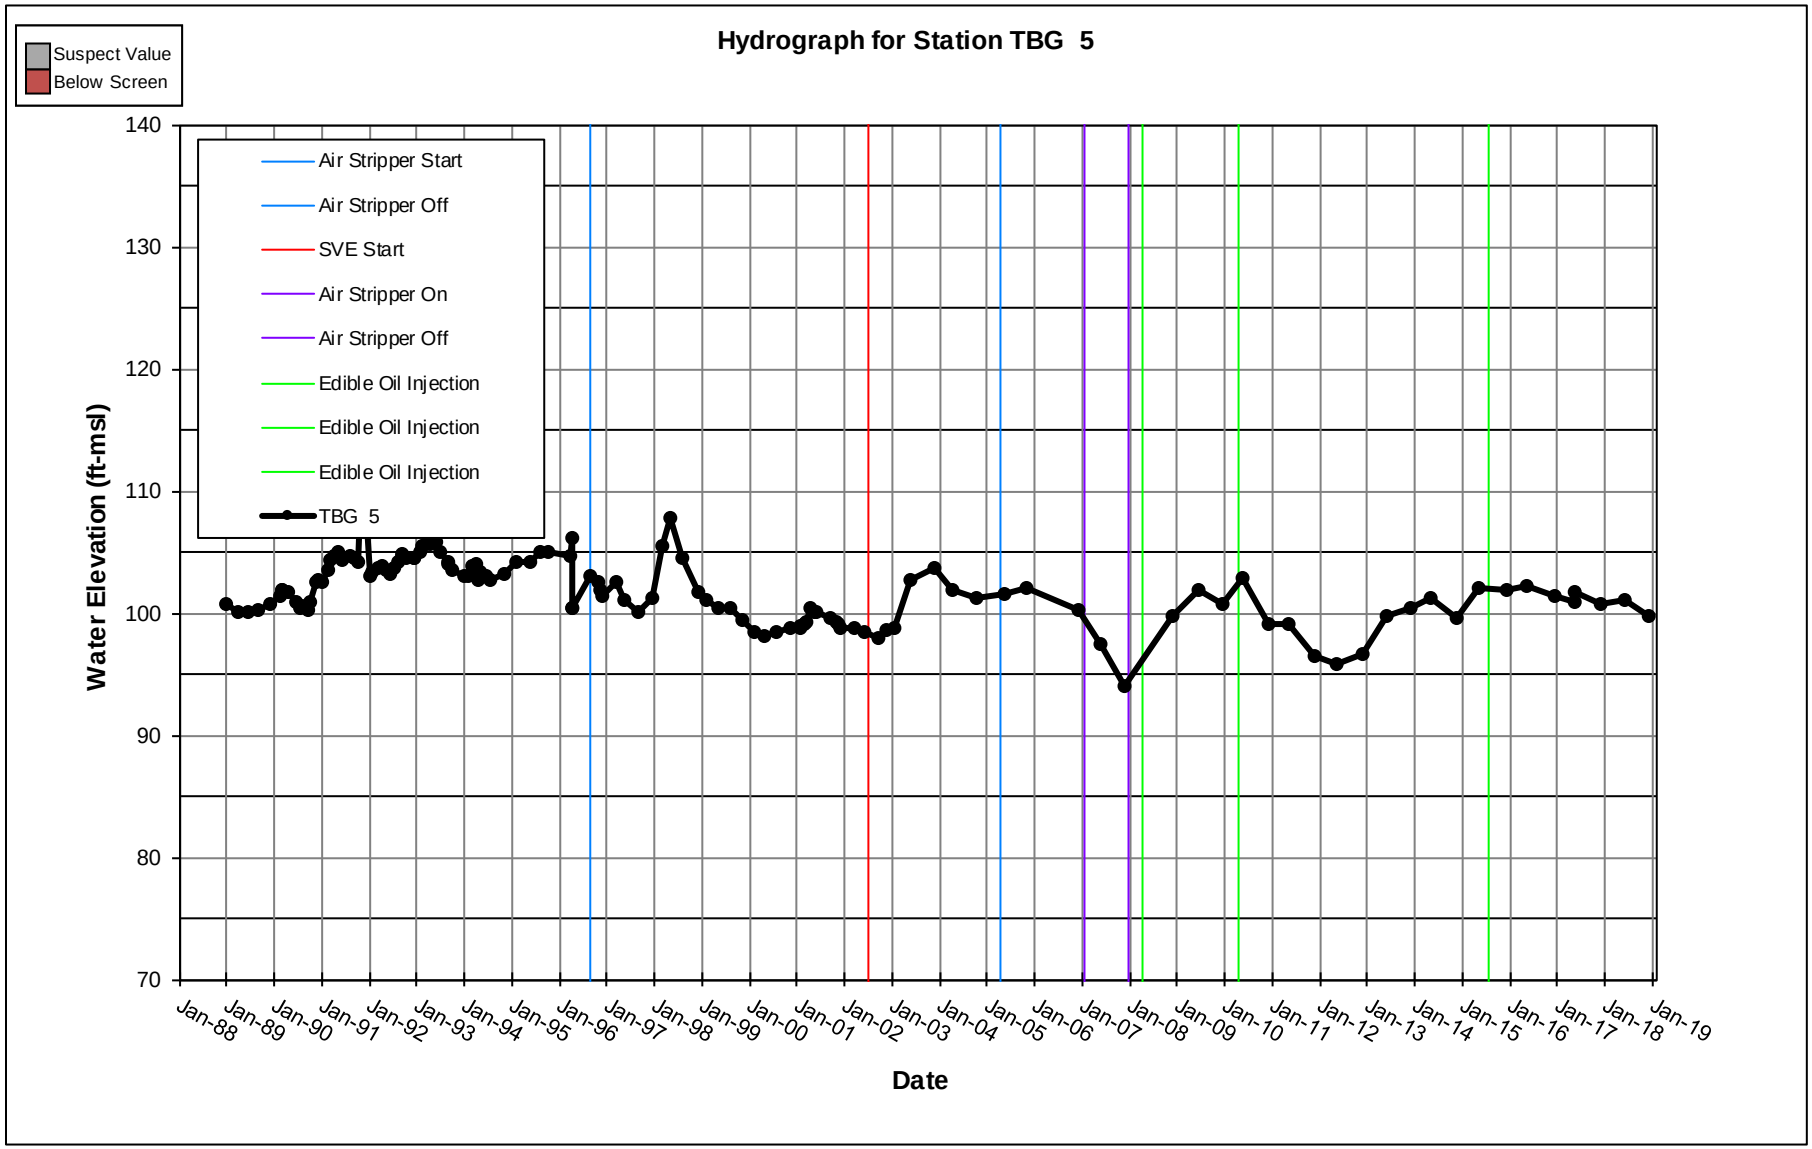
Hydrograph for Station TBG 5
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TBG 5
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

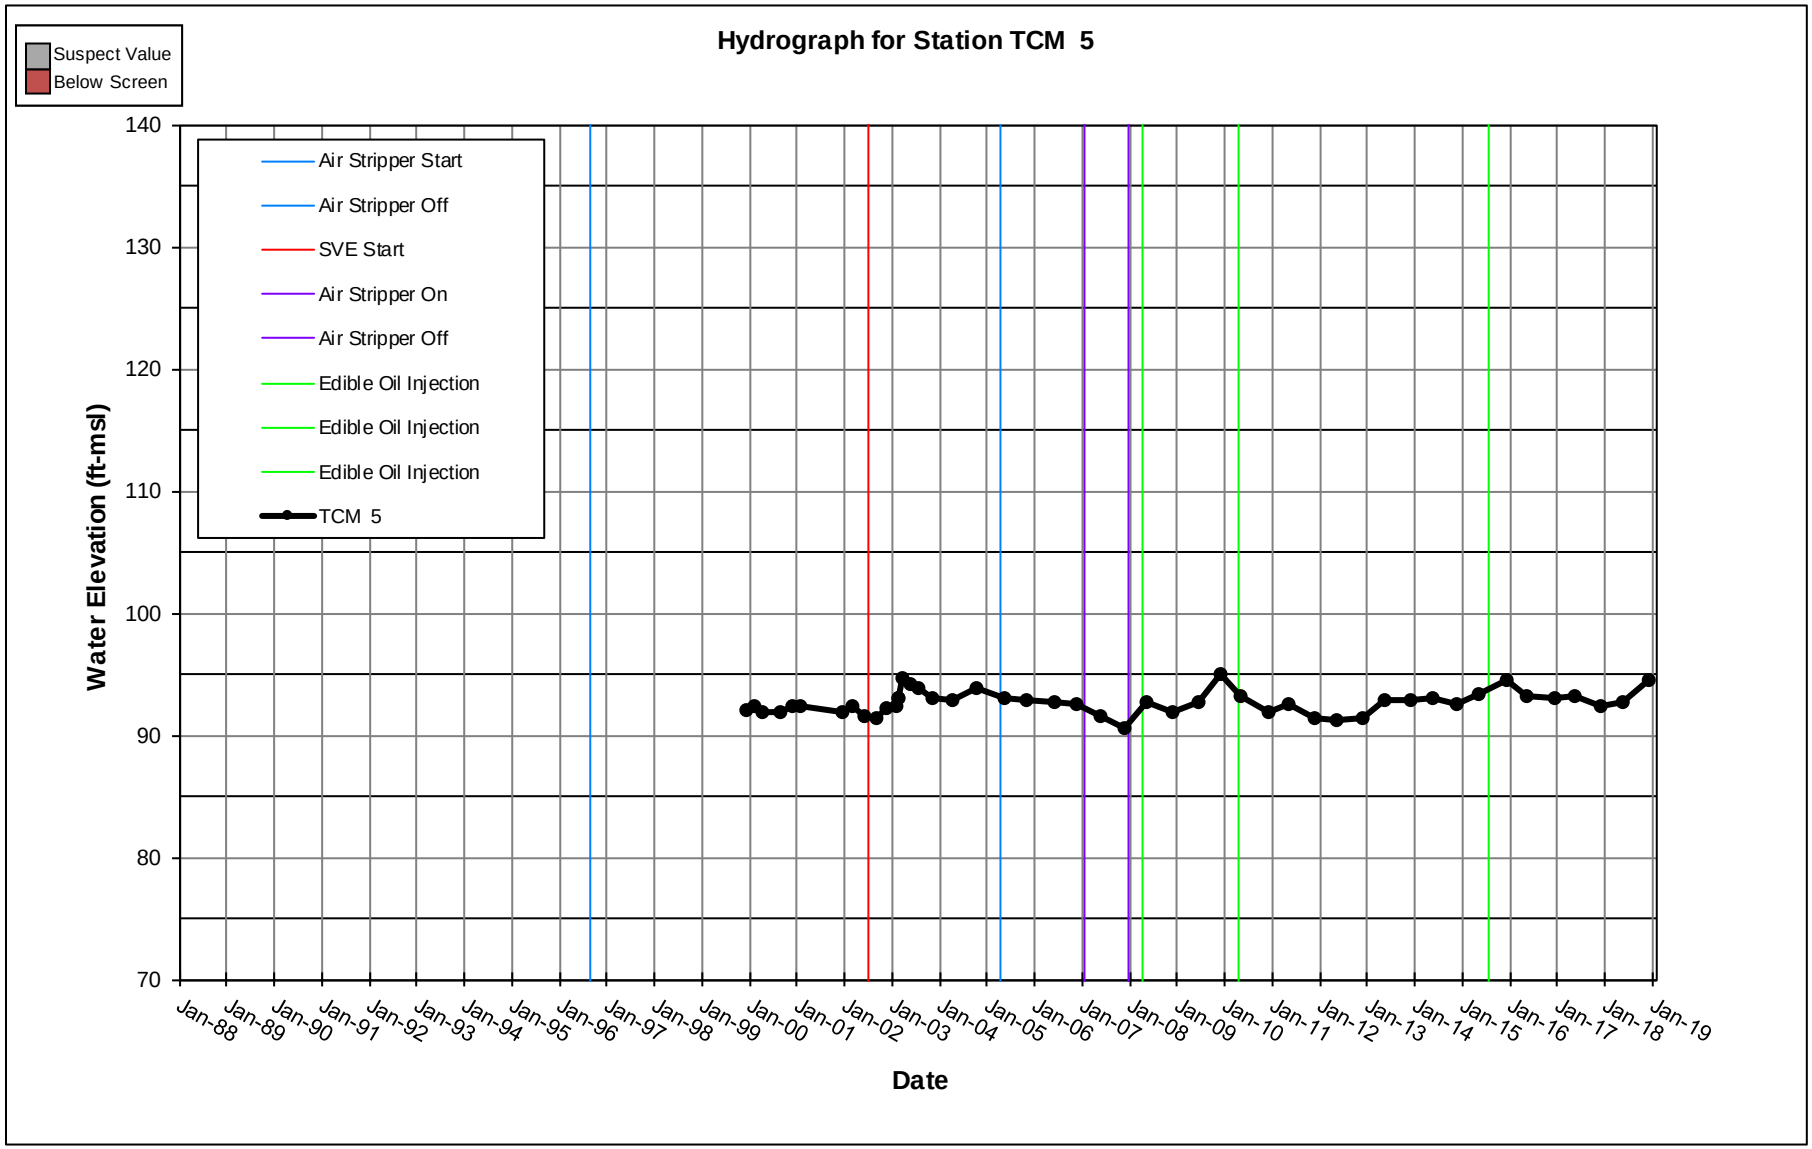
Hydrograph for Station TCM 5
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TCM 5
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

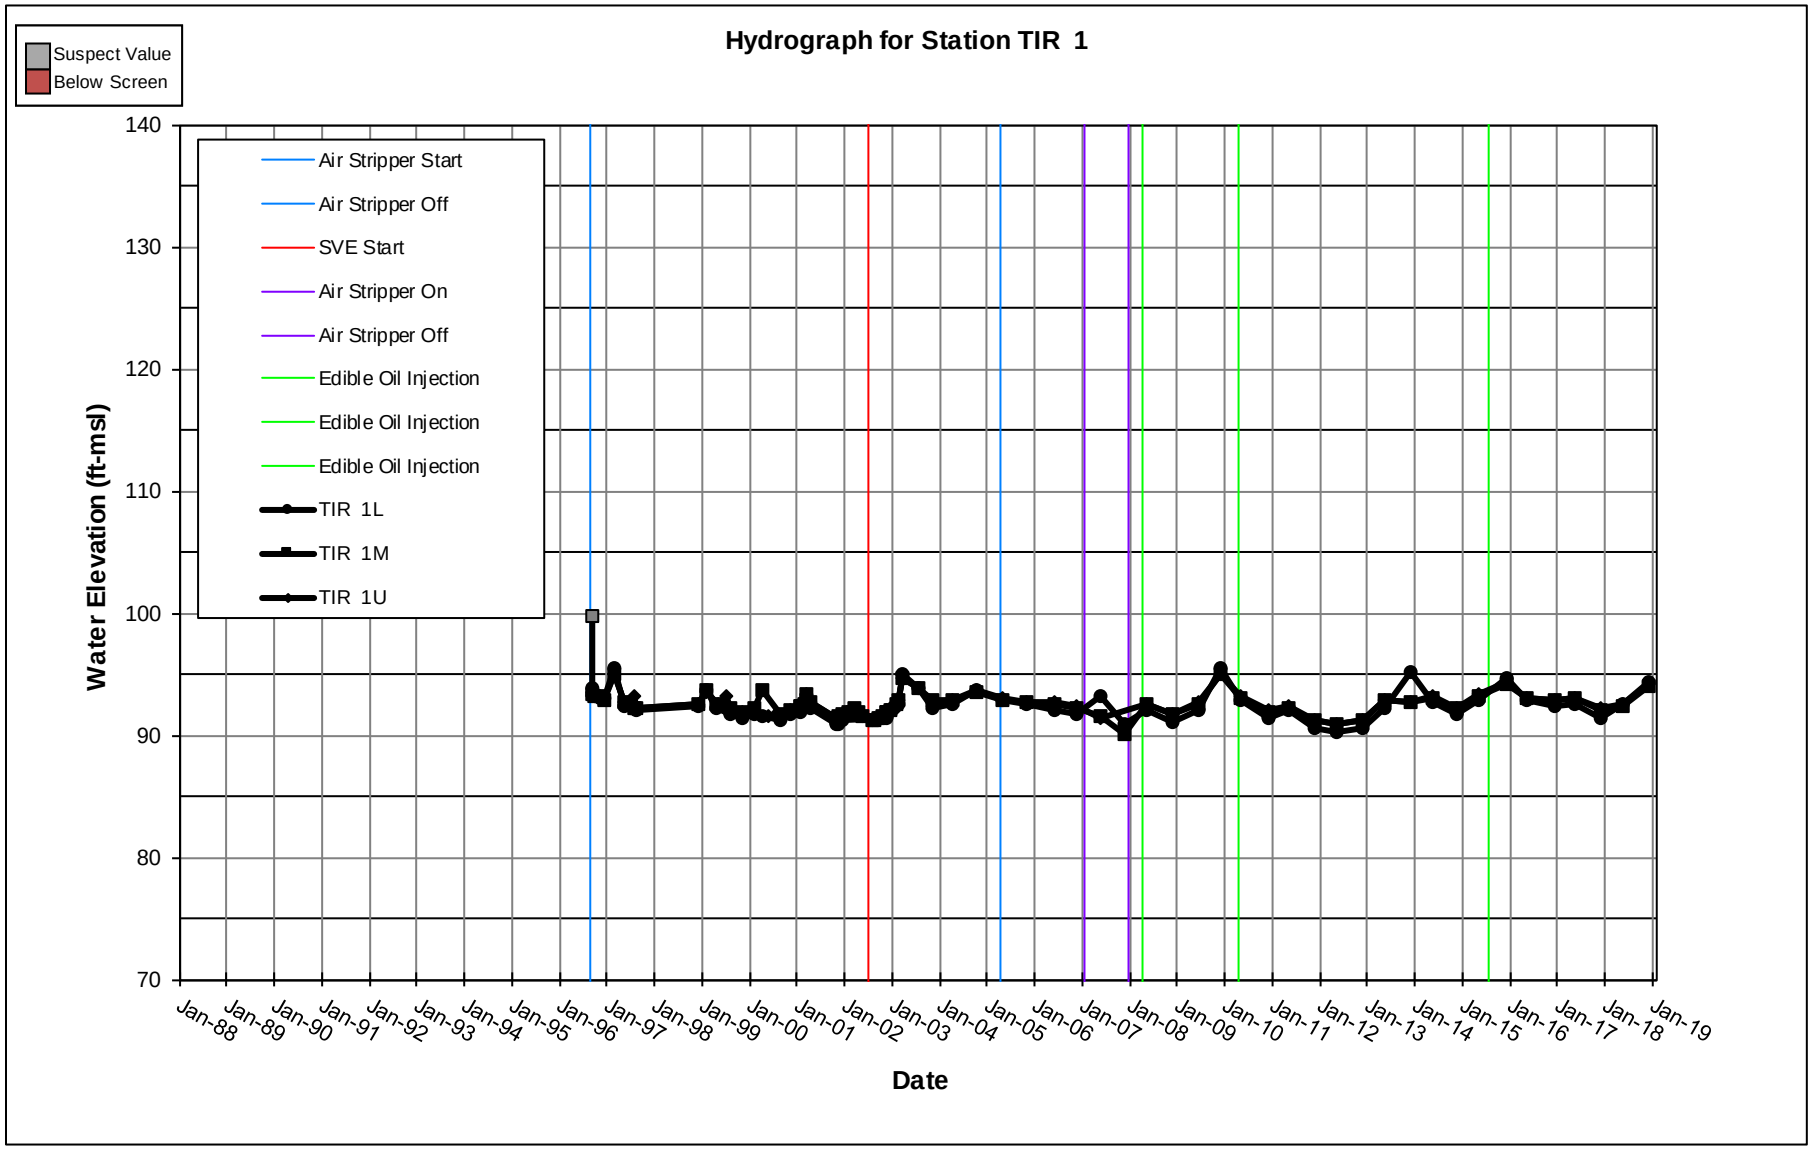
Hydrograph for Station TIR 1
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TIR 1L
TIR 1M
TIR 1U
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

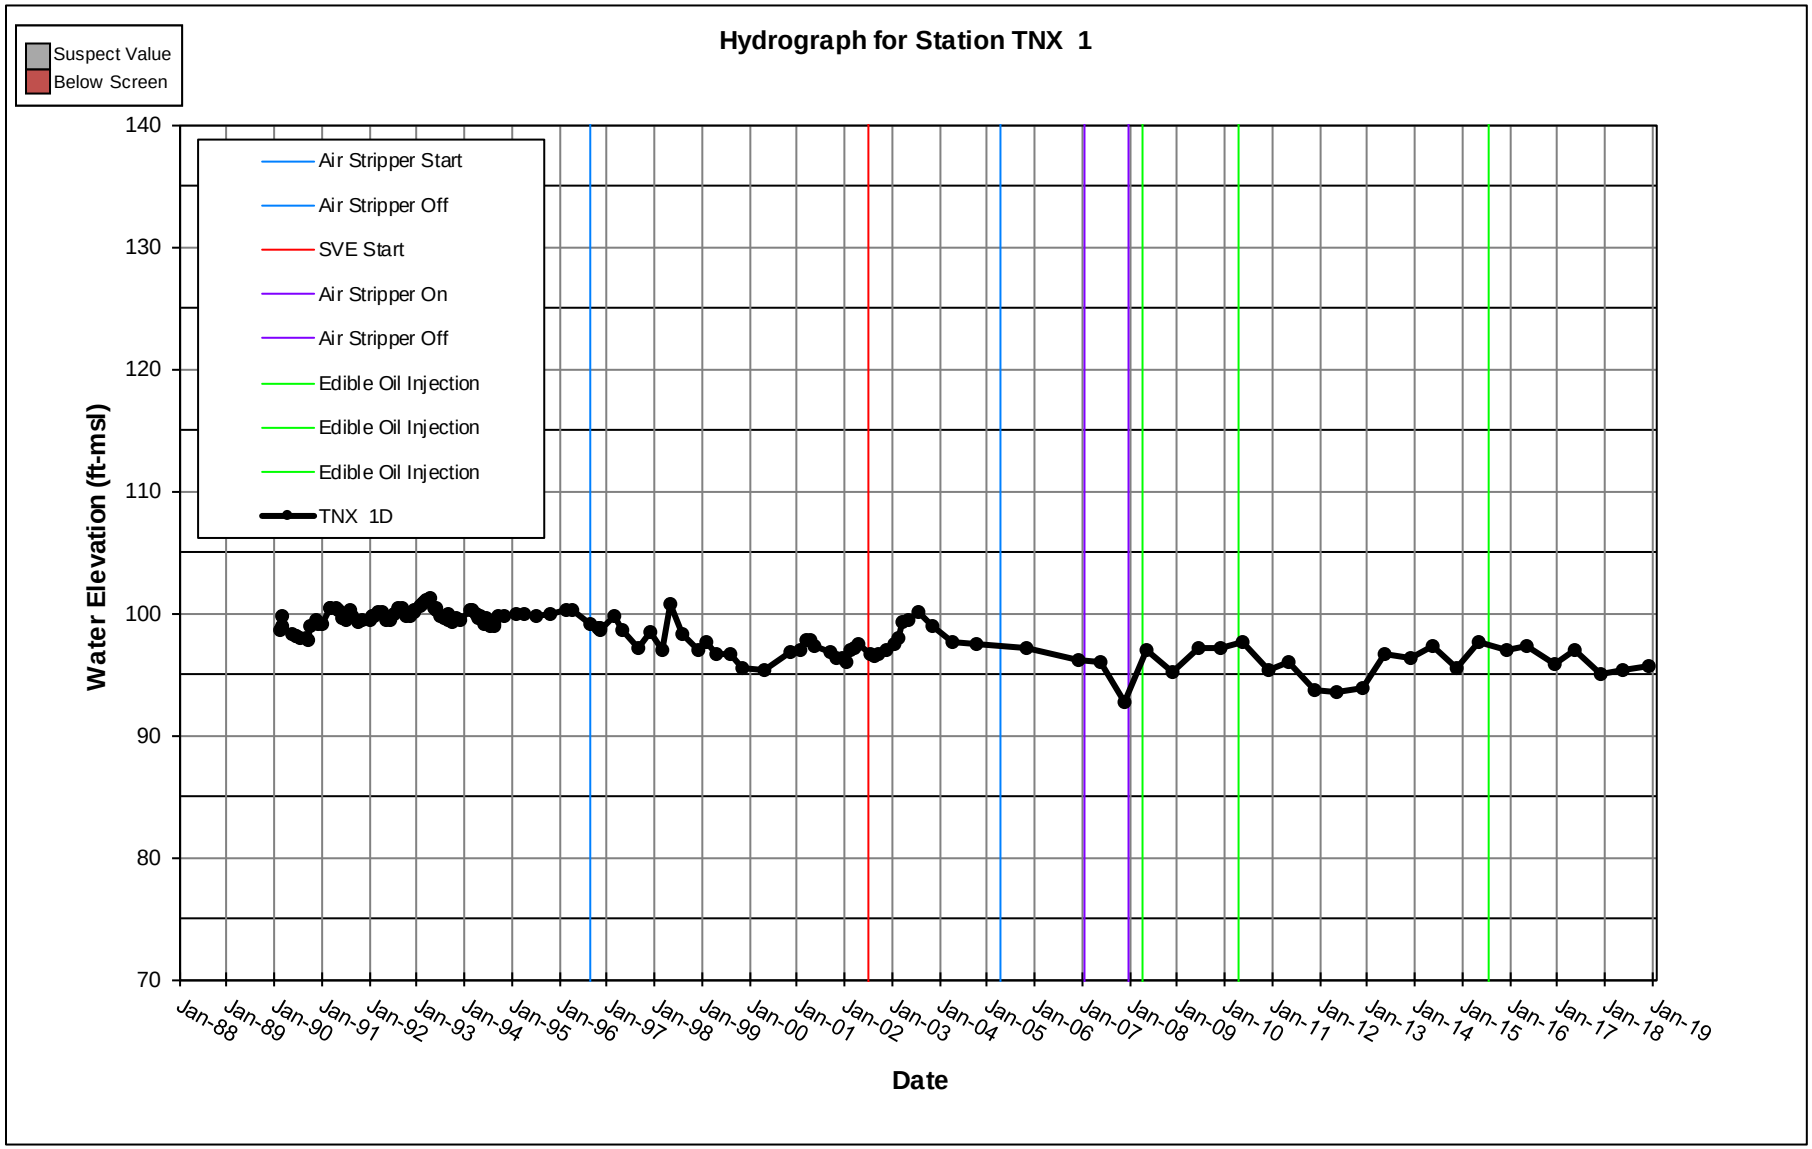
Hydrograph for Station TNX 1
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX 1D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

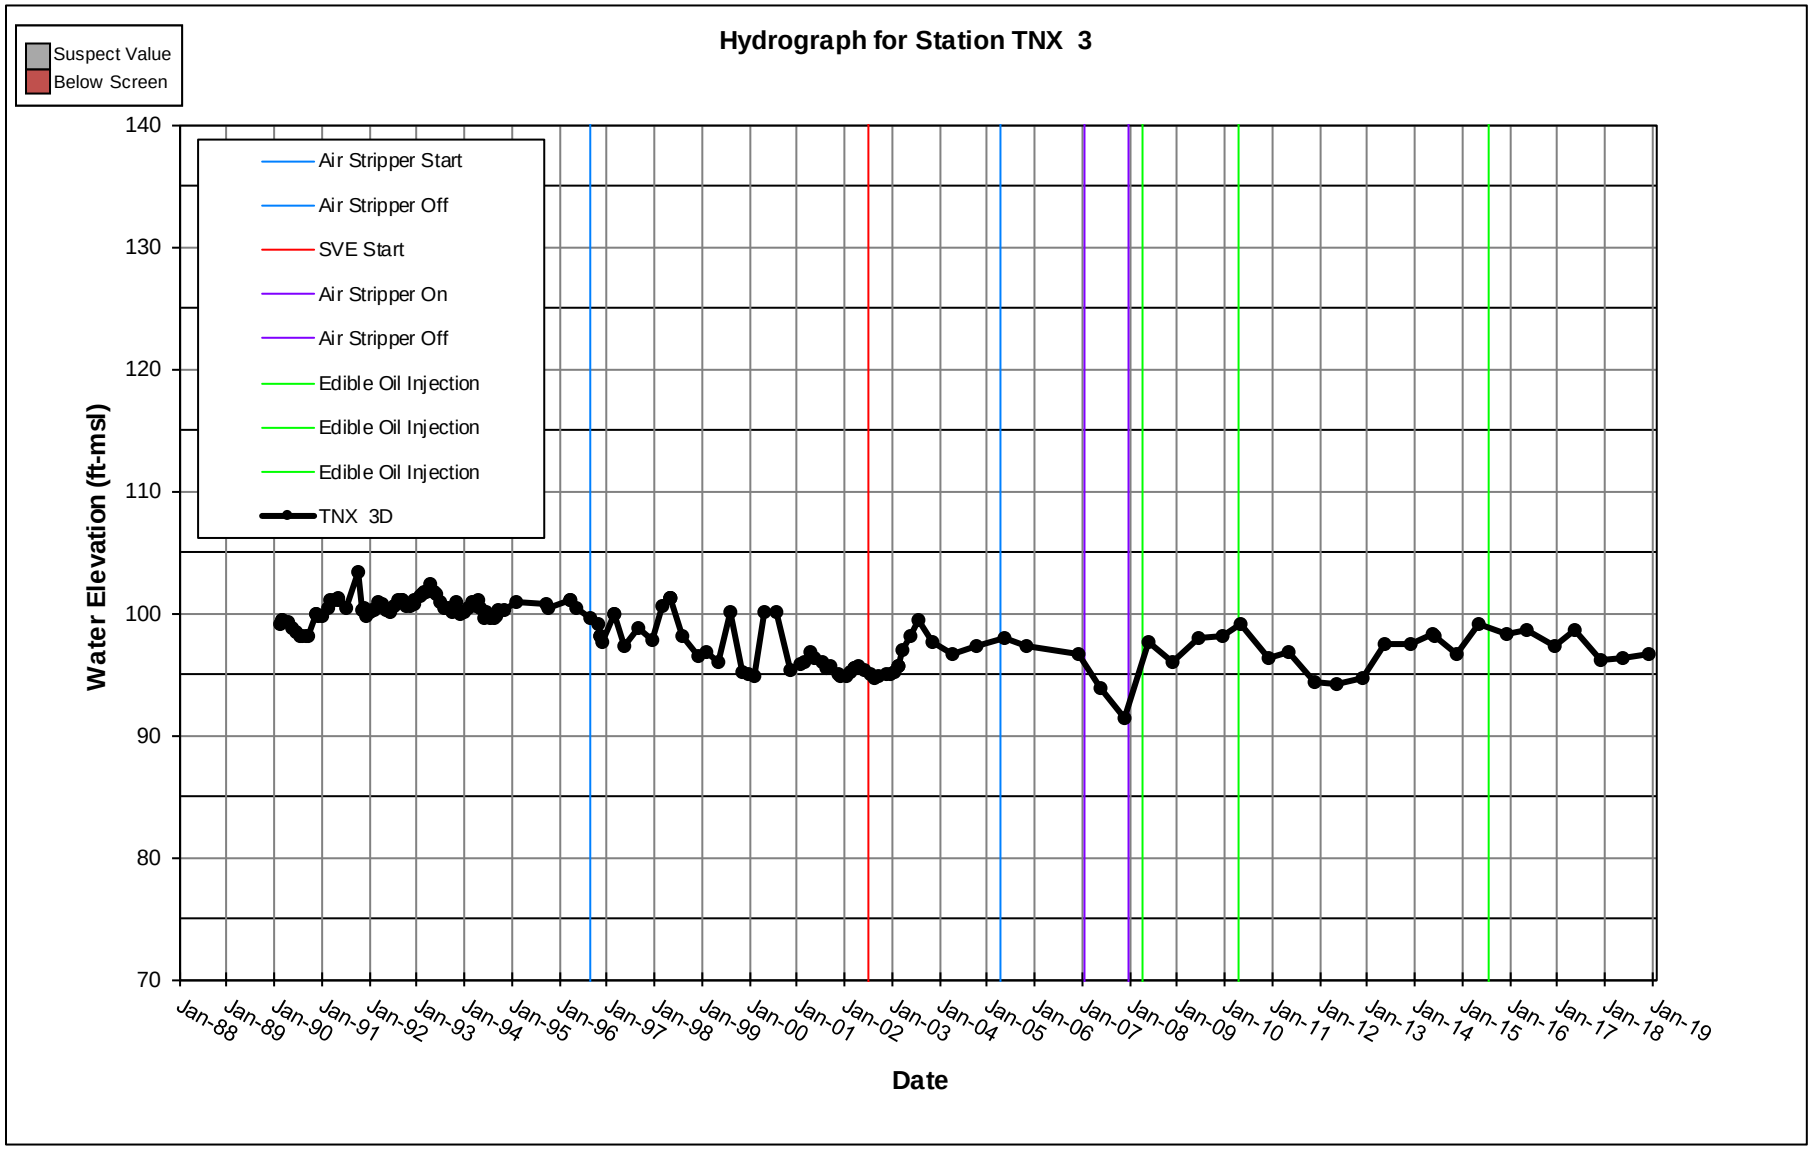
Hydrograph for Station TNX 3
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX 3D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

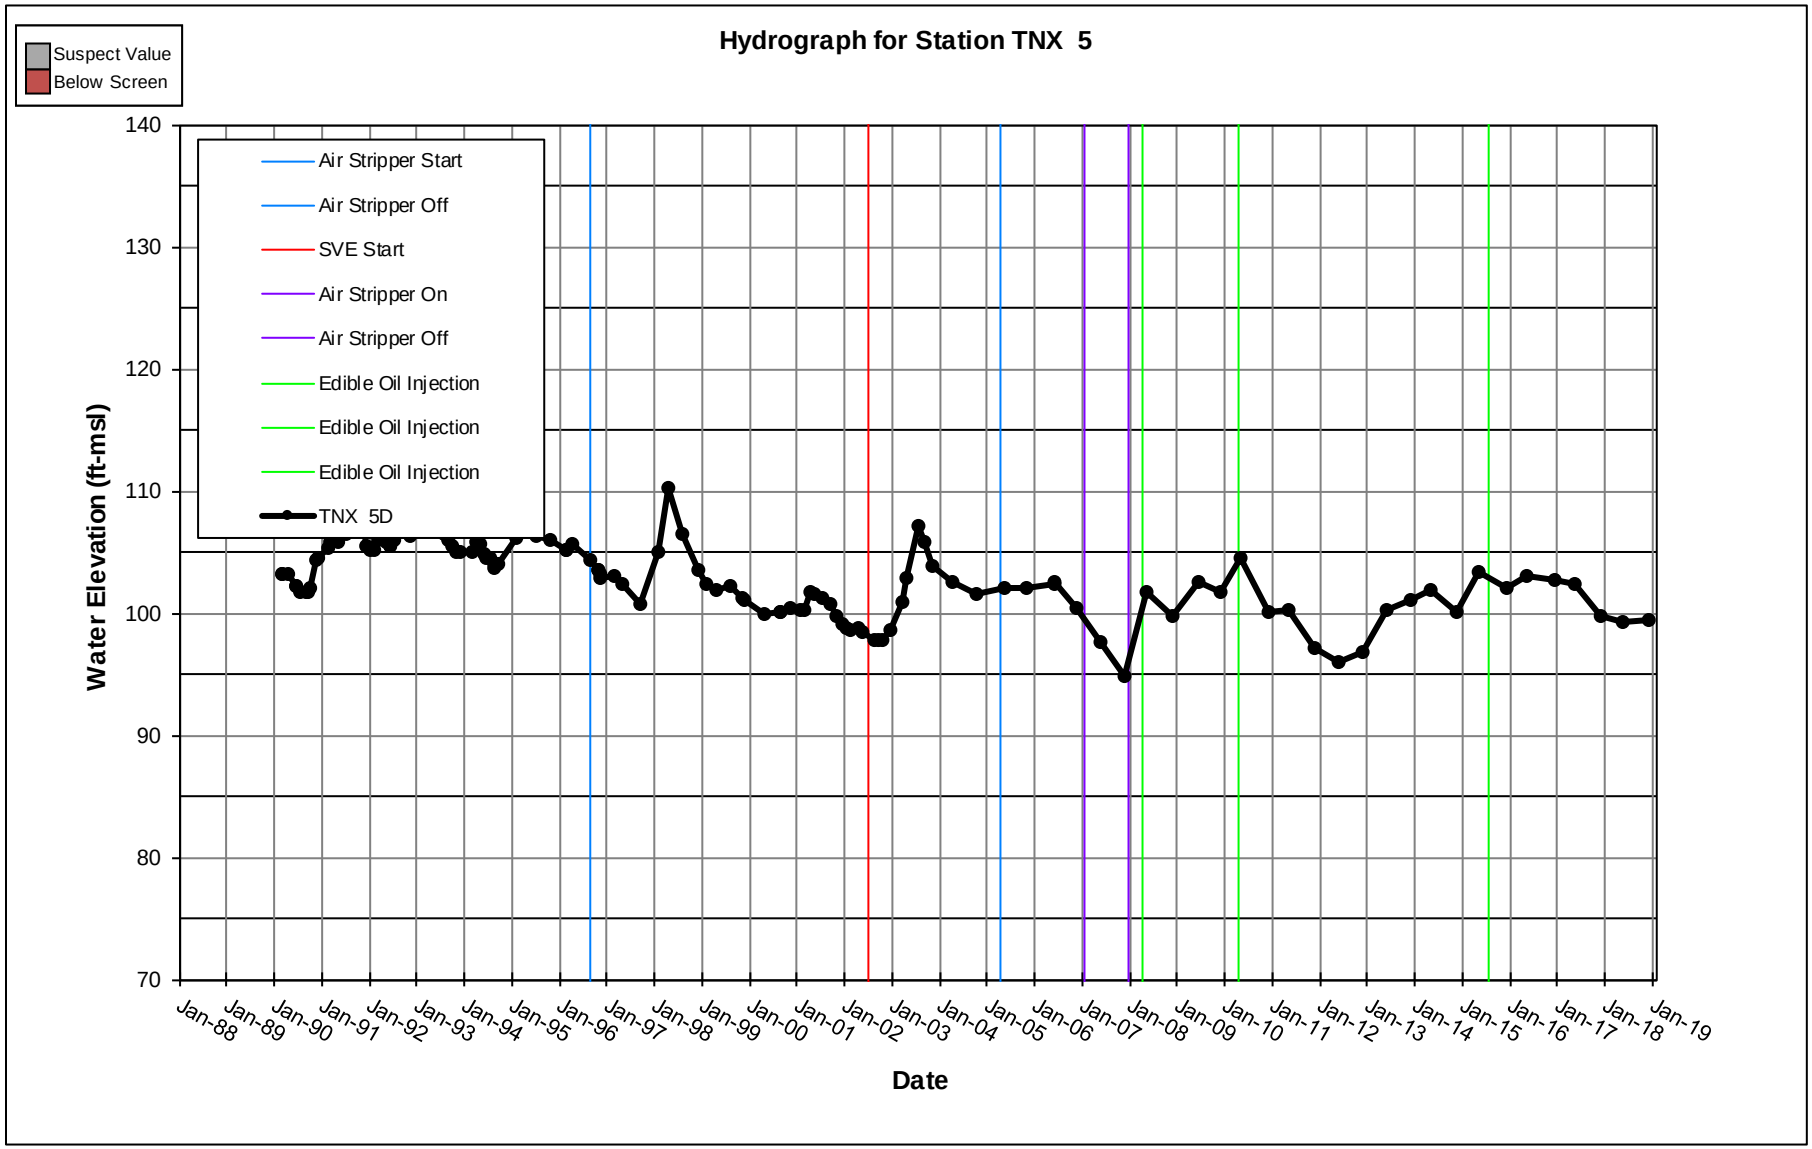
Hydrograph for Station TNX 5
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX 5D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

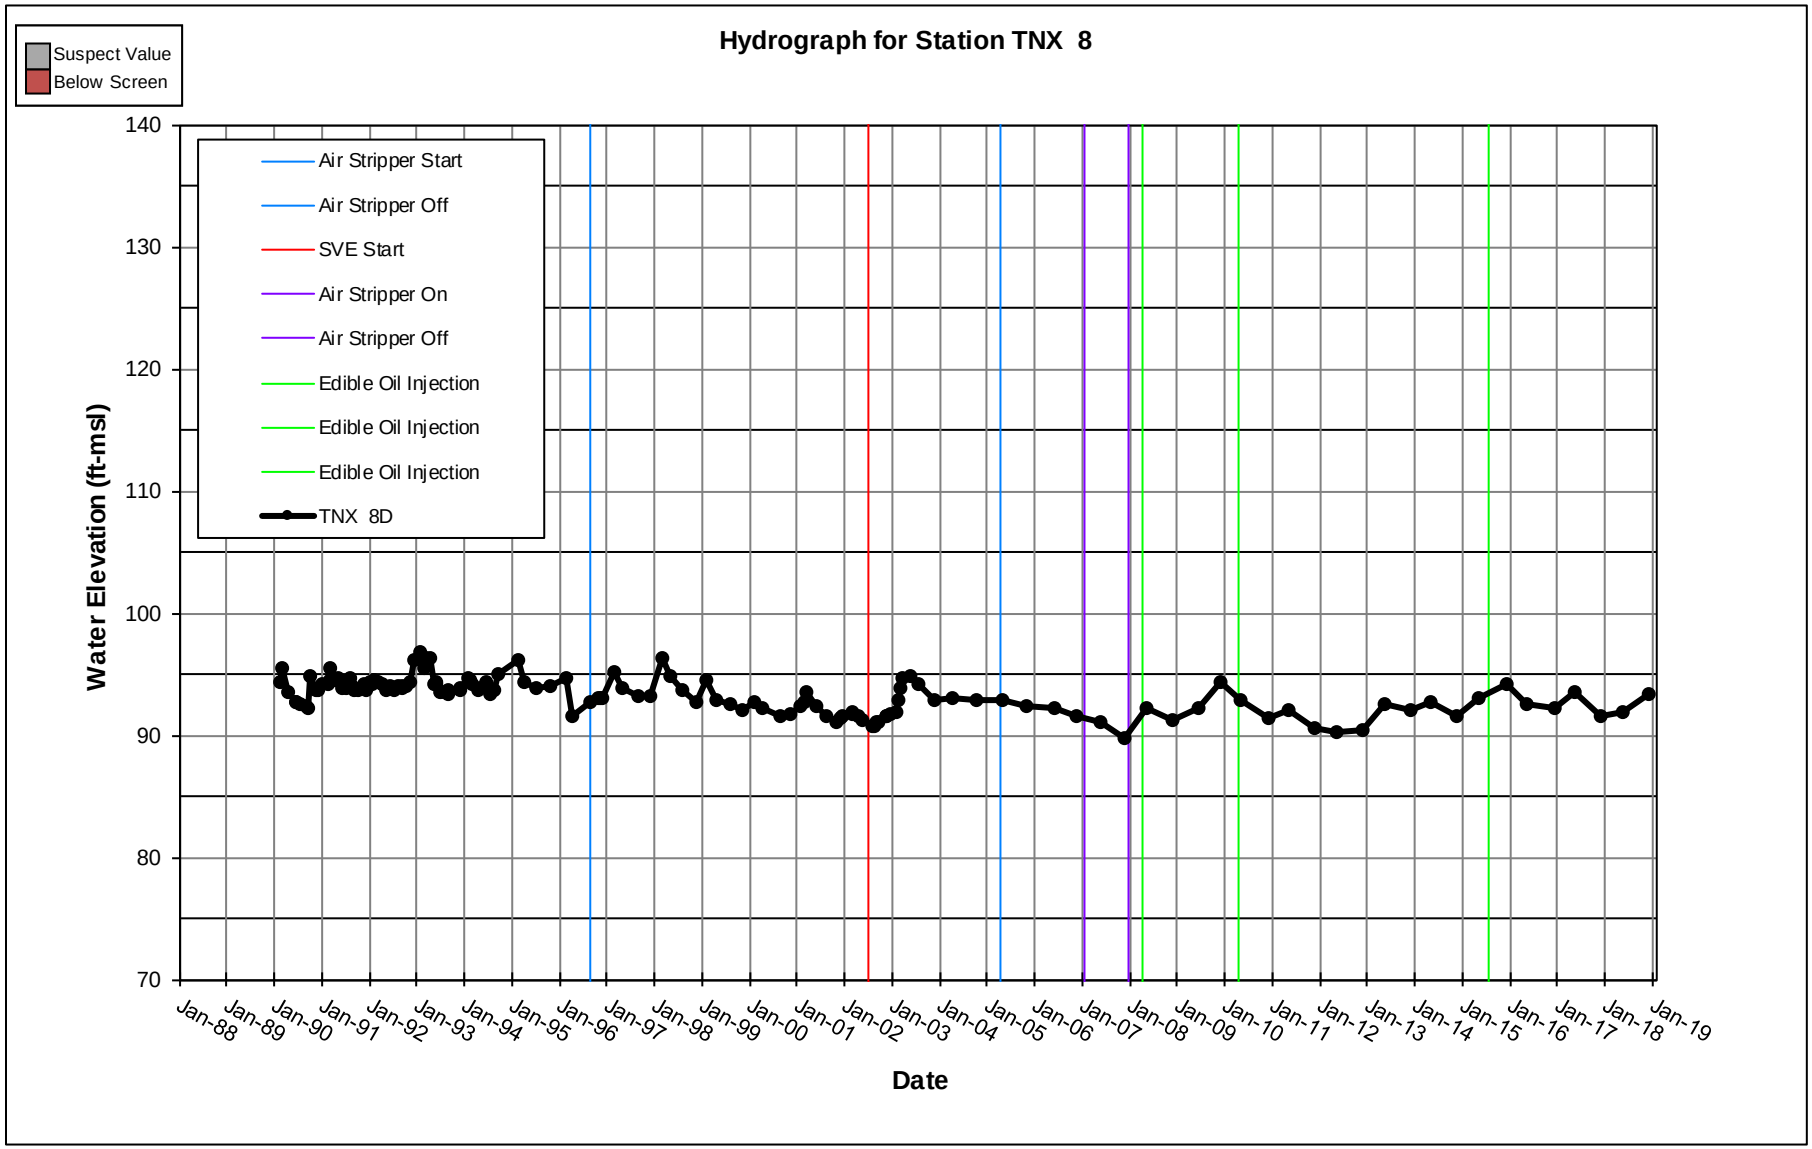
Hydrograph for Station TNX 8
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX 8D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

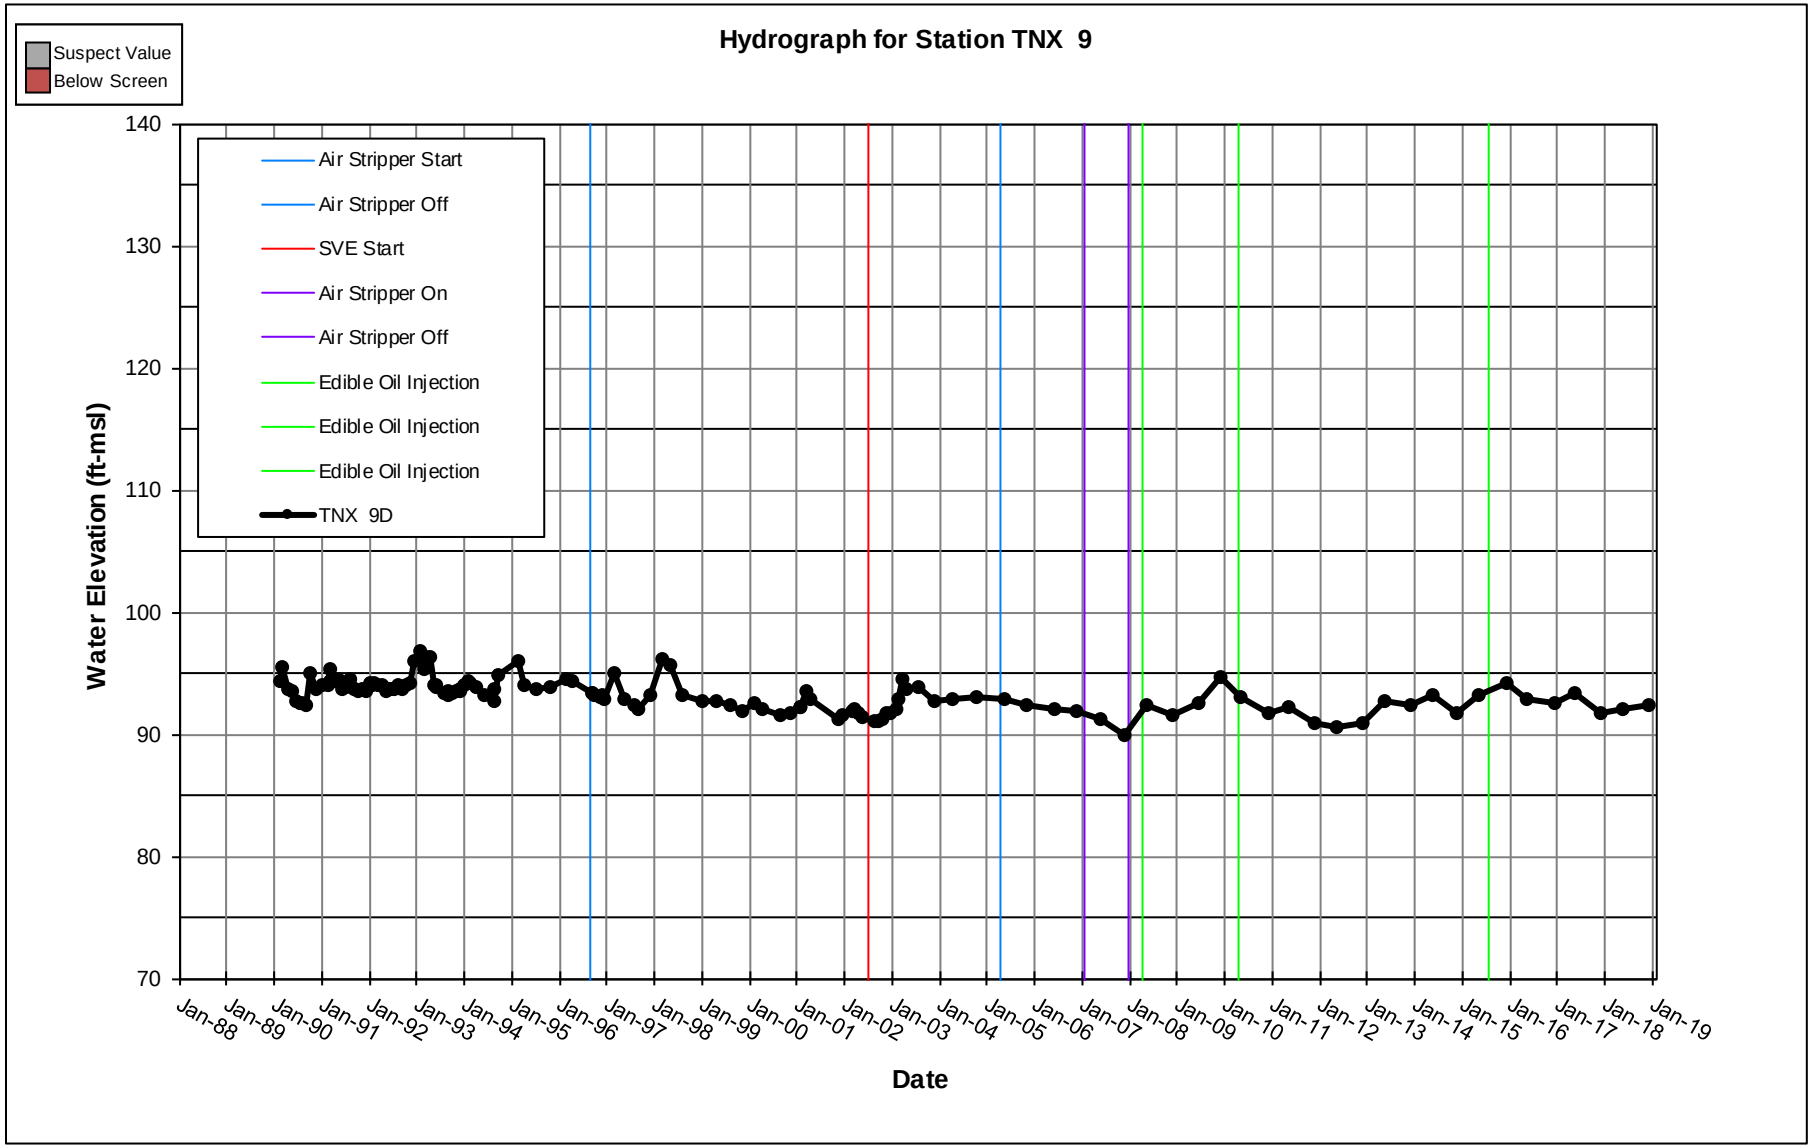
Hydrograph for Station TNX 9
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX 9D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

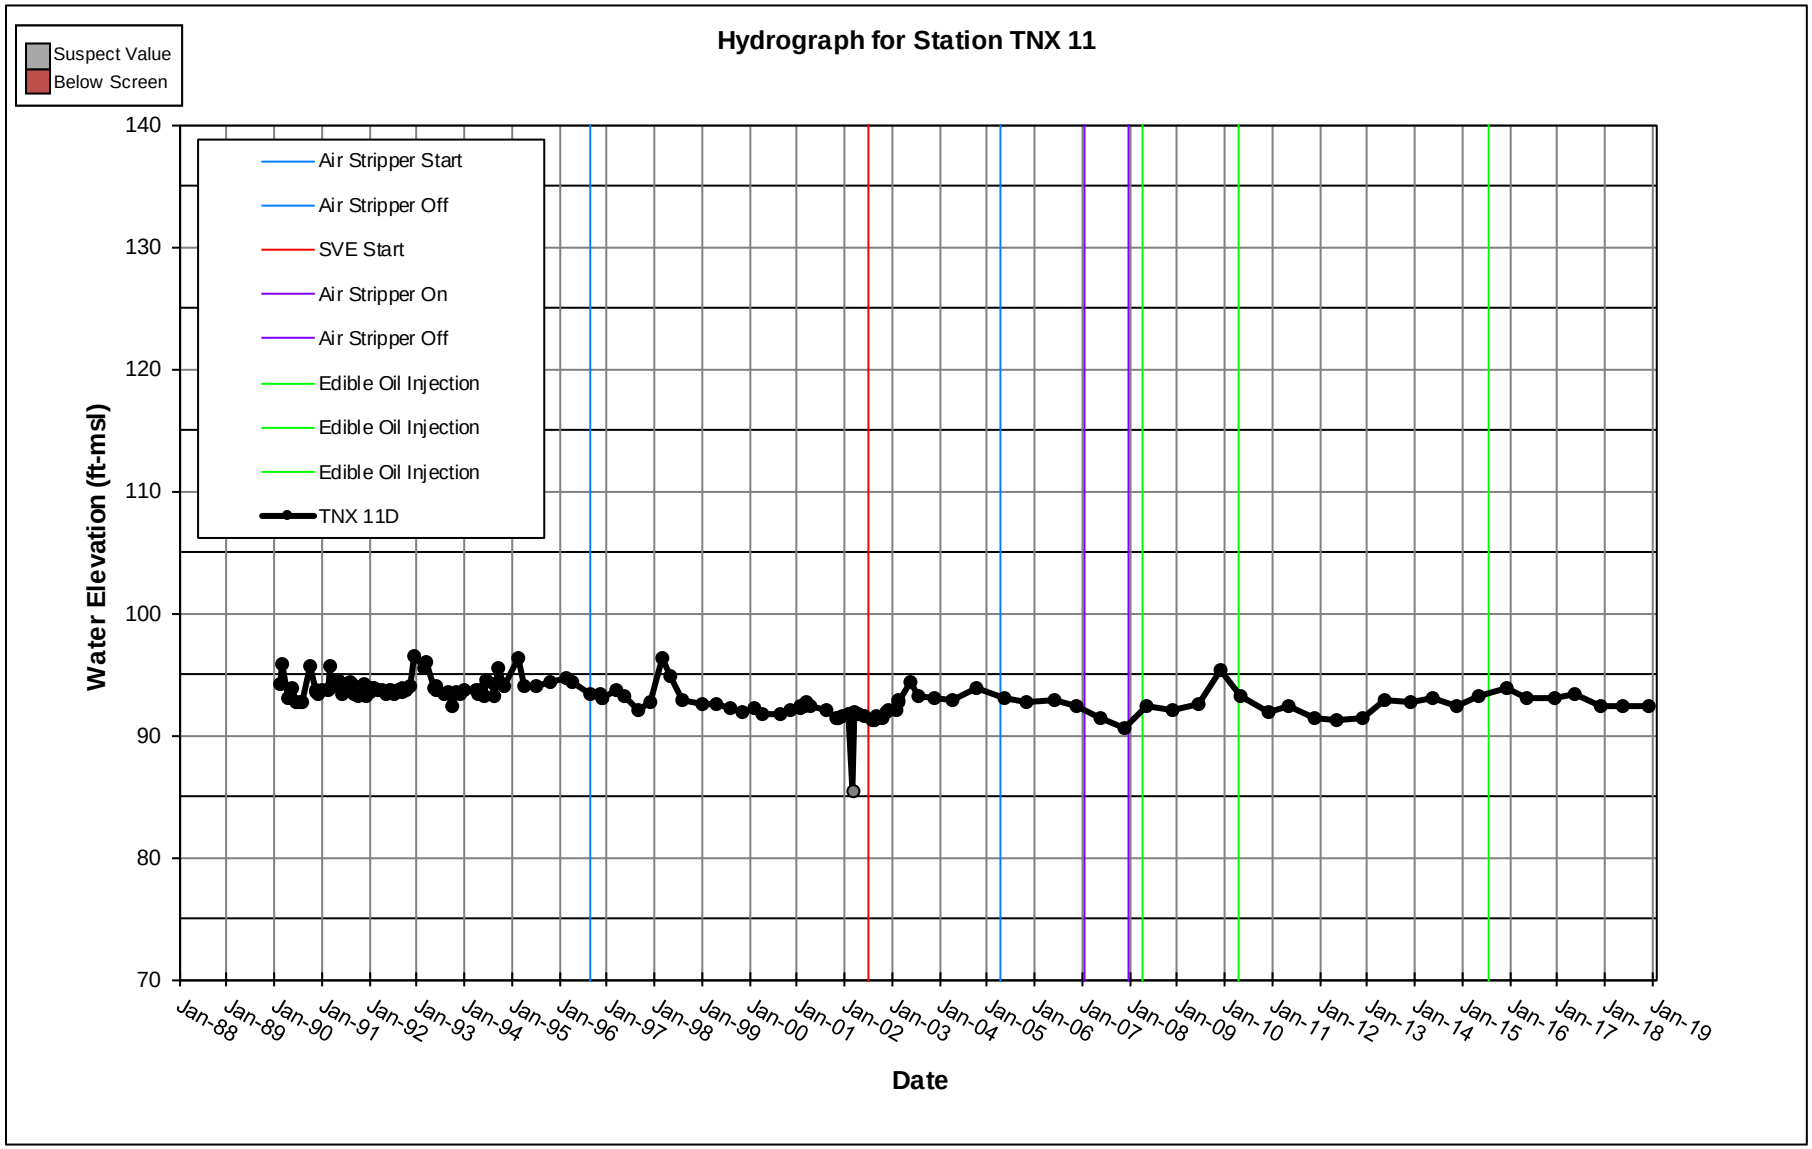
Hydrograph for Station TNX 11
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX 11D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

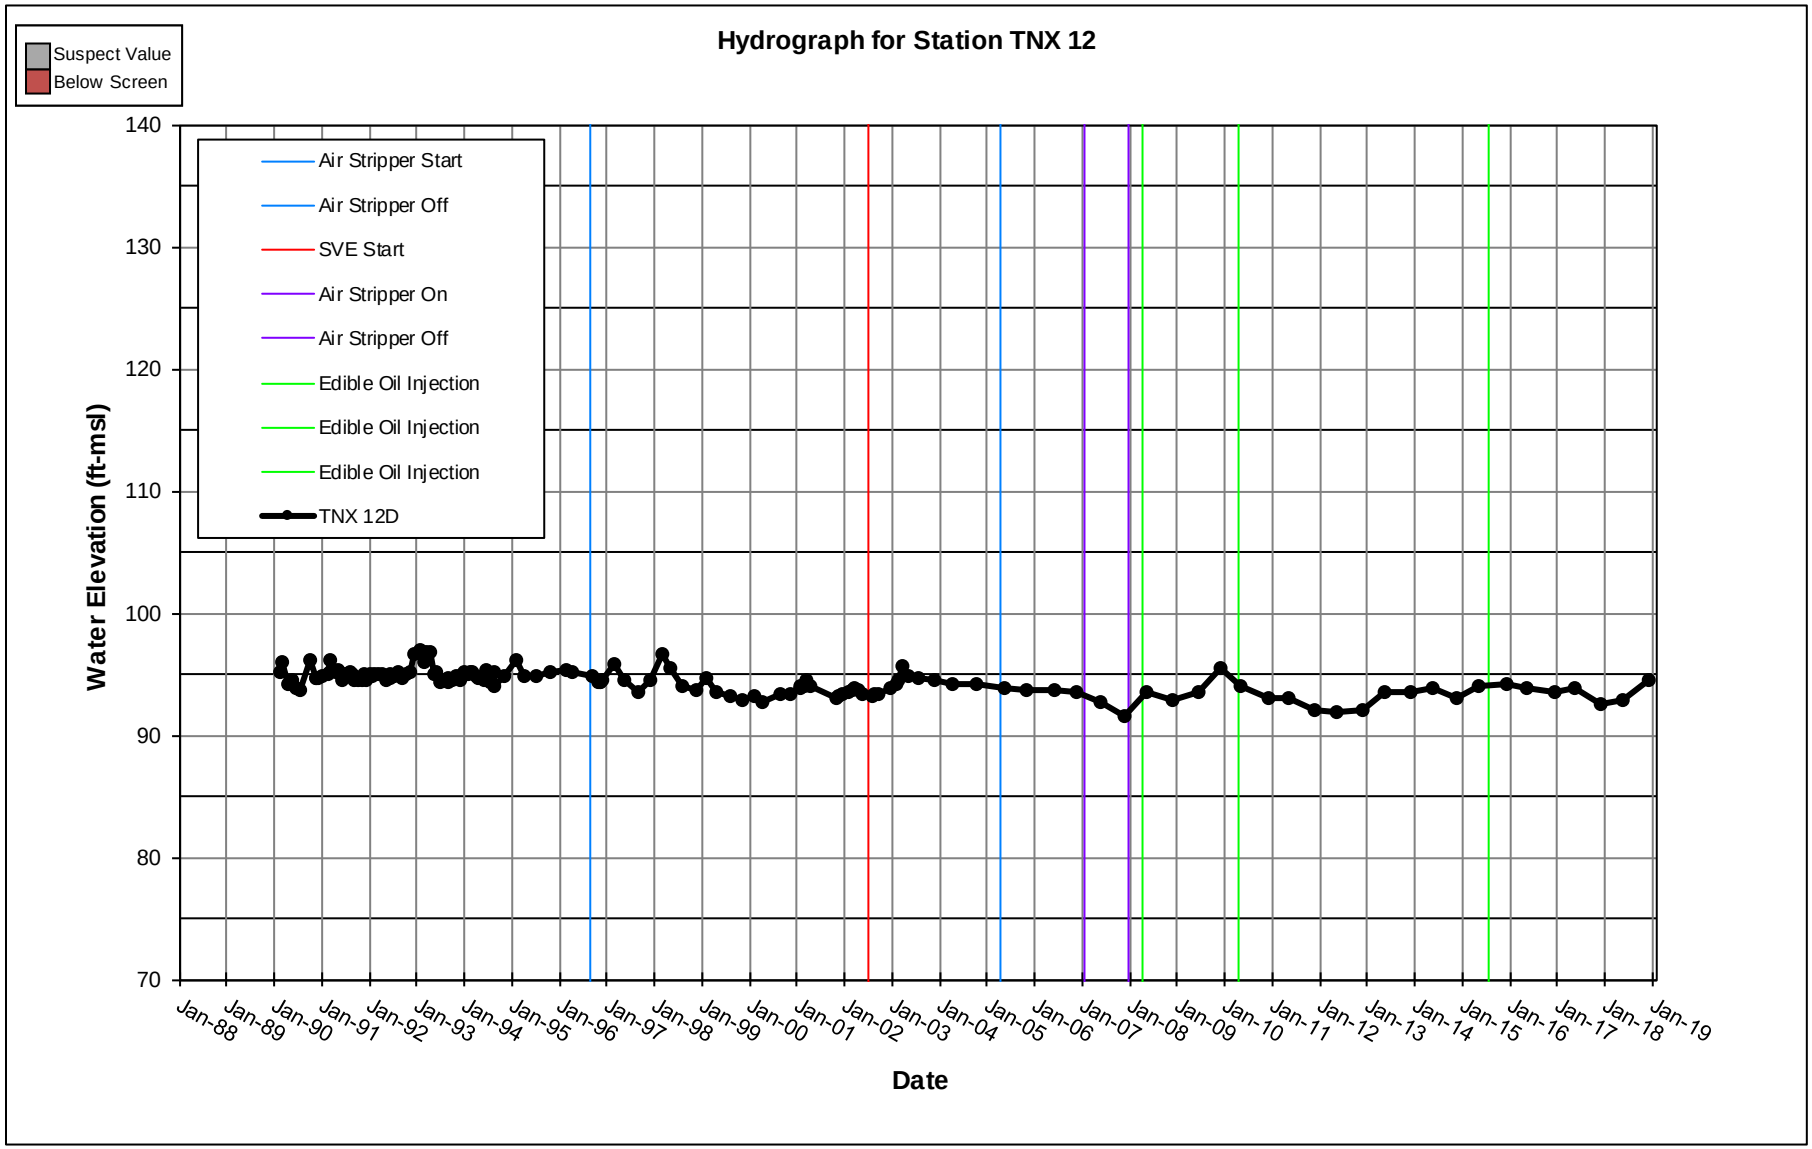
Hydrograph for Station TNX 12
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX 12D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

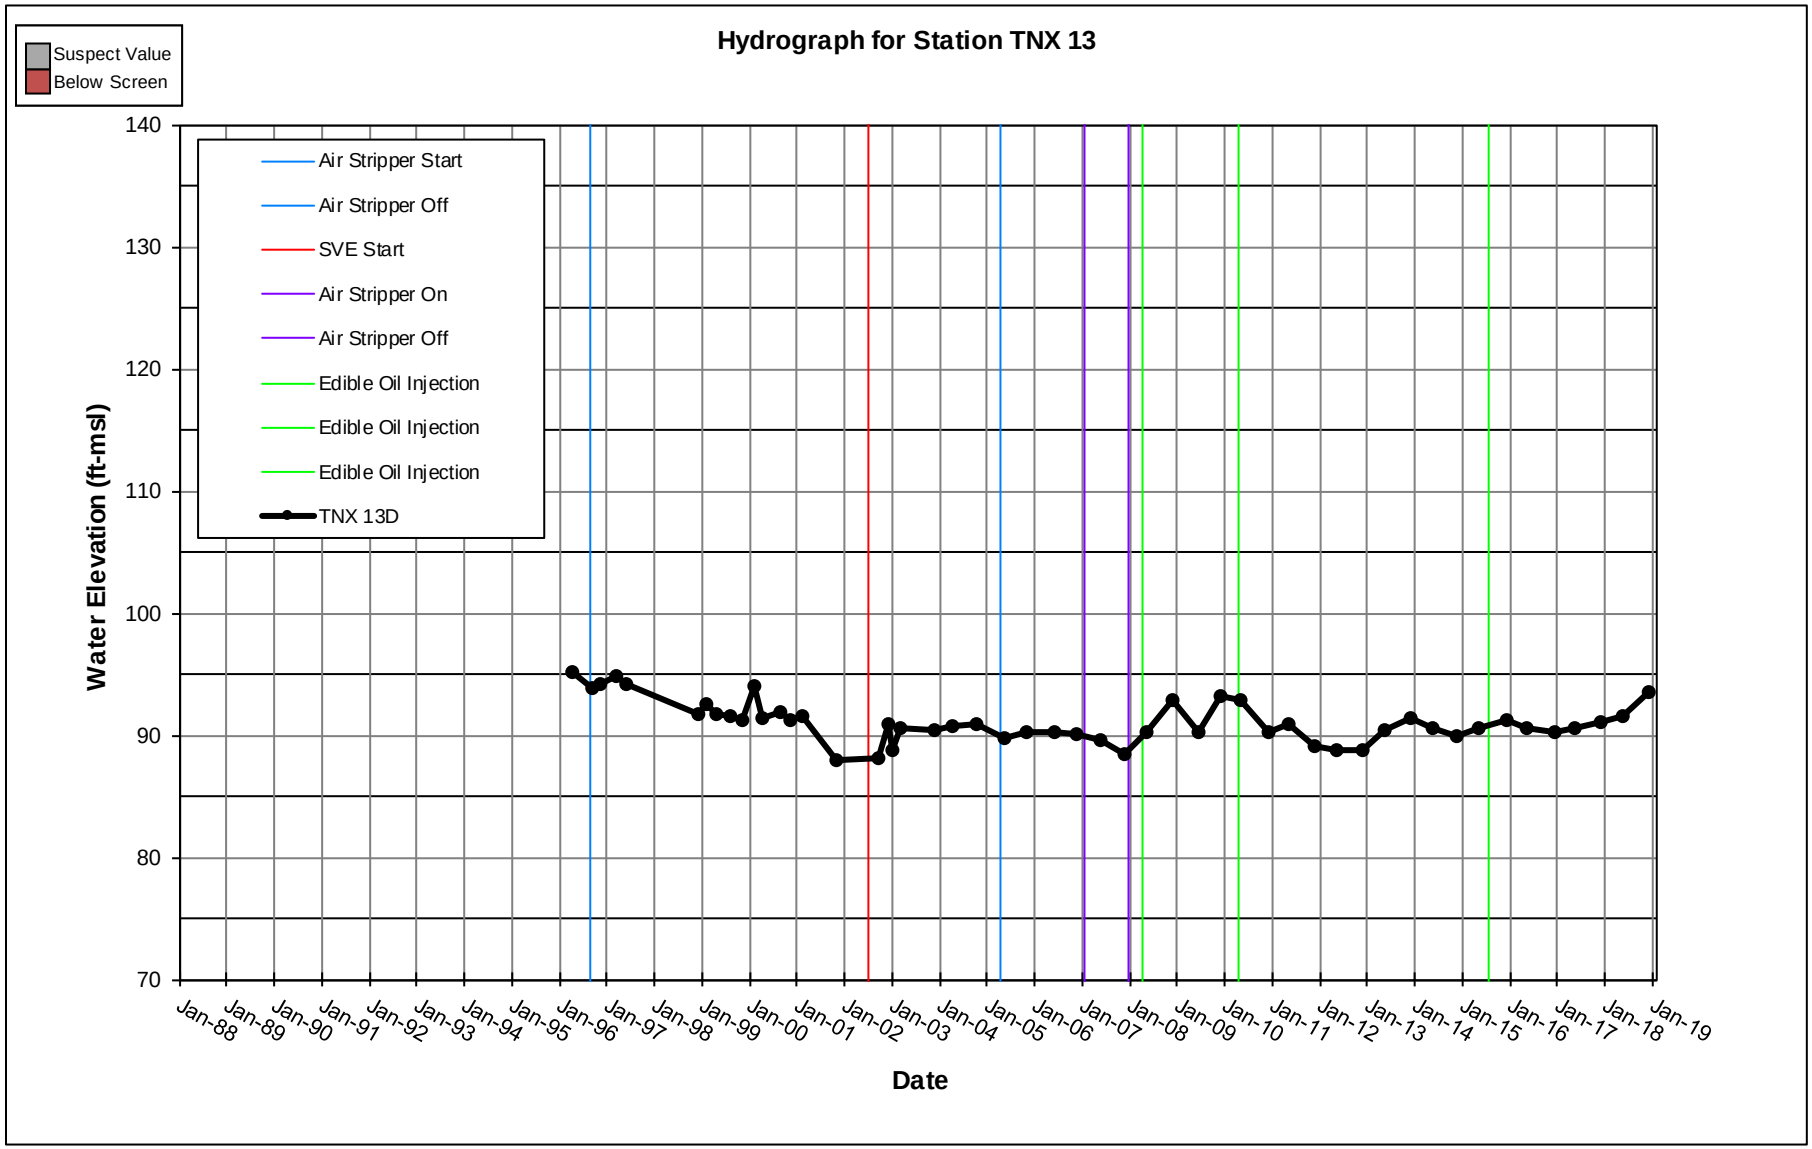
Hydrograph for Station TNX 13
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX 13D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

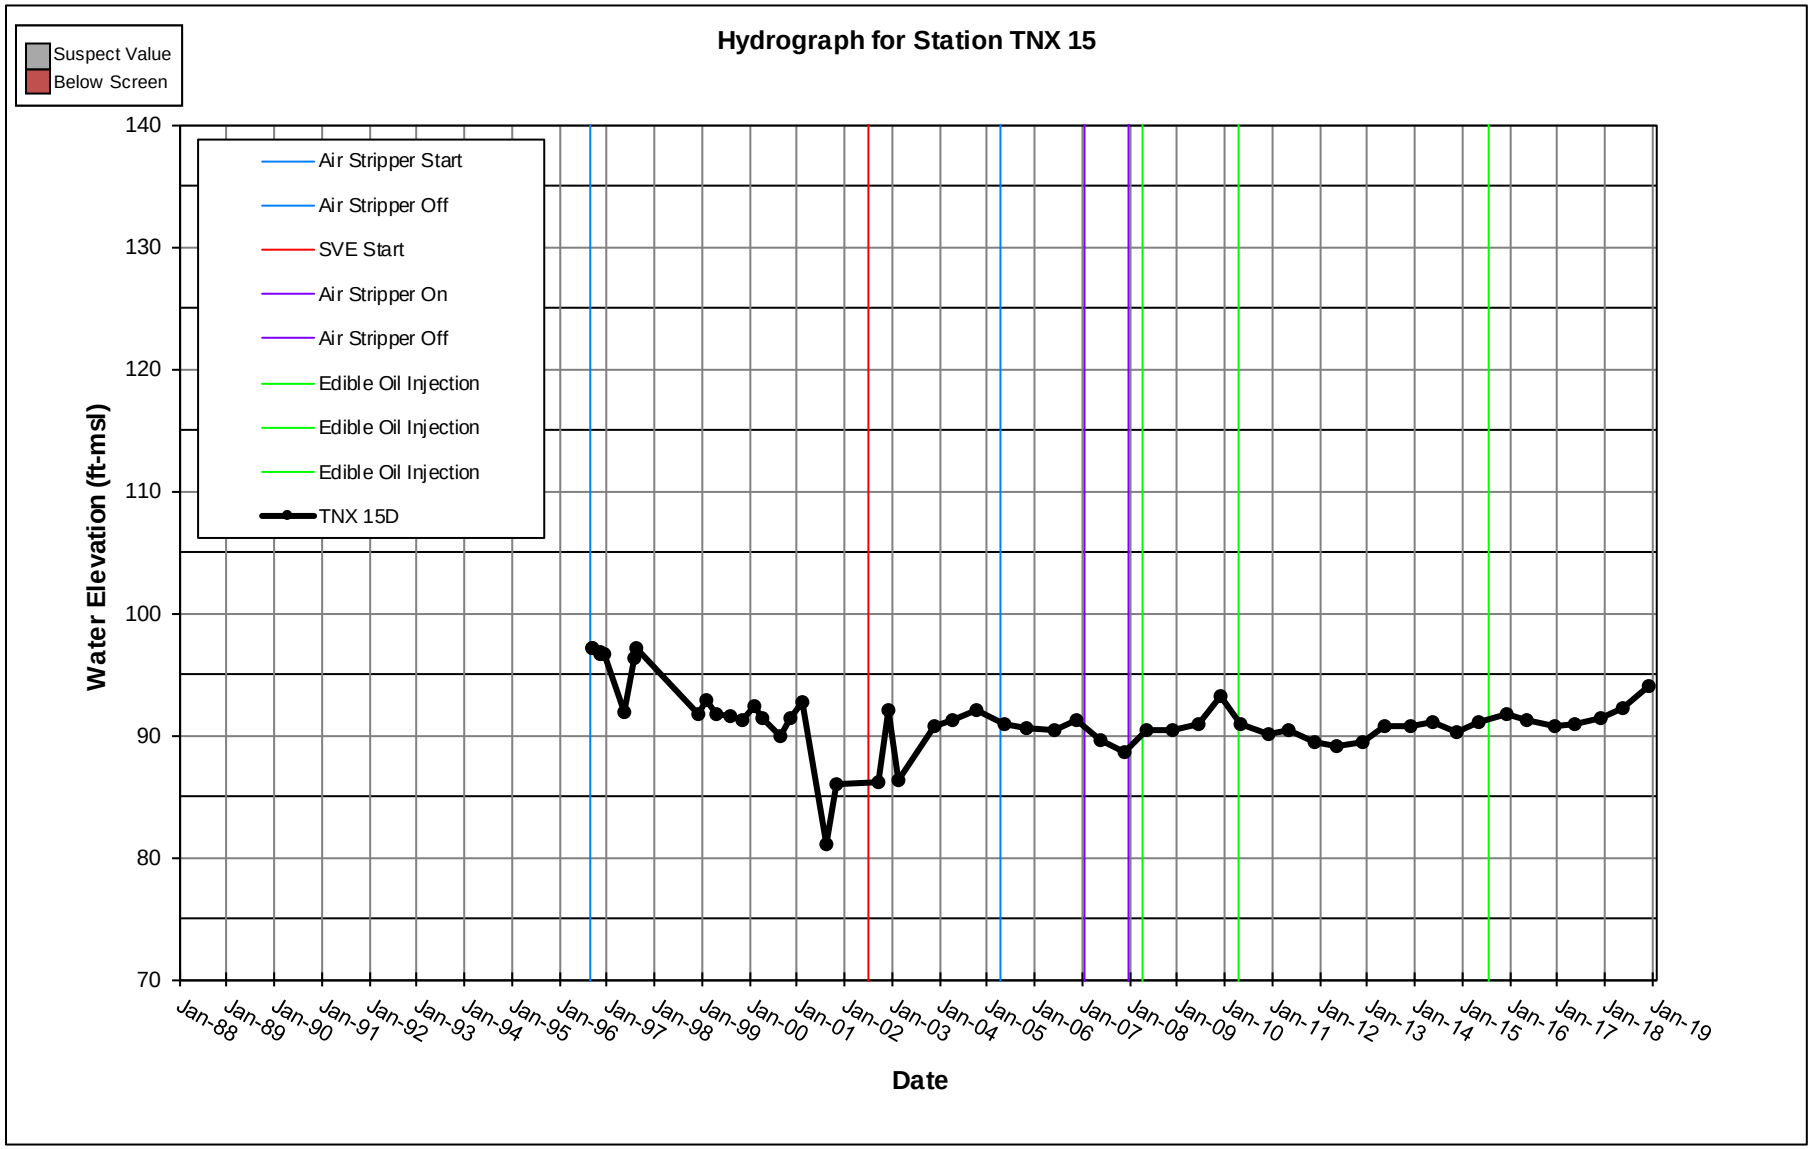
Hydrograph for Station TNX 15
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX 15D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

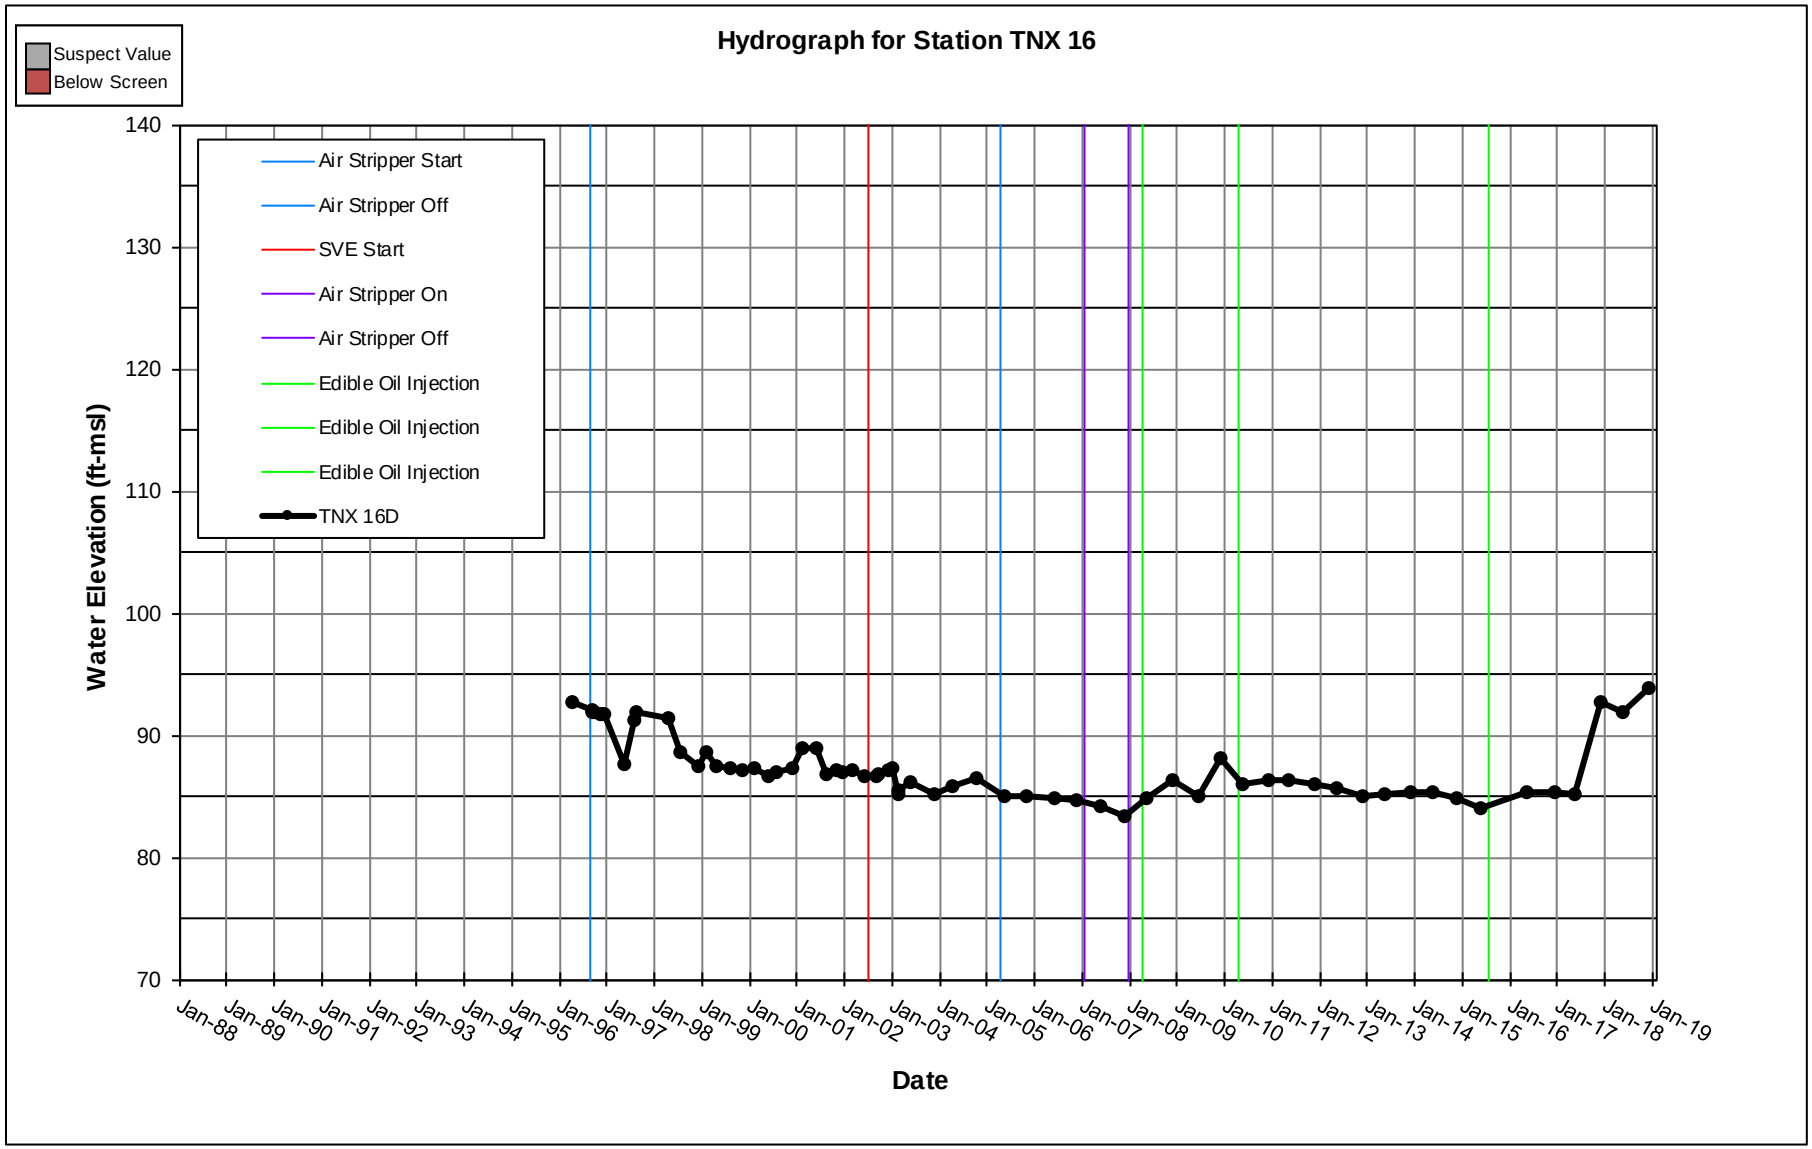
Hydrograph for Station TNX 16
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX 16D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

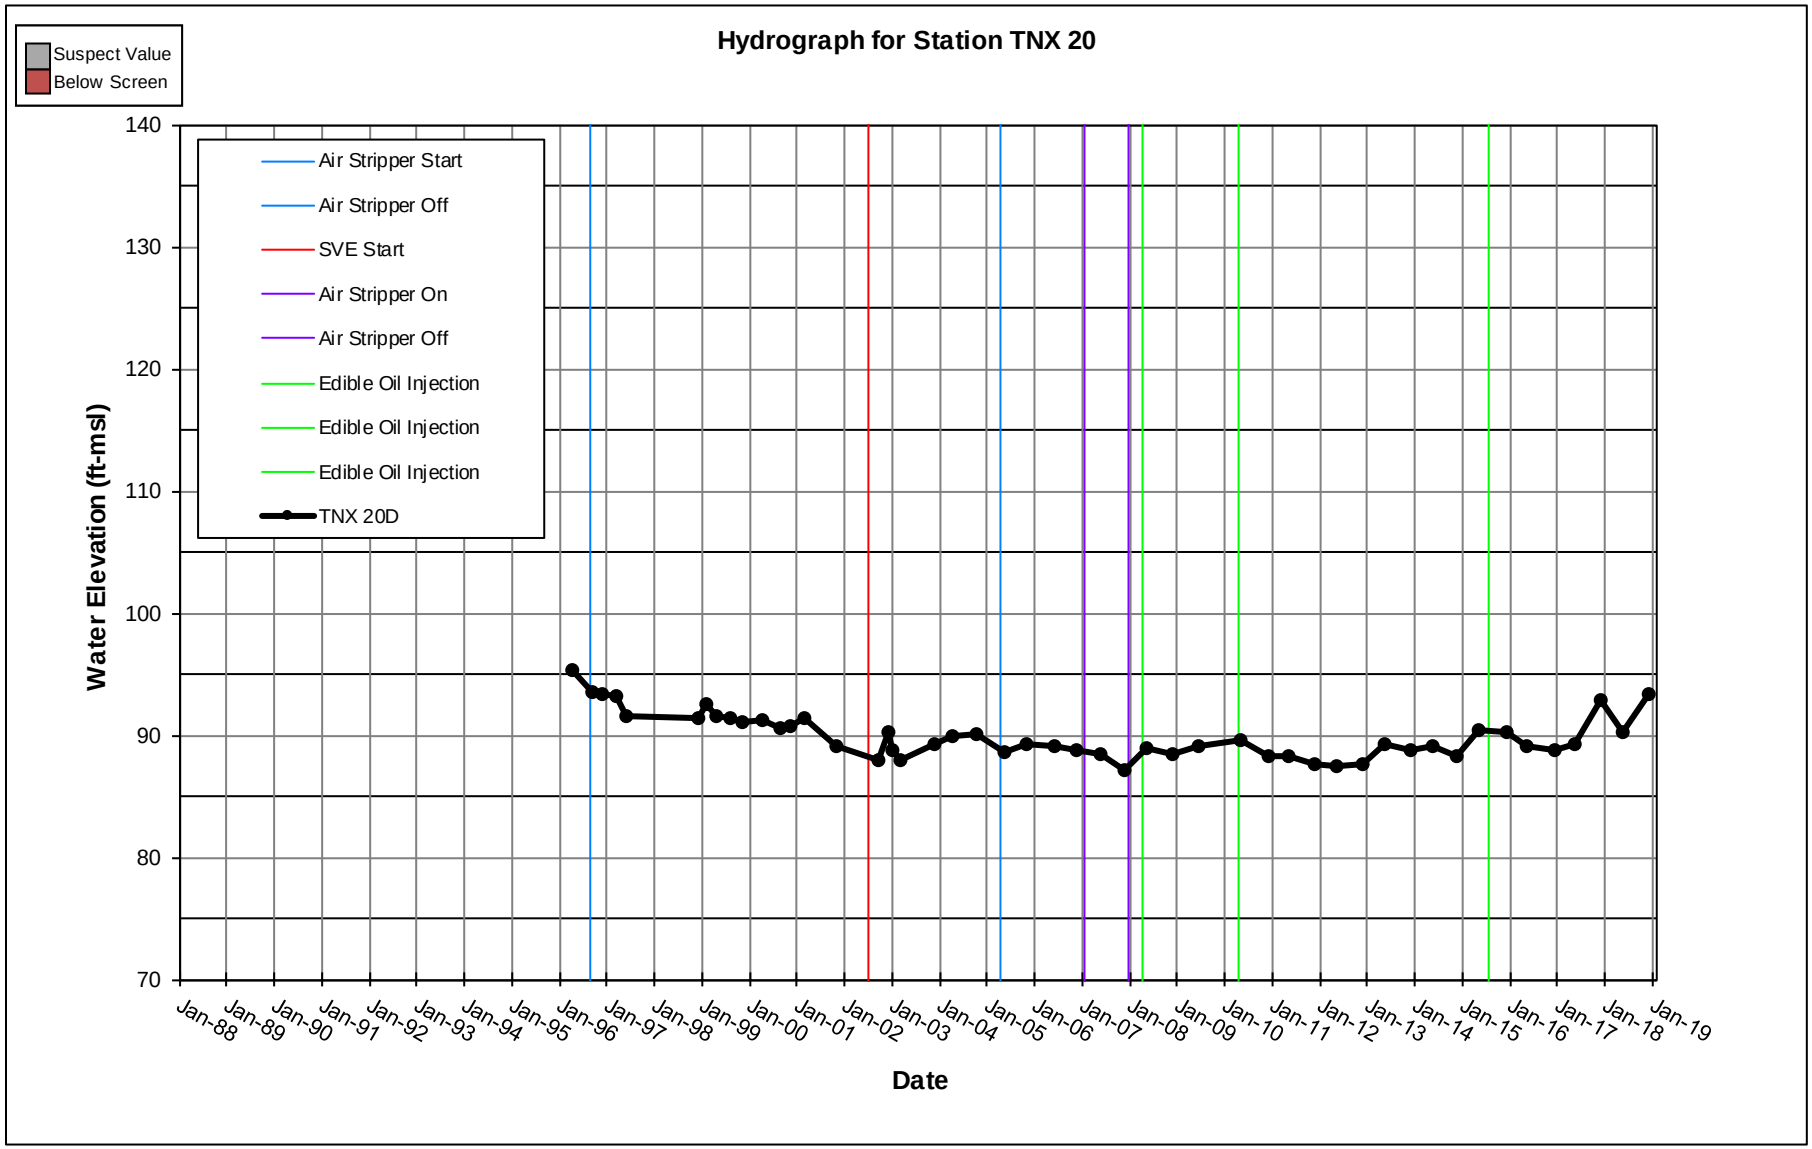
Hydrograph for Station TNX 20
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX 20D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

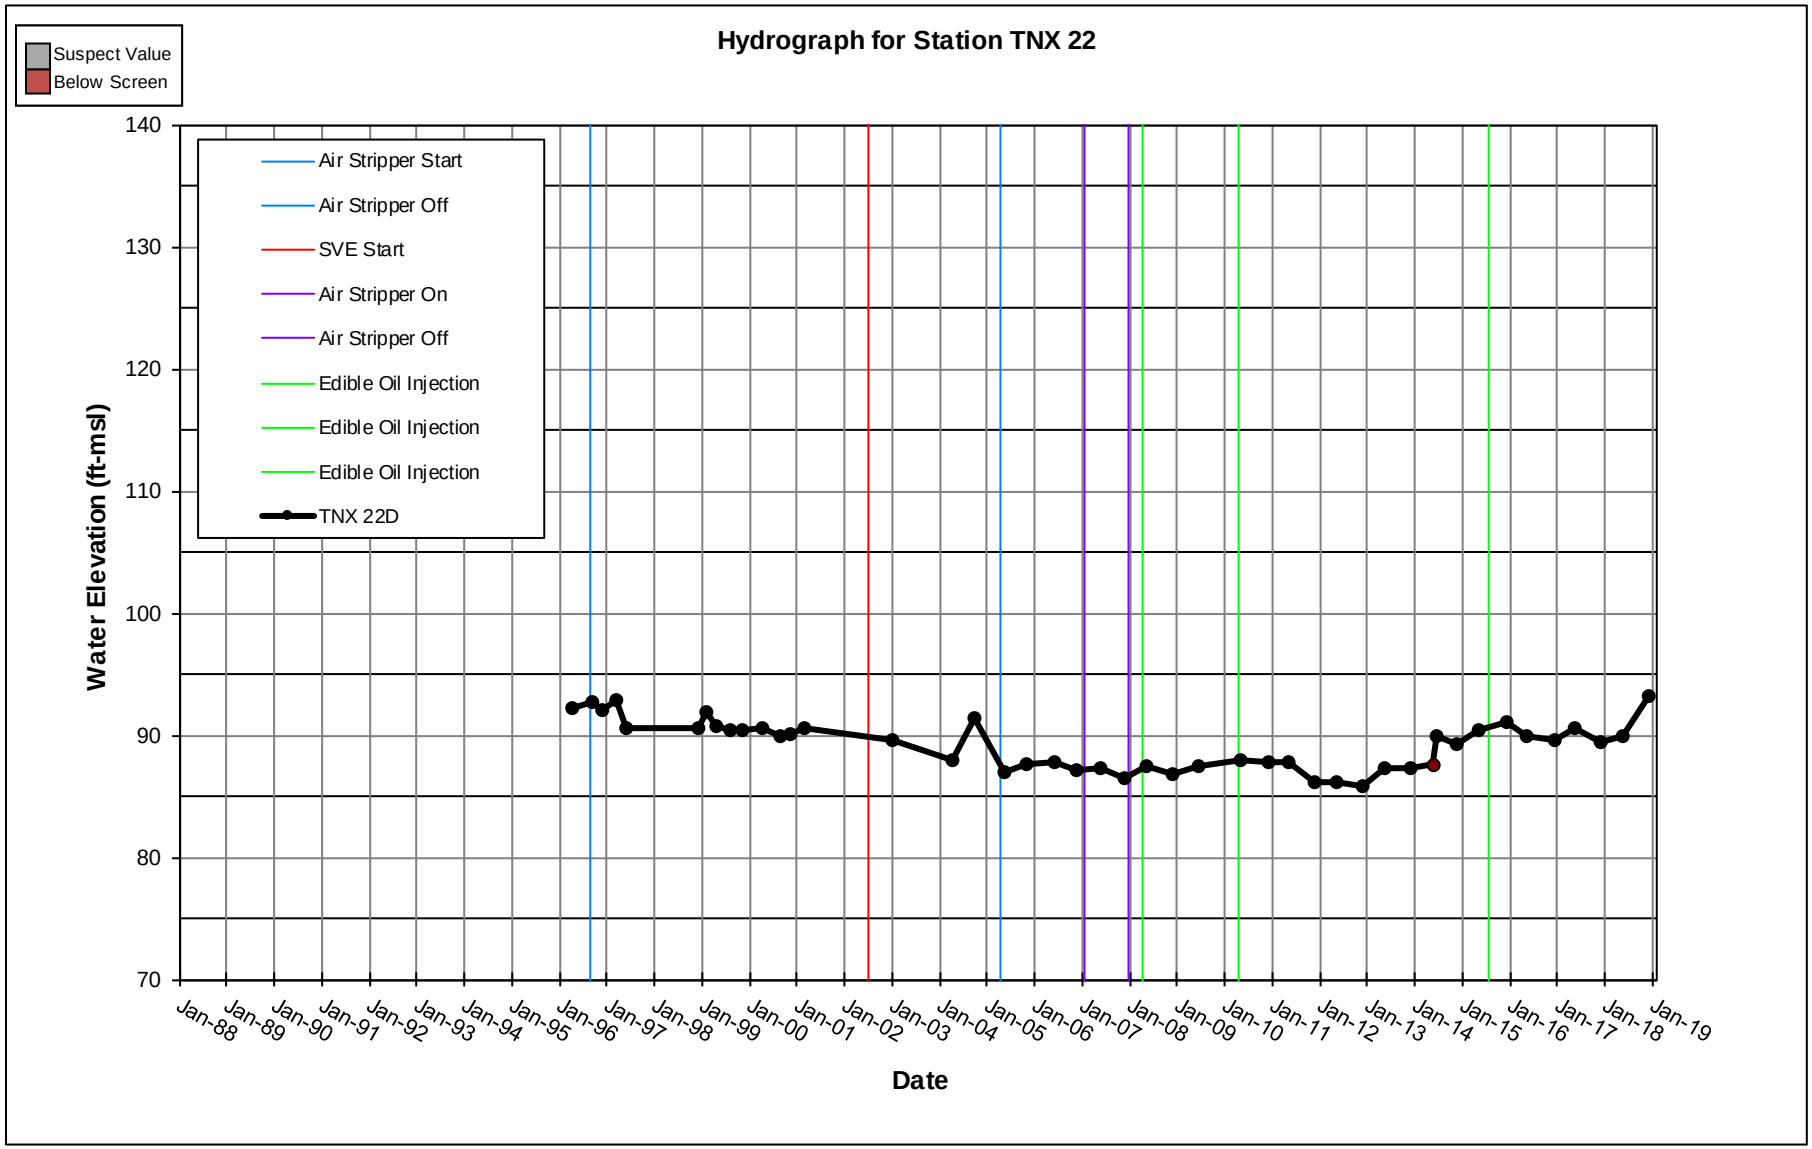
Hydrograph for Station TNX 22
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX 22D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

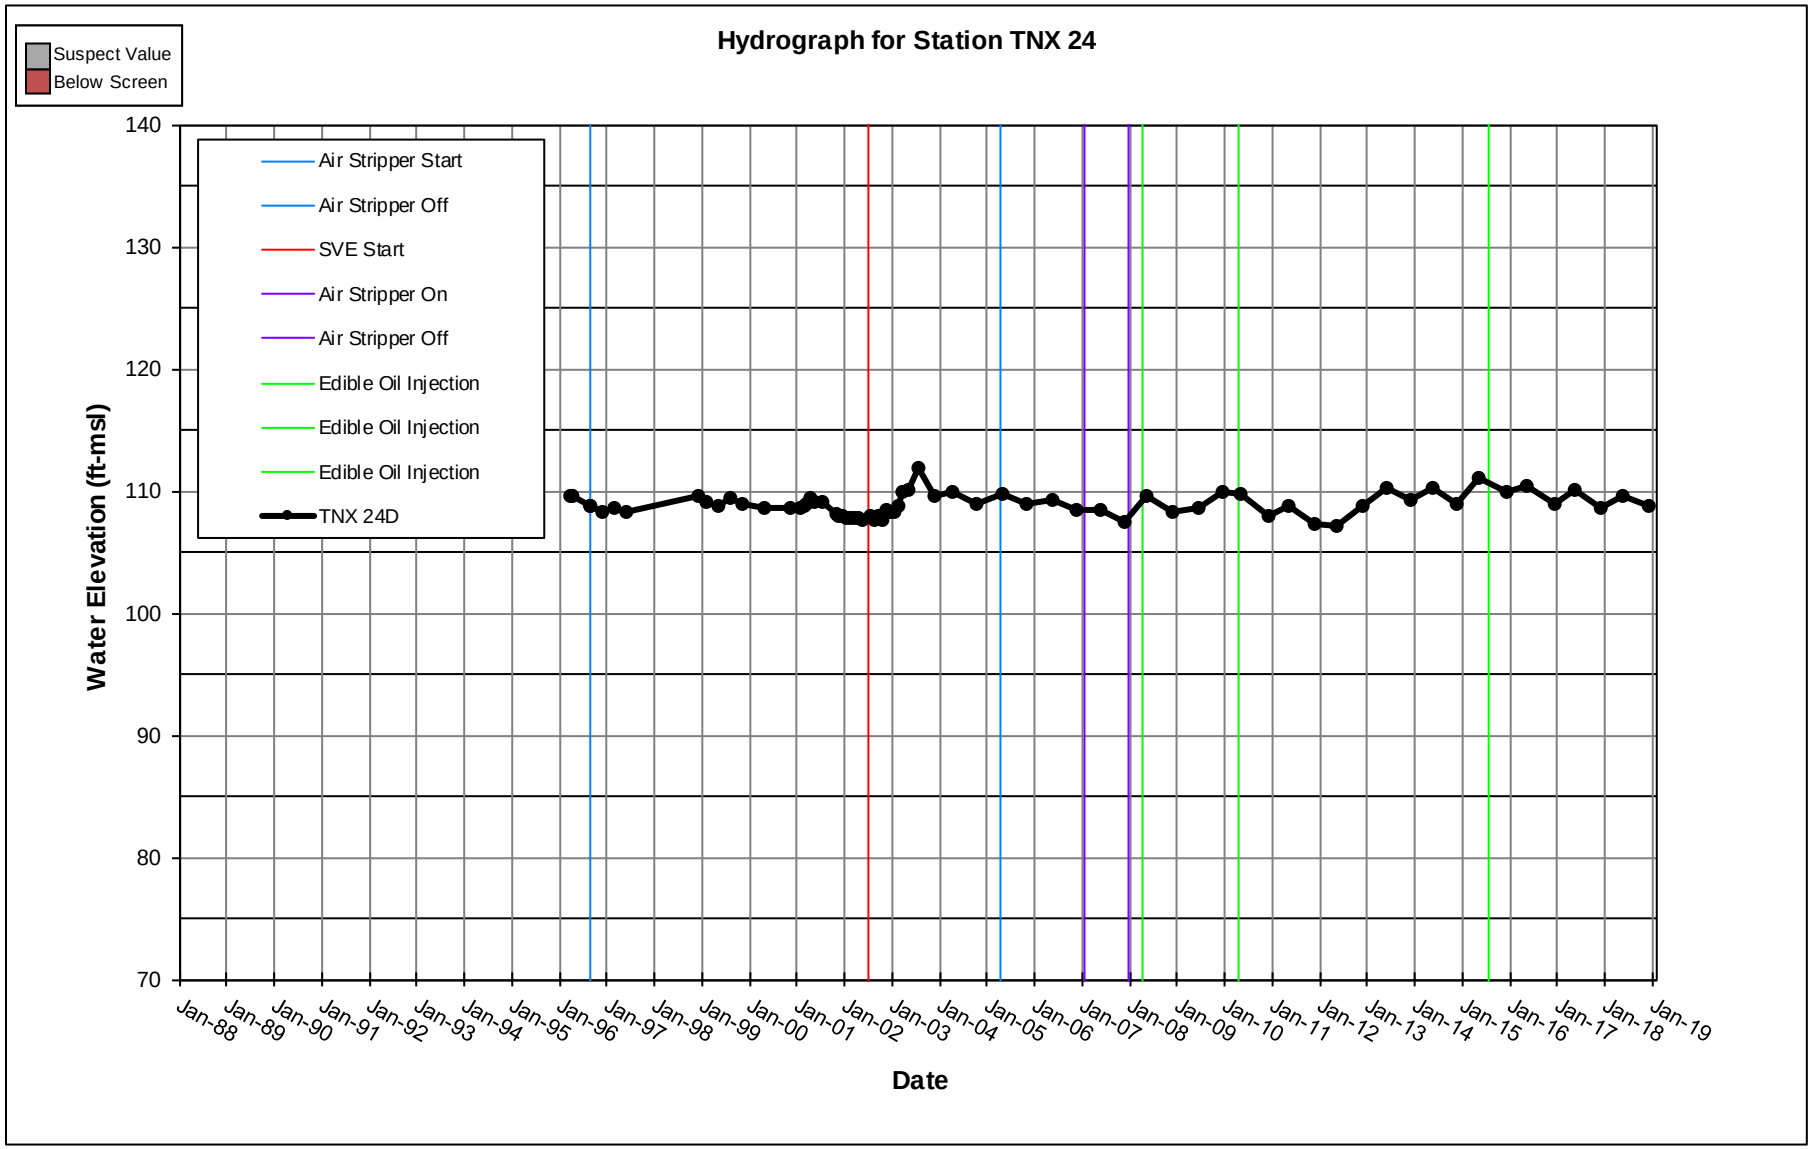
Hydrograph for Station TNX 24
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX 24D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

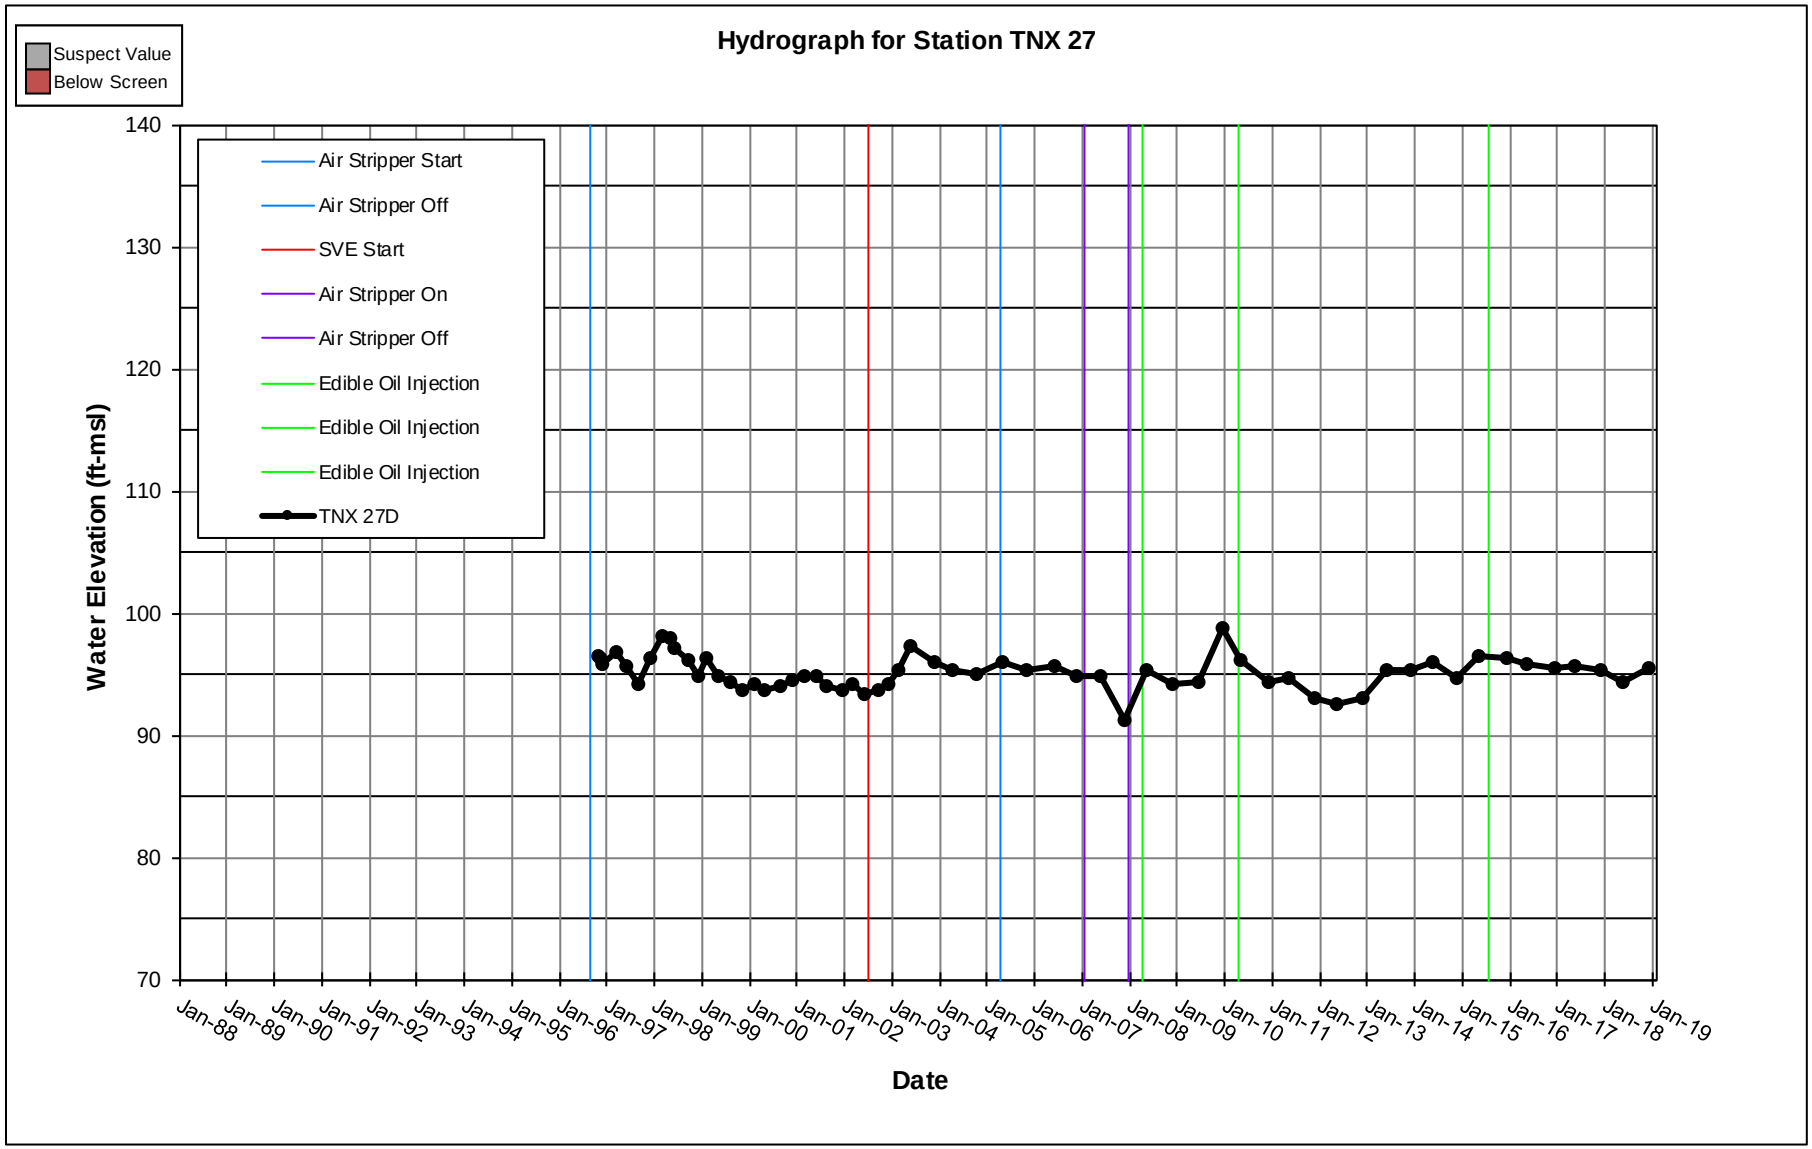
Hydrograph for Station TNX 27
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX 27D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

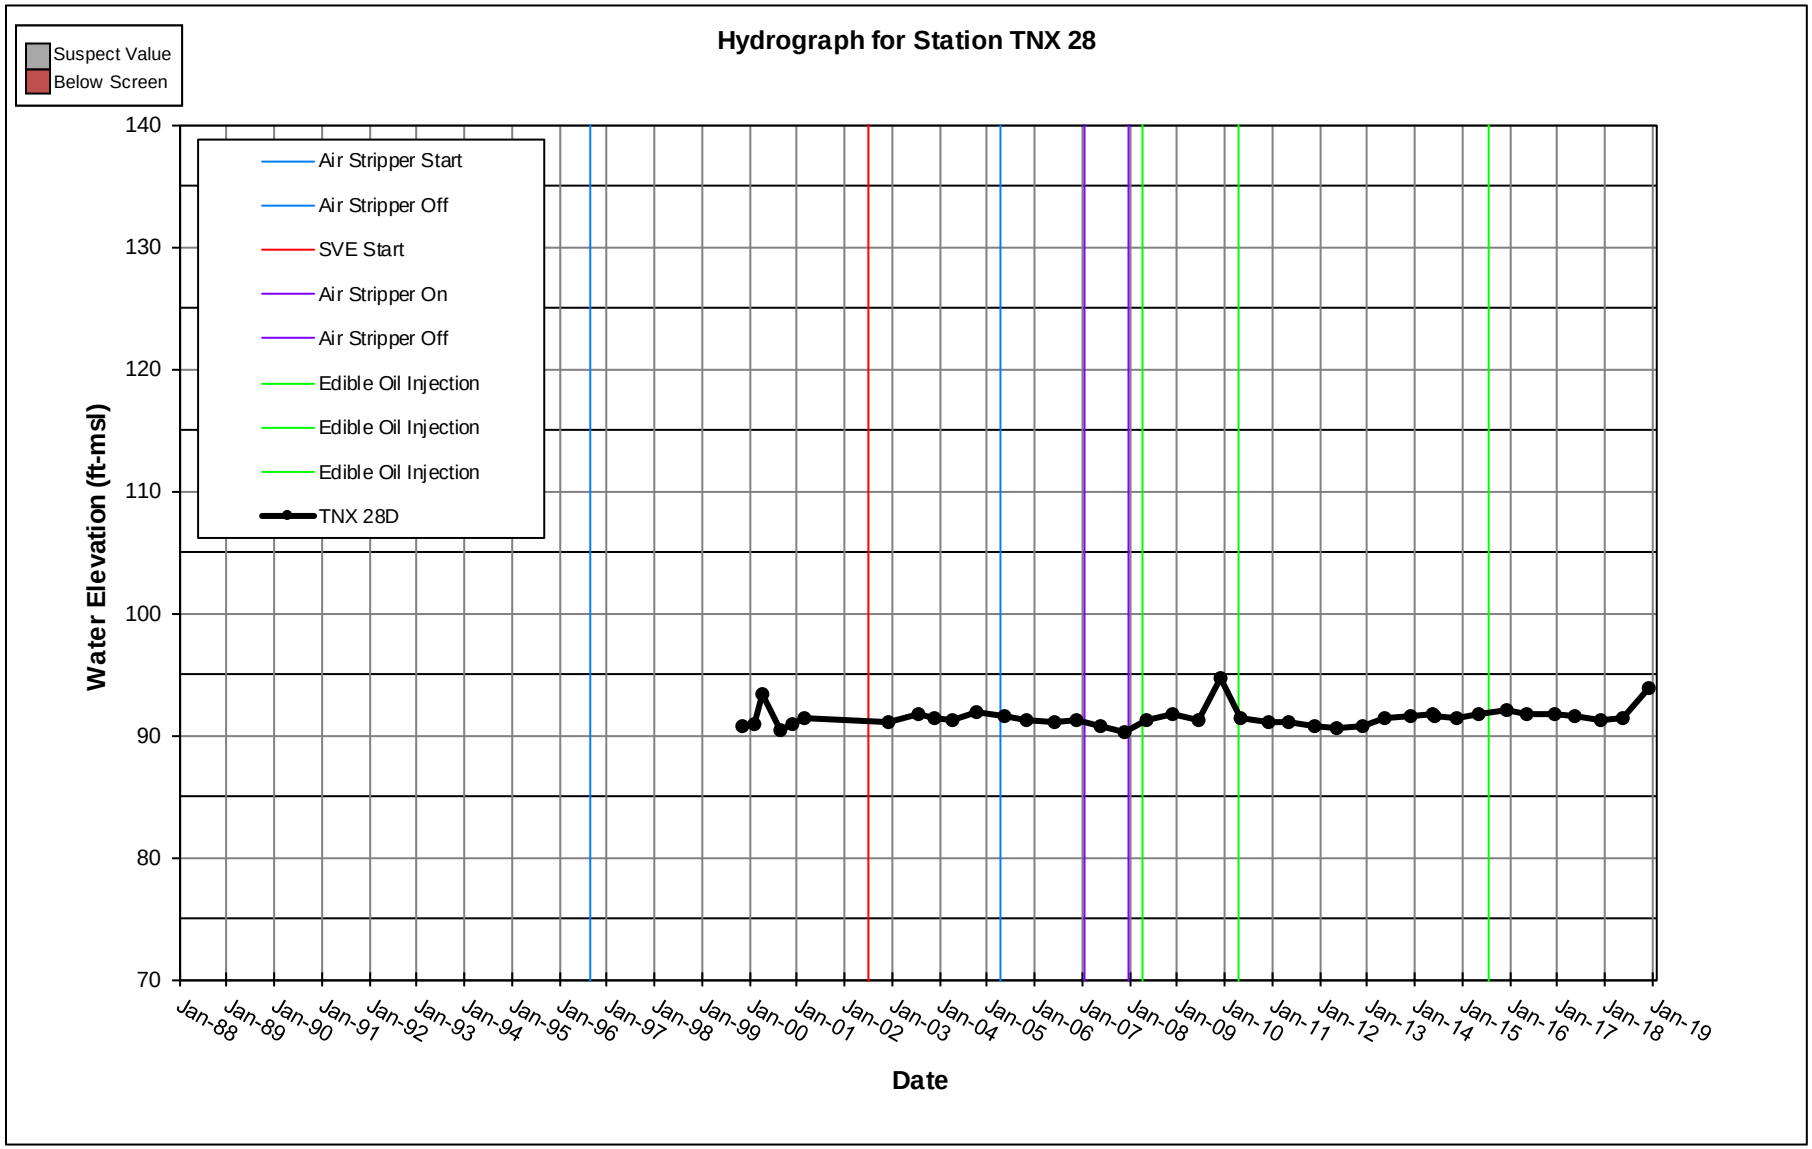
Hydrograph for Station TNX 28
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX 28D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

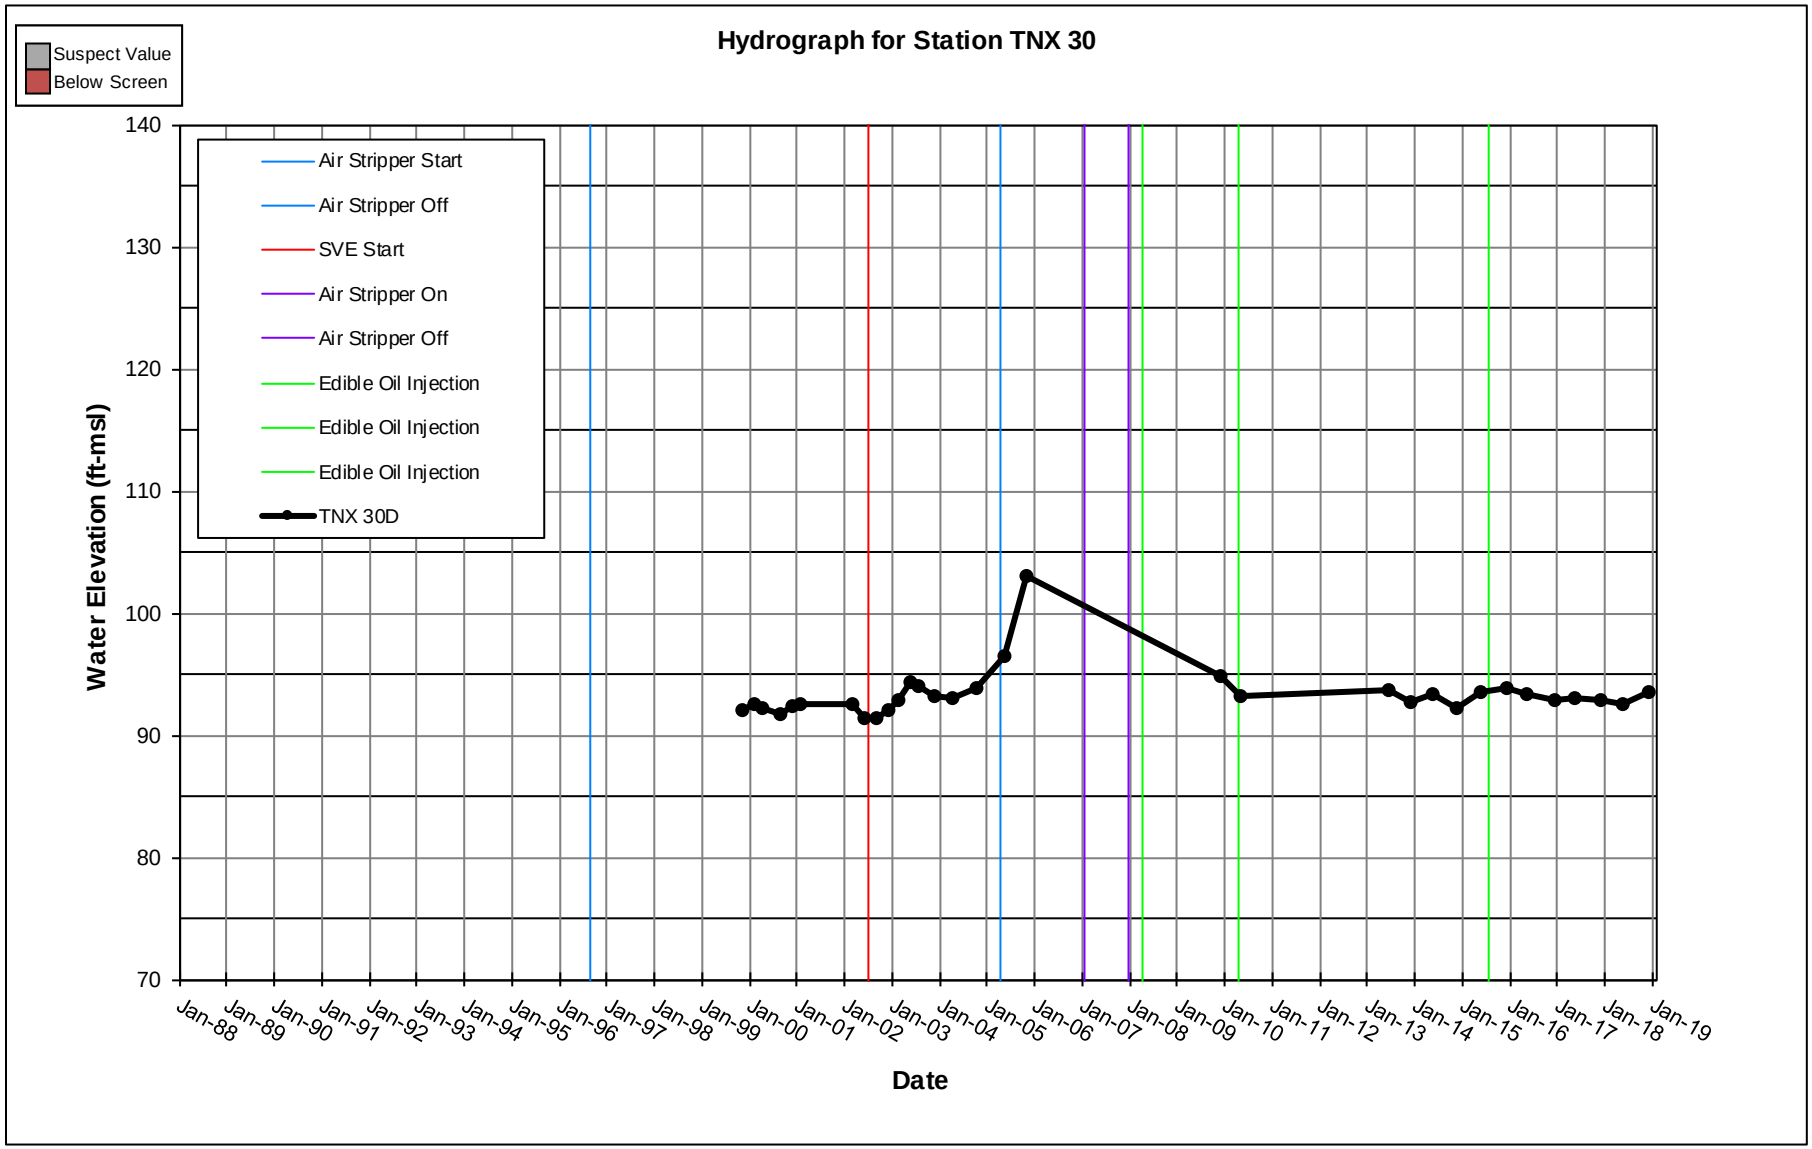
Hydrograph for Station TNX 30
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX 30D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

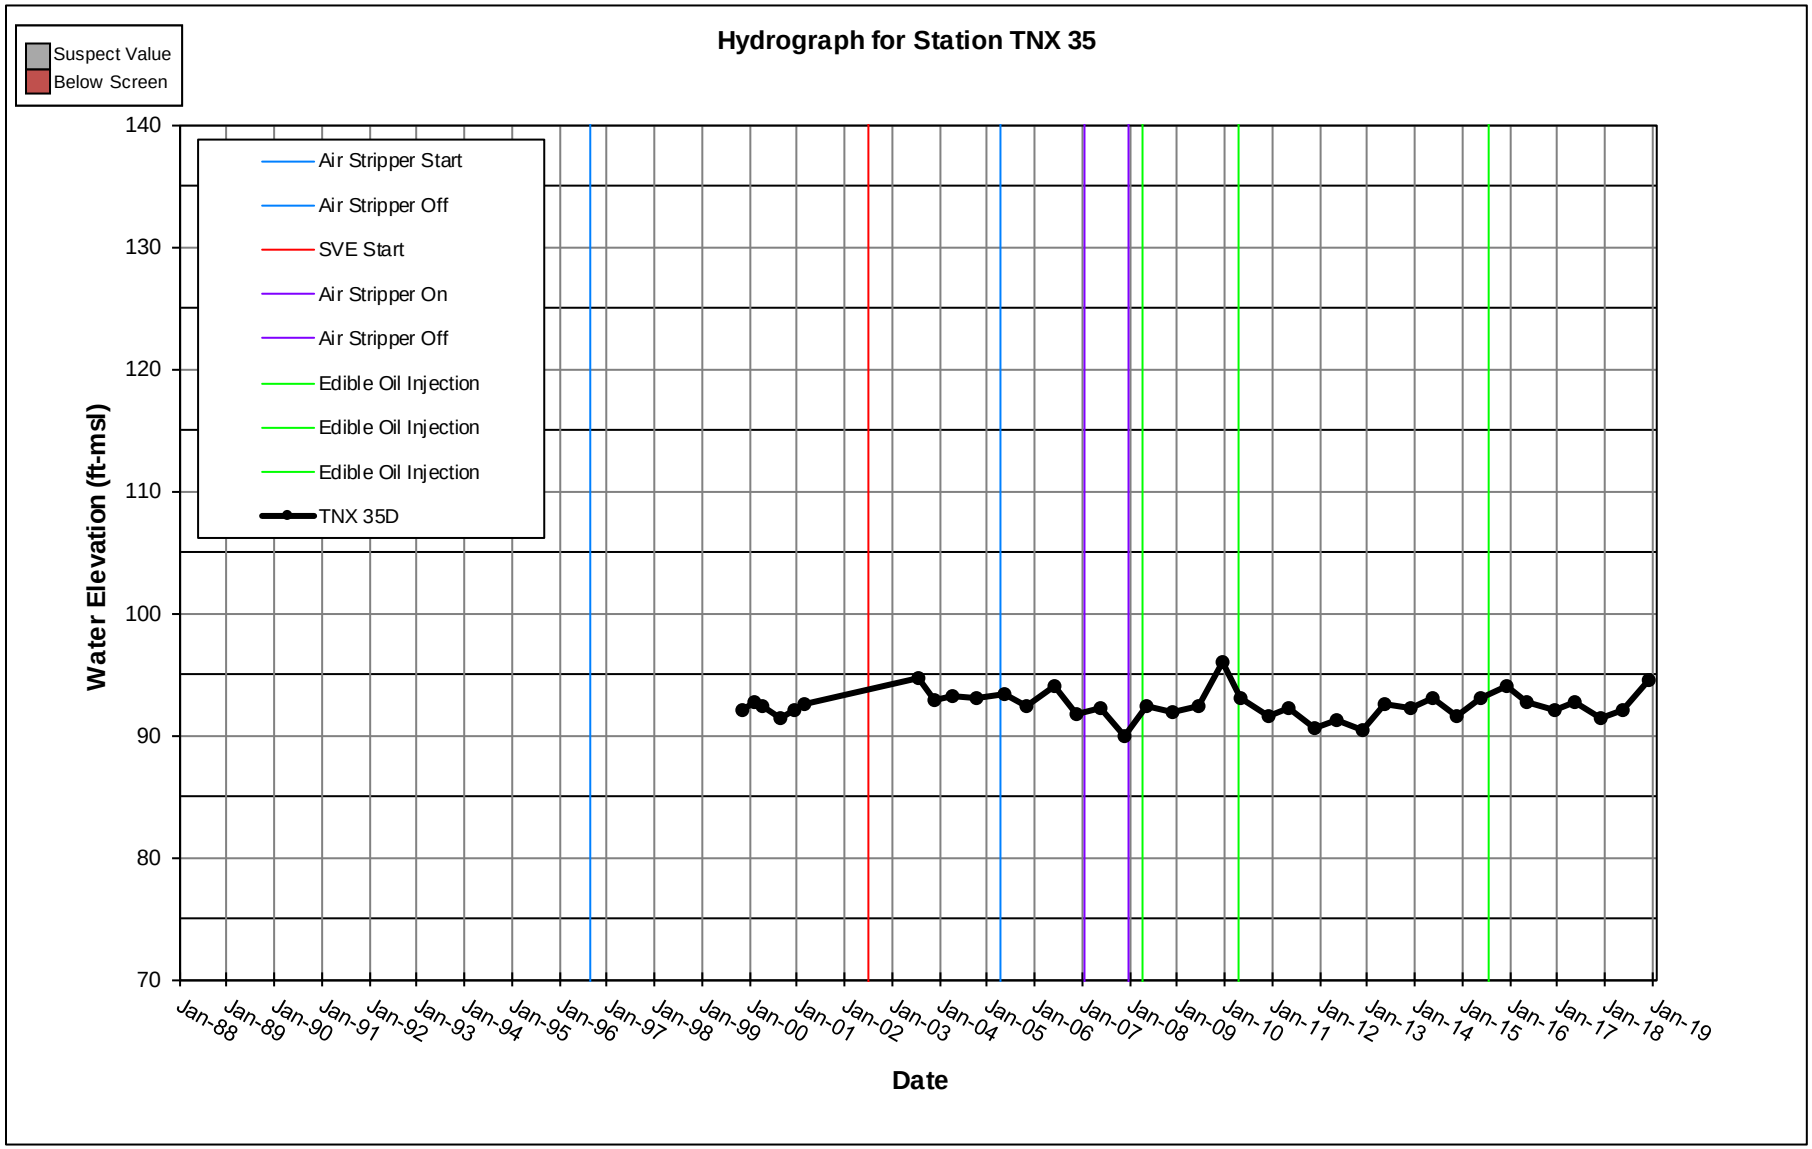
Hydrograph for Station TNX 35
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX 35D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

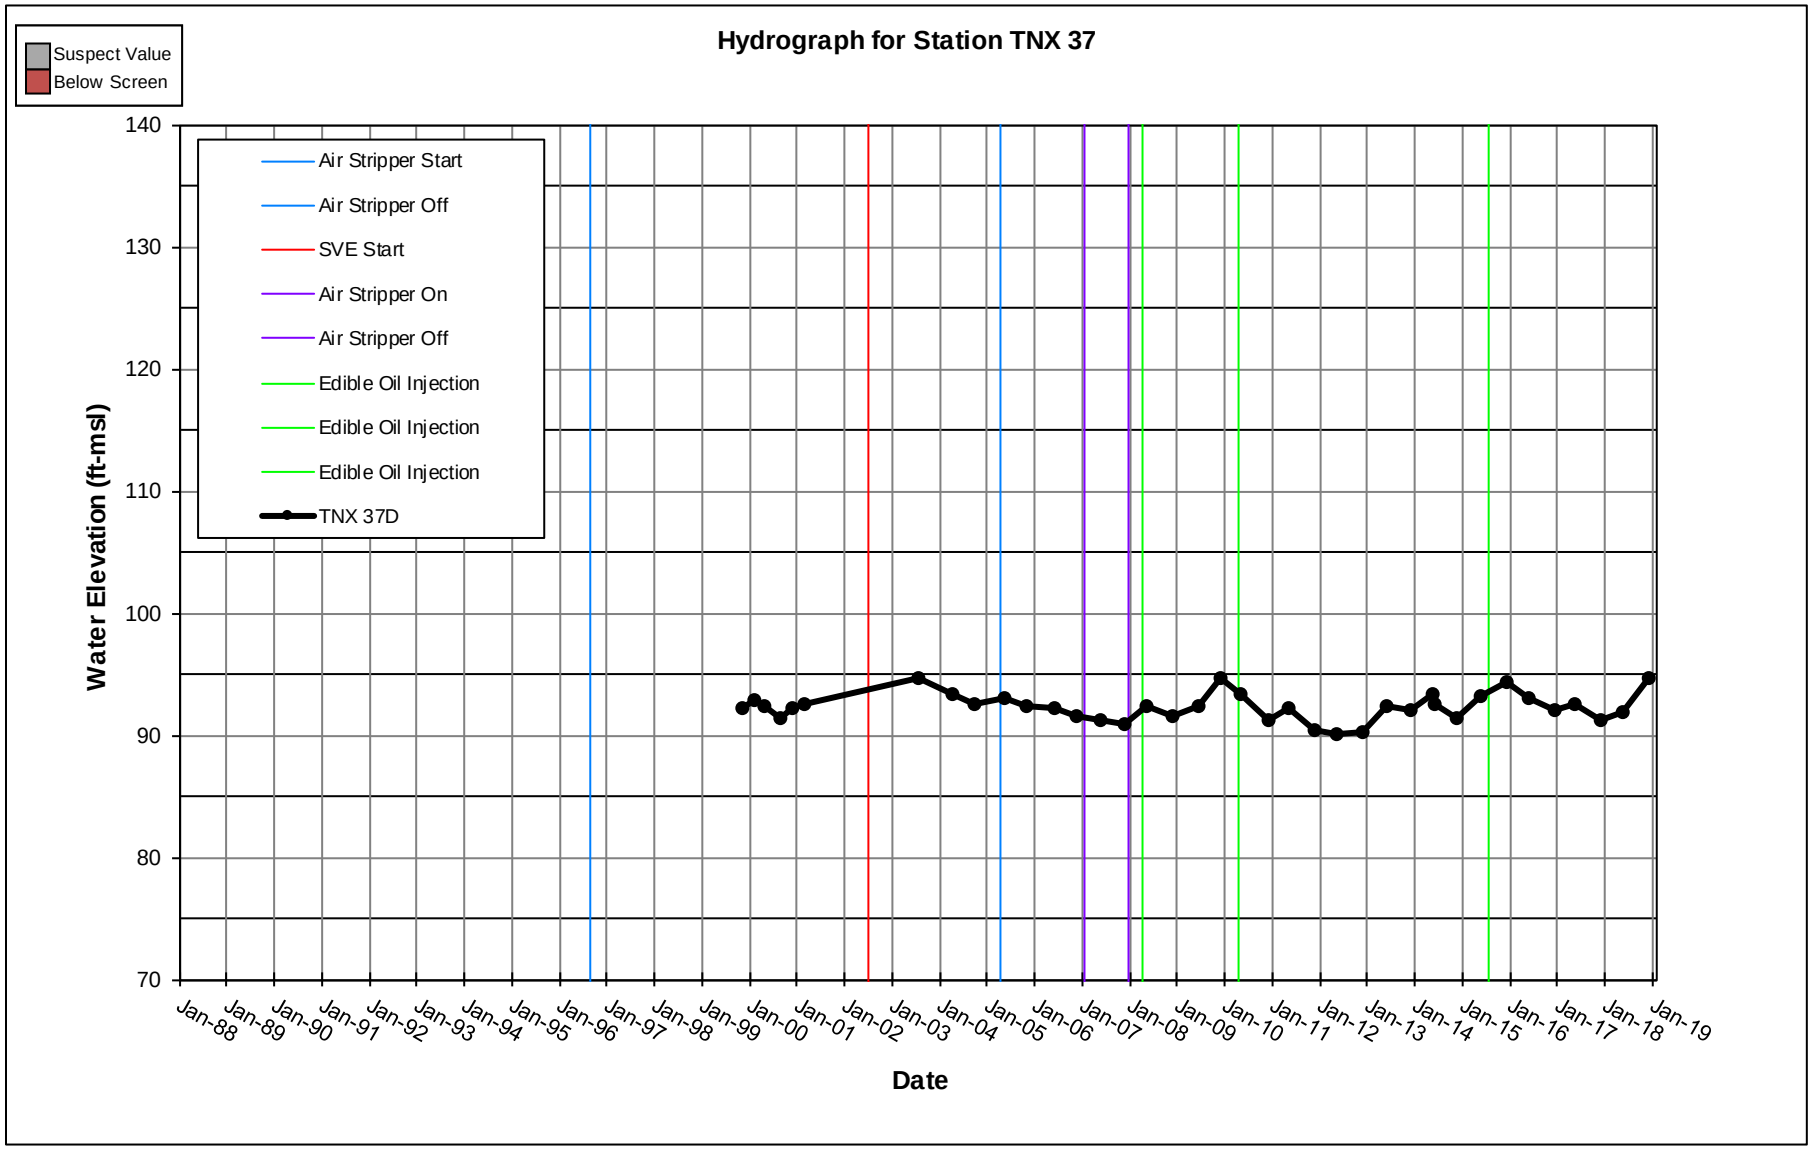
Hydrograph for Station TNX 37
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX 37D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

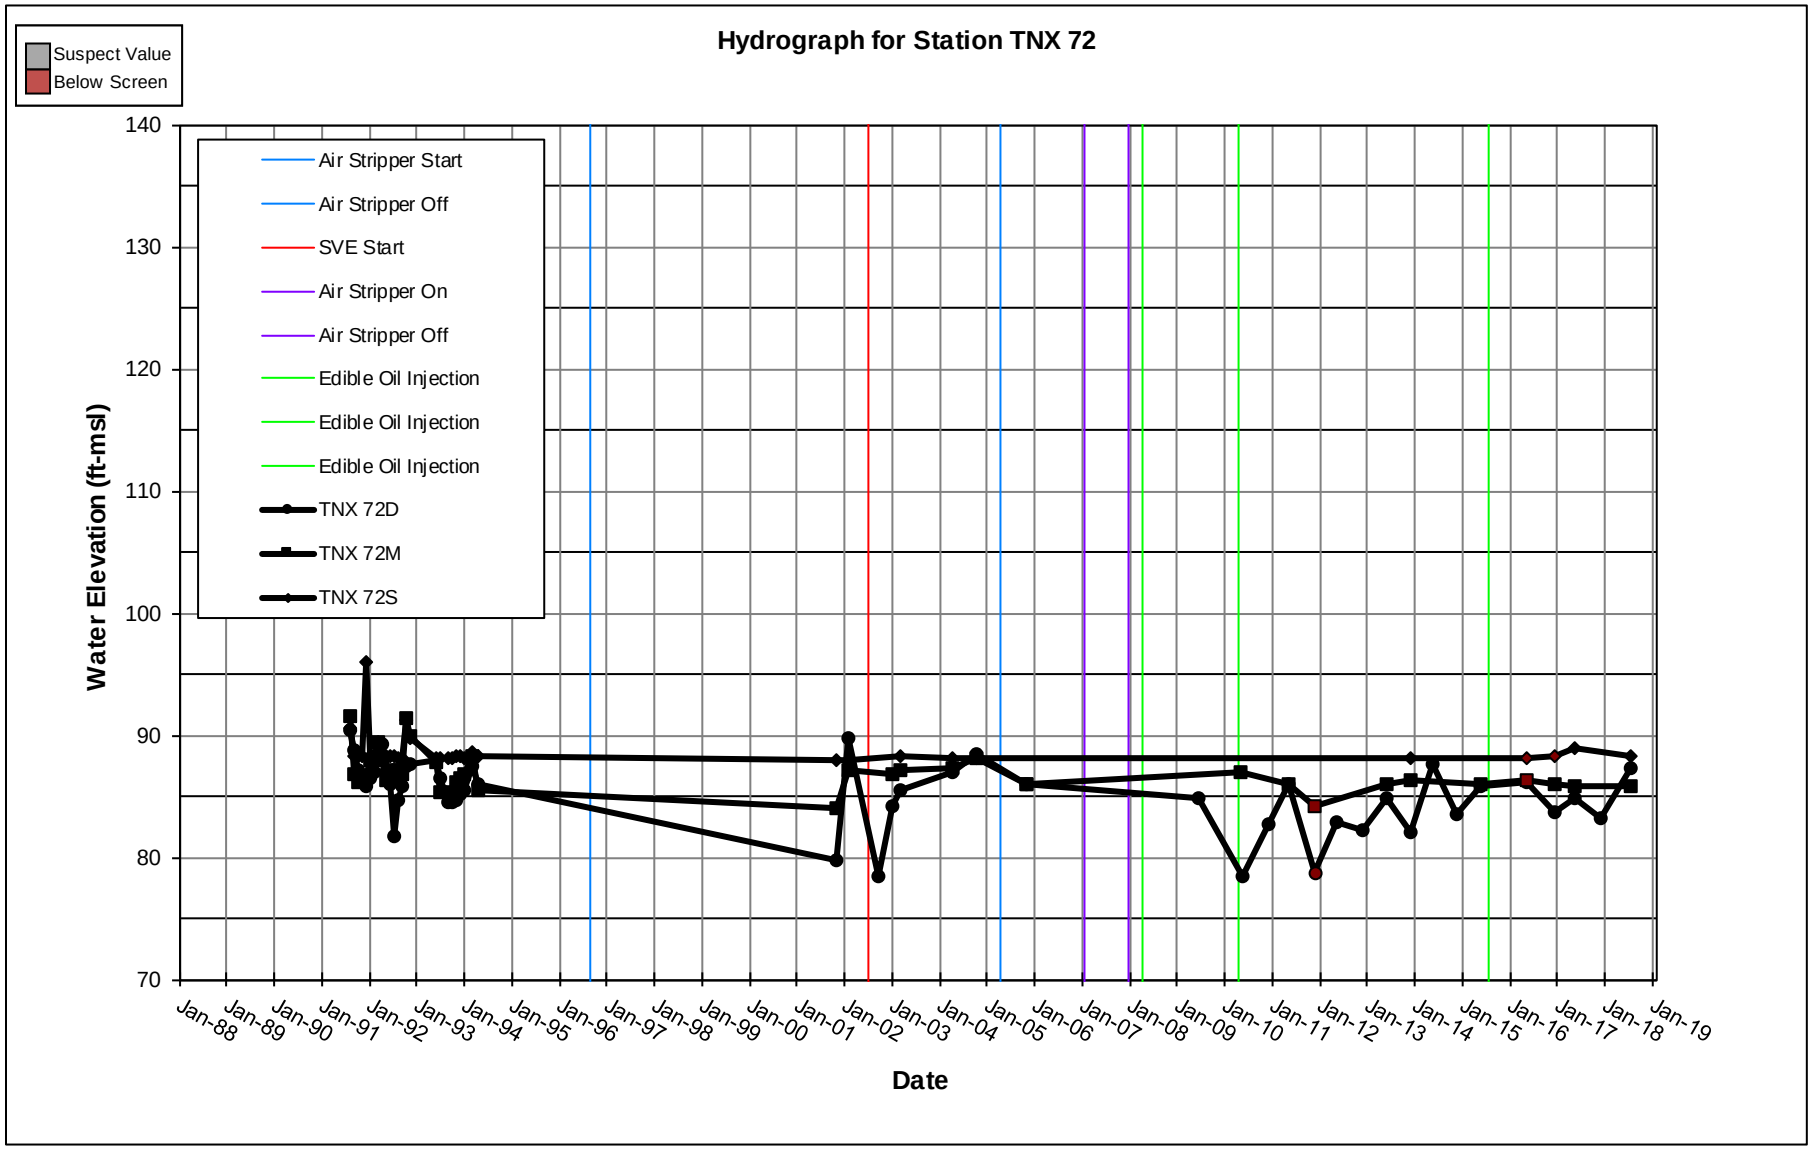
Hydrograph for Station TNX 72
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX 72D
TNX 72M
TNX 72S
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

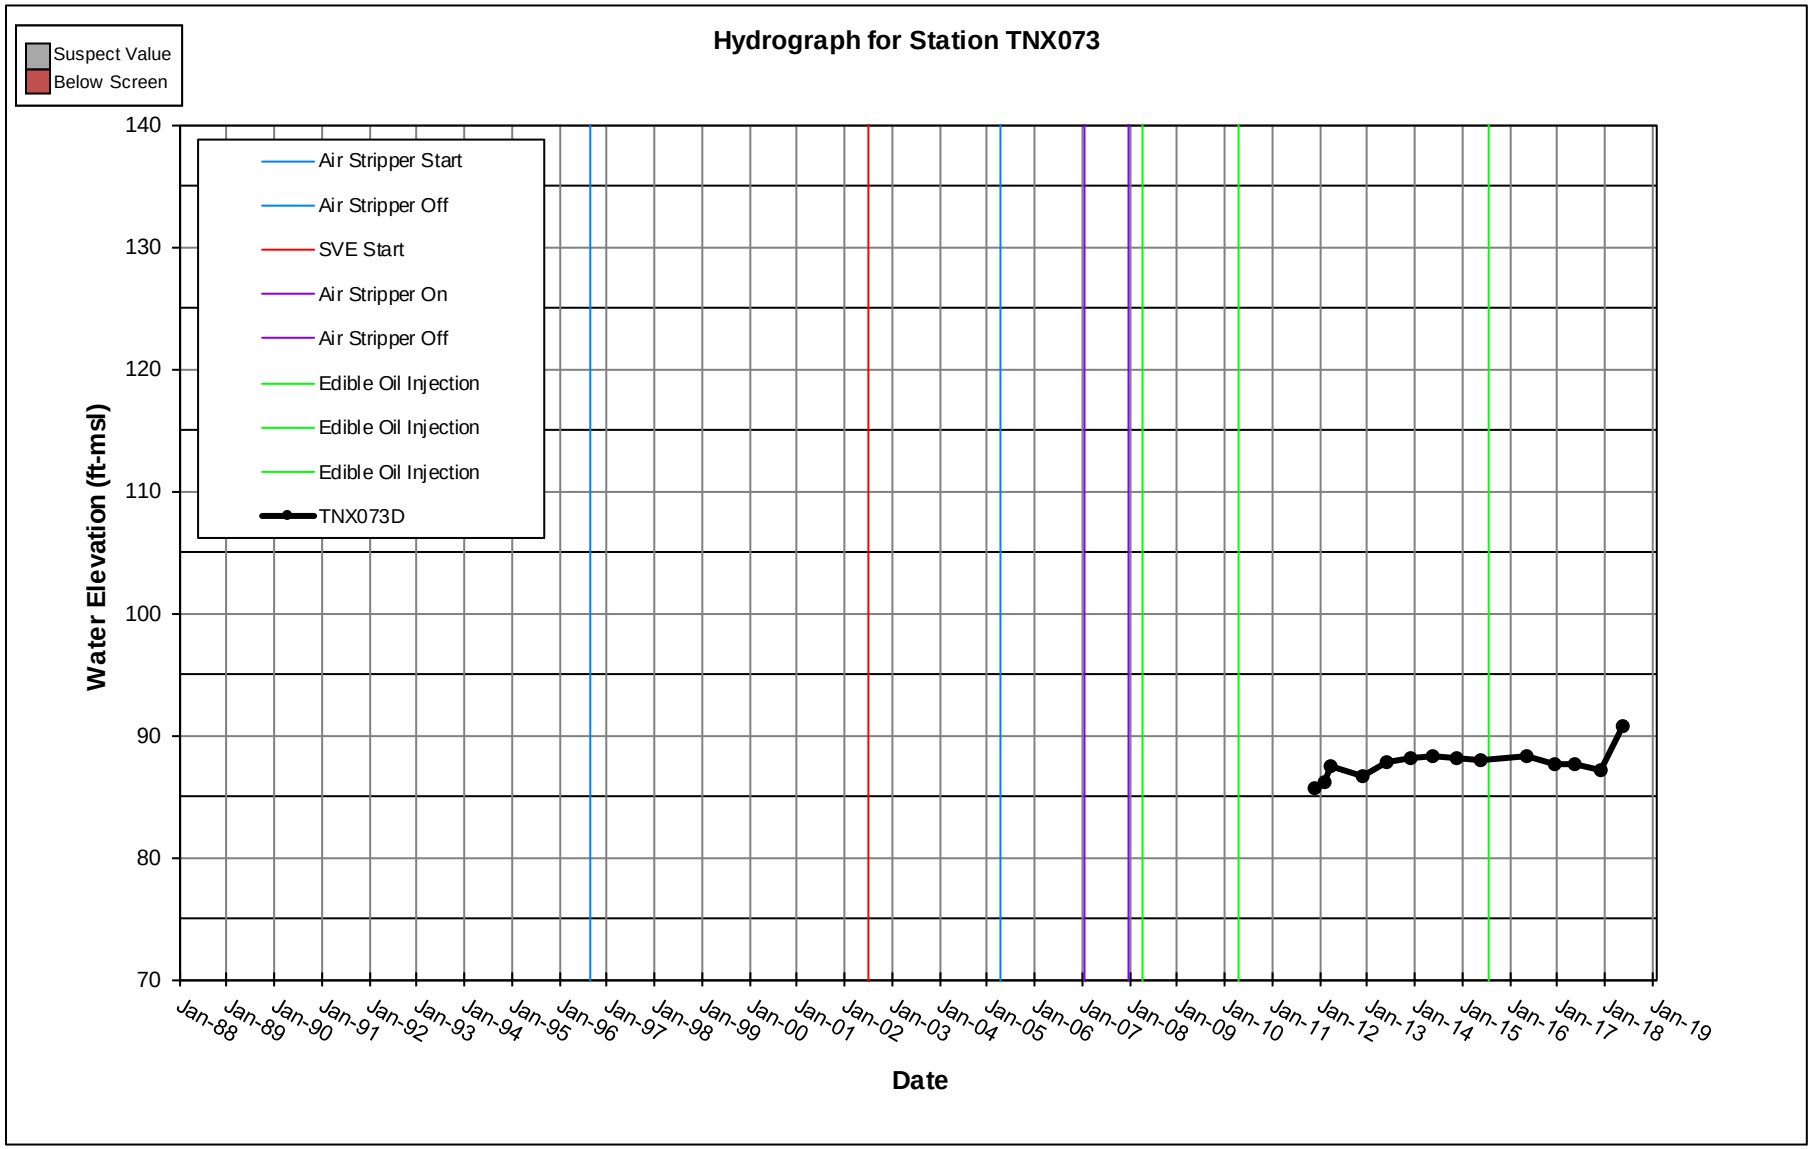
Hydrograph for Station TNX073
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX073D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

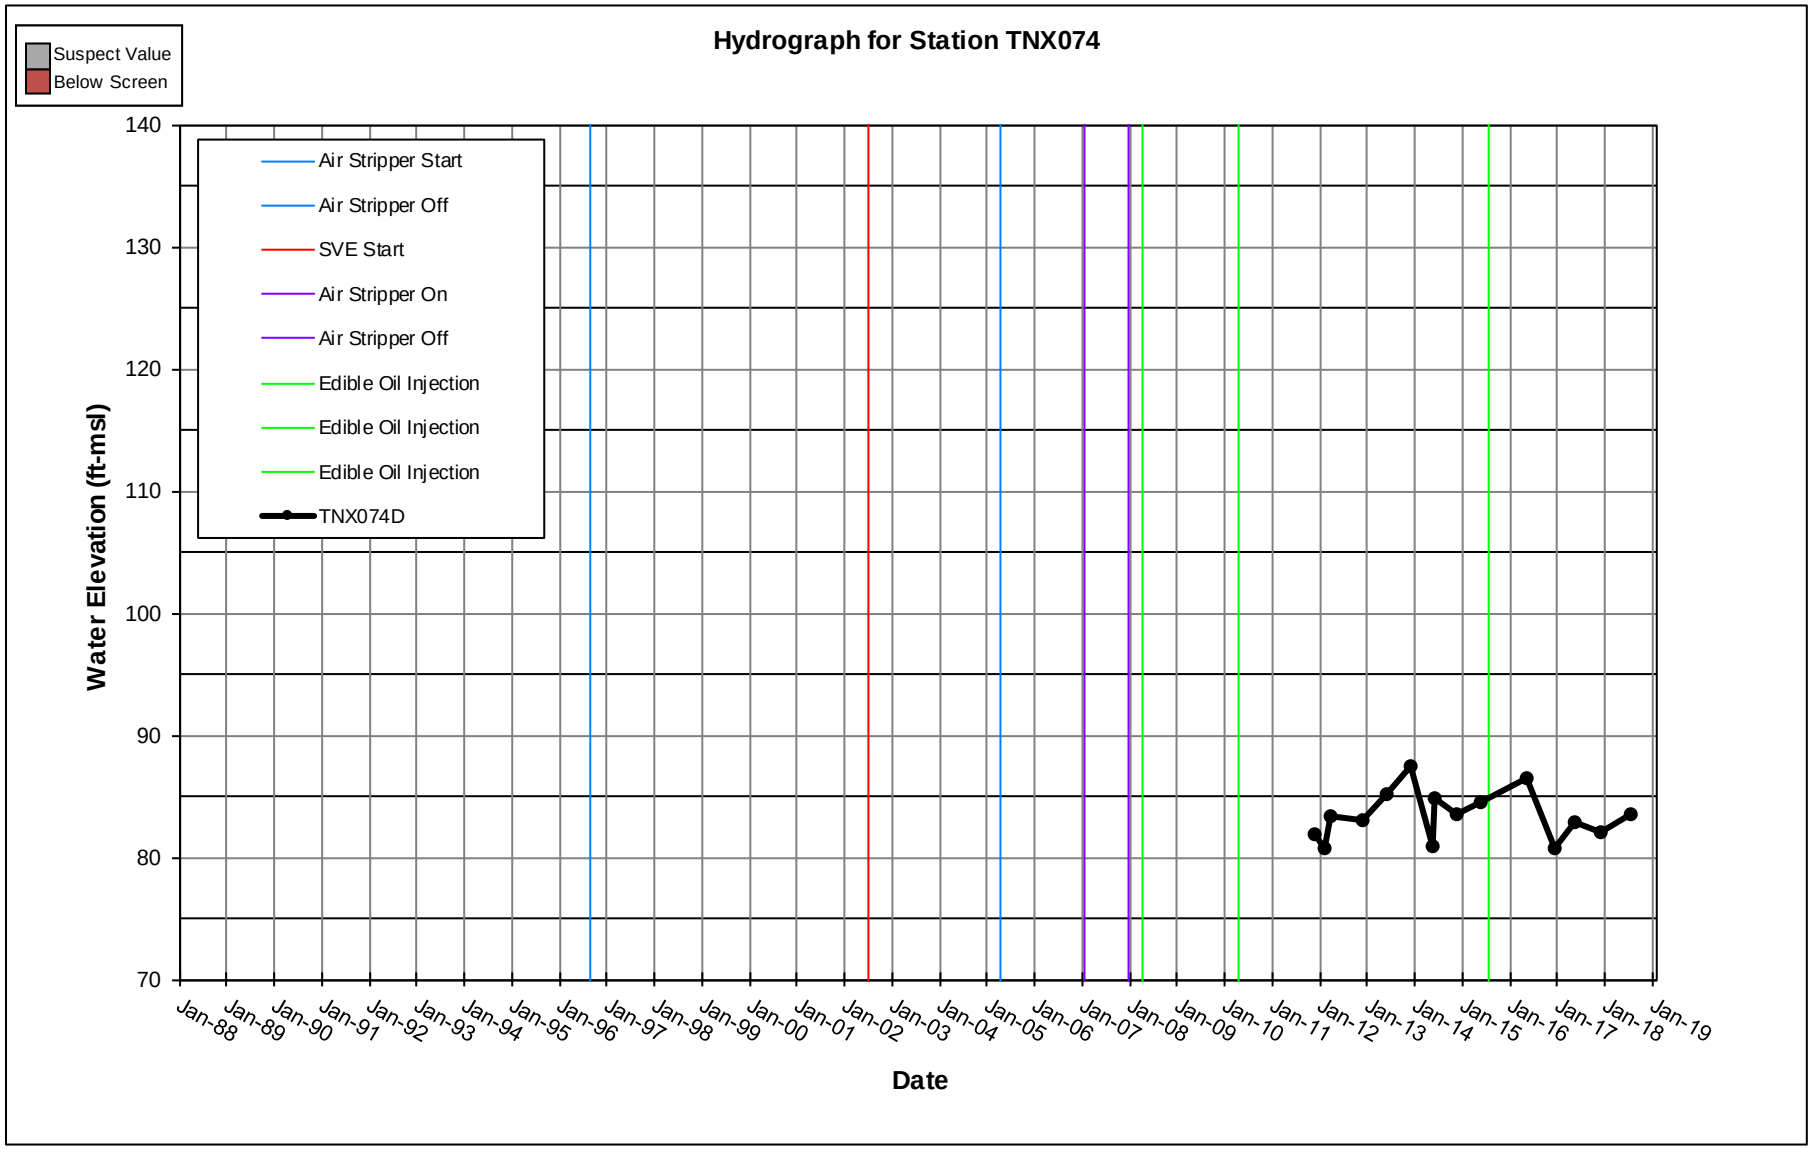
Hydrograph for Station TNX074
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX074D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

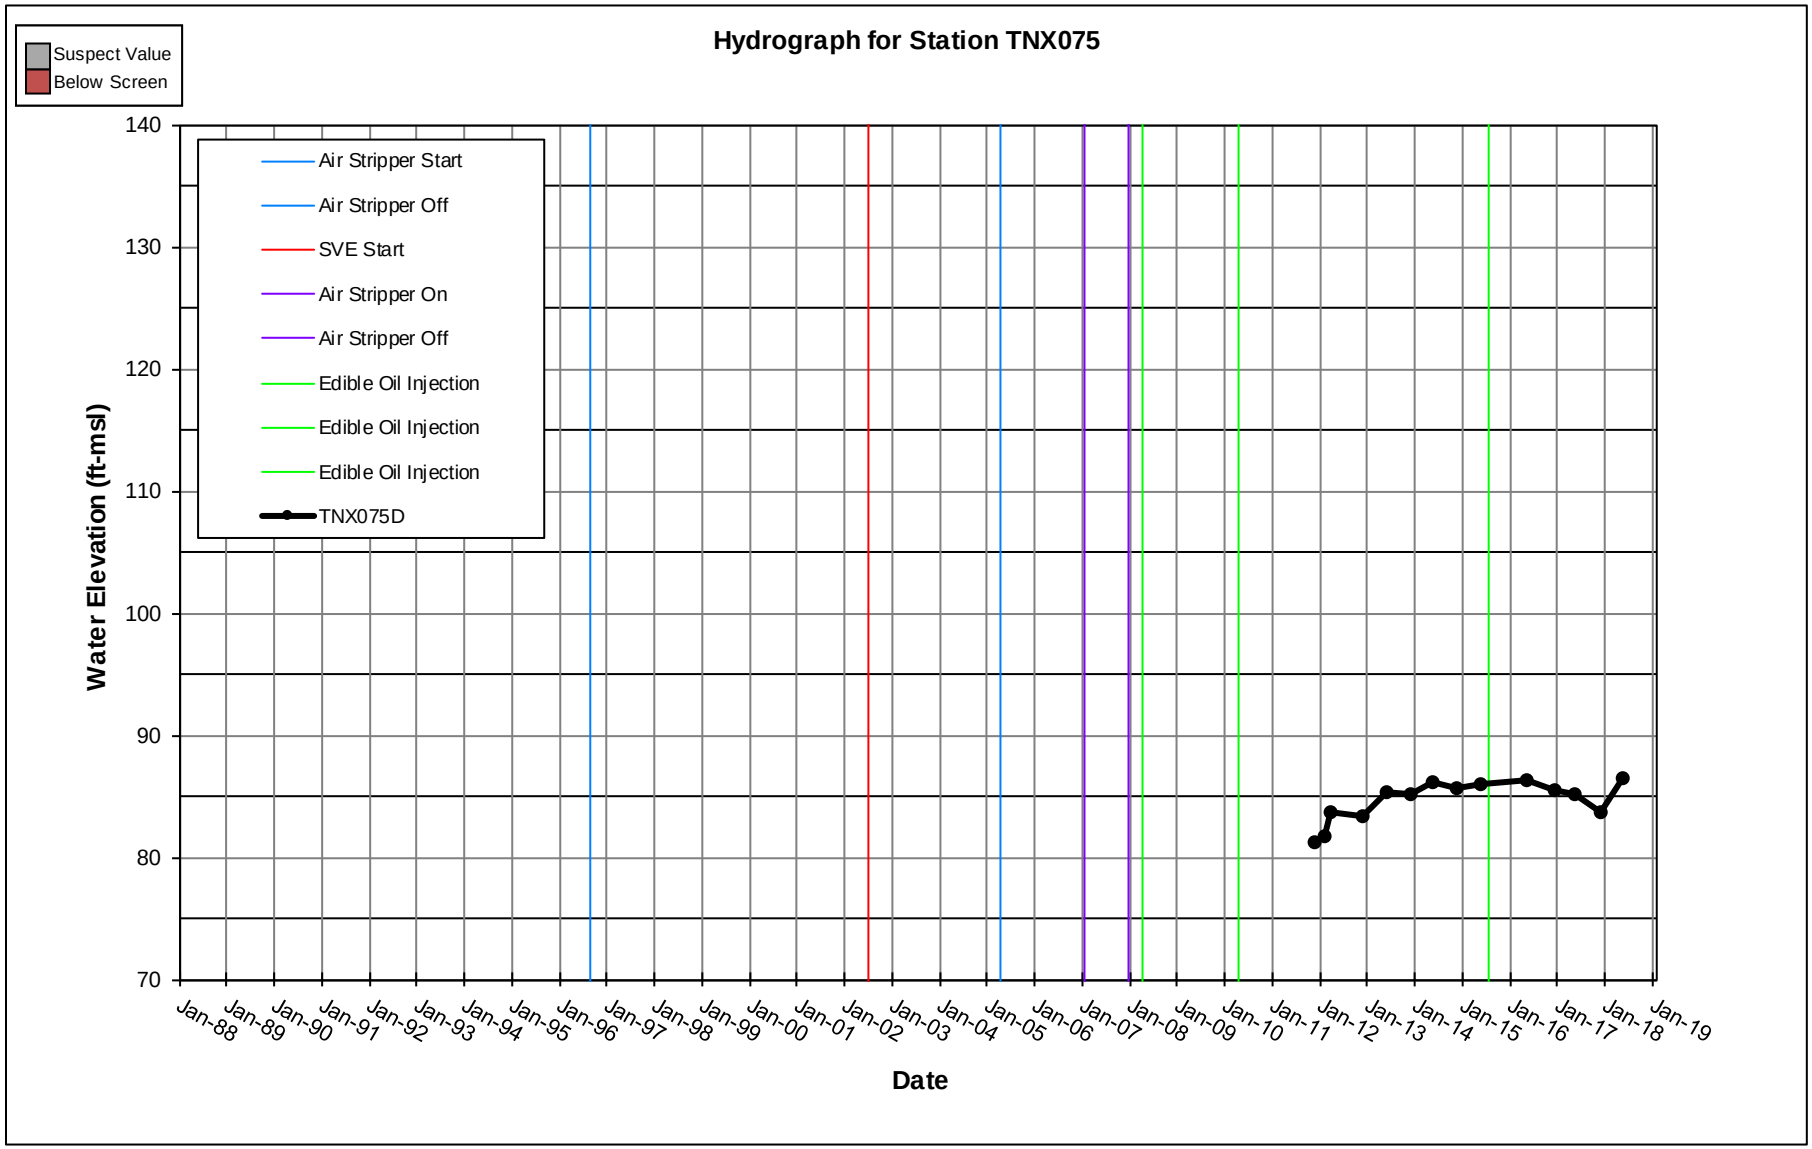
Hydrograph for Station TNX075
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TNX075D
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

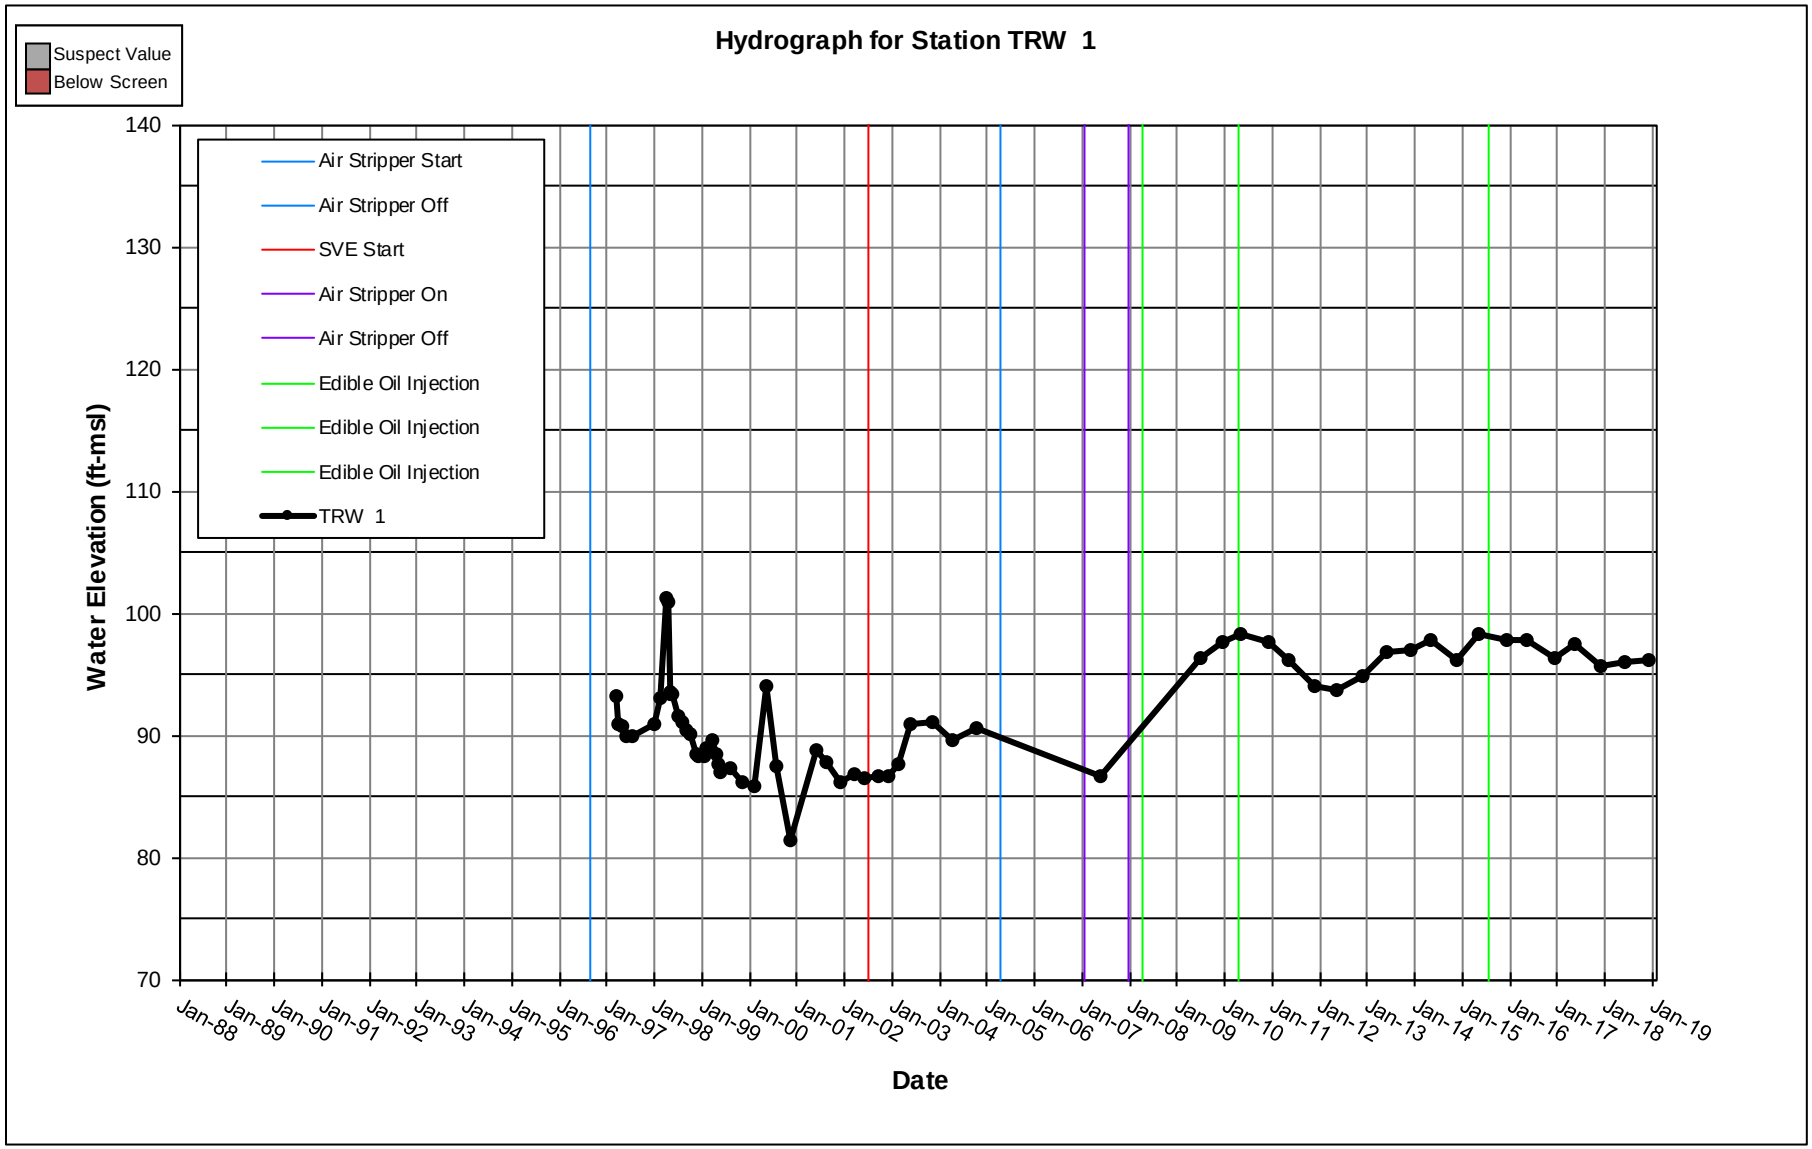
Hydrograph for Station TRW 1
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TRW 1
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

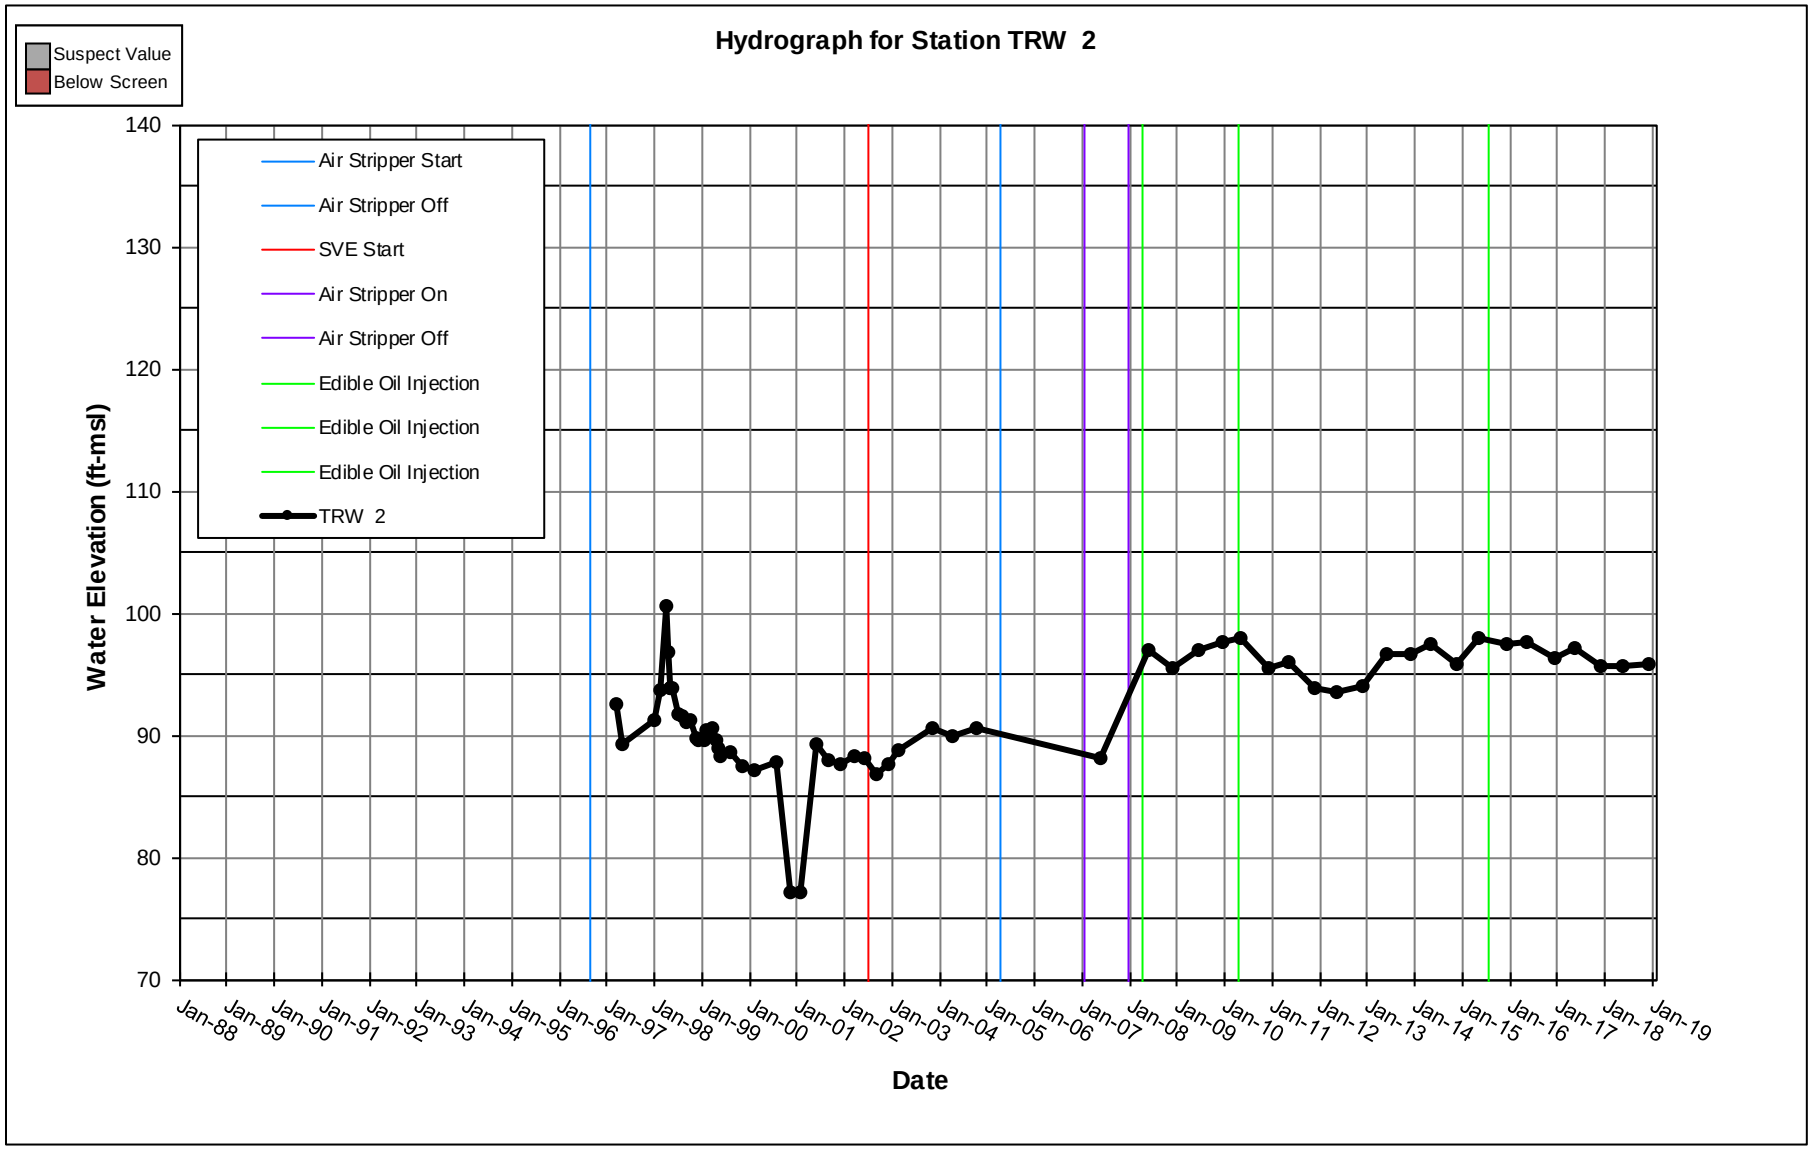
Hydrograph for Station TRW 2
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TRW 2
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

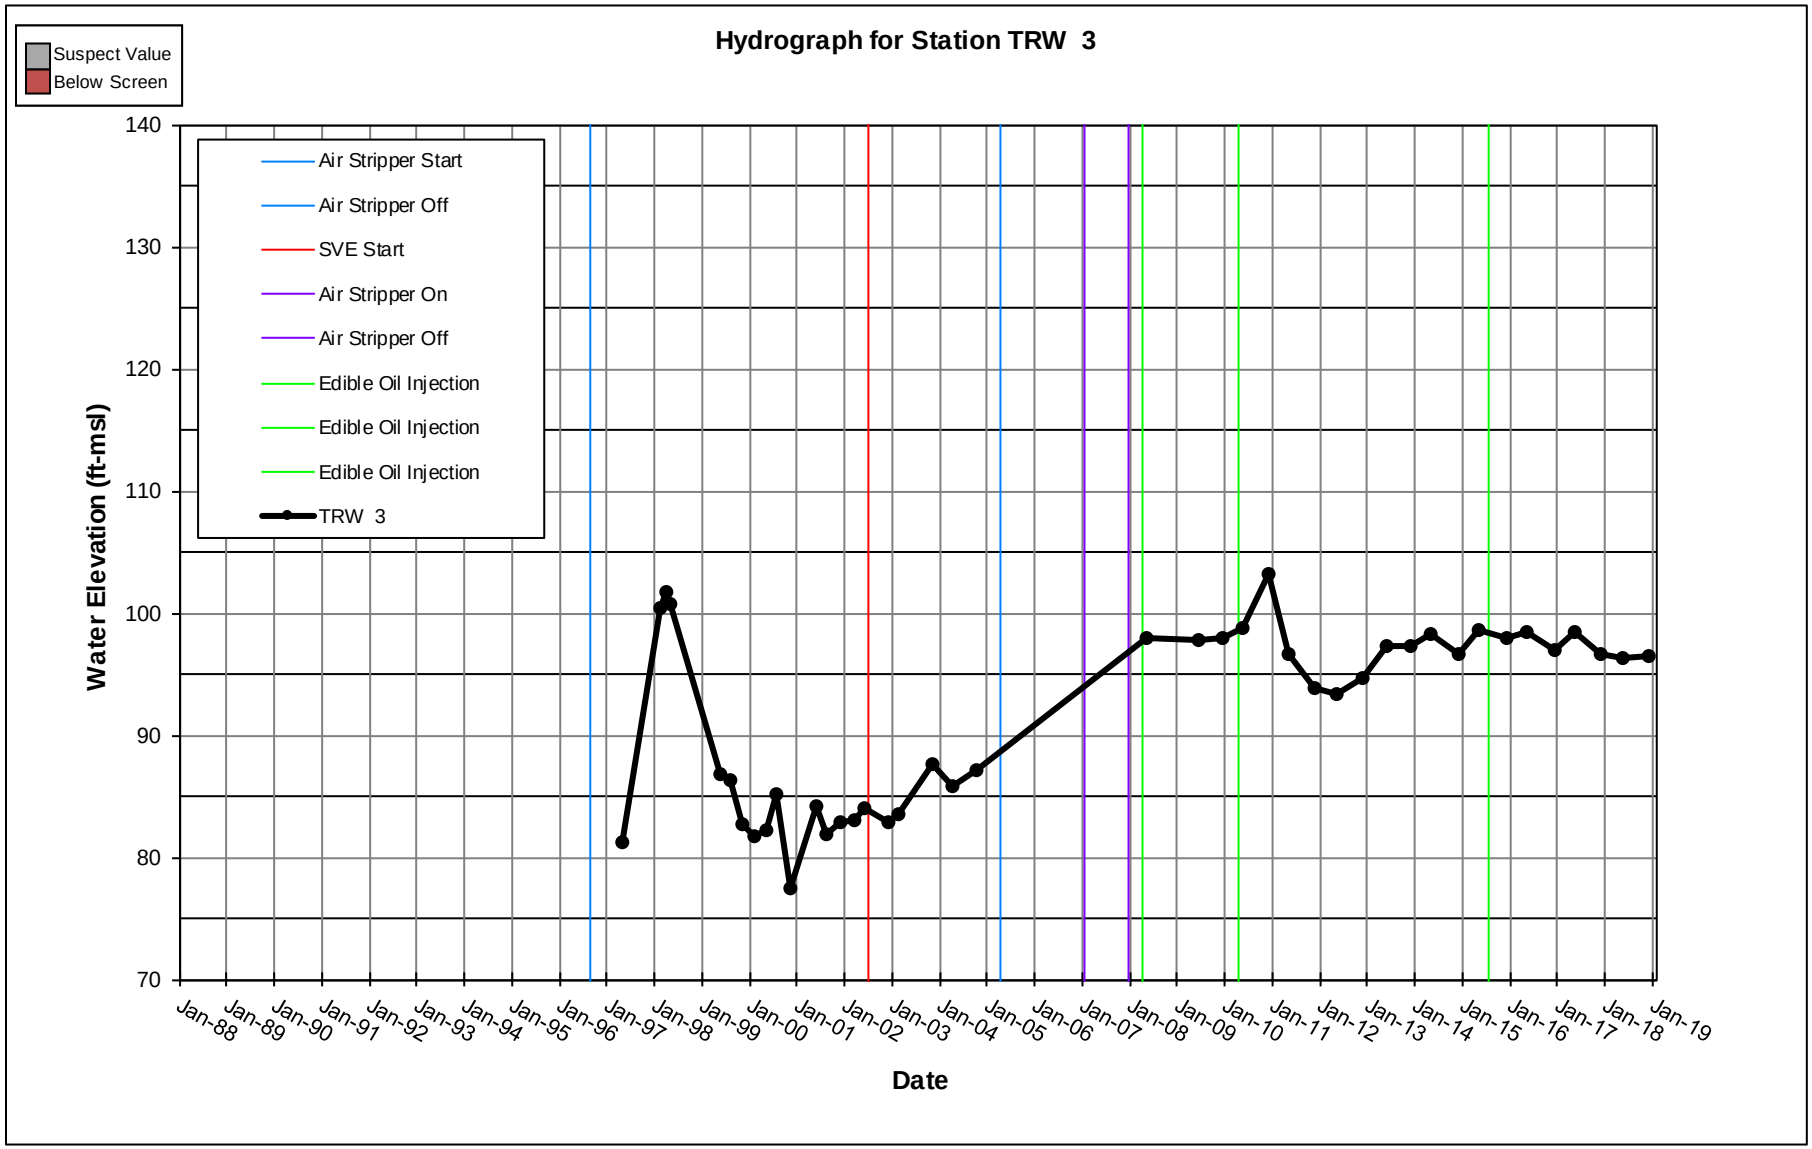
Hydrograph for Station TRW 3
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TRW 3
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

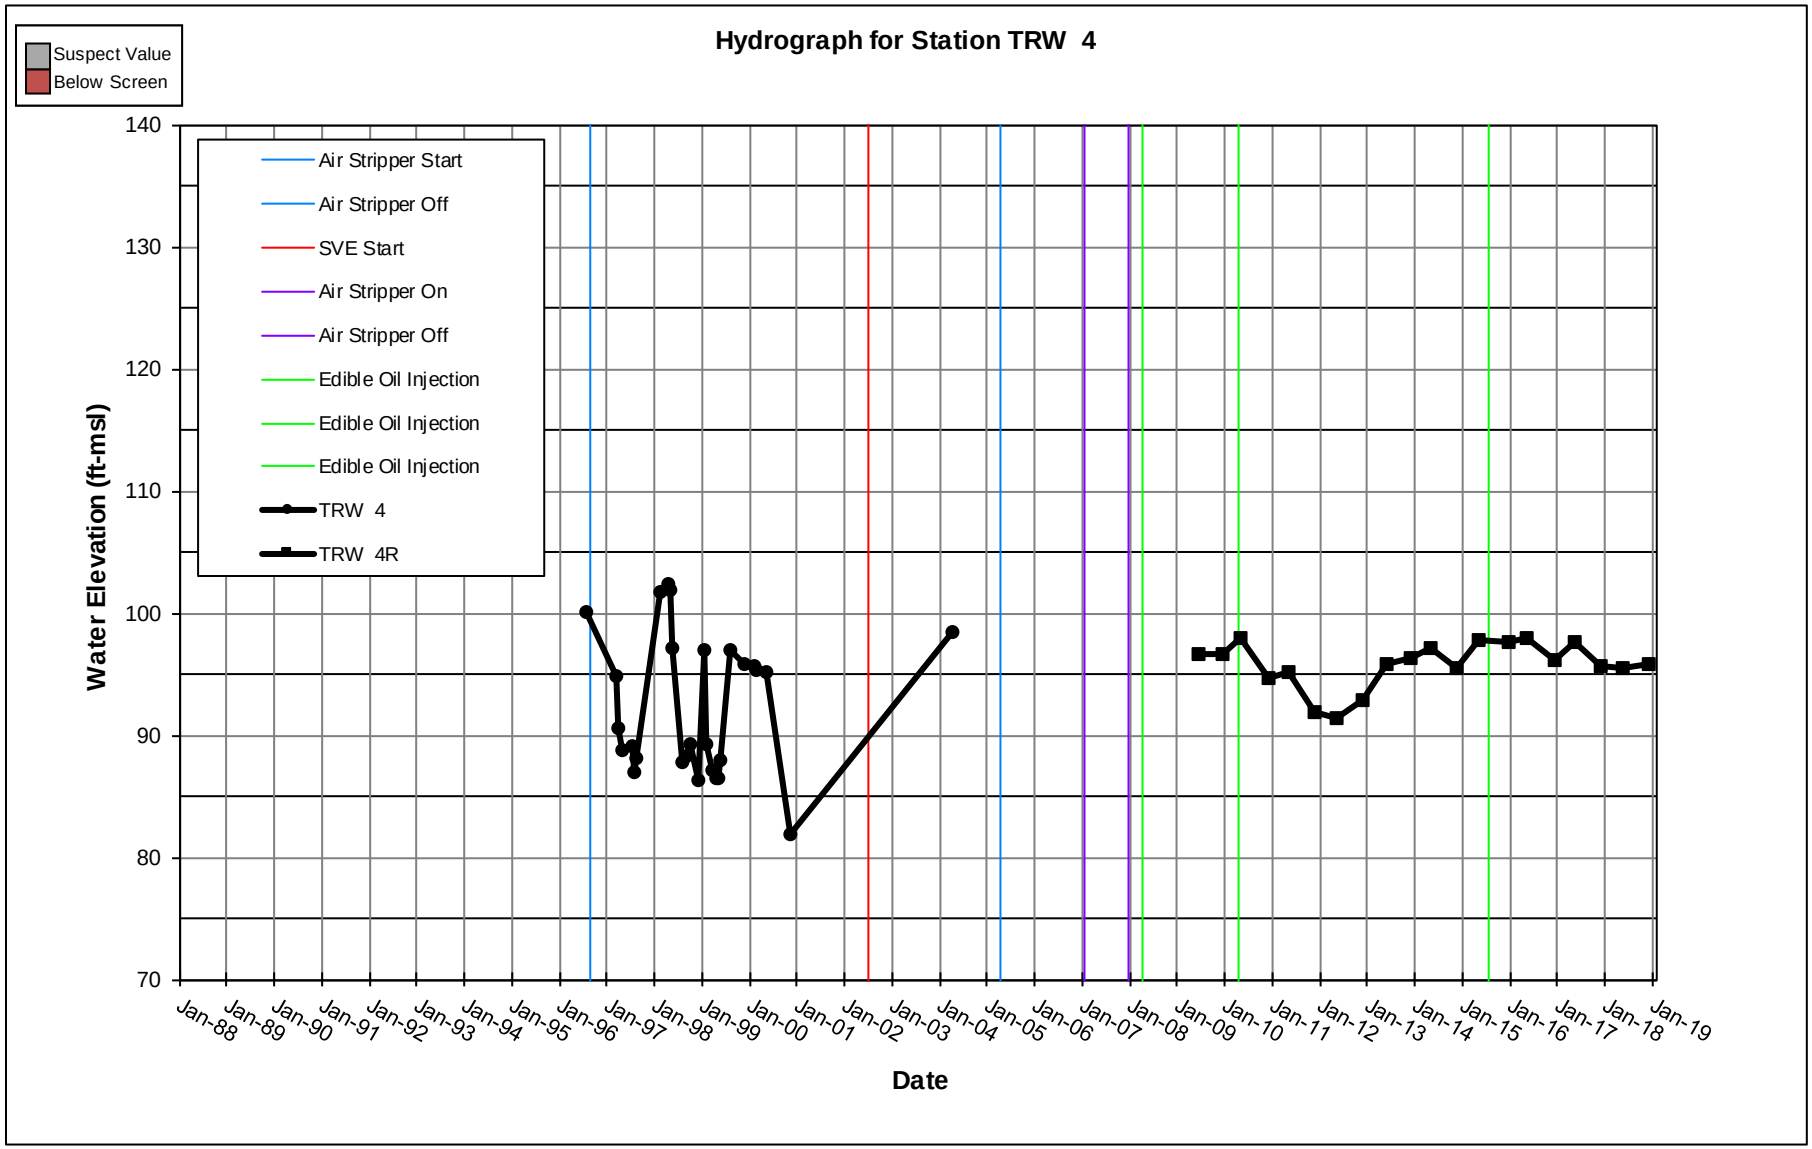
Hydrograph for Station TRW 4
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TRW 4
TRW 4R
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

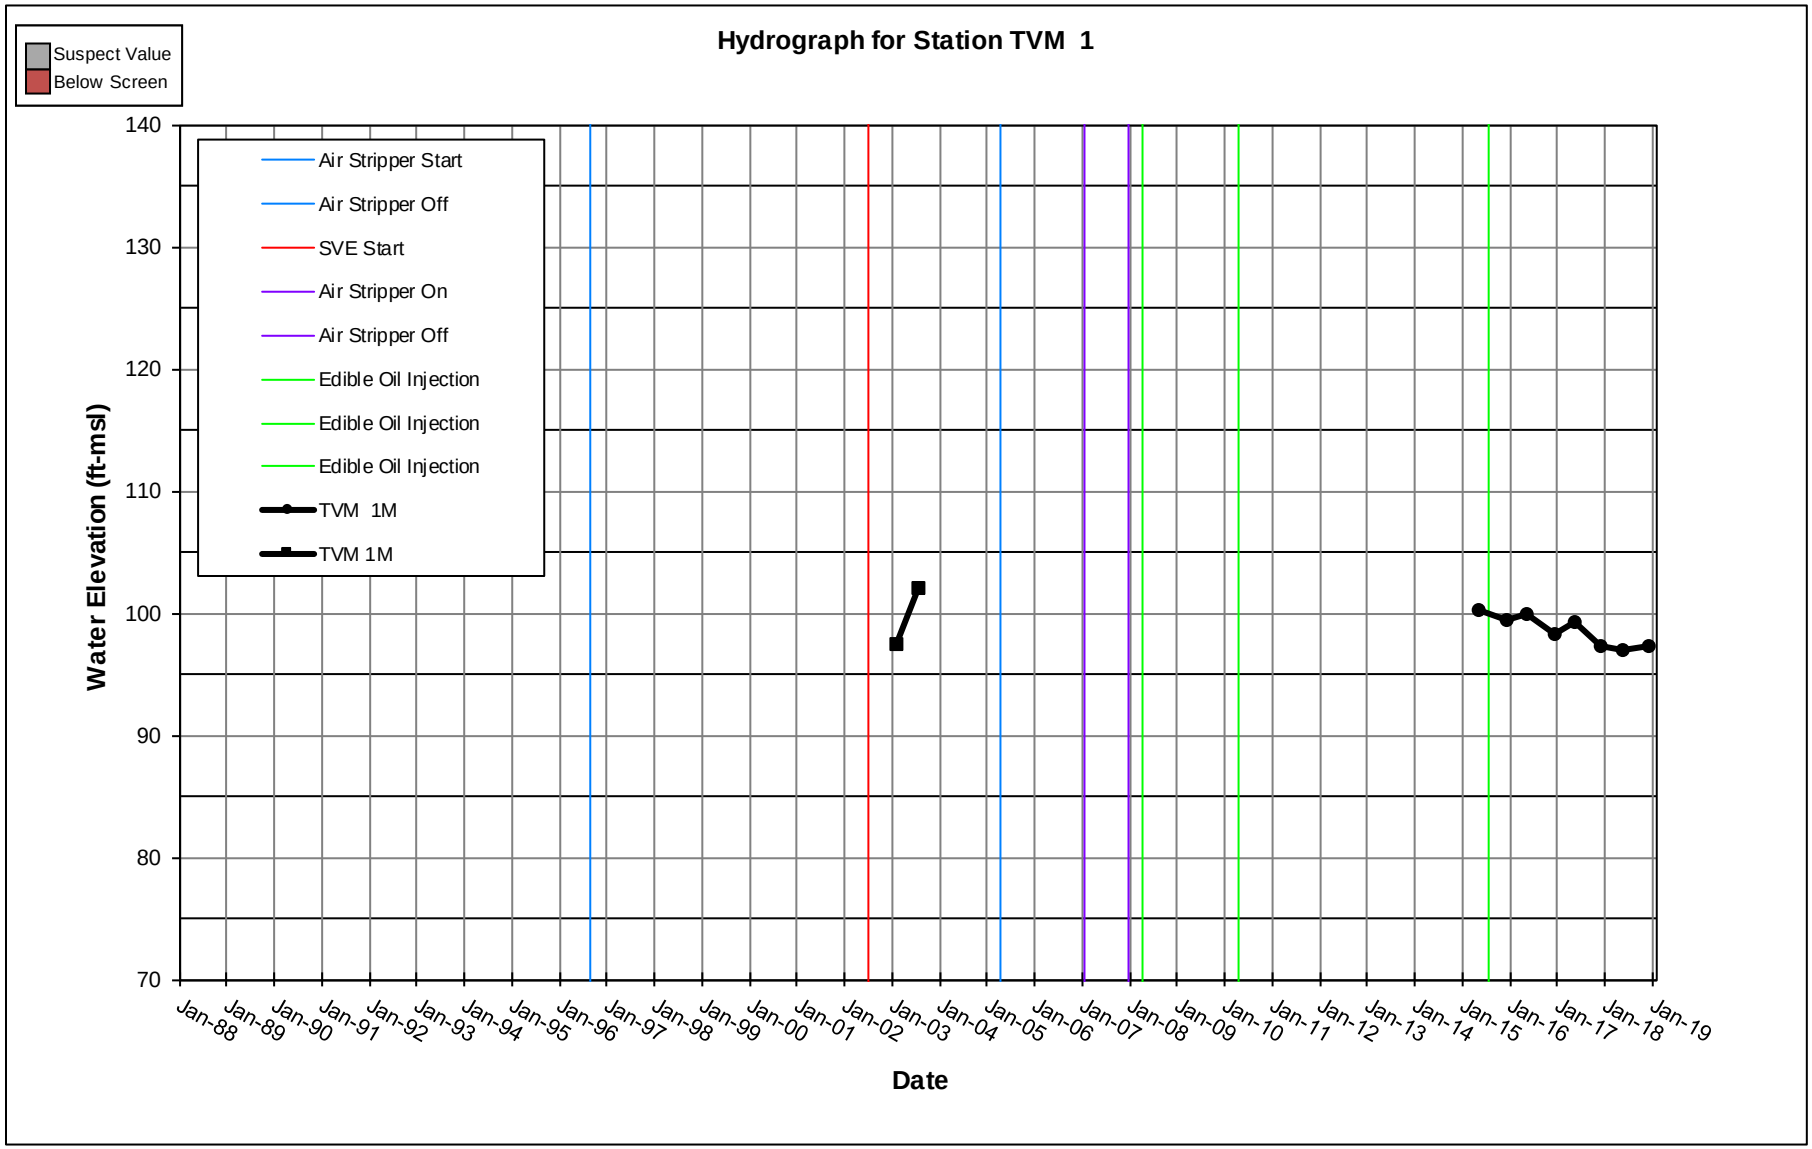
Hydrograph for Station TVM 1
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TVM 1M
TVM 1M
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

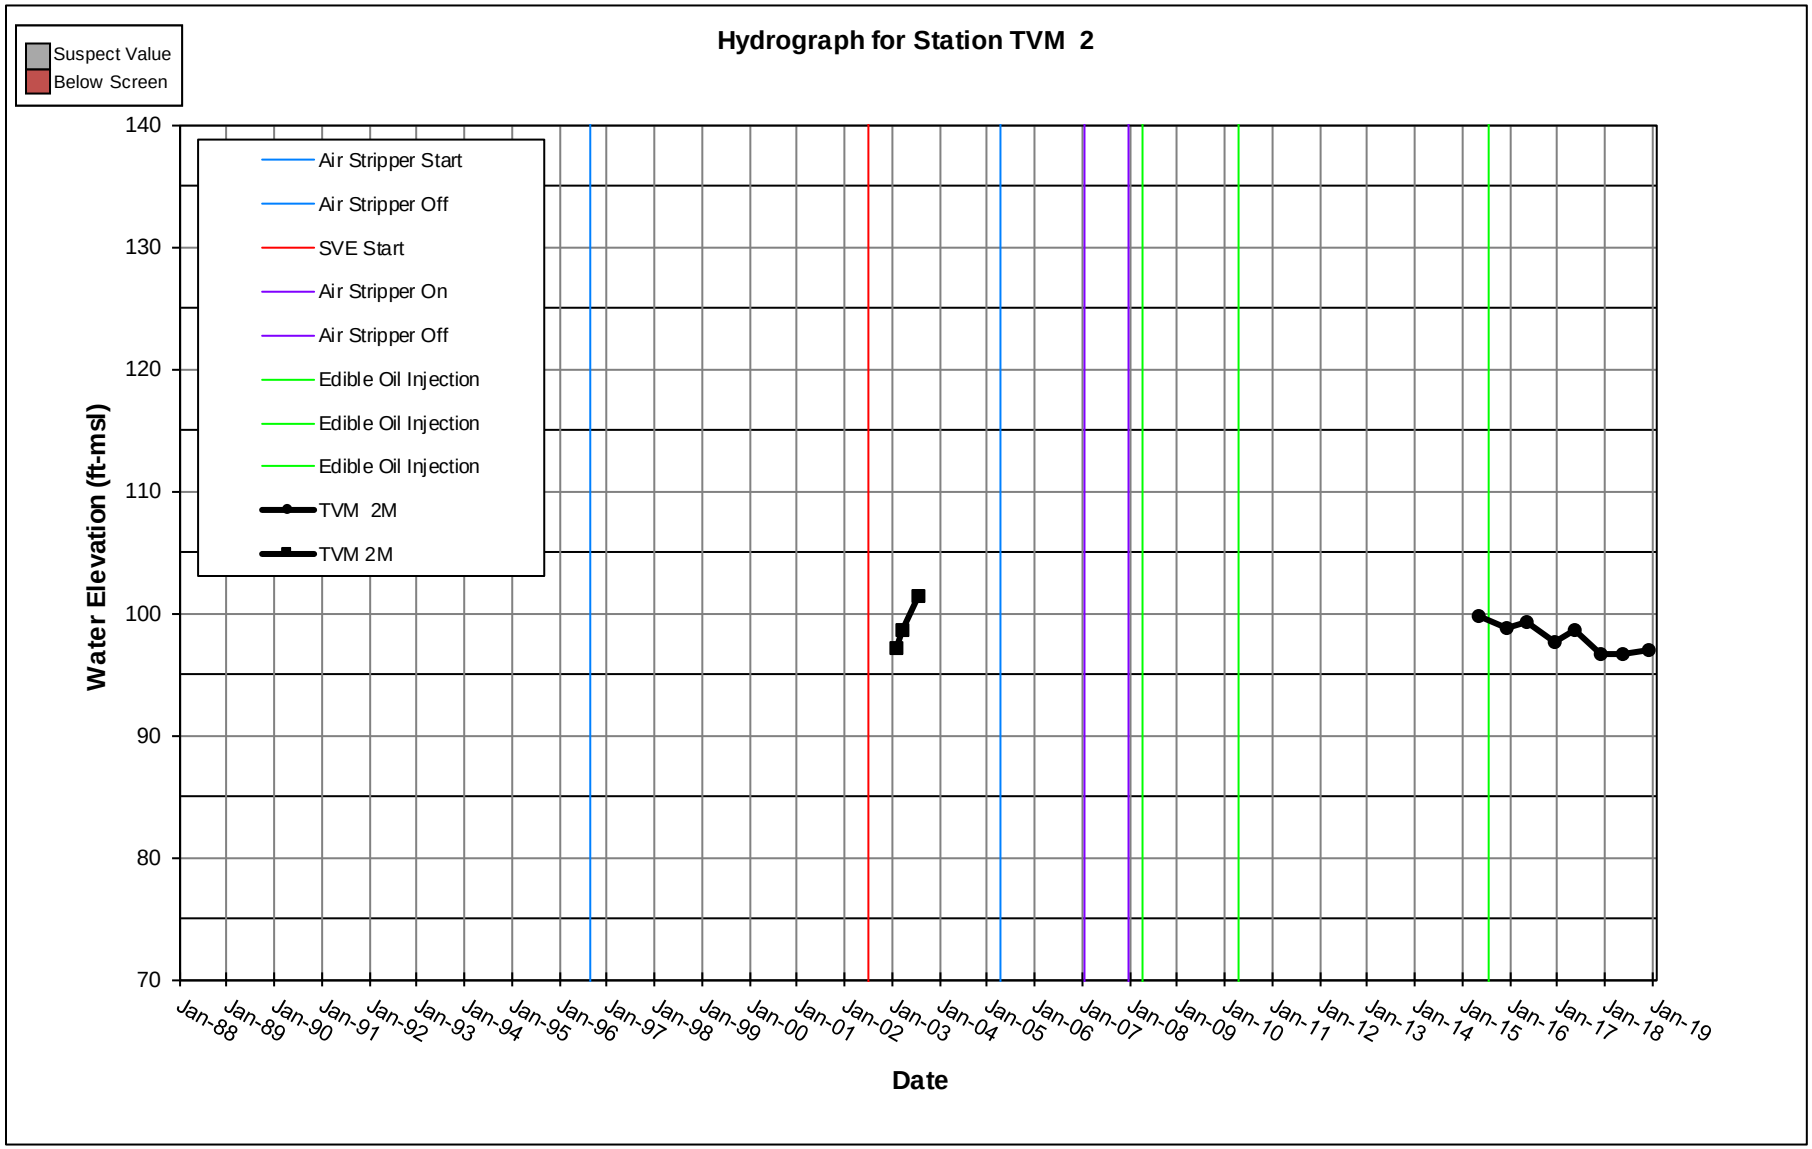
Hydrograph for Station TVM 2
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TVM 2M
TVM 2M
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

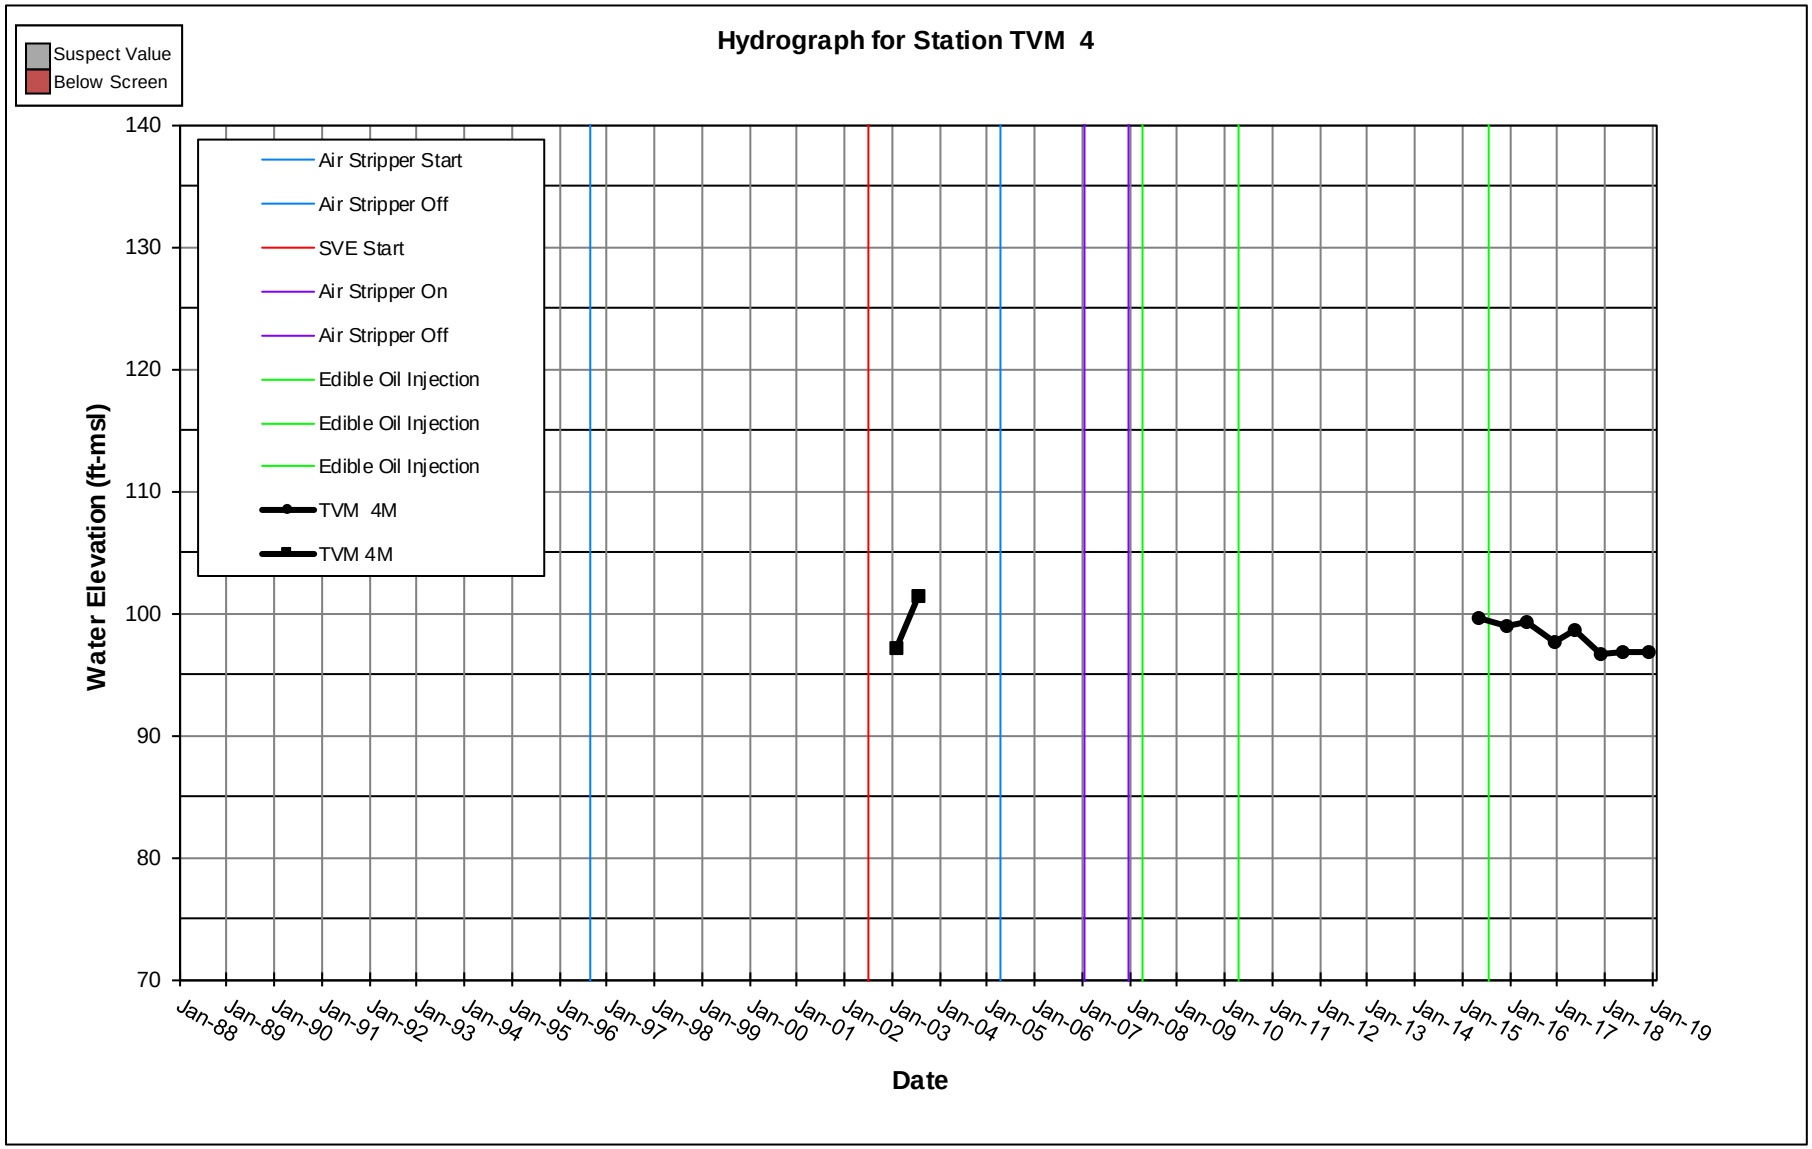
Hydrograph for Station TVM 4
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TVM 4M
TVM 4M
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

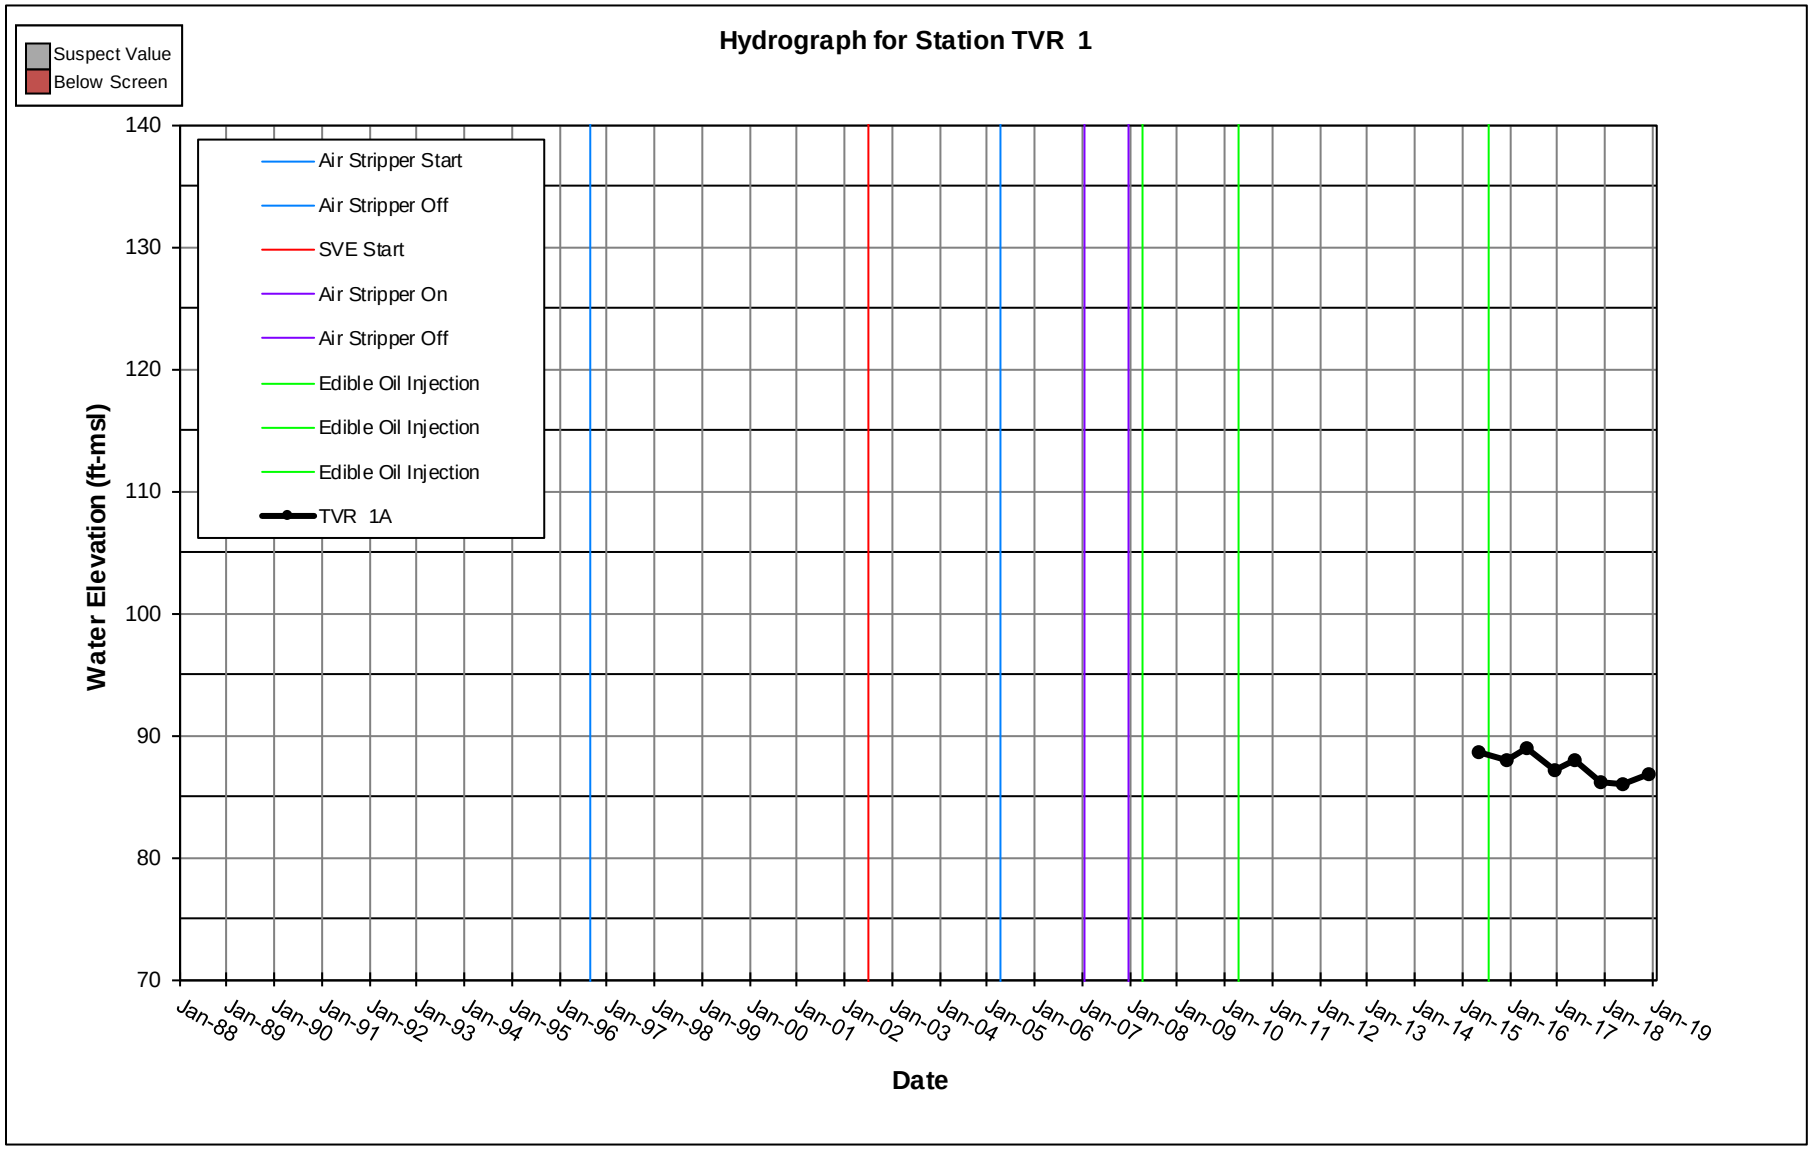
Hydrograph for Station TVR 1
Suspect Value
Below Screen
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
TVR 1A
Water Elevation (ft-msl)
140
130
120
110
100
90
80
70
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

APPENDIX E

TIME SERIES PLOTS

This page intentionally left blank.

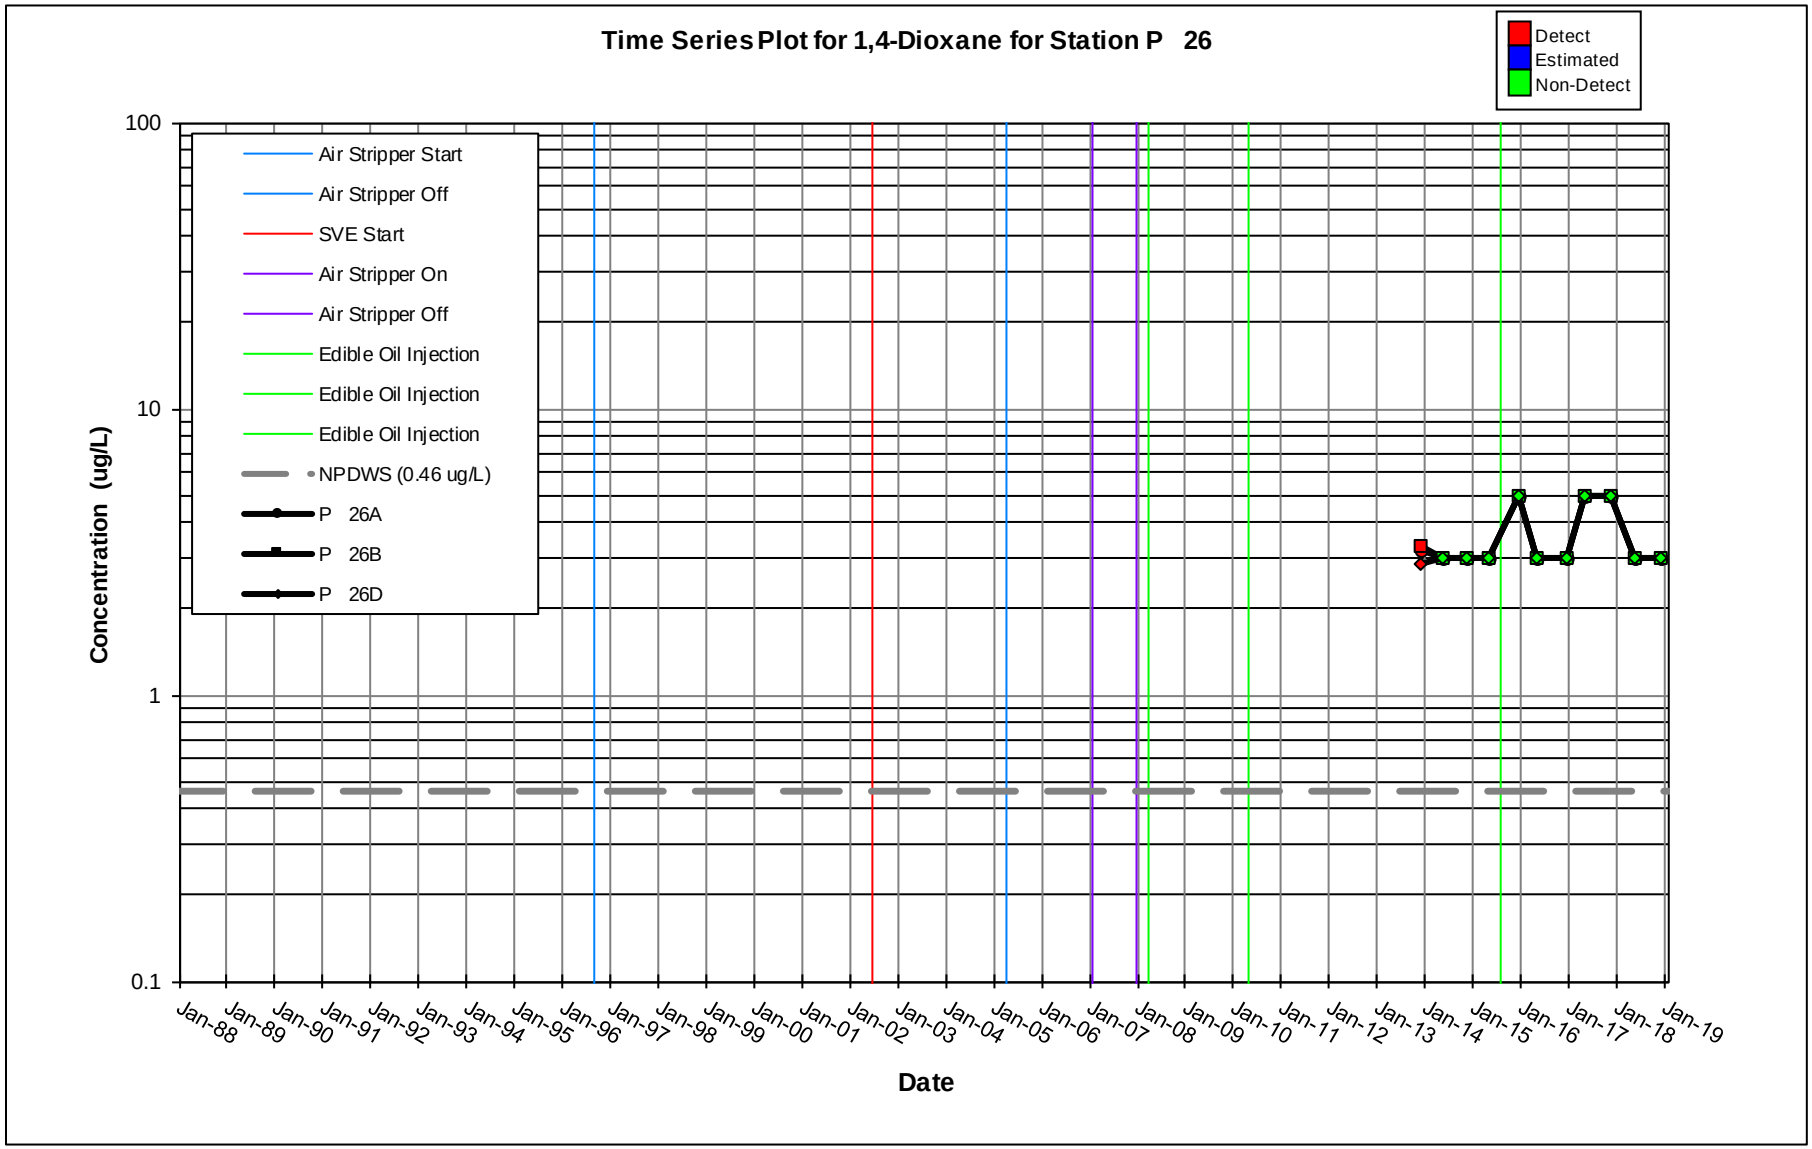
Time Series Plot for 1,4-Dioxane for Station P 26
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
P 26A
P 26B
P 26D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

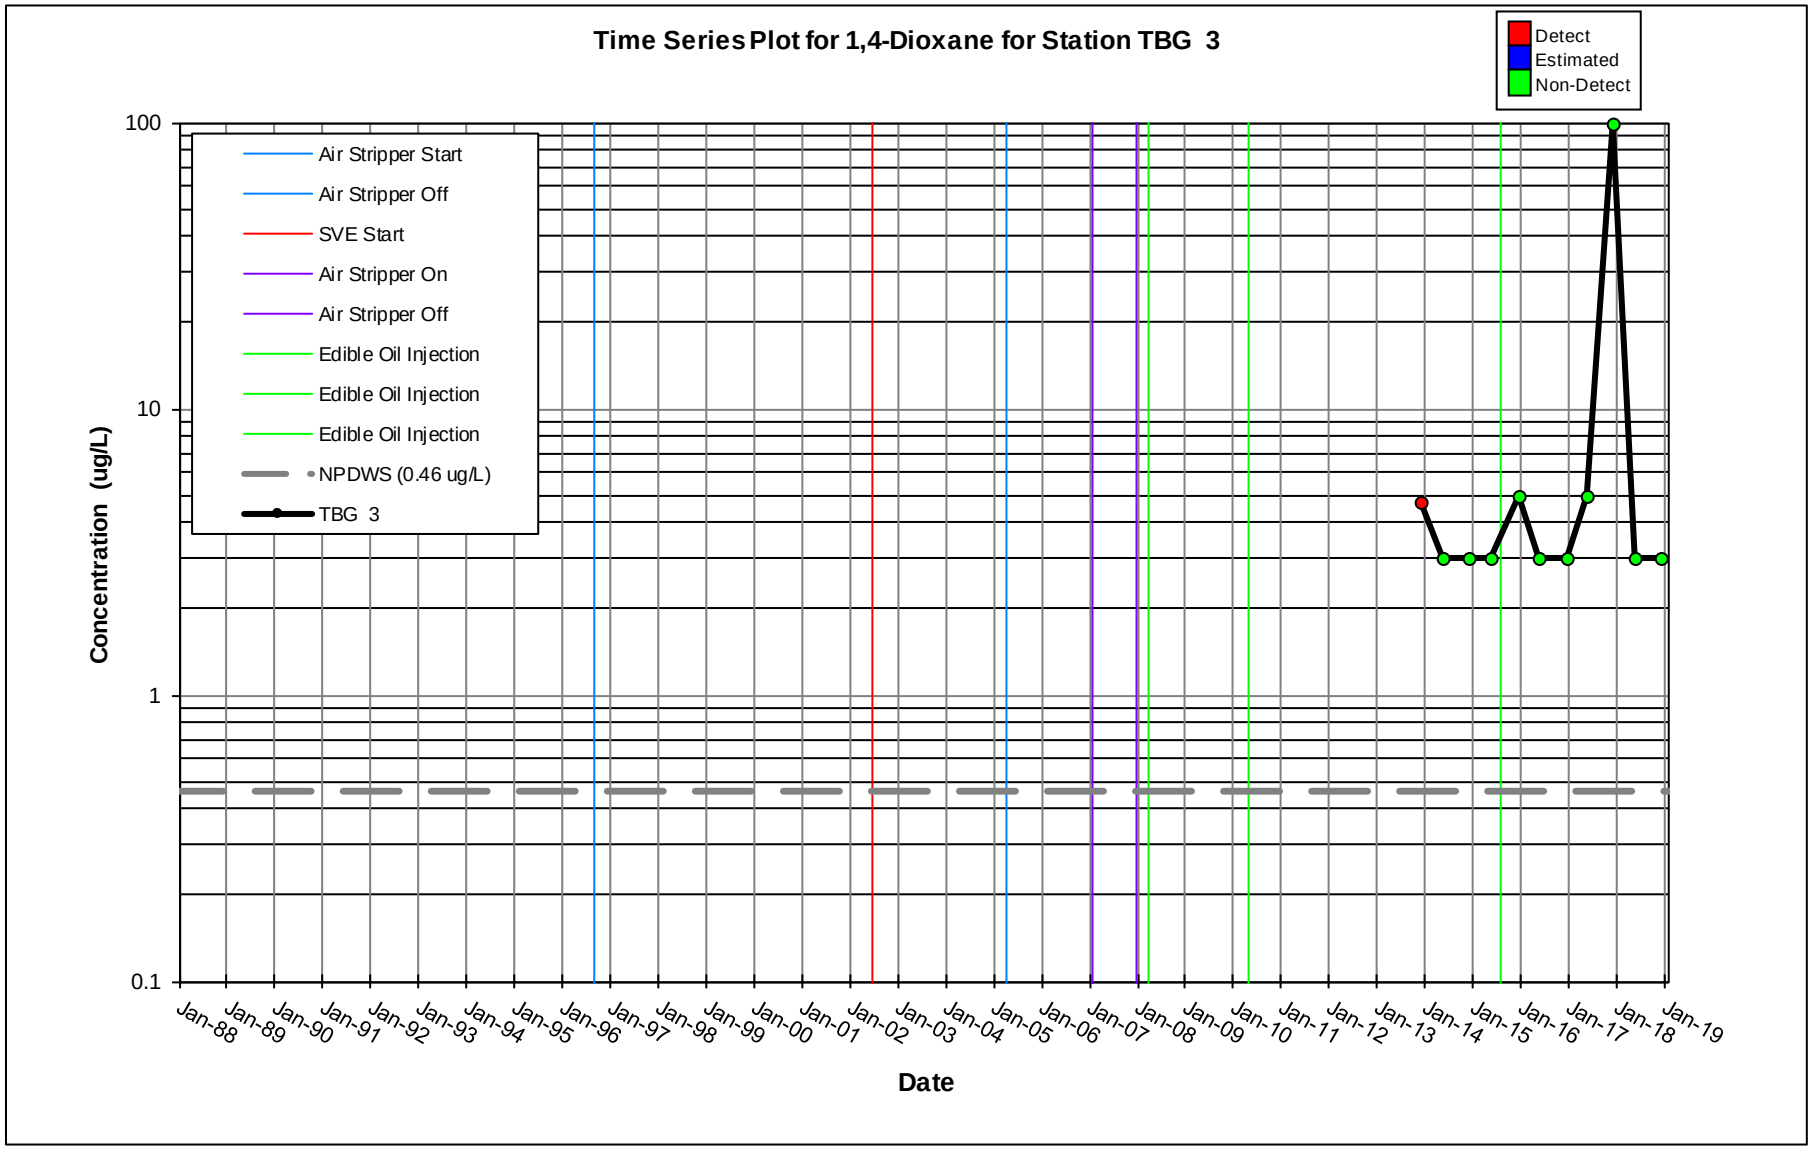
Time Series Plot for 1,4-Dioxane for Station TBG 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TBG 3
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

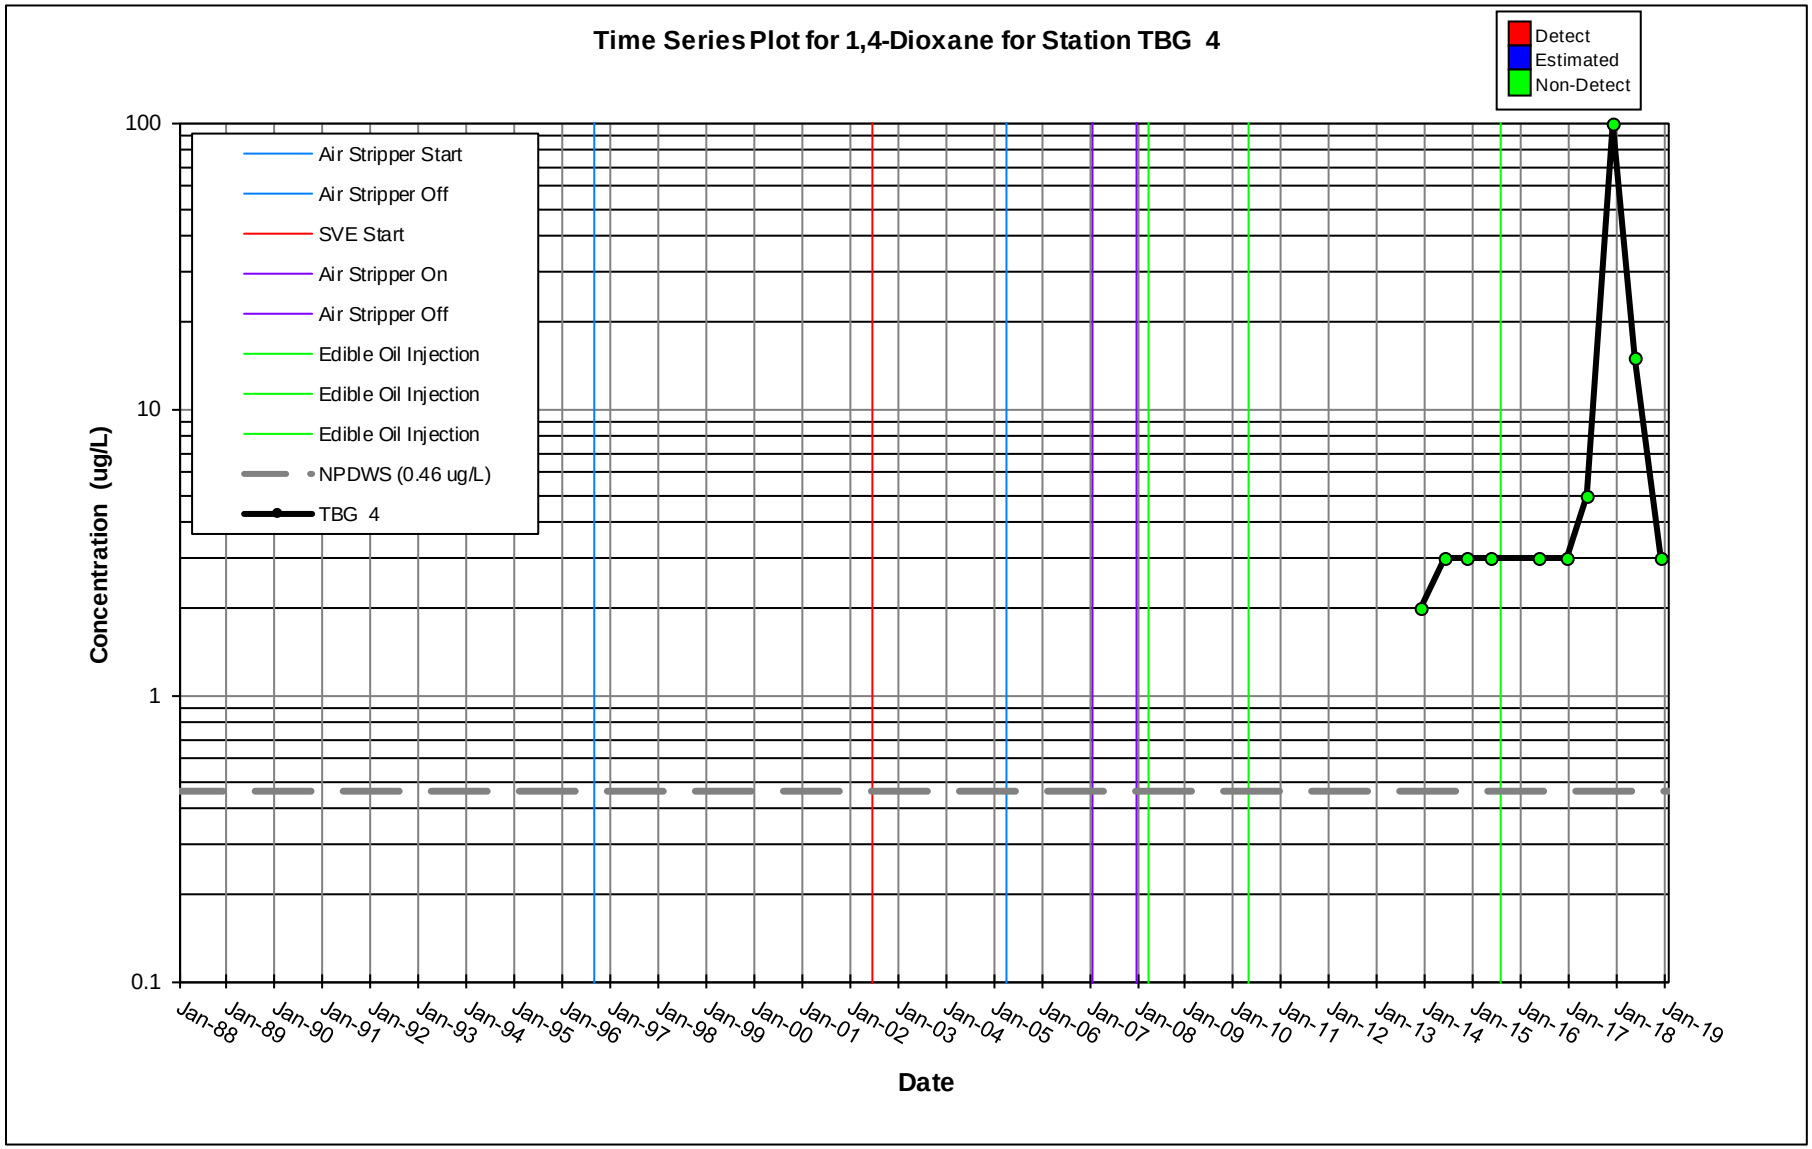
Time Series Plot for 1,4-Dioxane for Station TBG 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TBG 4
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

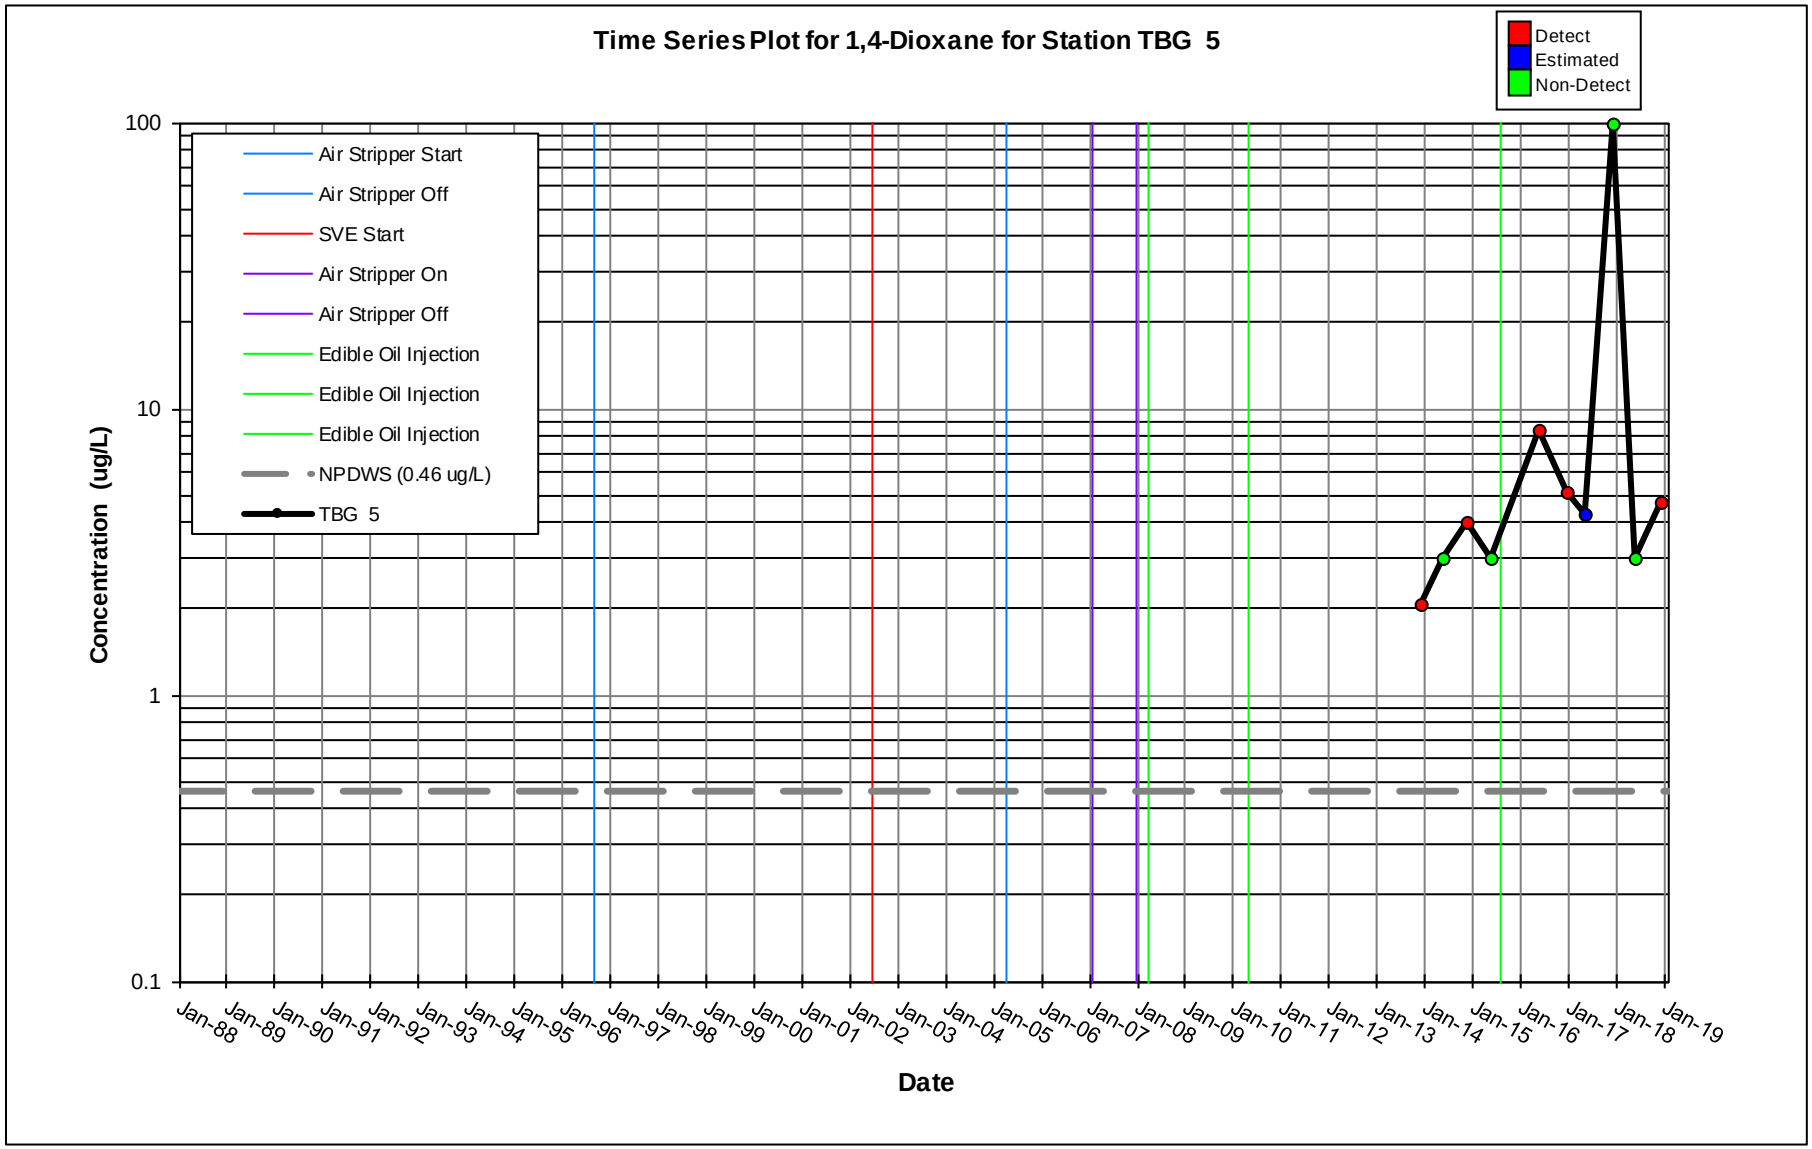
Time Series Plot for 1,4-Dioxane for Station TBG 5
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TBG 5
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

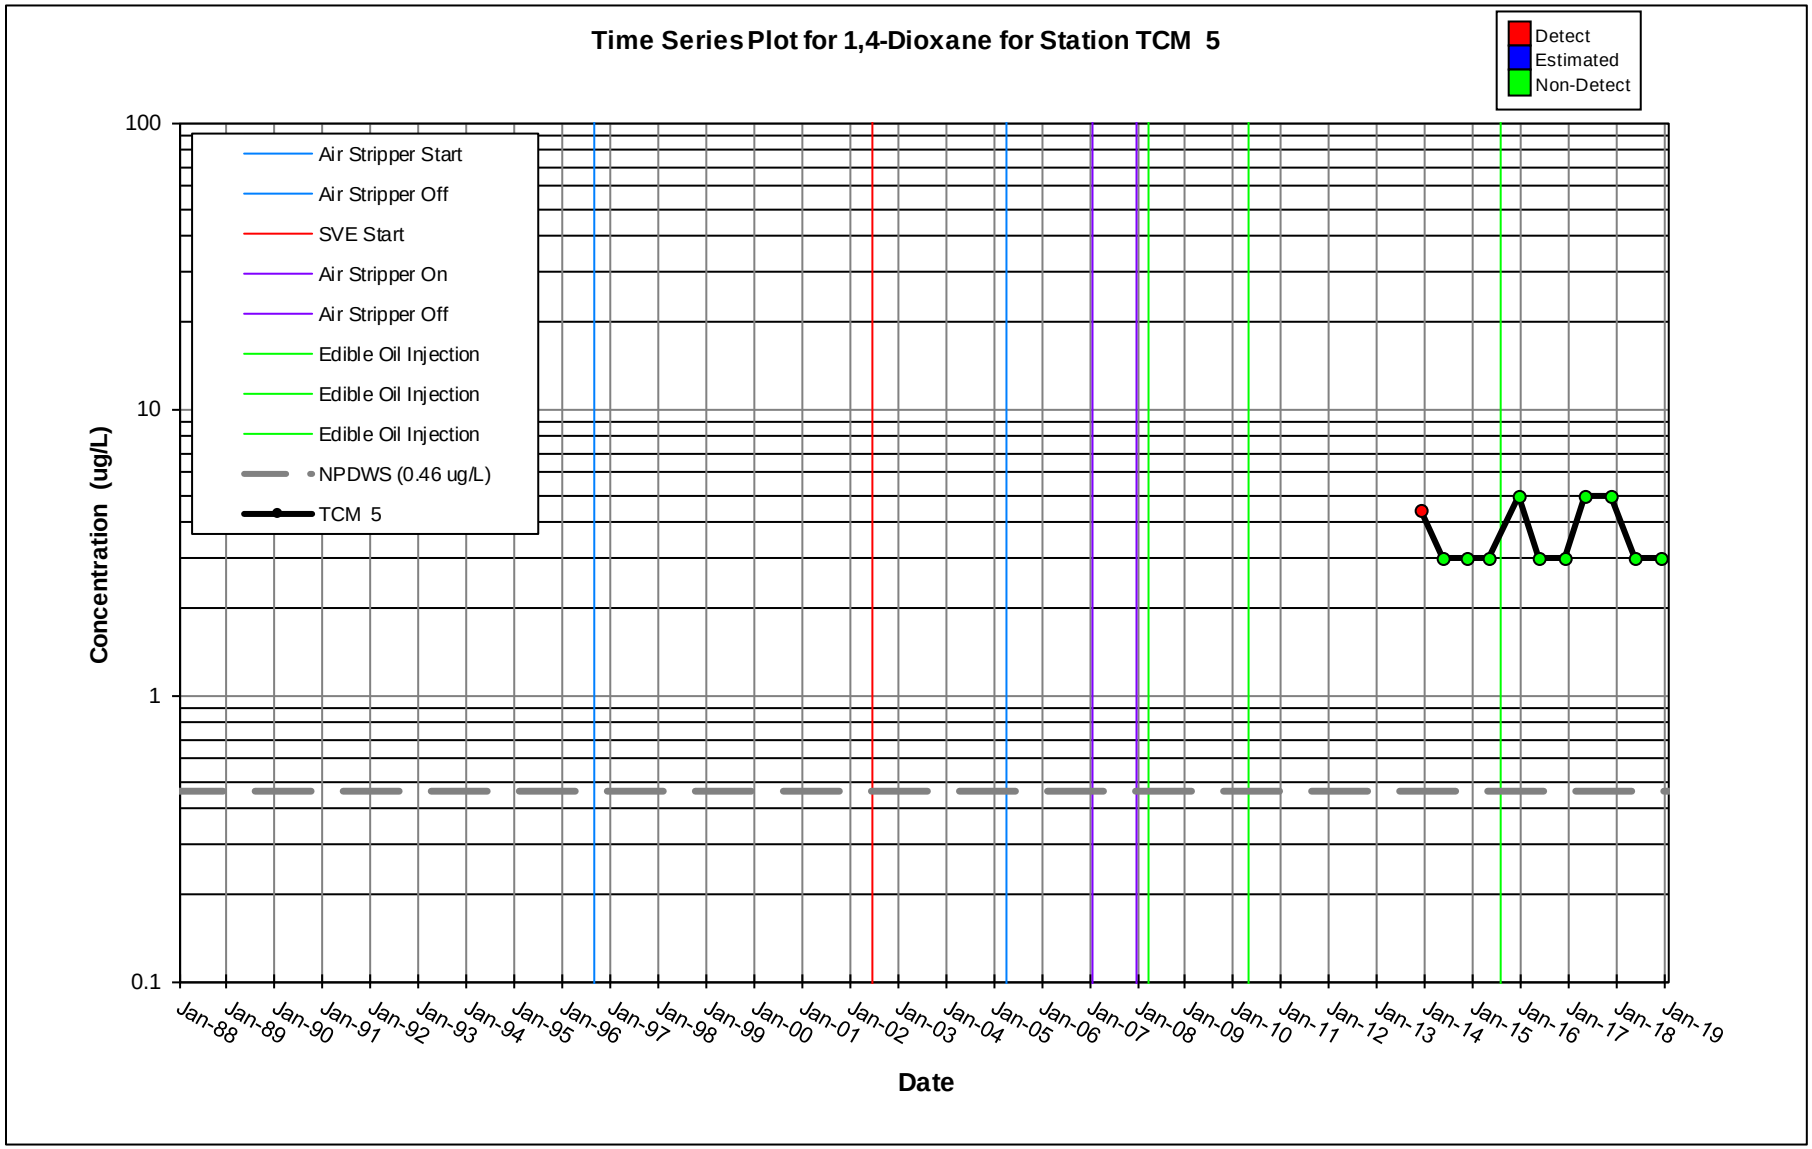
Time Series Plot for 1,4-Dioxane for Station TCM 5
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TCM 5
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

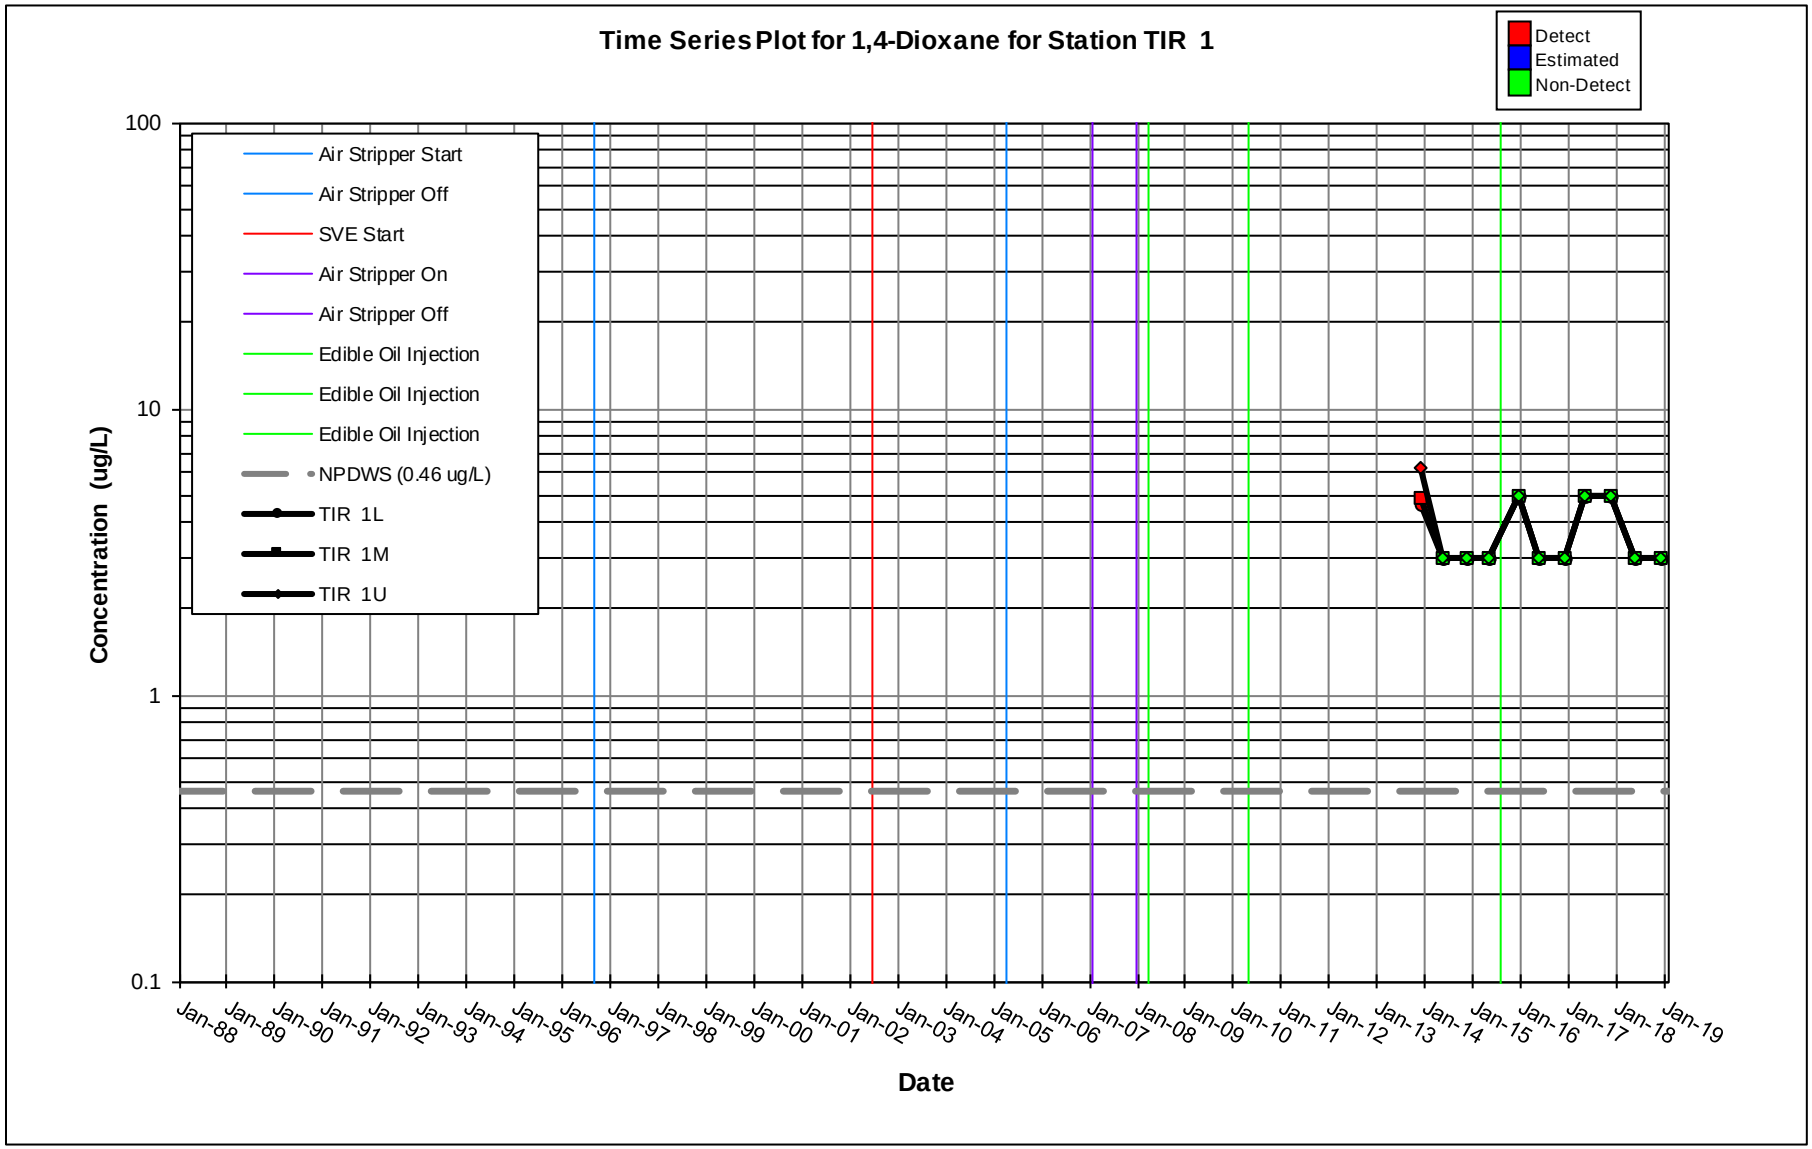
Time Series Plot for 1,4-Dioxane for Station TIR 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TIR 1L
TIR 1M
TIR 1U
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

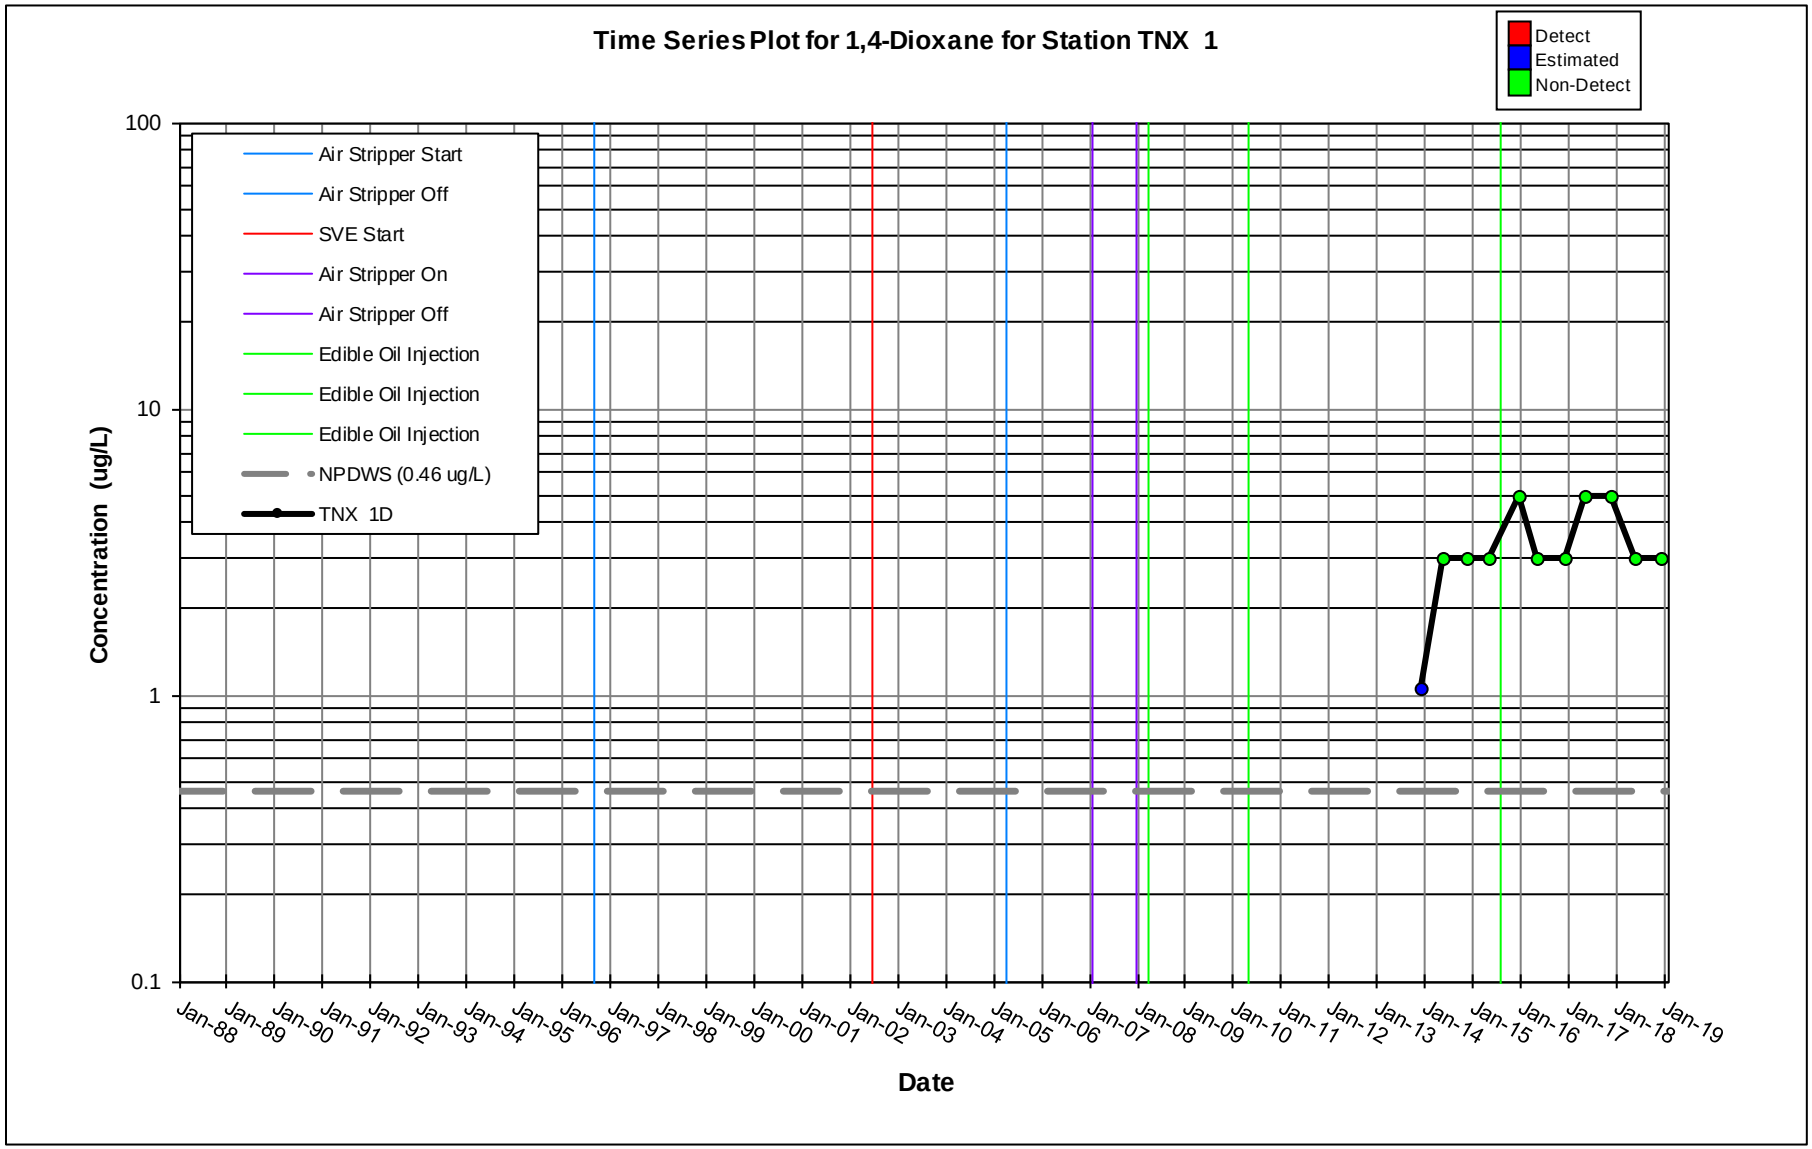
Time Series Plot for 1,4-Dioxane for Station TNX 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX 1D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

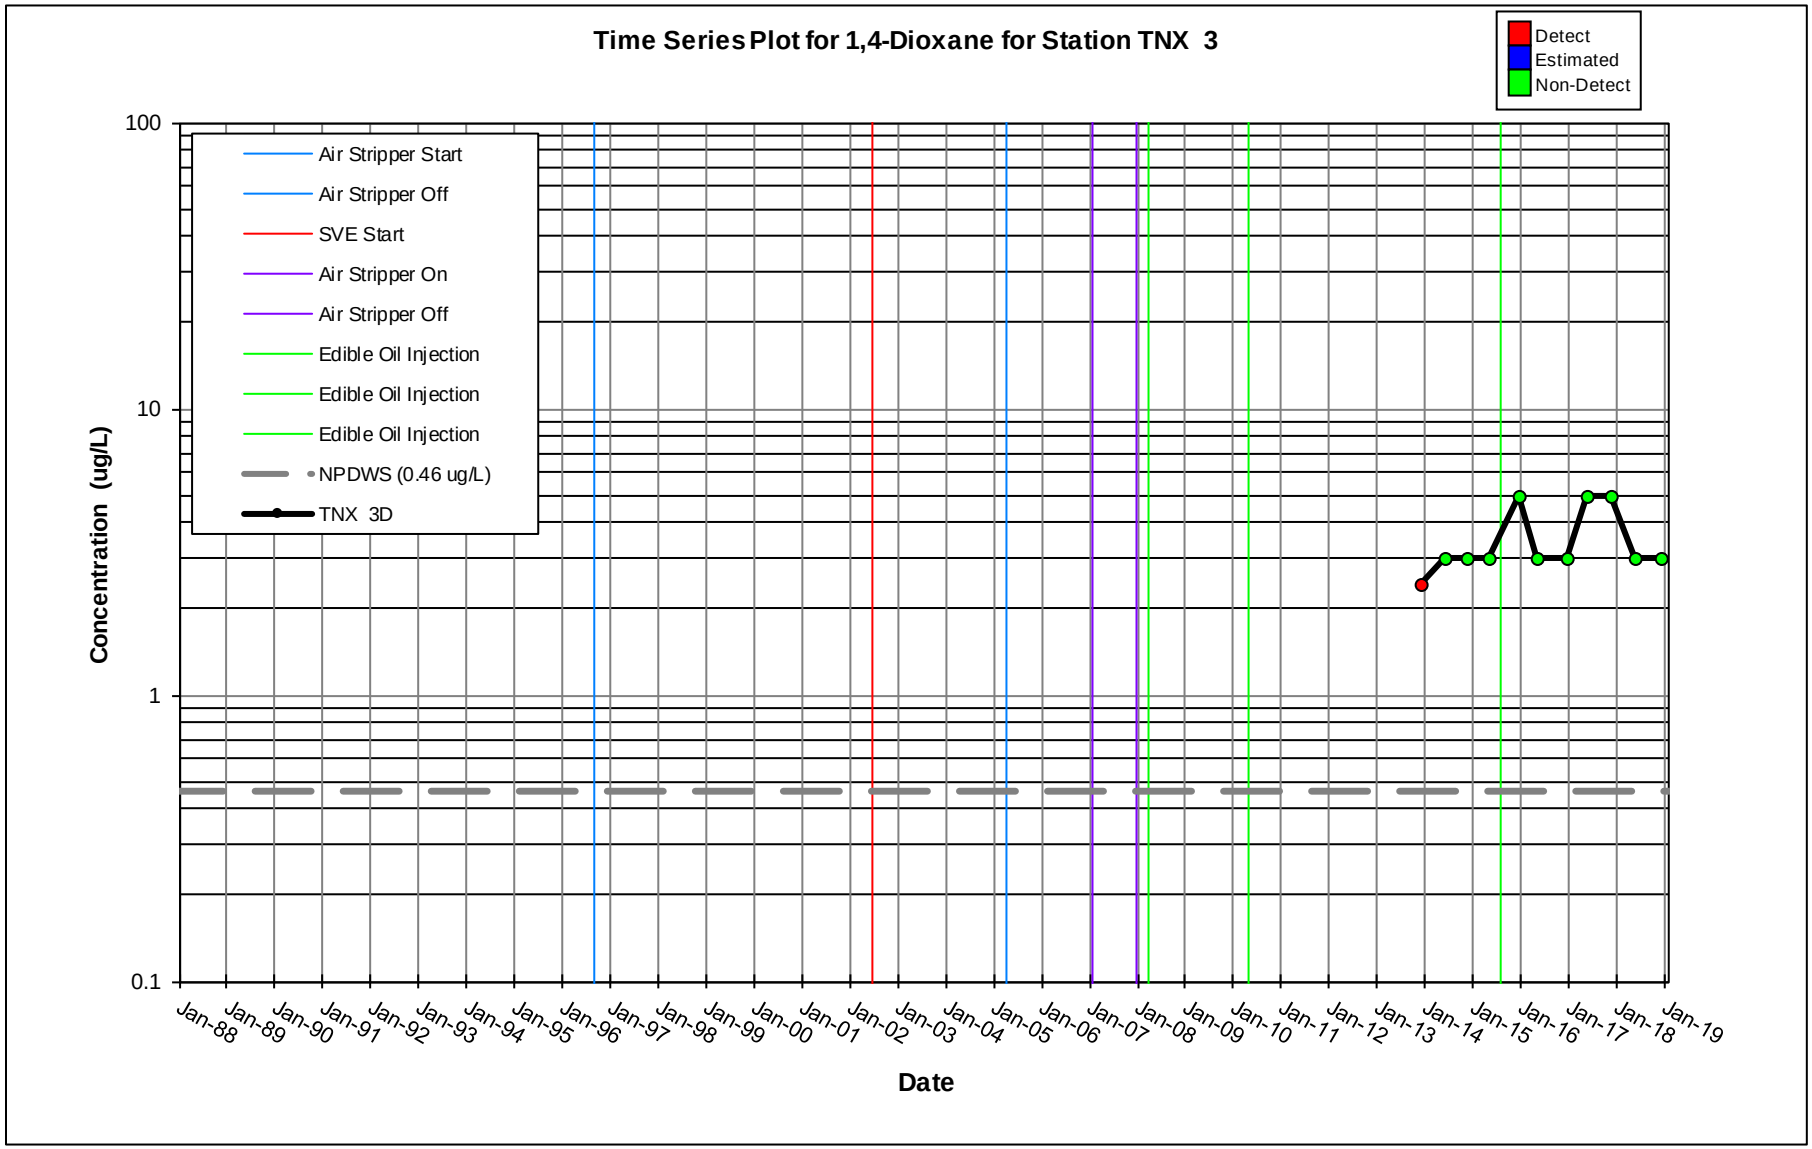
Time Series Plot for 1,4-Dioxane for Station TNX 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX 3D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

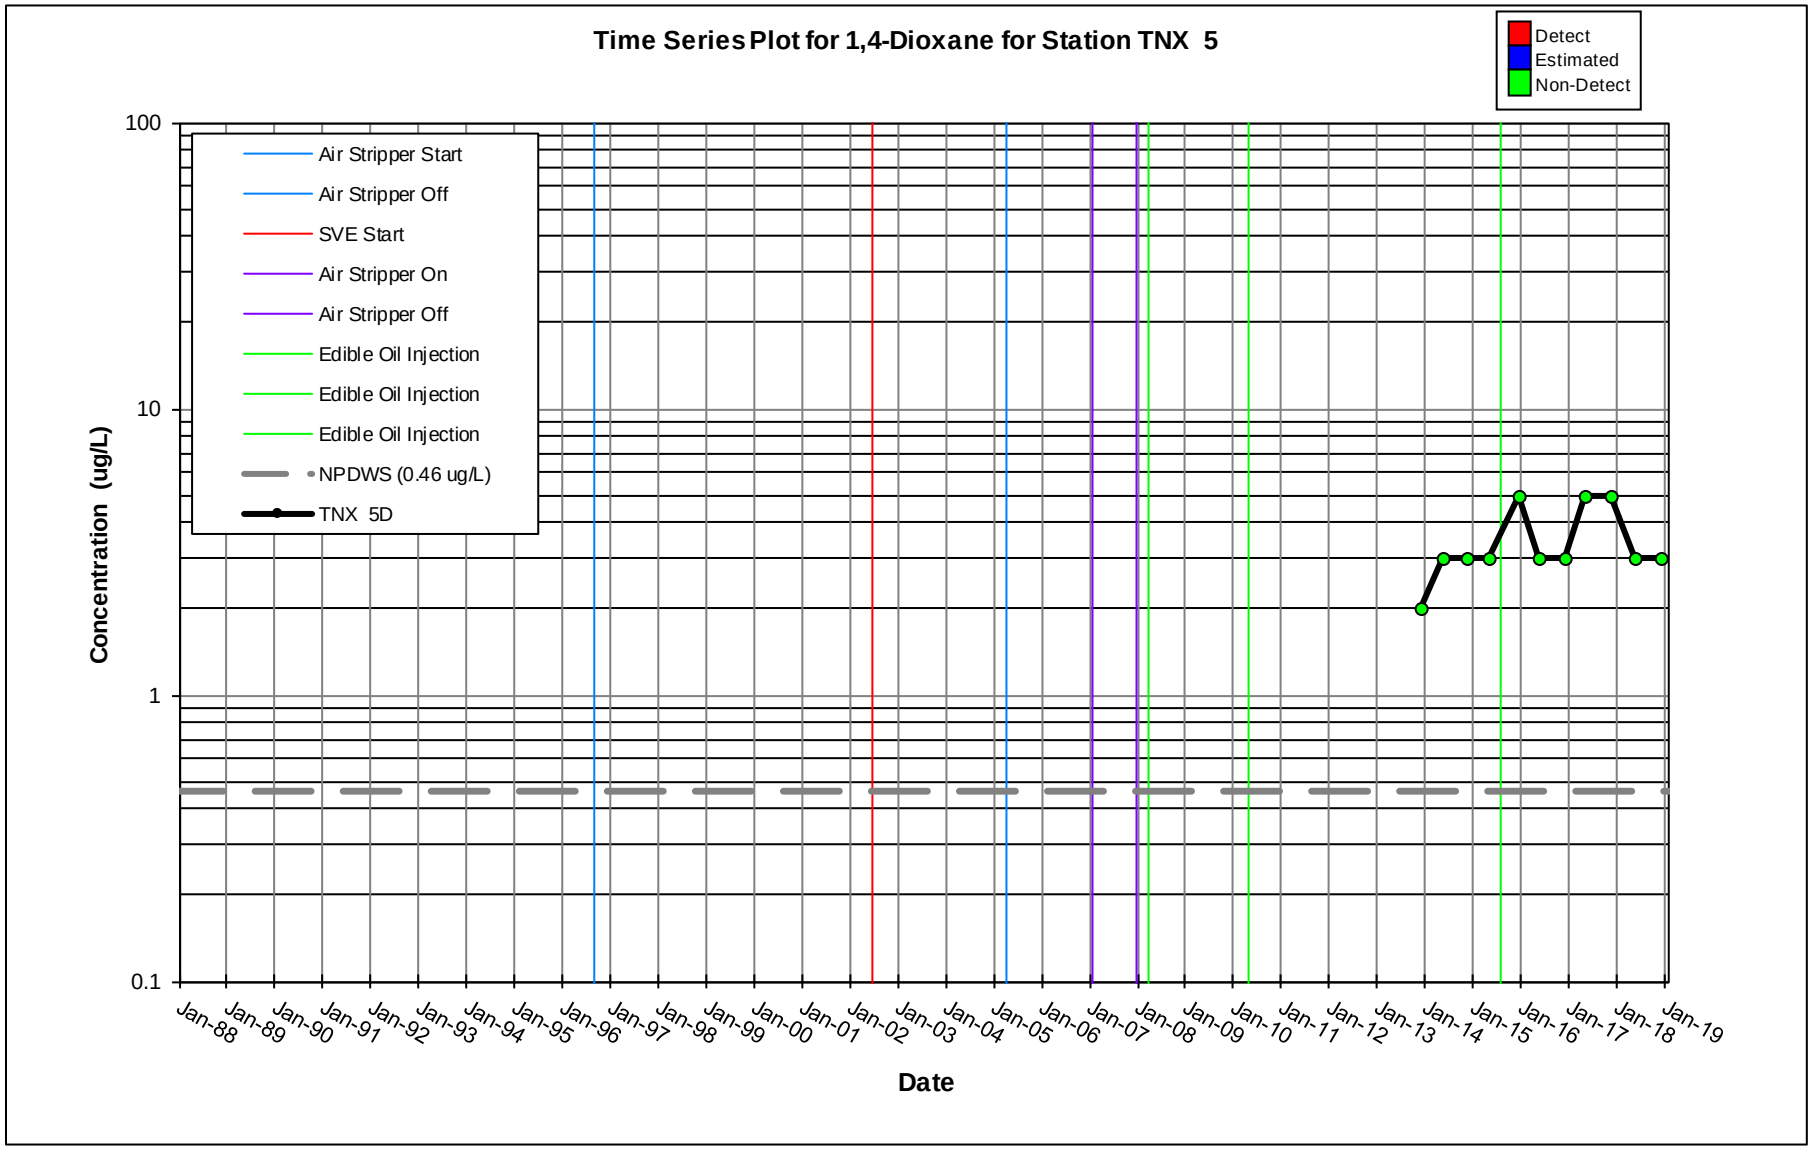
Time Series Plot for 1,4-Dioxane for Station TNX 5
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX 5D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

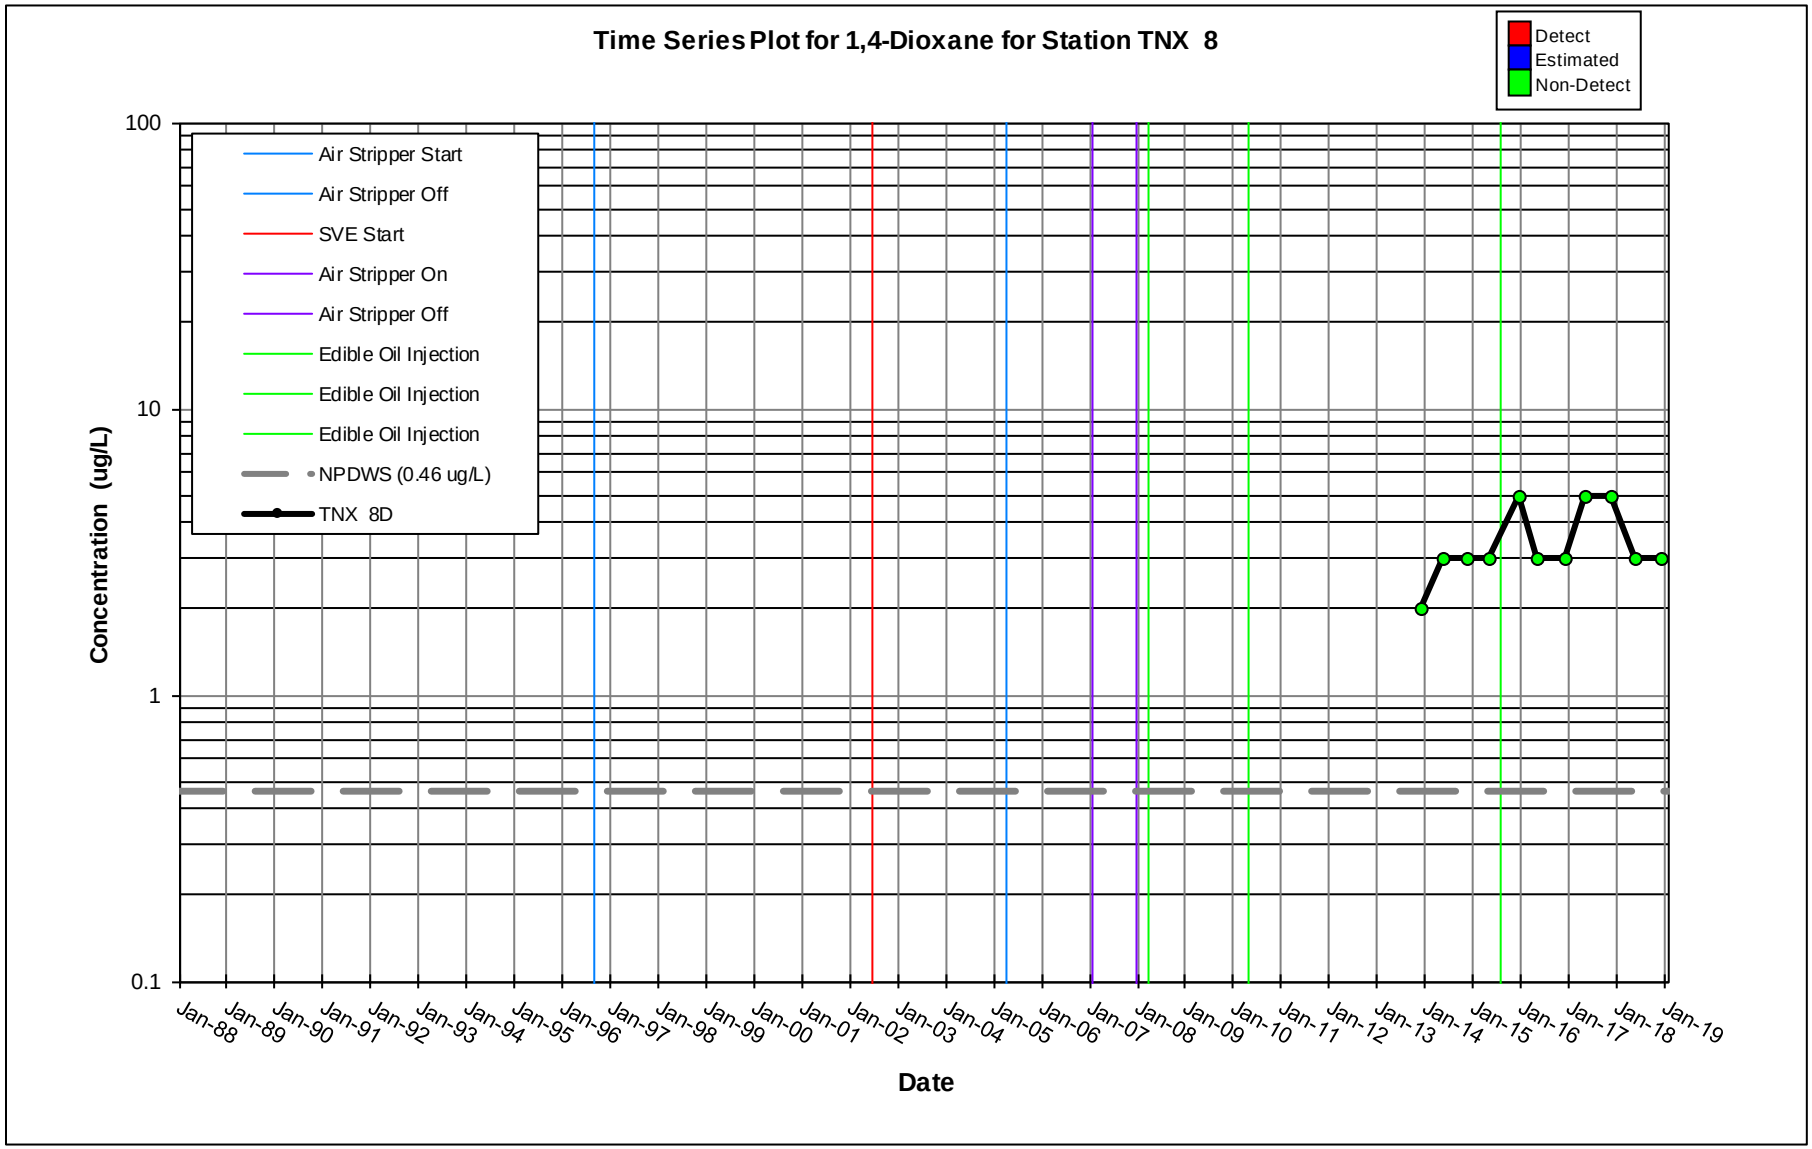
Time Series Plot for 1,4-Dioxane for Station TNX 8
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX 8D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

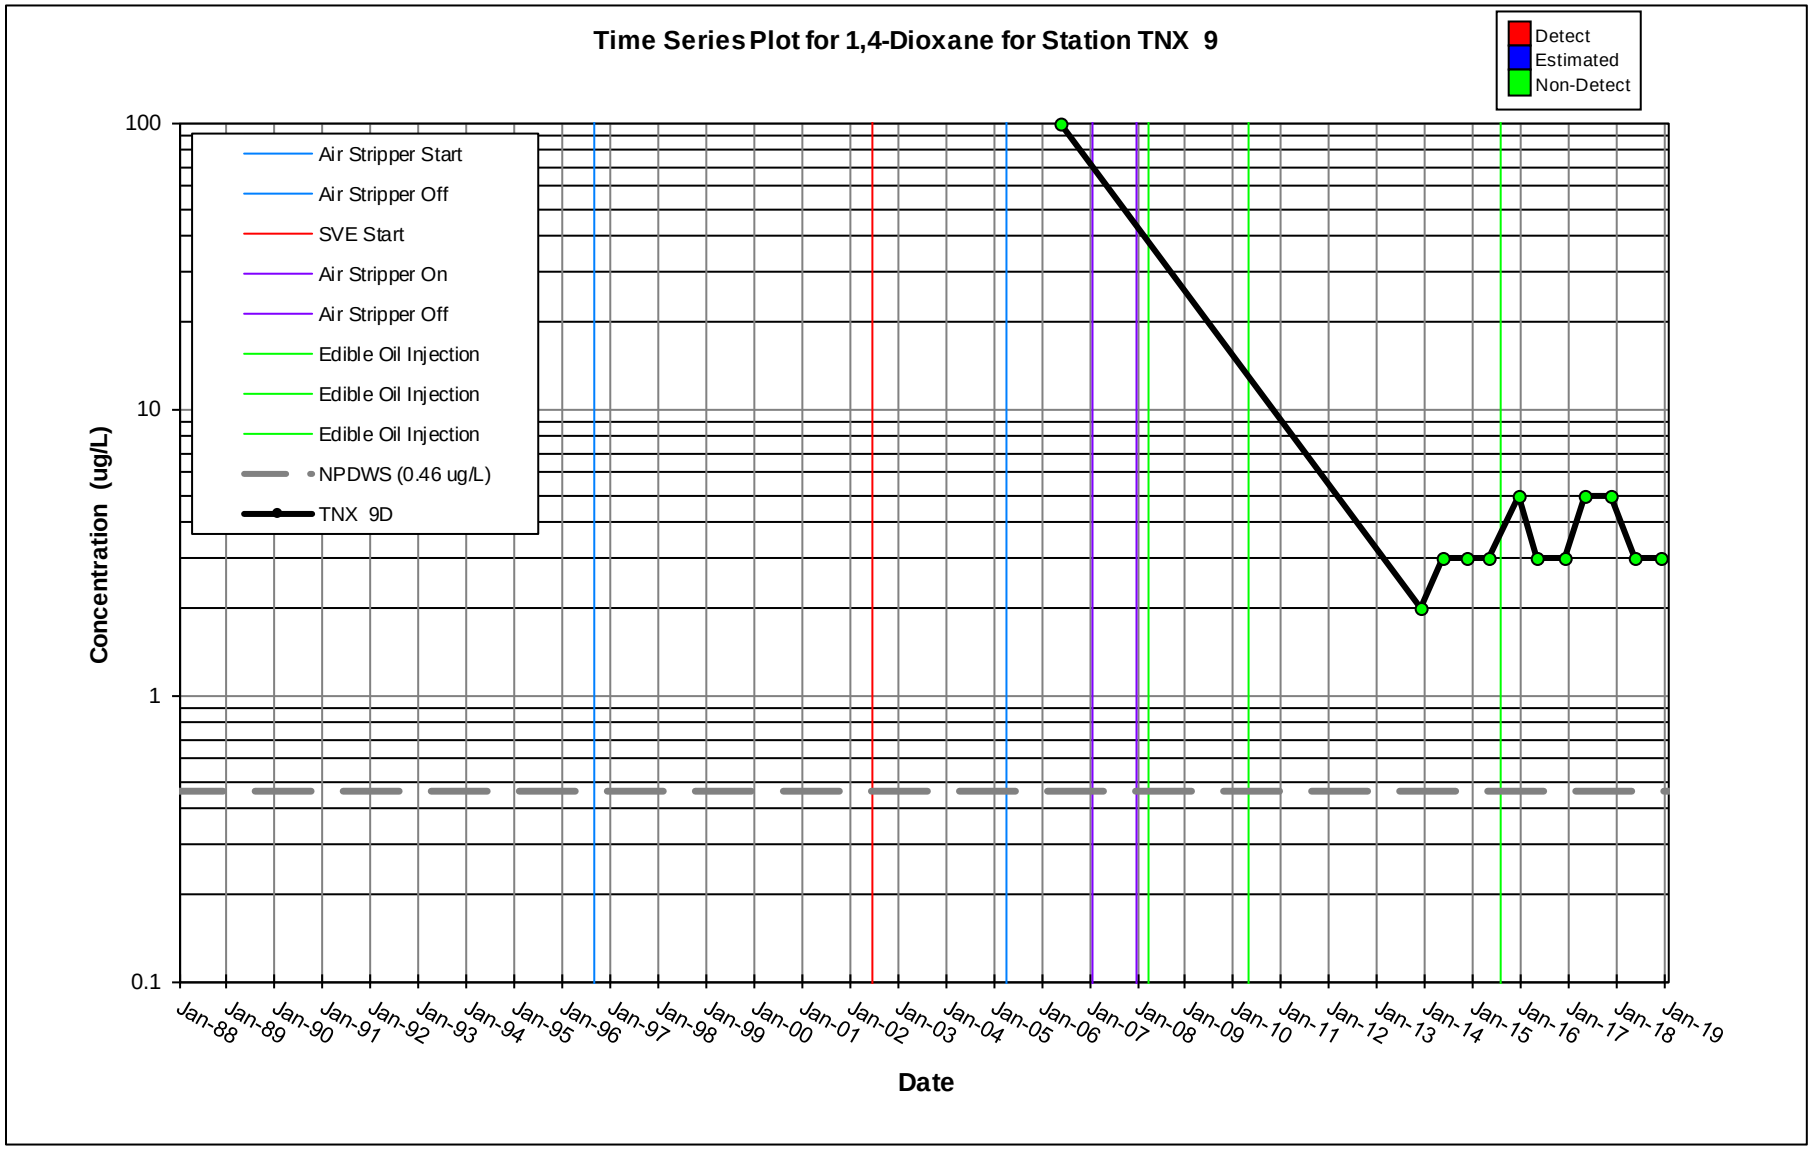
Time Series Plot for 1,4-Dioxane for Station TNX 9
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX 9D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

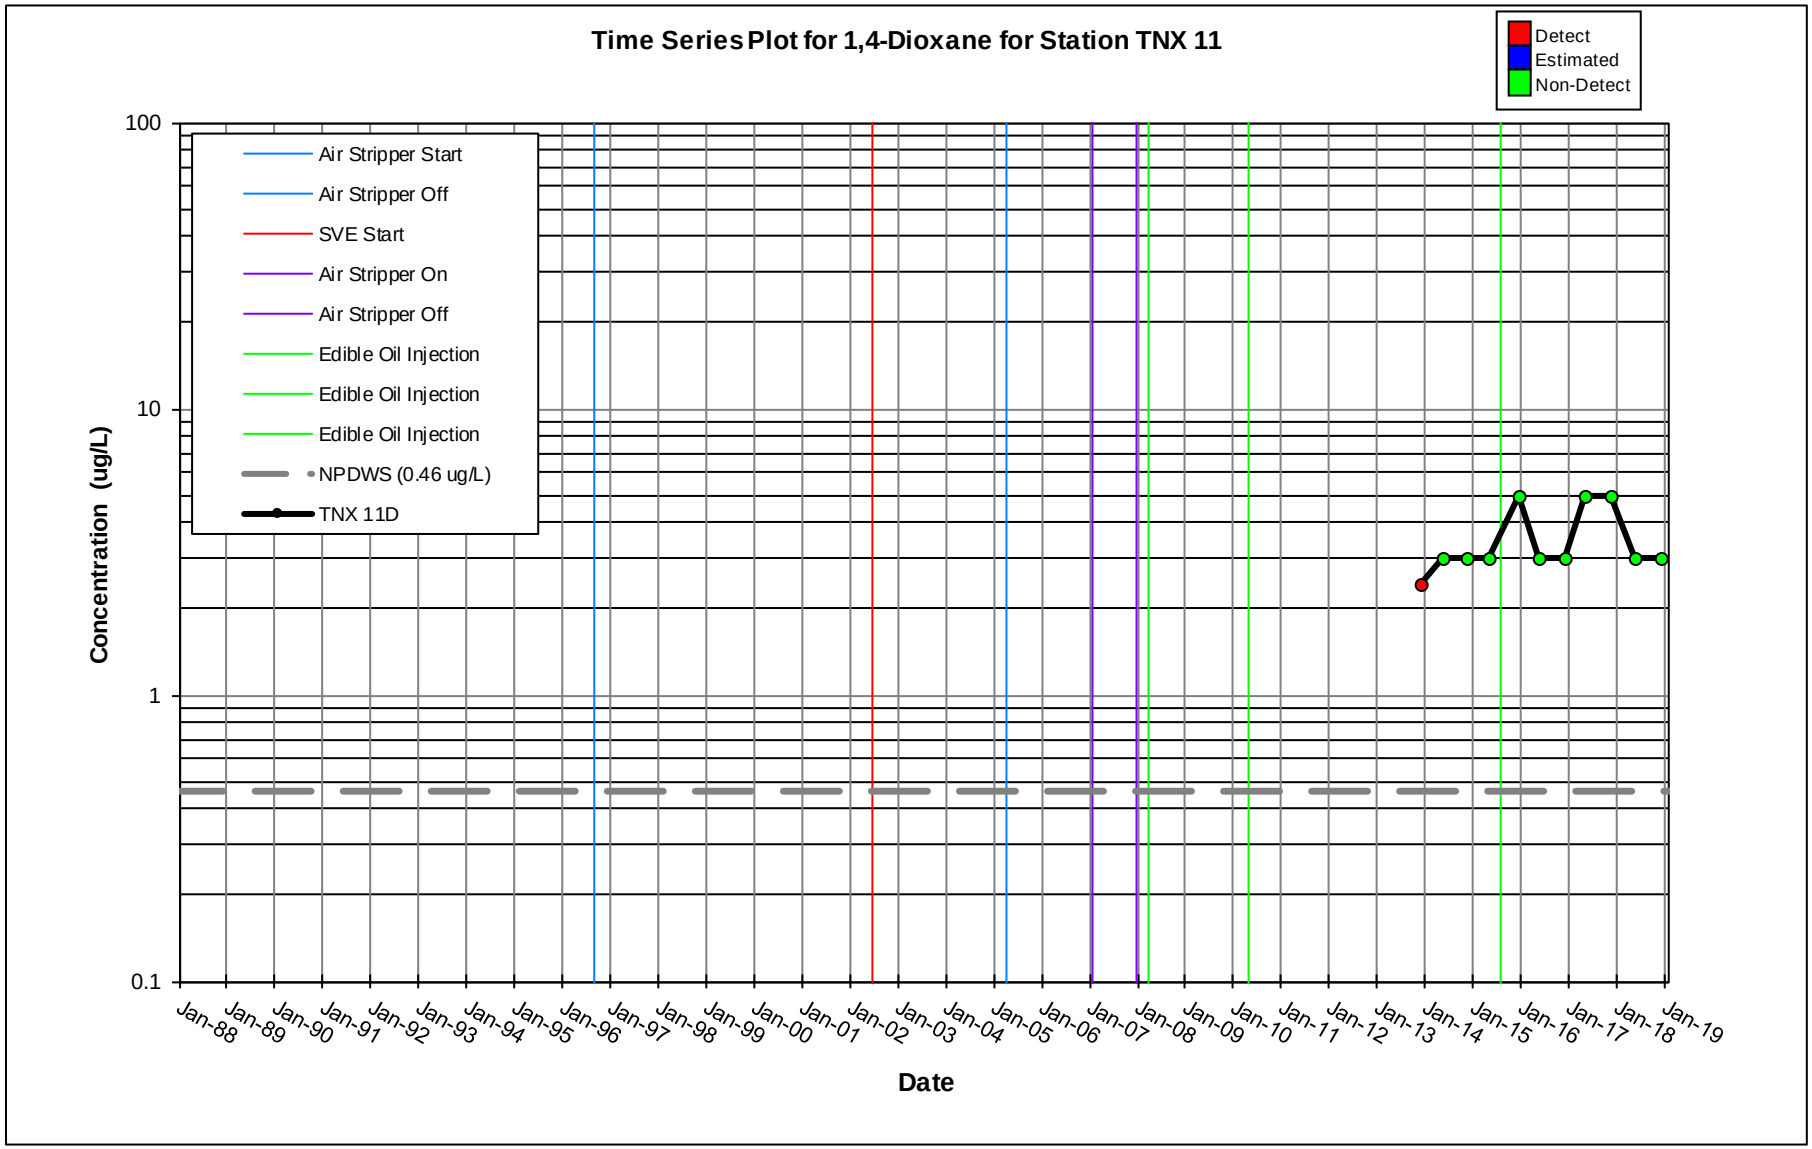
Time Series Plot for 1,4-Dioxane for Station TNX 11
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX 11D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

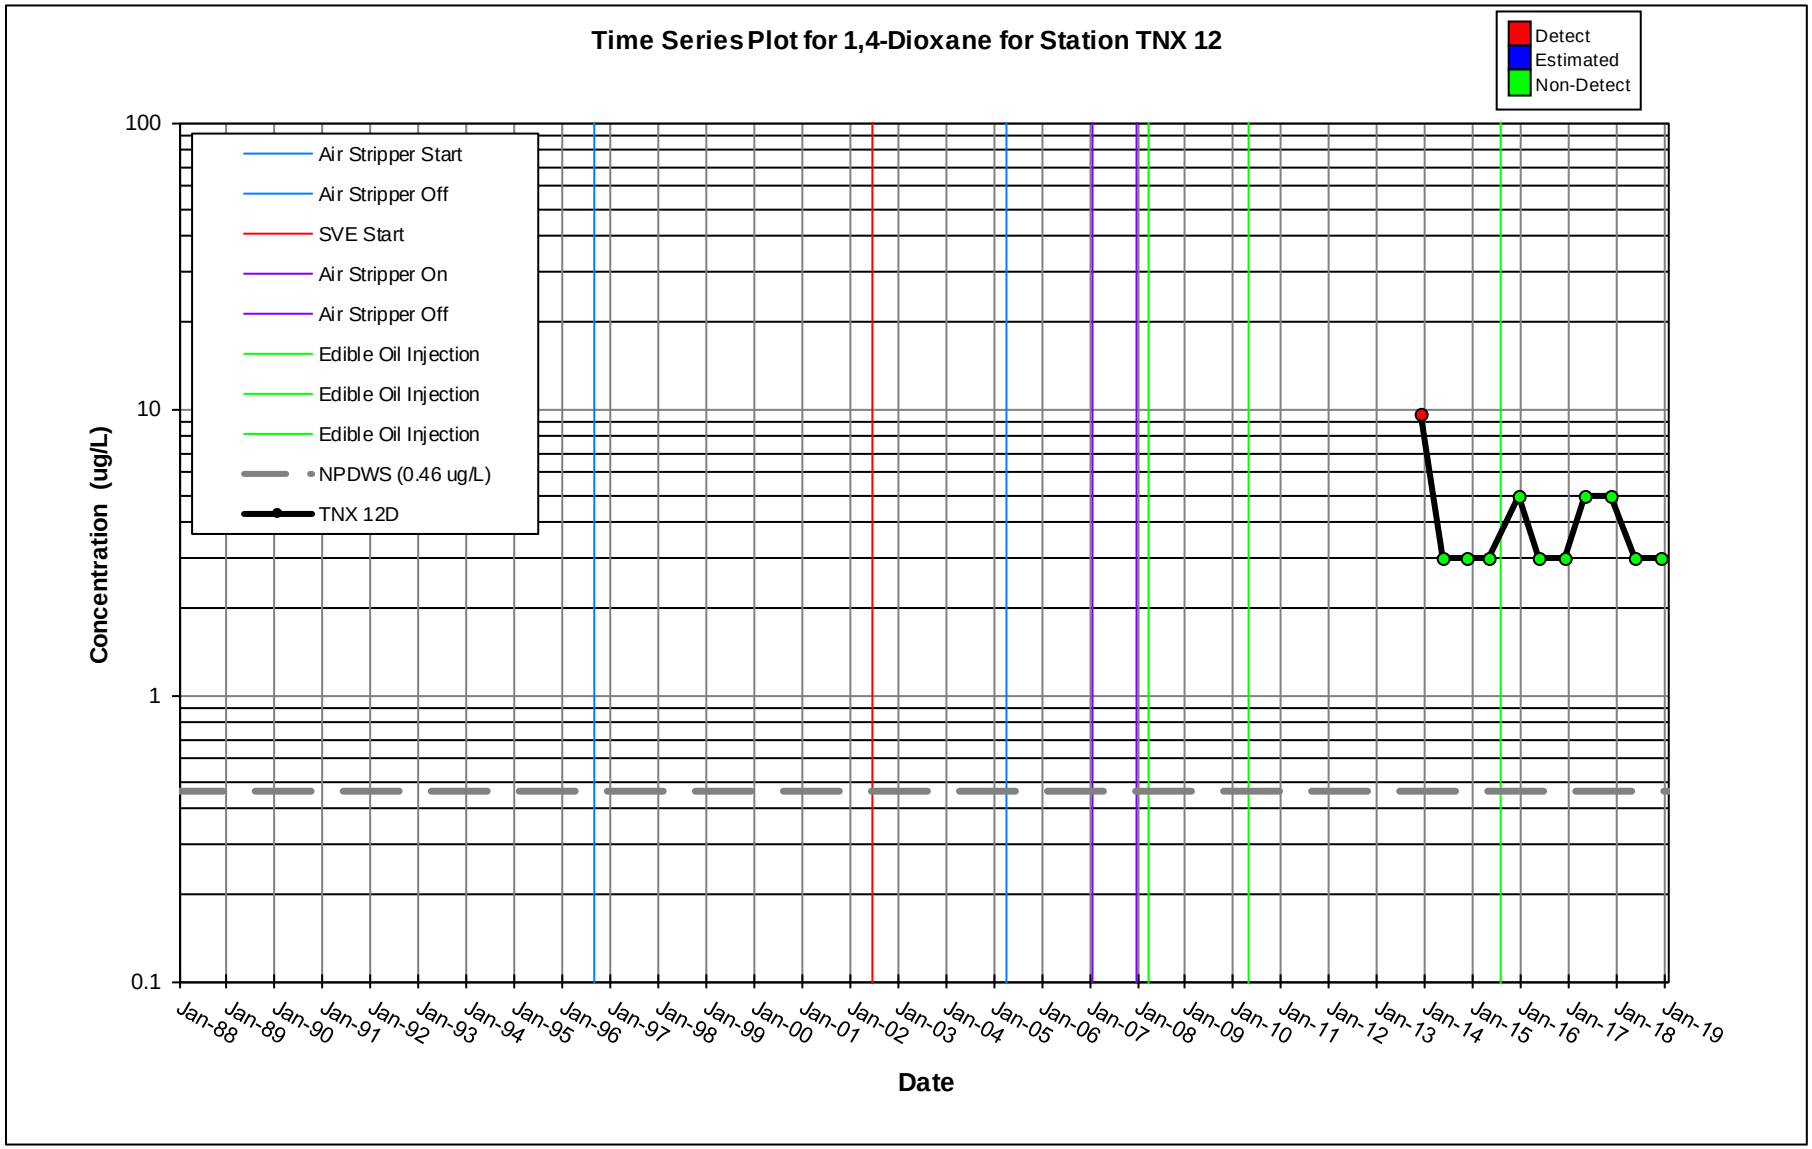
Time Series Plot for 1,4-Dioxane for Station TNX 12
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX 12D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

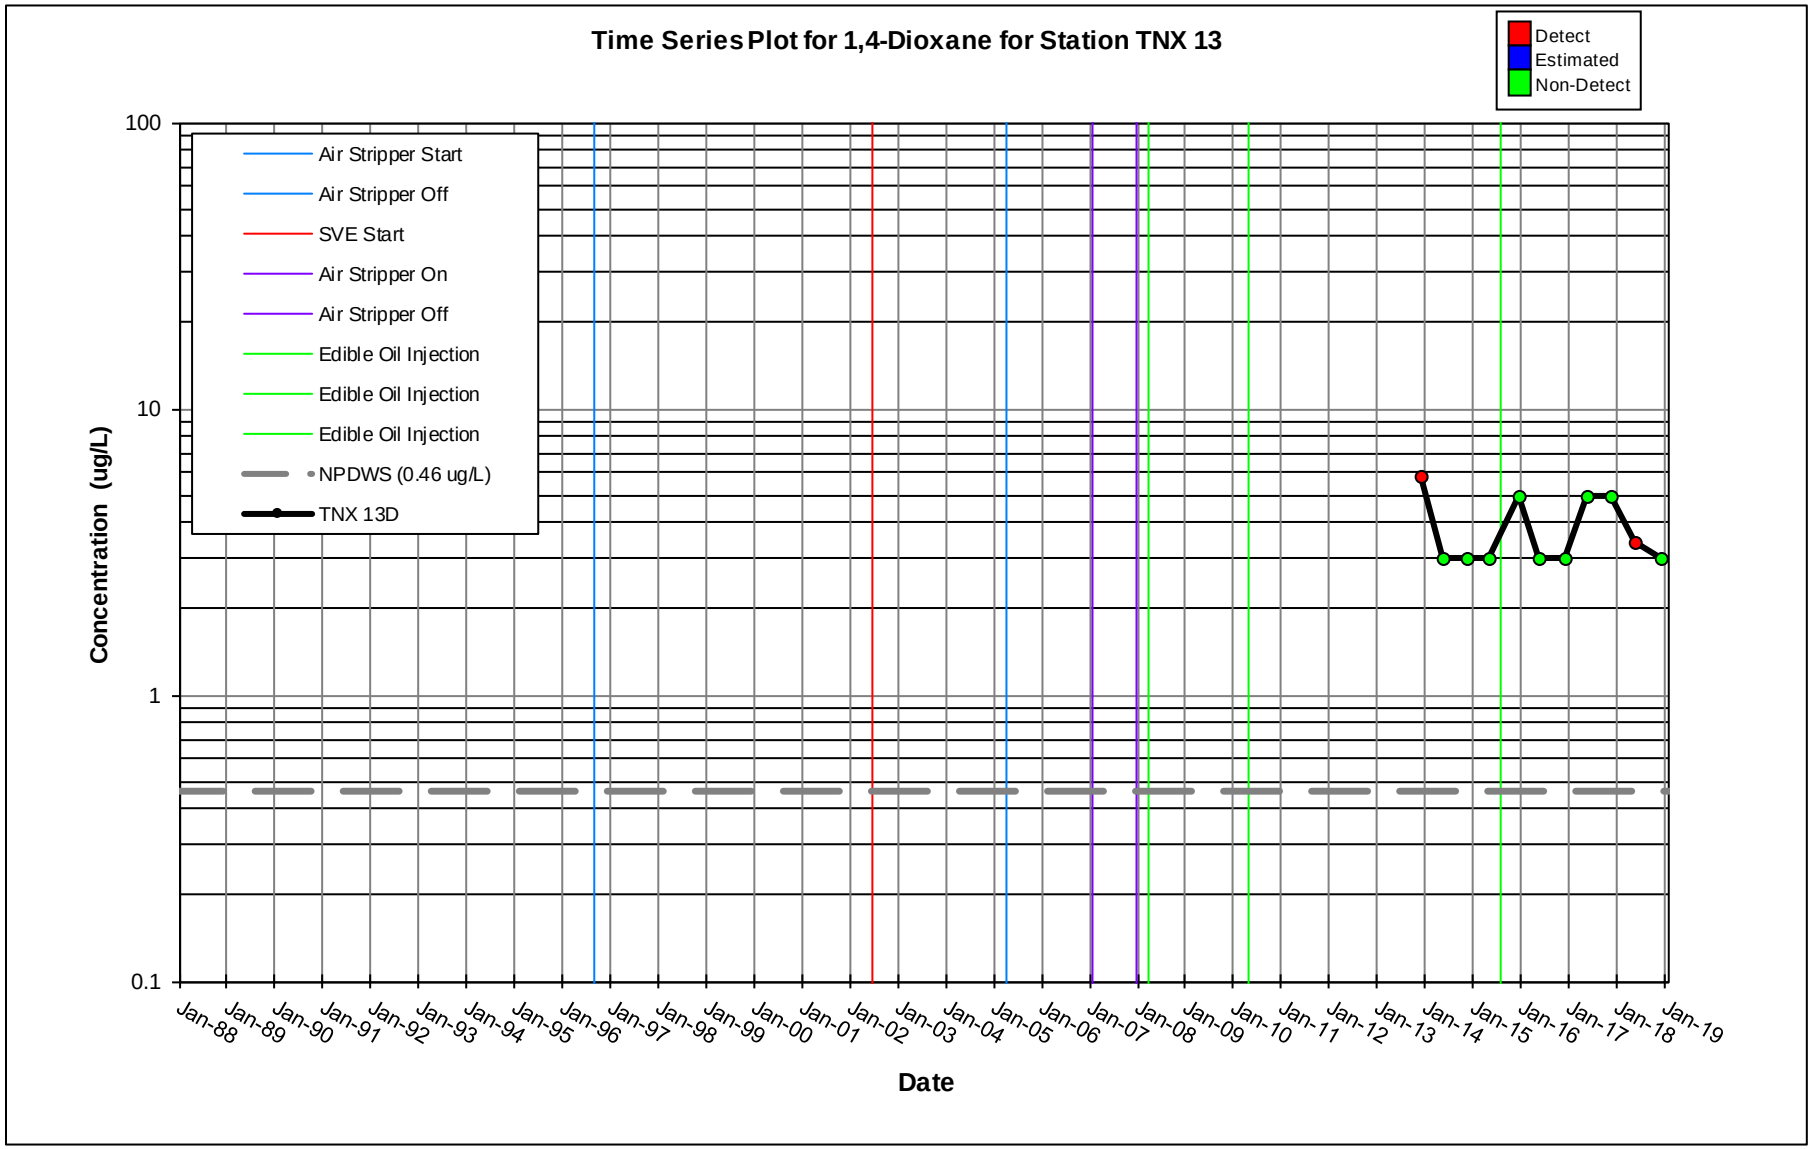
Time Series Plot for 1,4-Dioxane for Station TNX 13
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX 13D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

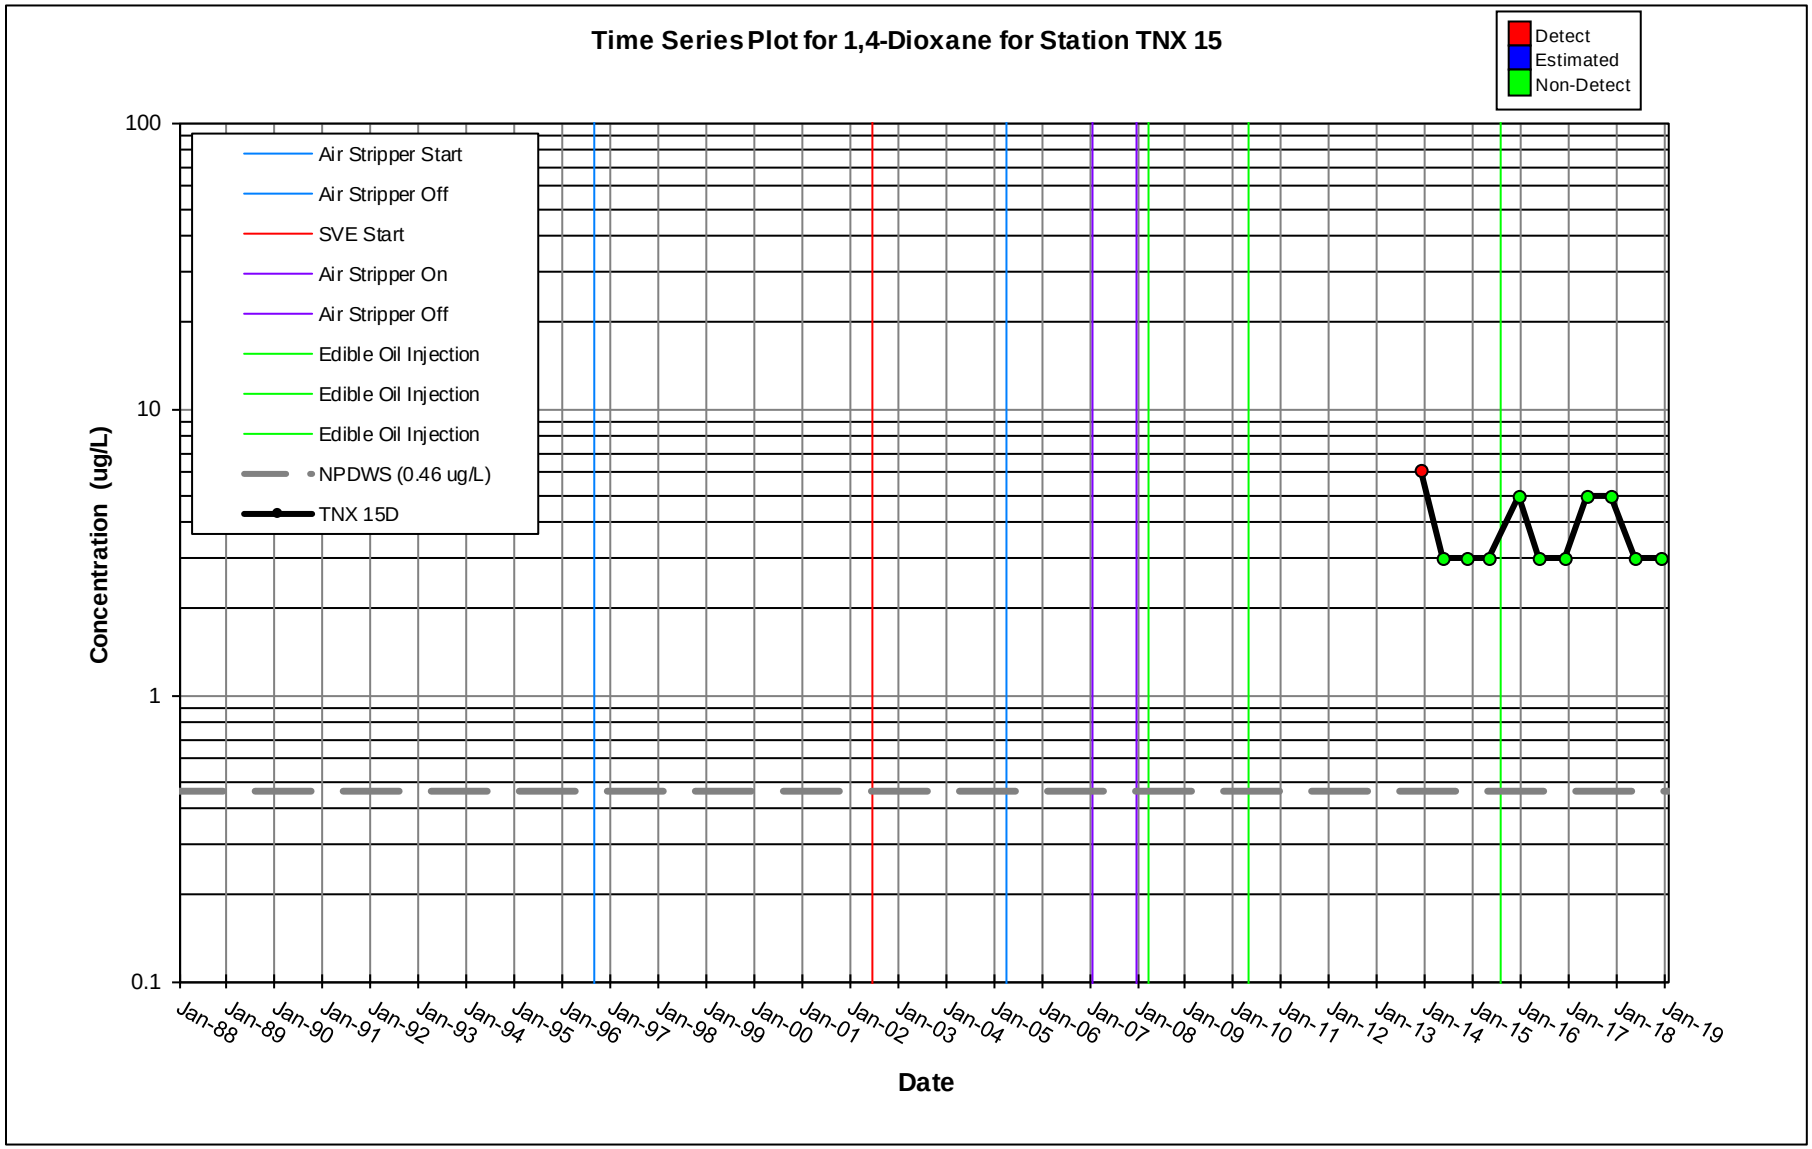
Time Series Plot for 1,4-Dioxane for Station TNX 15
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX 15D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

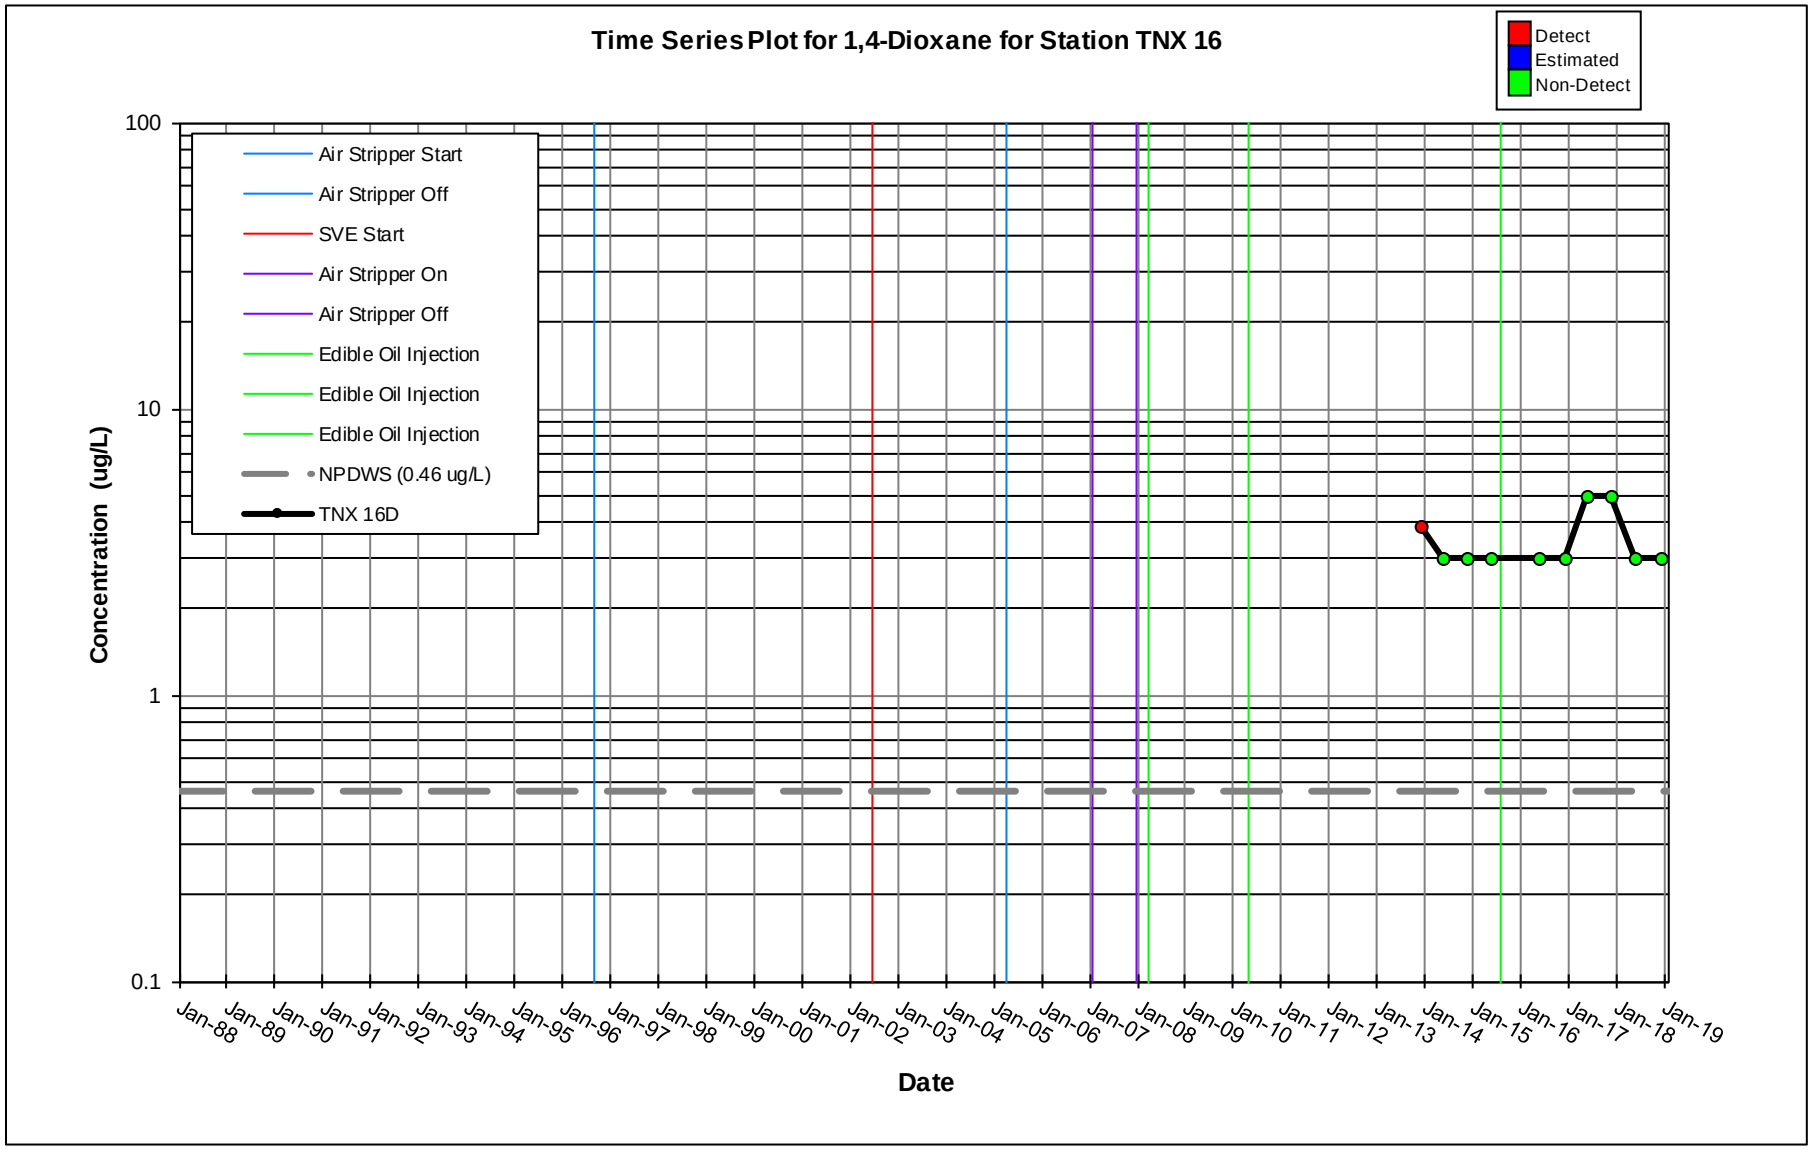
Time Series Plot for 1,4-Dioxane for Station TNX 16
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX 16D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

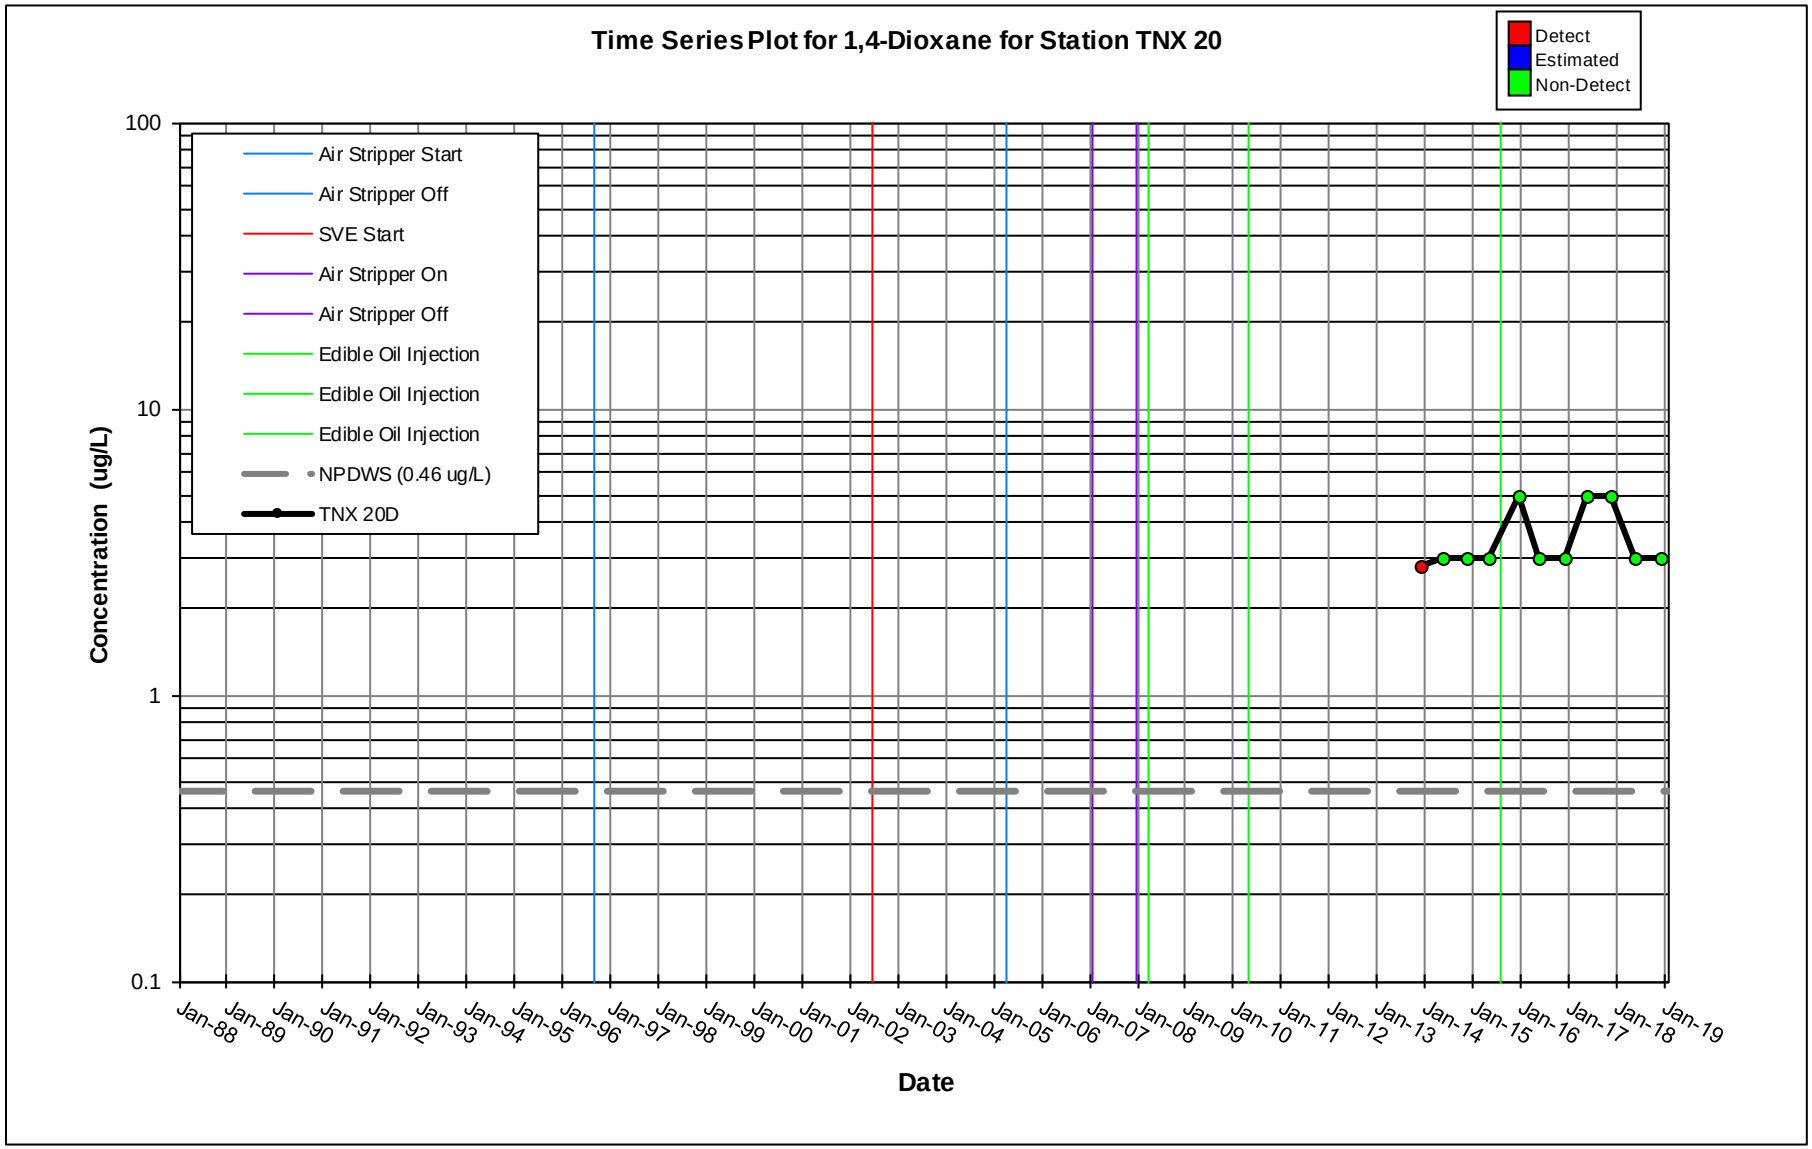
Time Series Plot for 1,4-Dioxane for Station TNX 20
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX 20D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

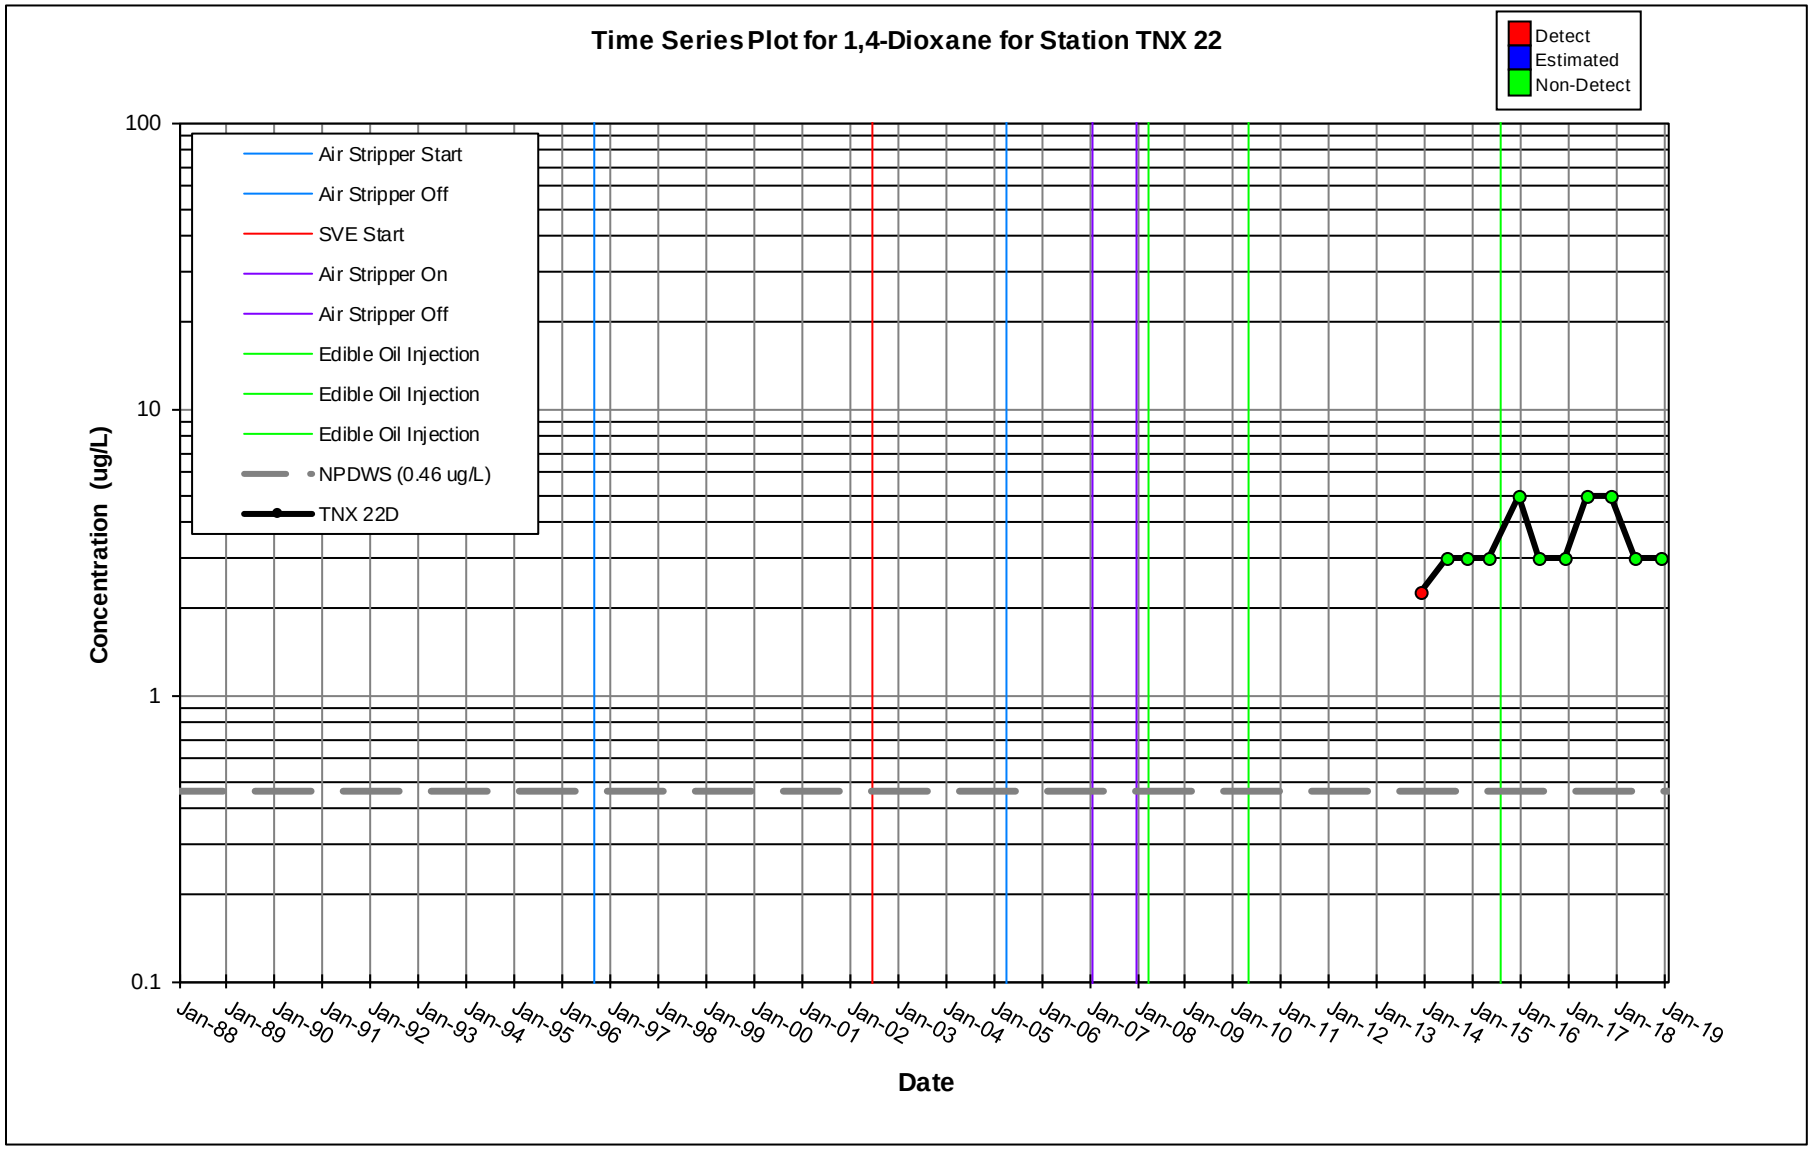
Time Series Plot for 1,4-Dioxane for Station TNX 22
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX 22D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

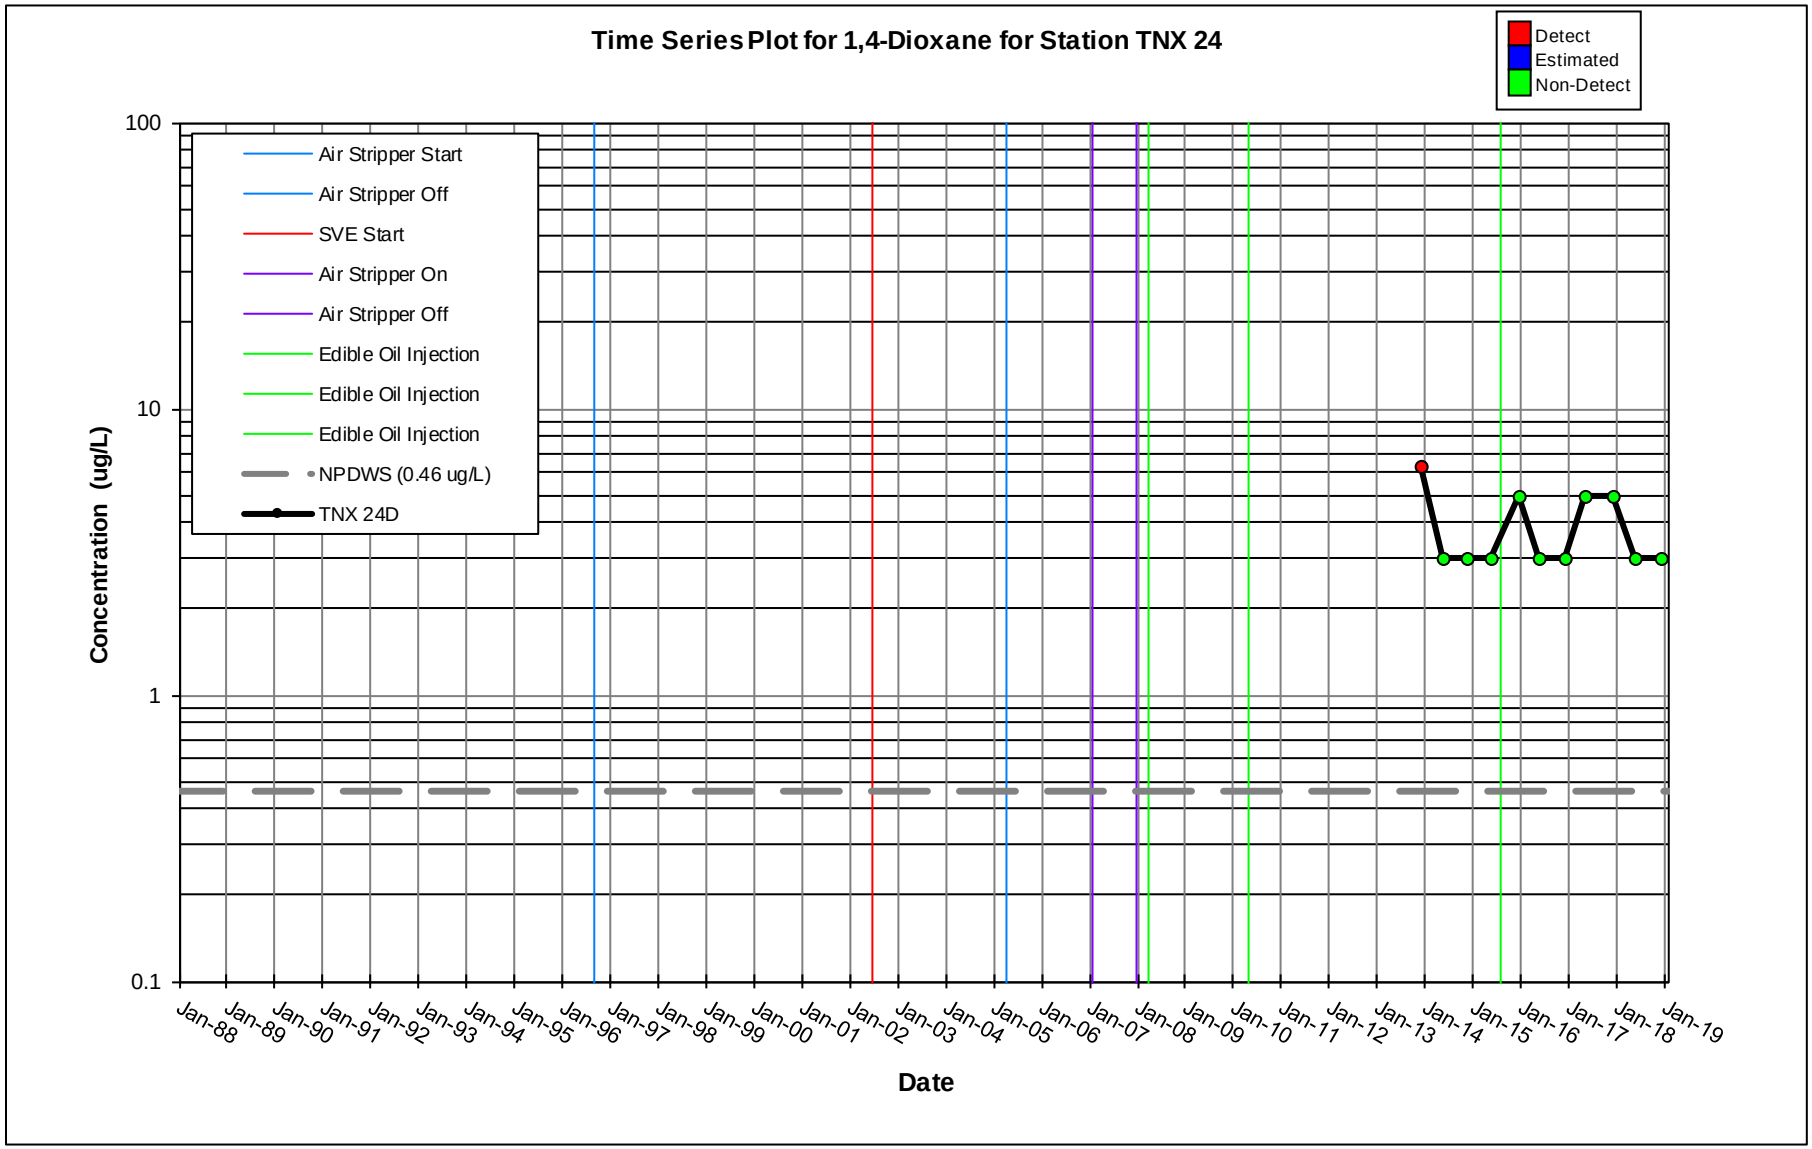
Time Series Plot for 1,4-Dioxane for Station TNX 24
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX 24D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

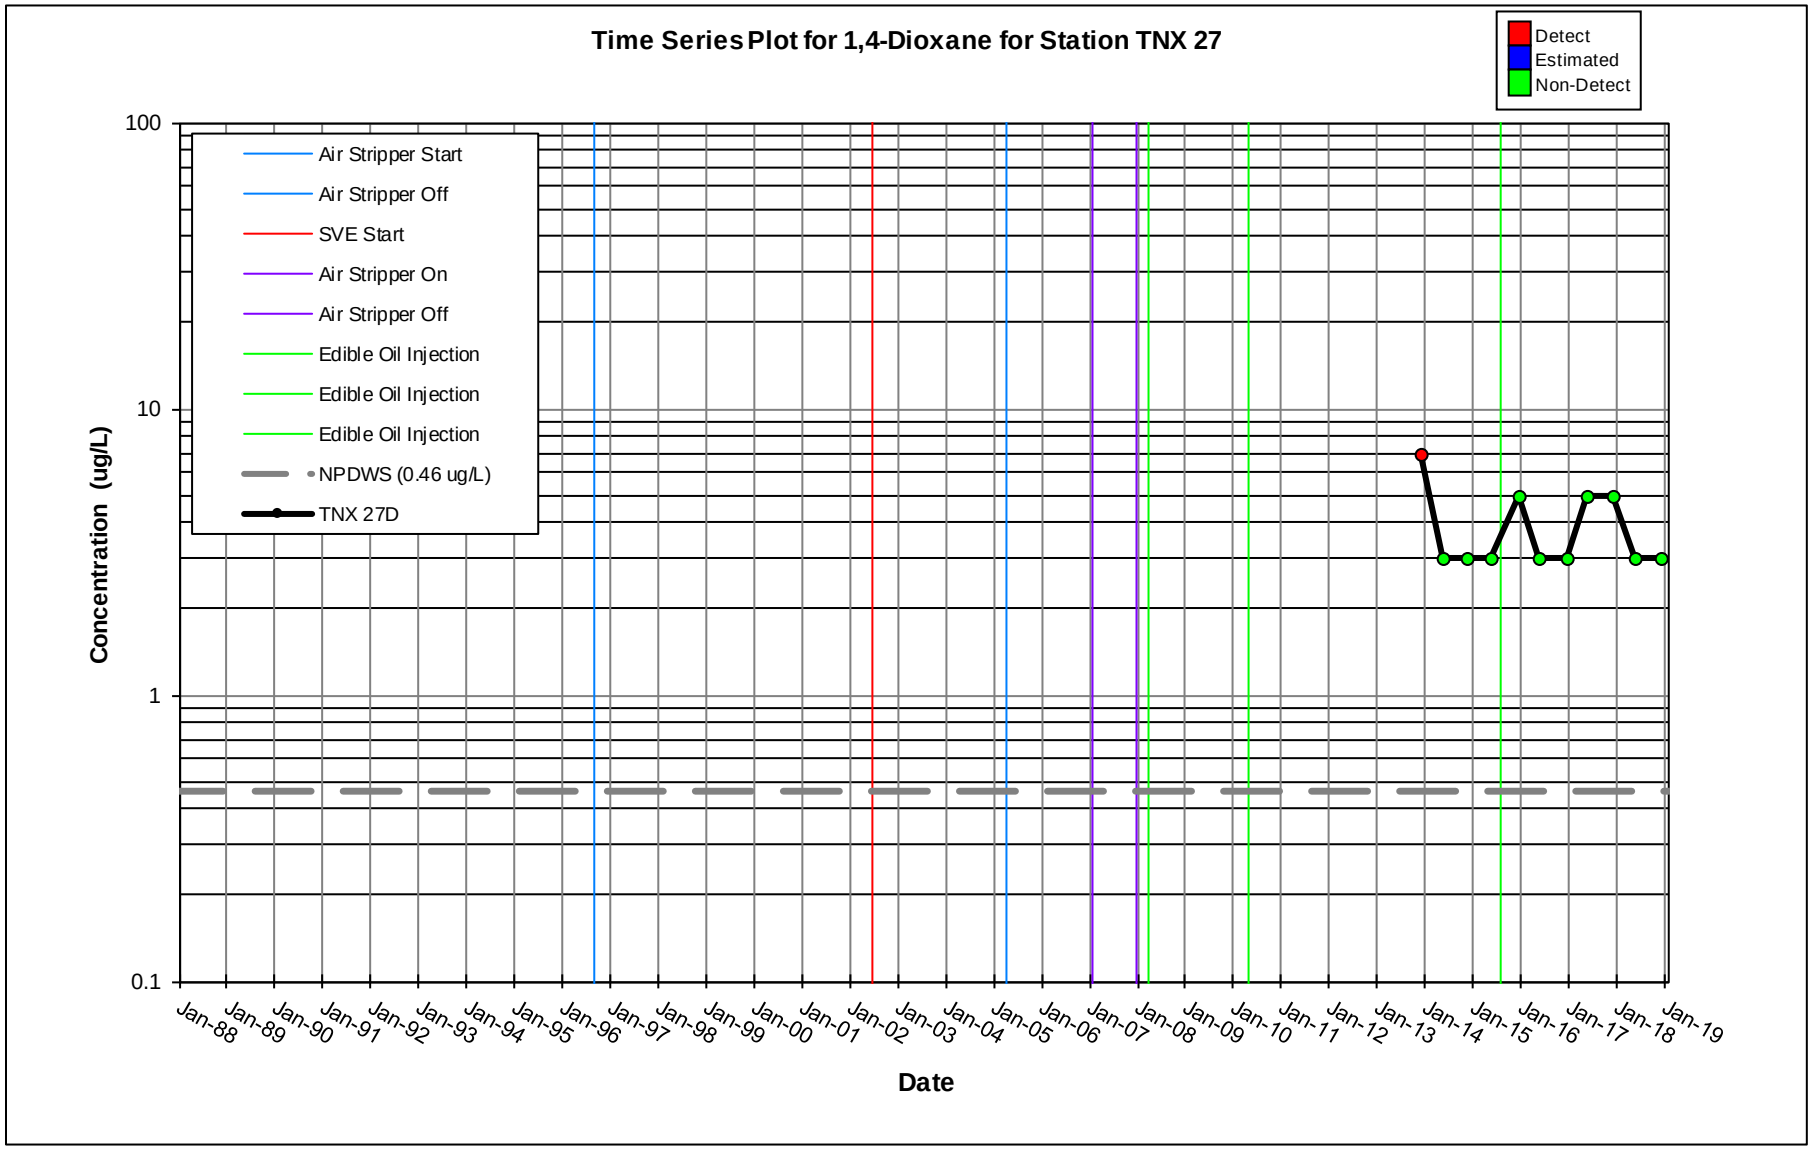
Time Series Plot for 1,4-Dioxane for Station TNX 27
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX 27D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

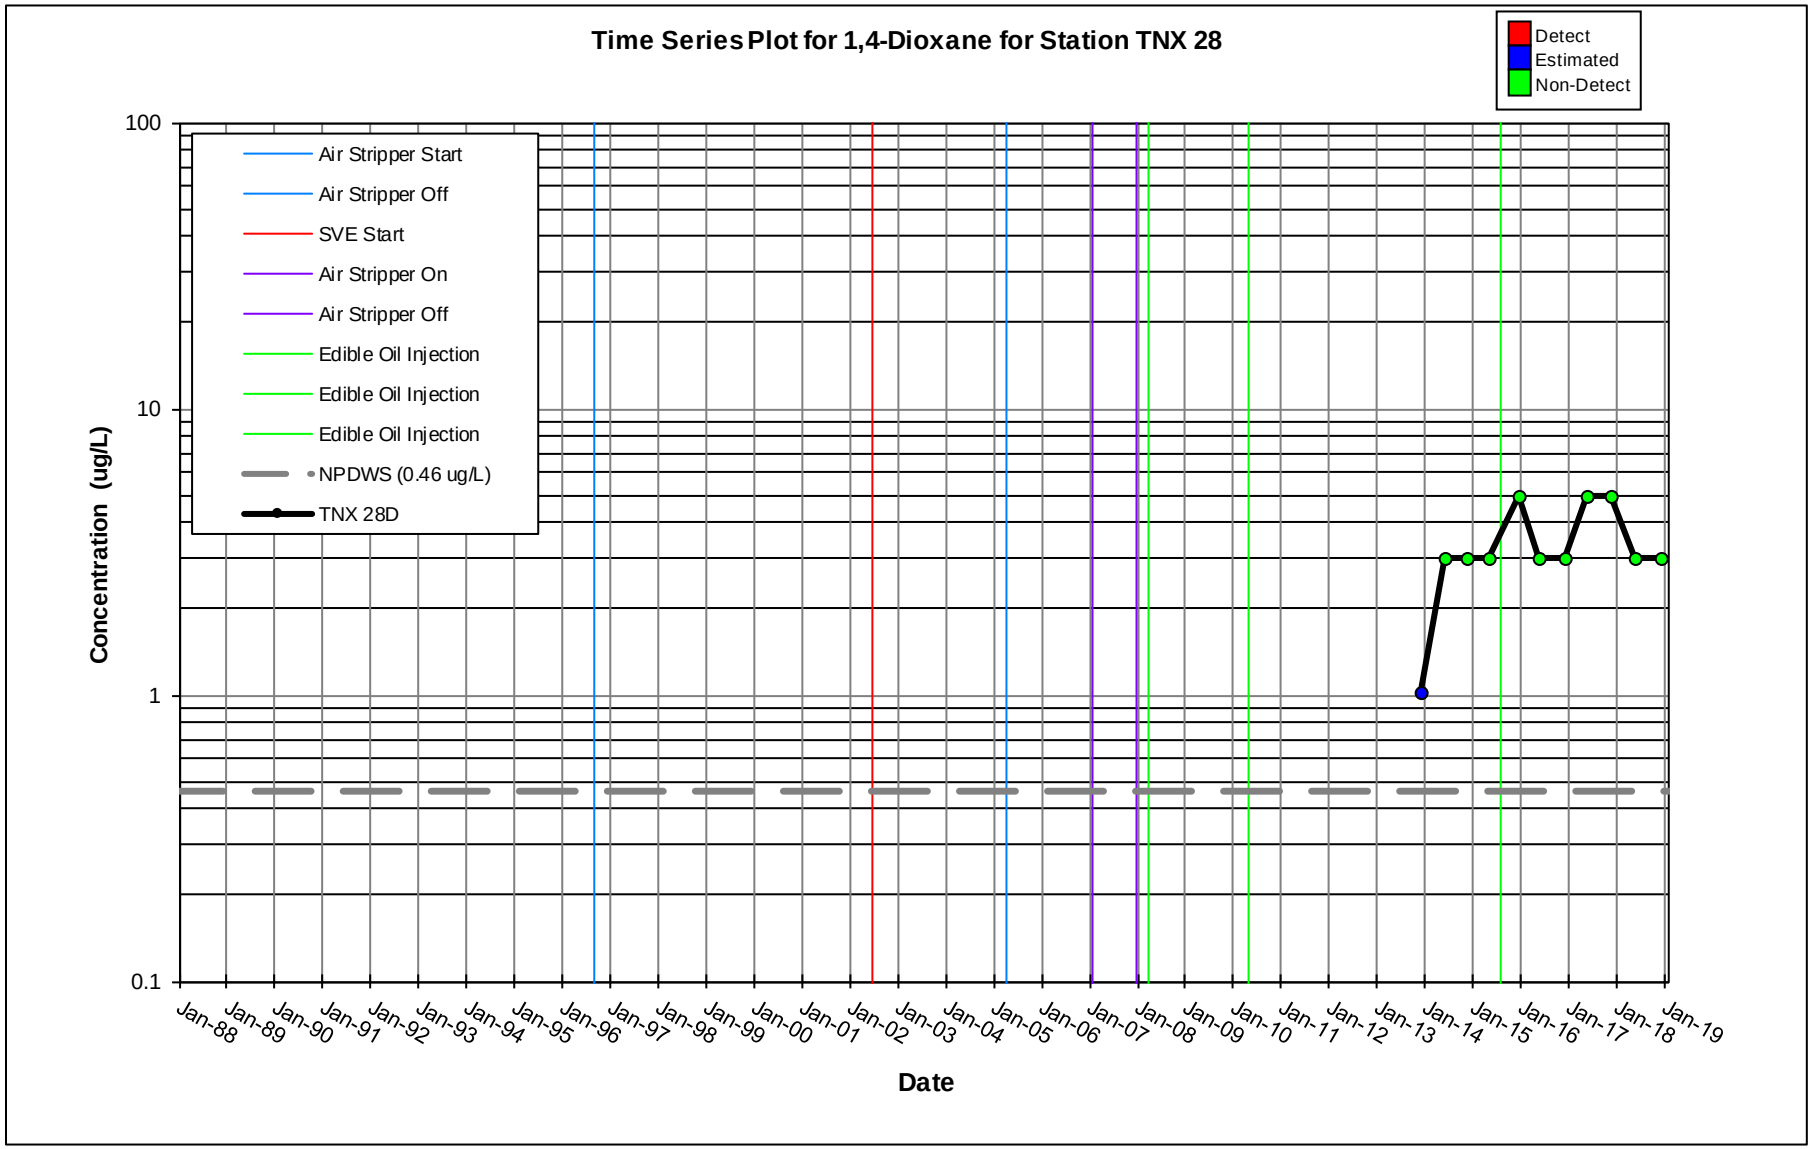
Time Series Plot for 1,4-Dioxane for Station TNX 28
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX 28D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

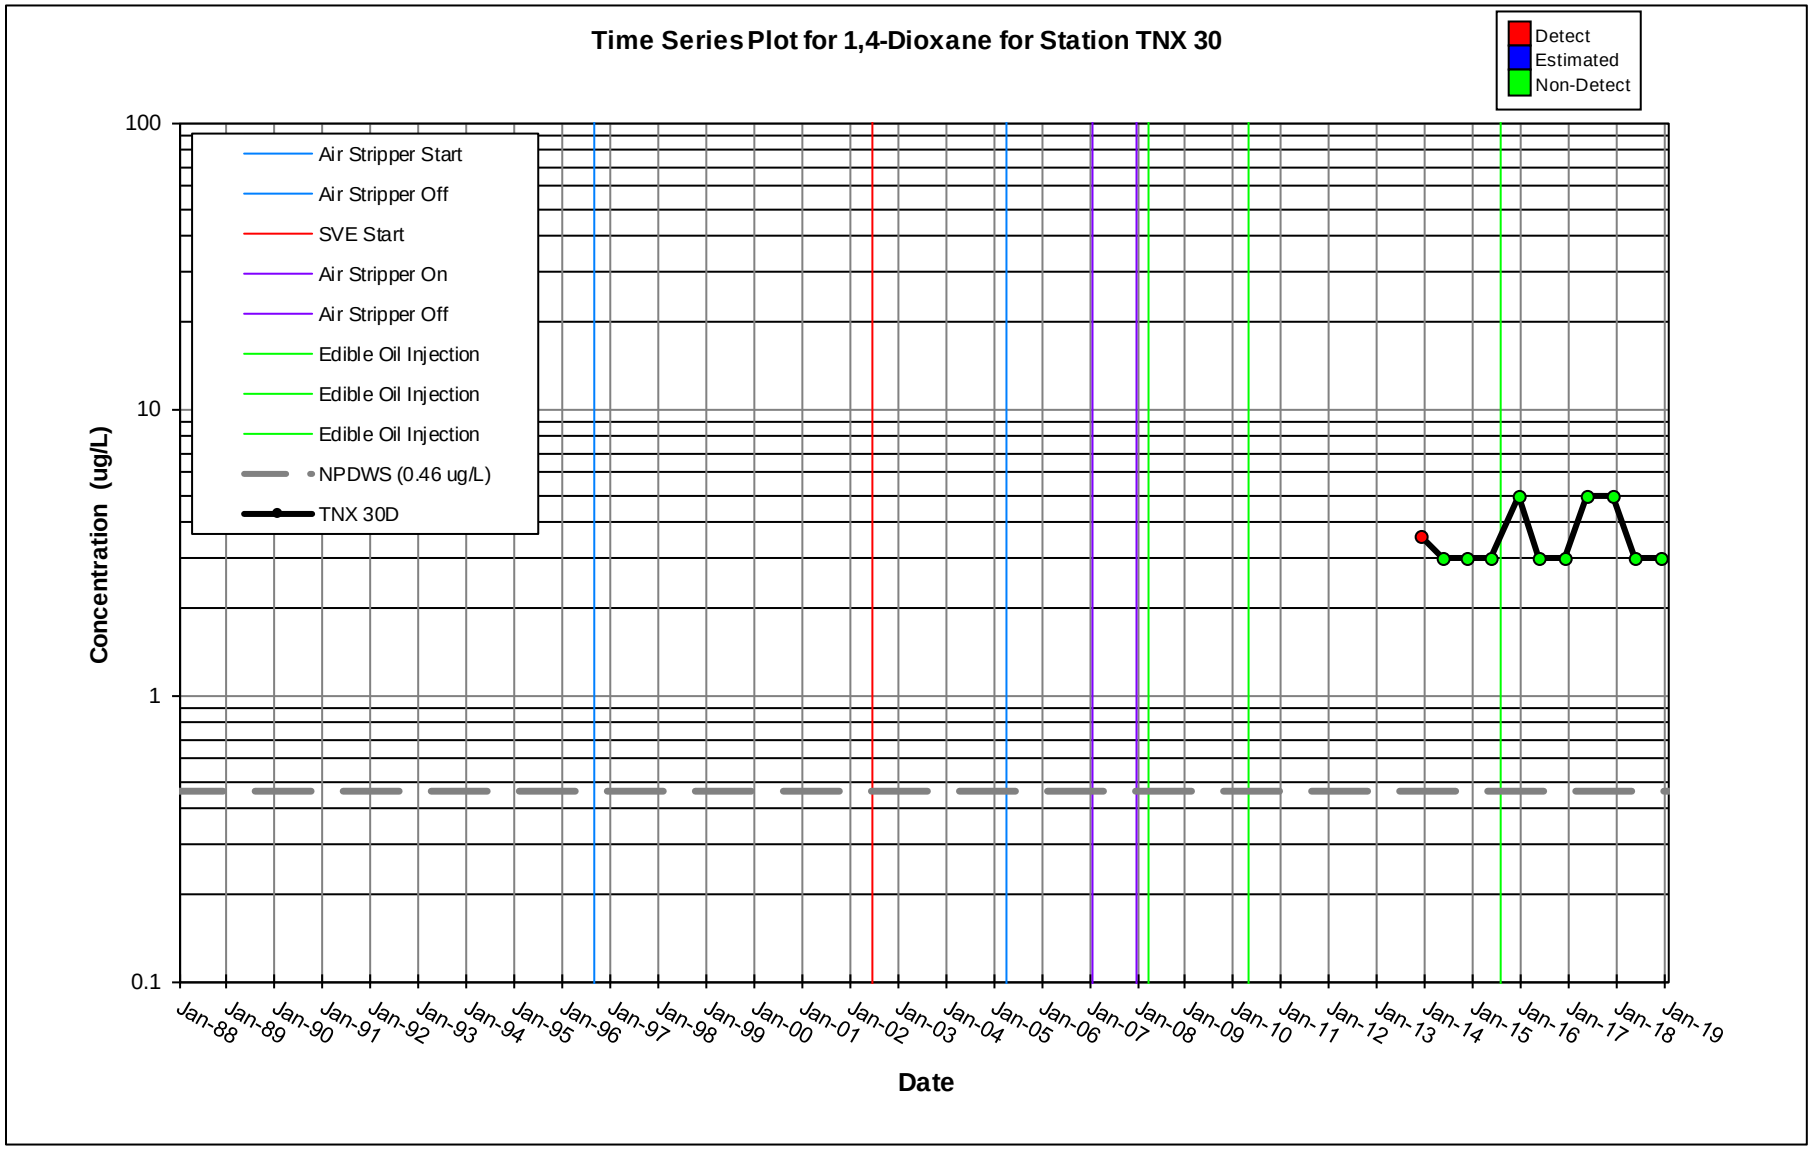
Time Series Plot for 1,4-Dioxane for Station TNX 30
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX 30D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

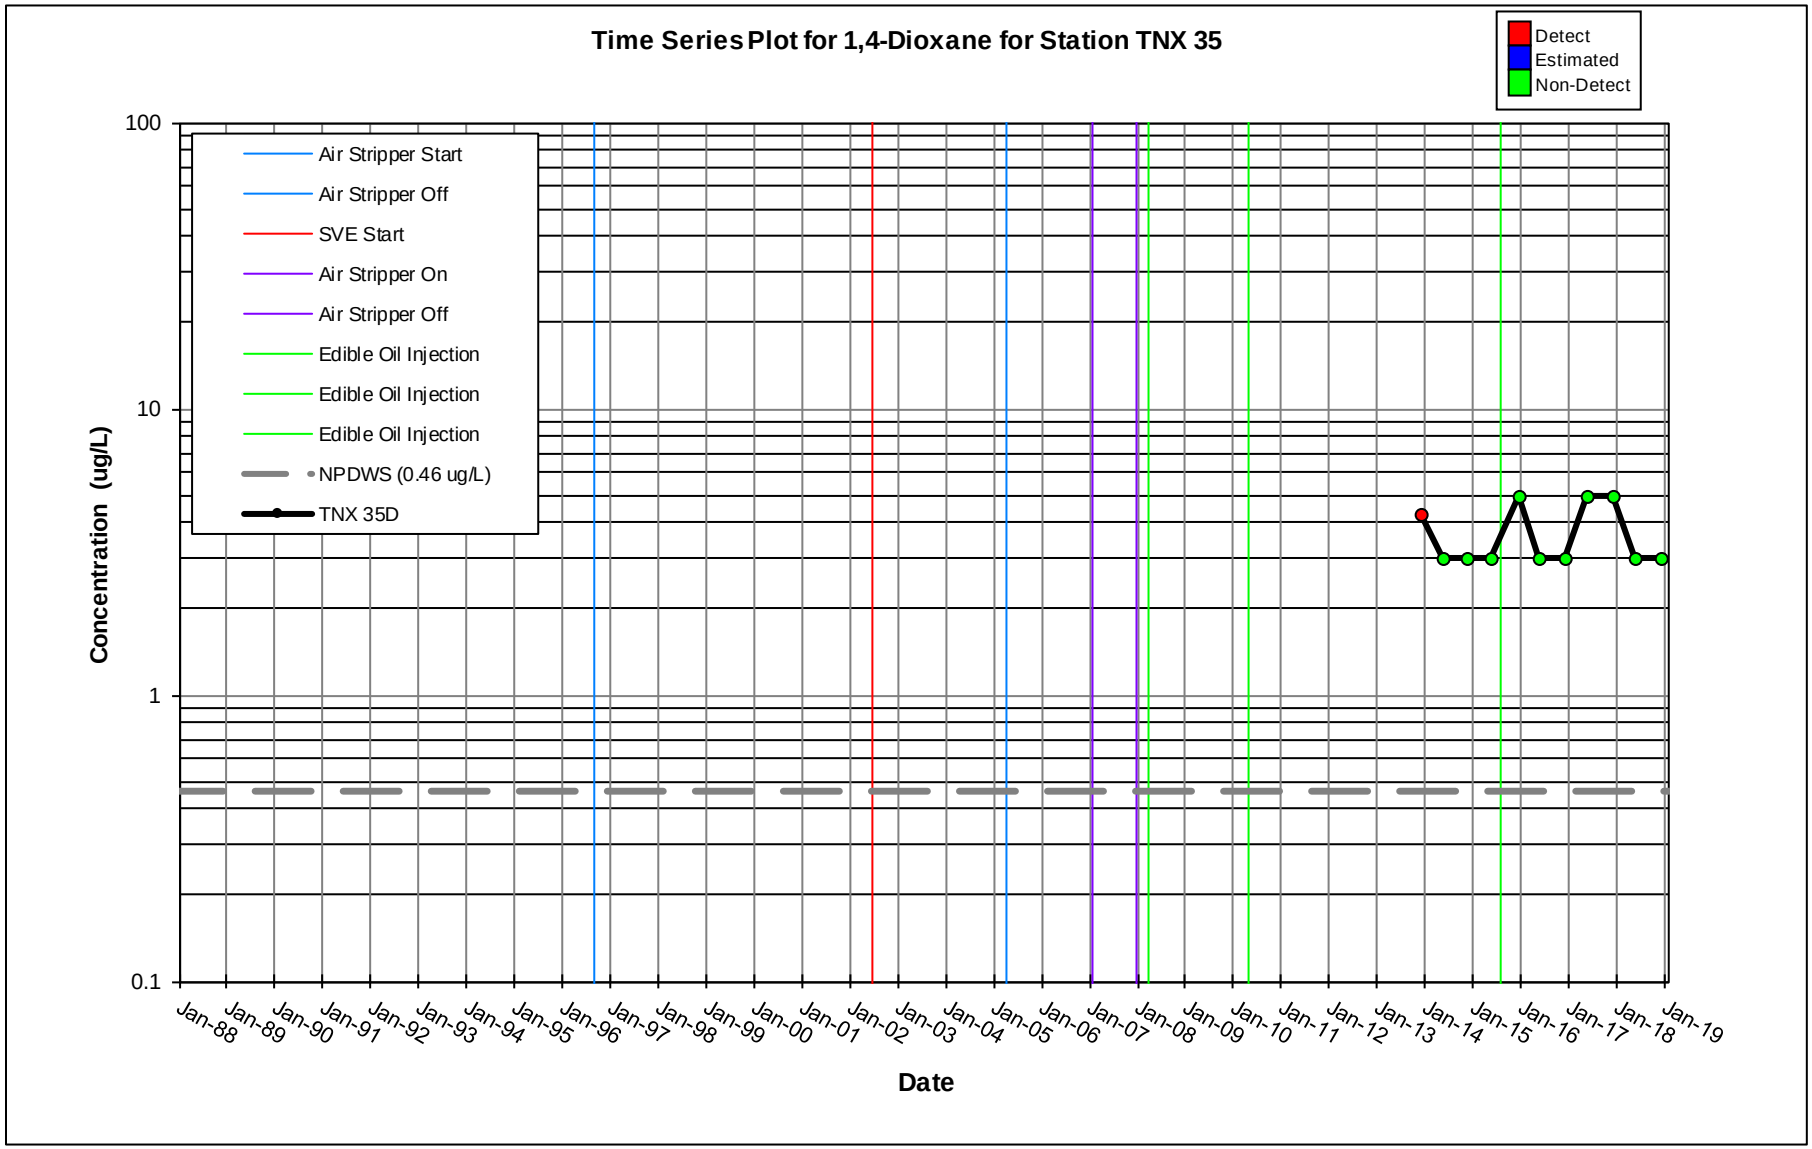
Time Series Plot for 1,4-Dioxane for Station TNX 35
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX 35D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

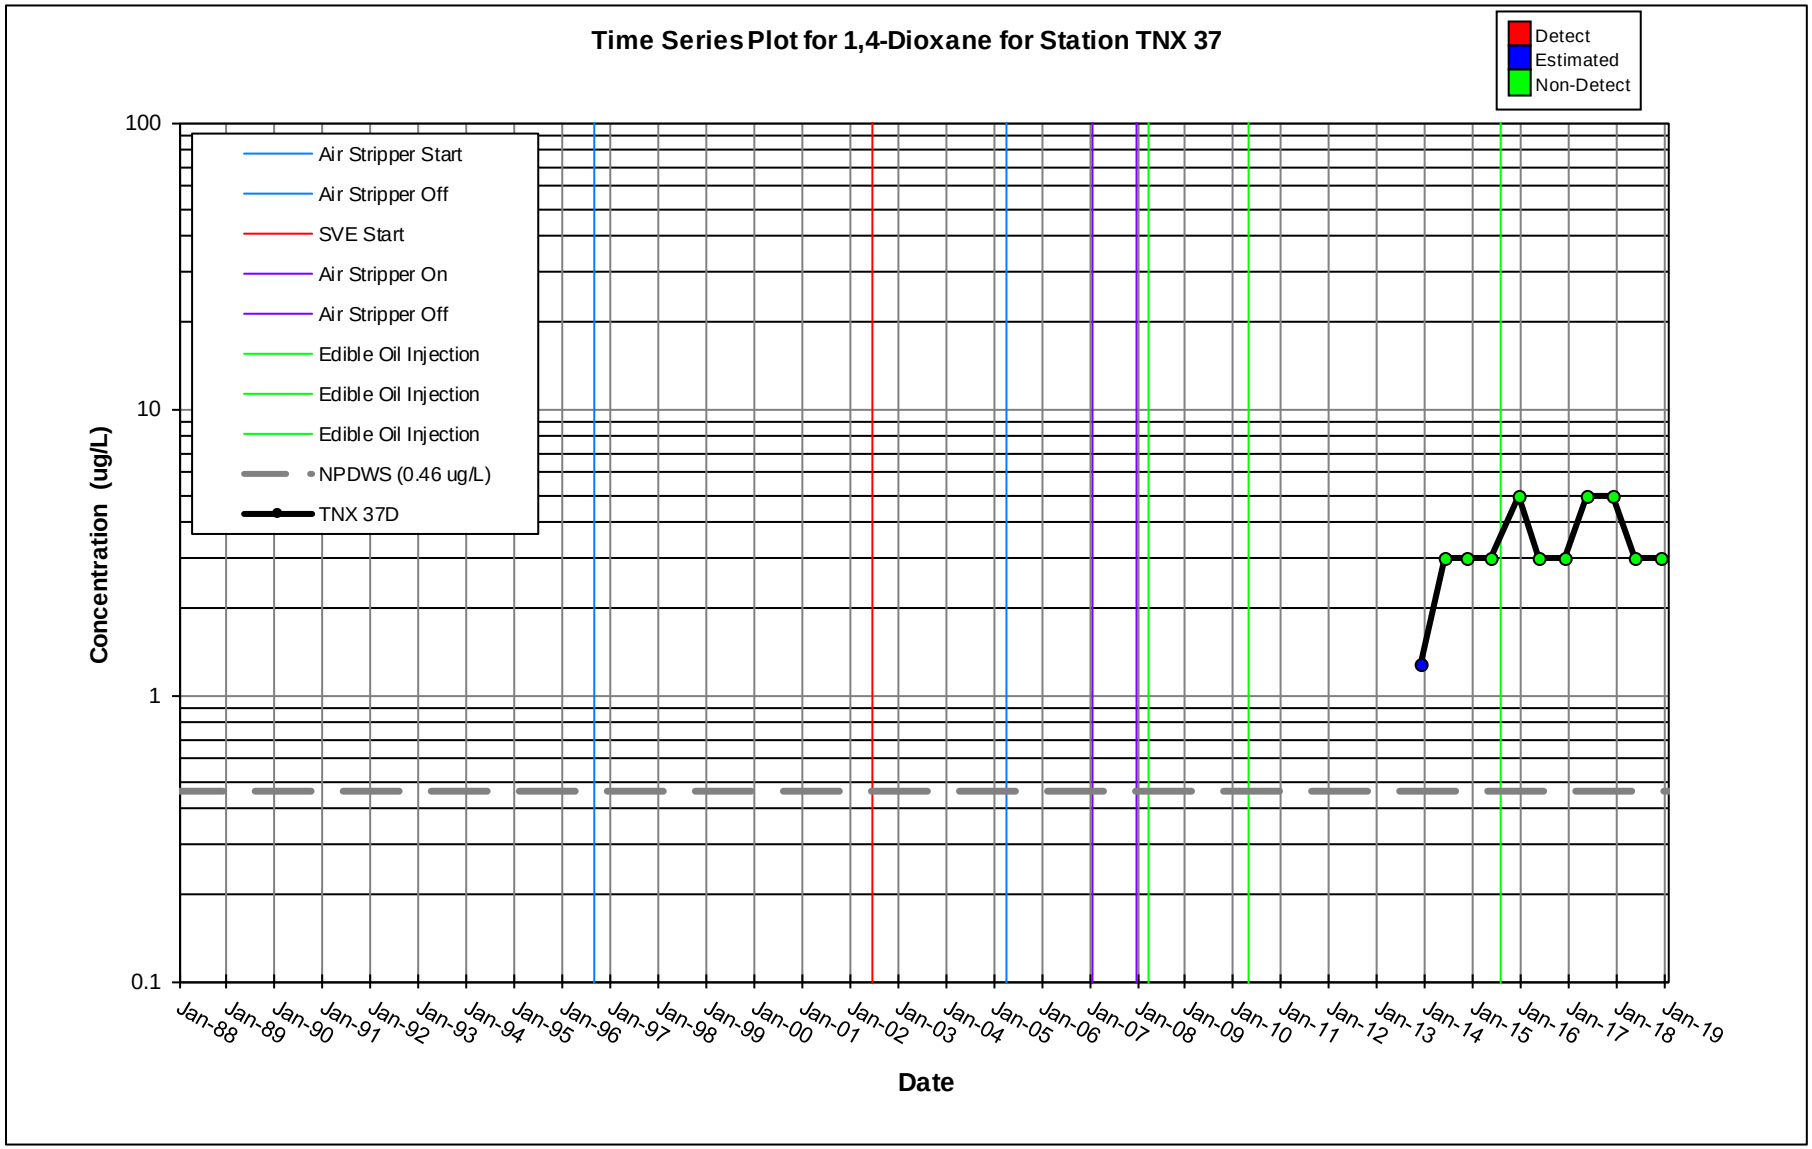
Time Series Plot for 1,4-Dioxane for Station TNX 37
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX 37D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

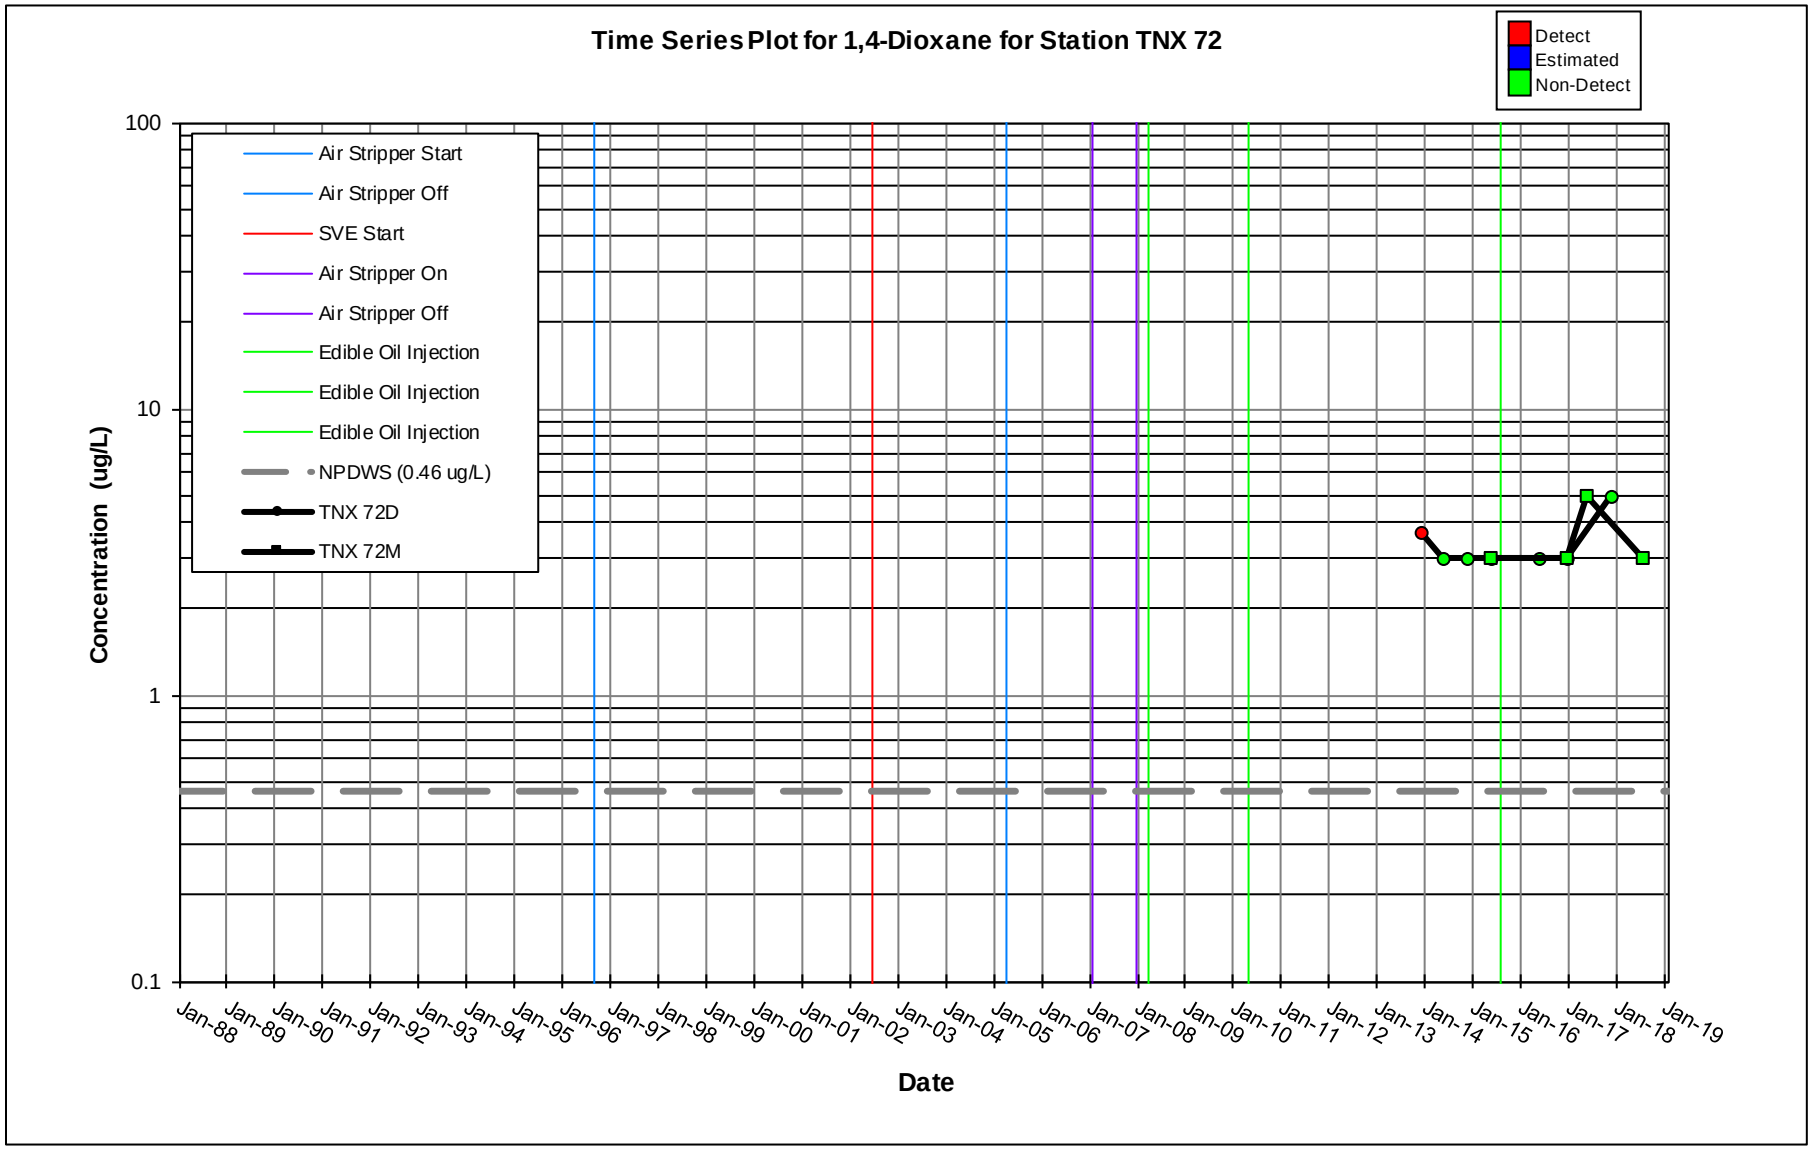
Time Series Plot for 1,4-Dioxane for Station TNX 72
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX 72D
TNX 72M
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

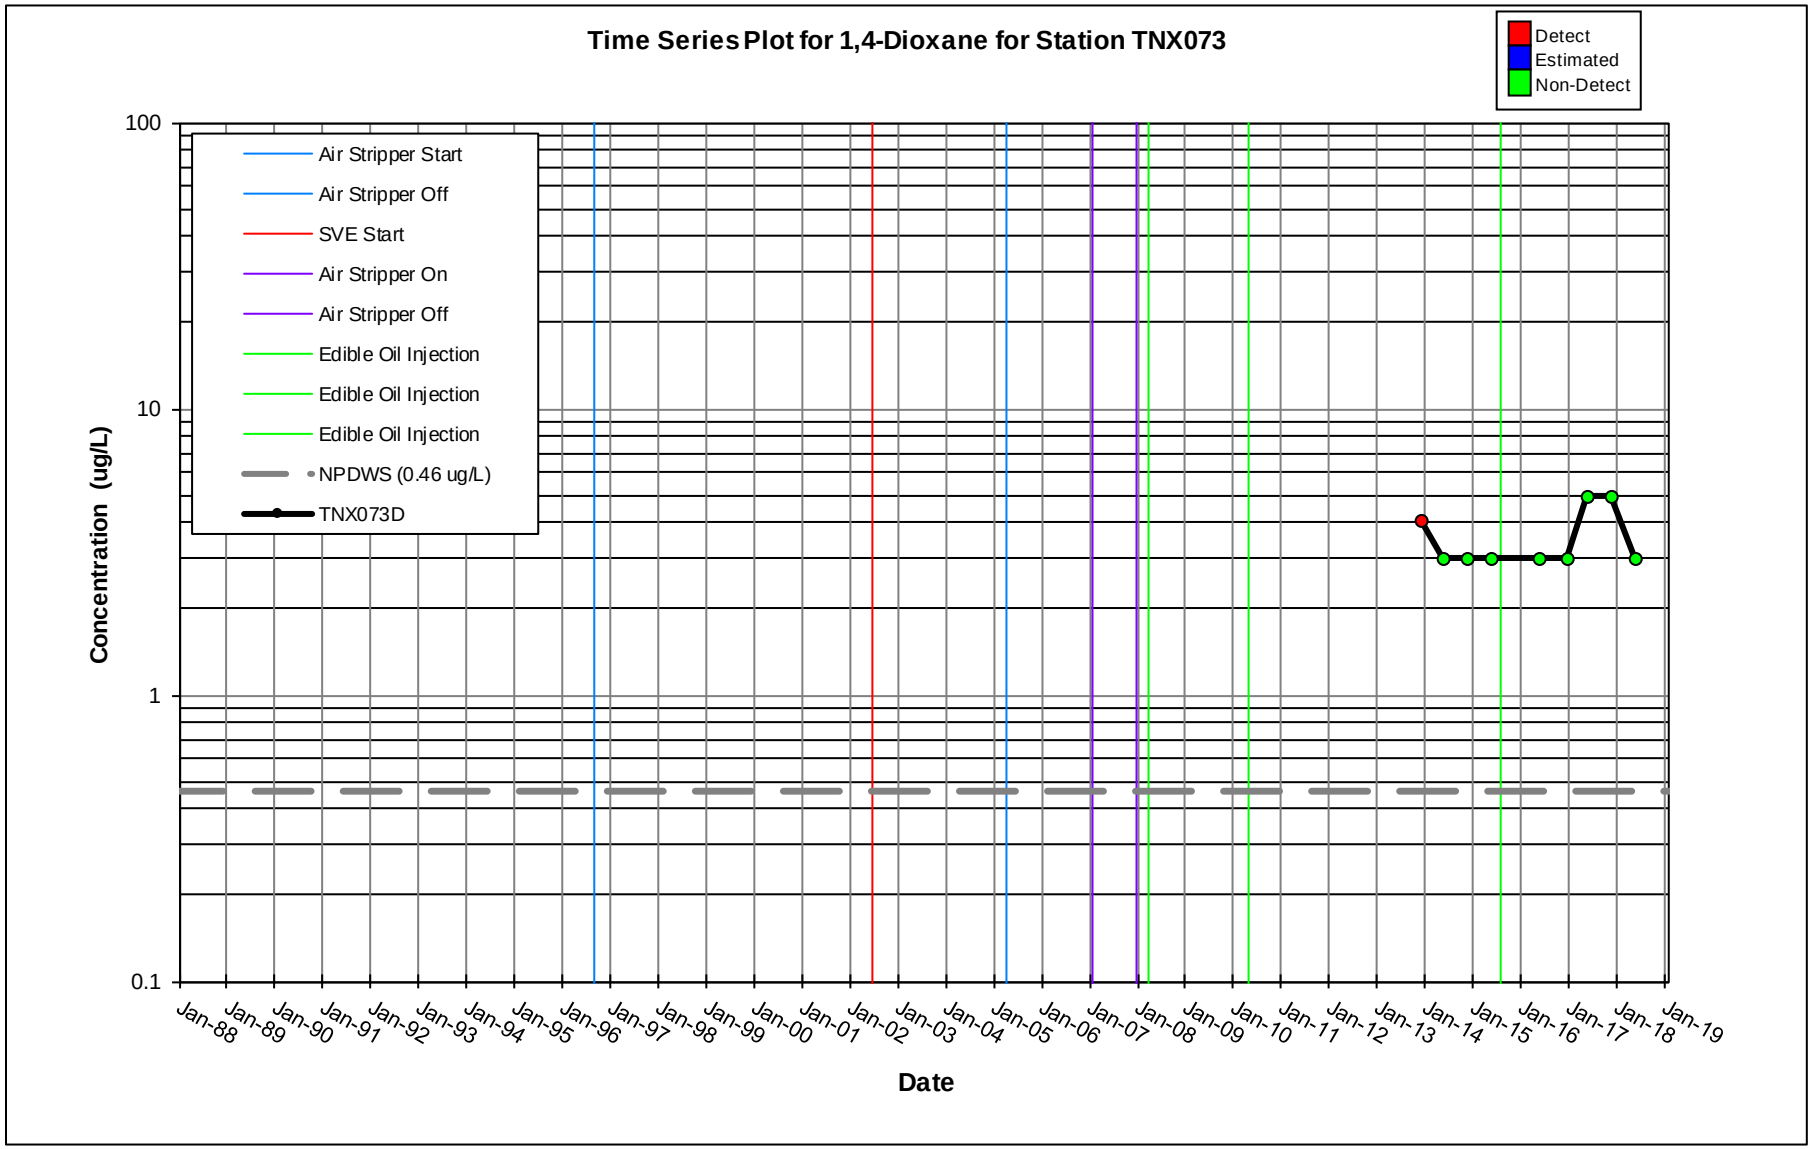
Time Series Plot for 1,4-Dioxane for Station TNX073
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX073D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

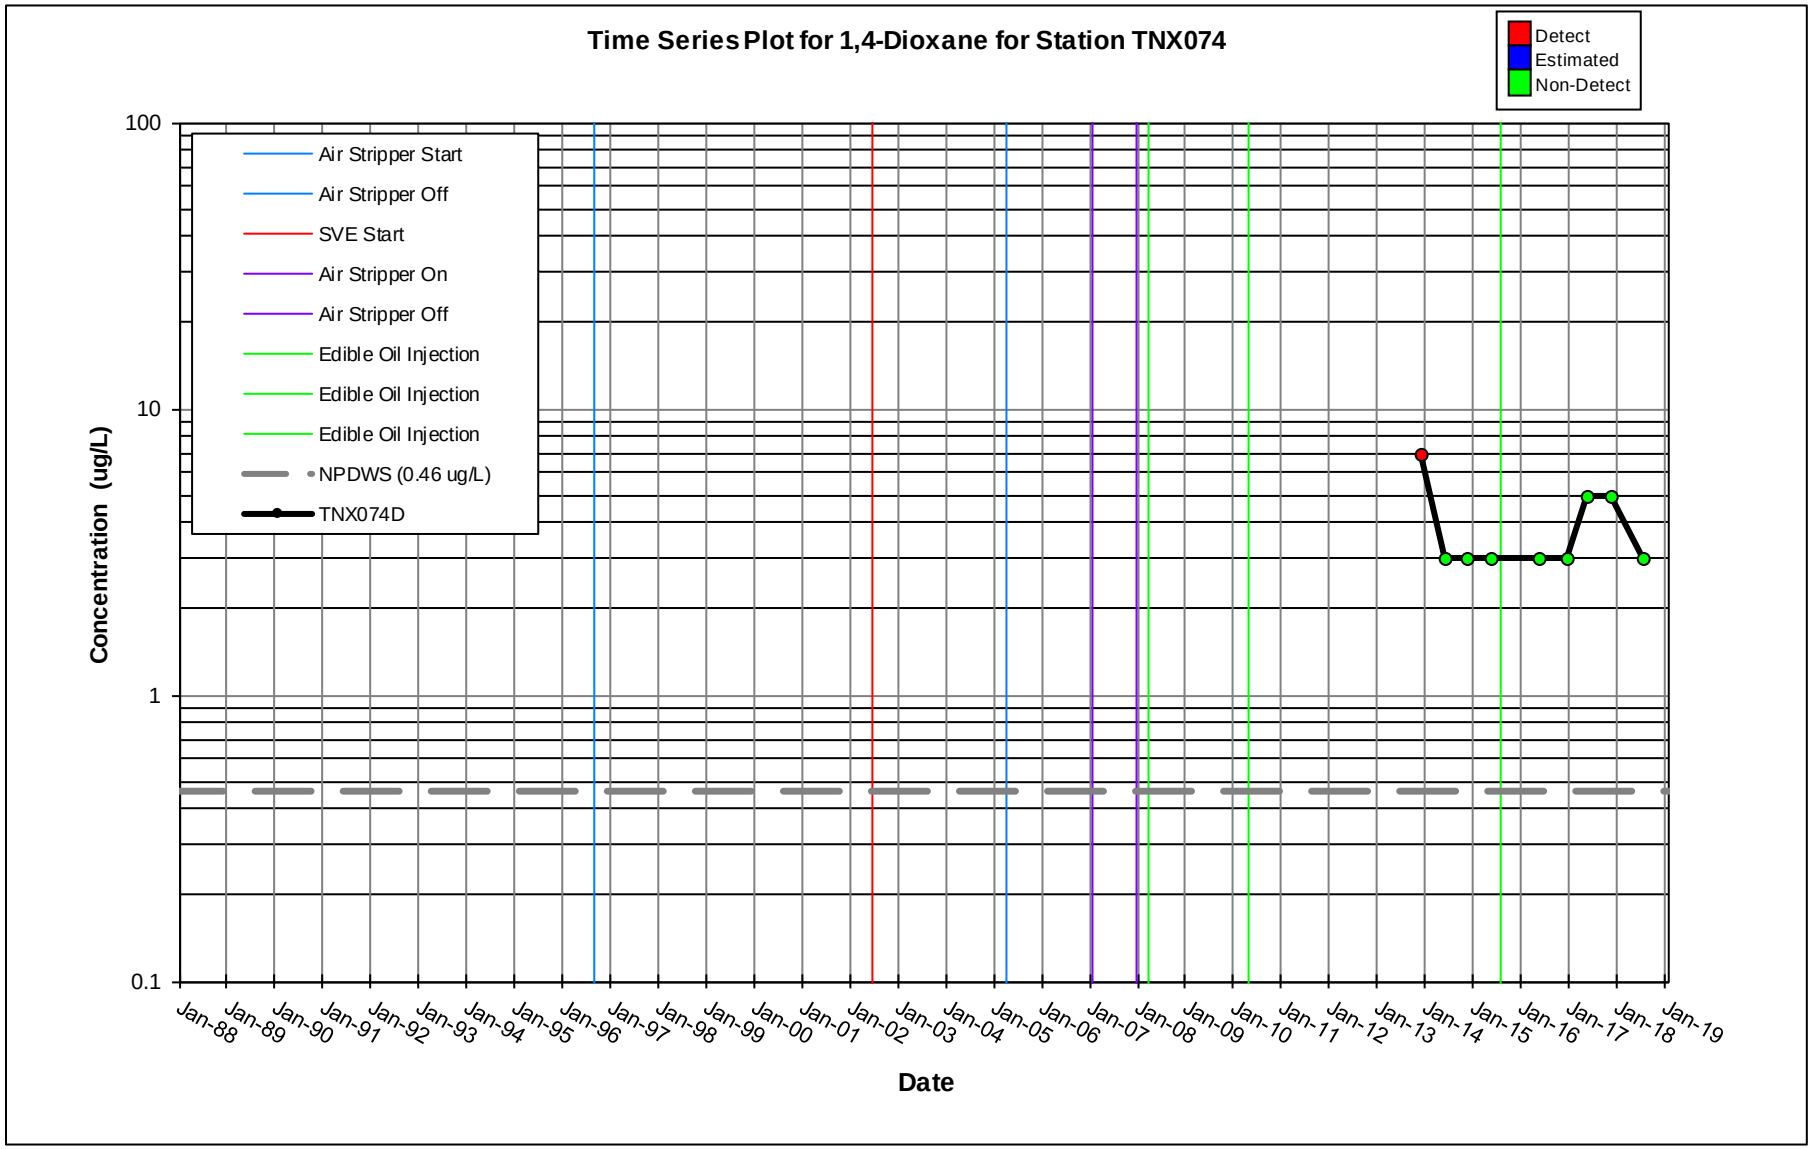
Time Series Plot for 1,4-Dioxane for Station TNX074
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX074D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

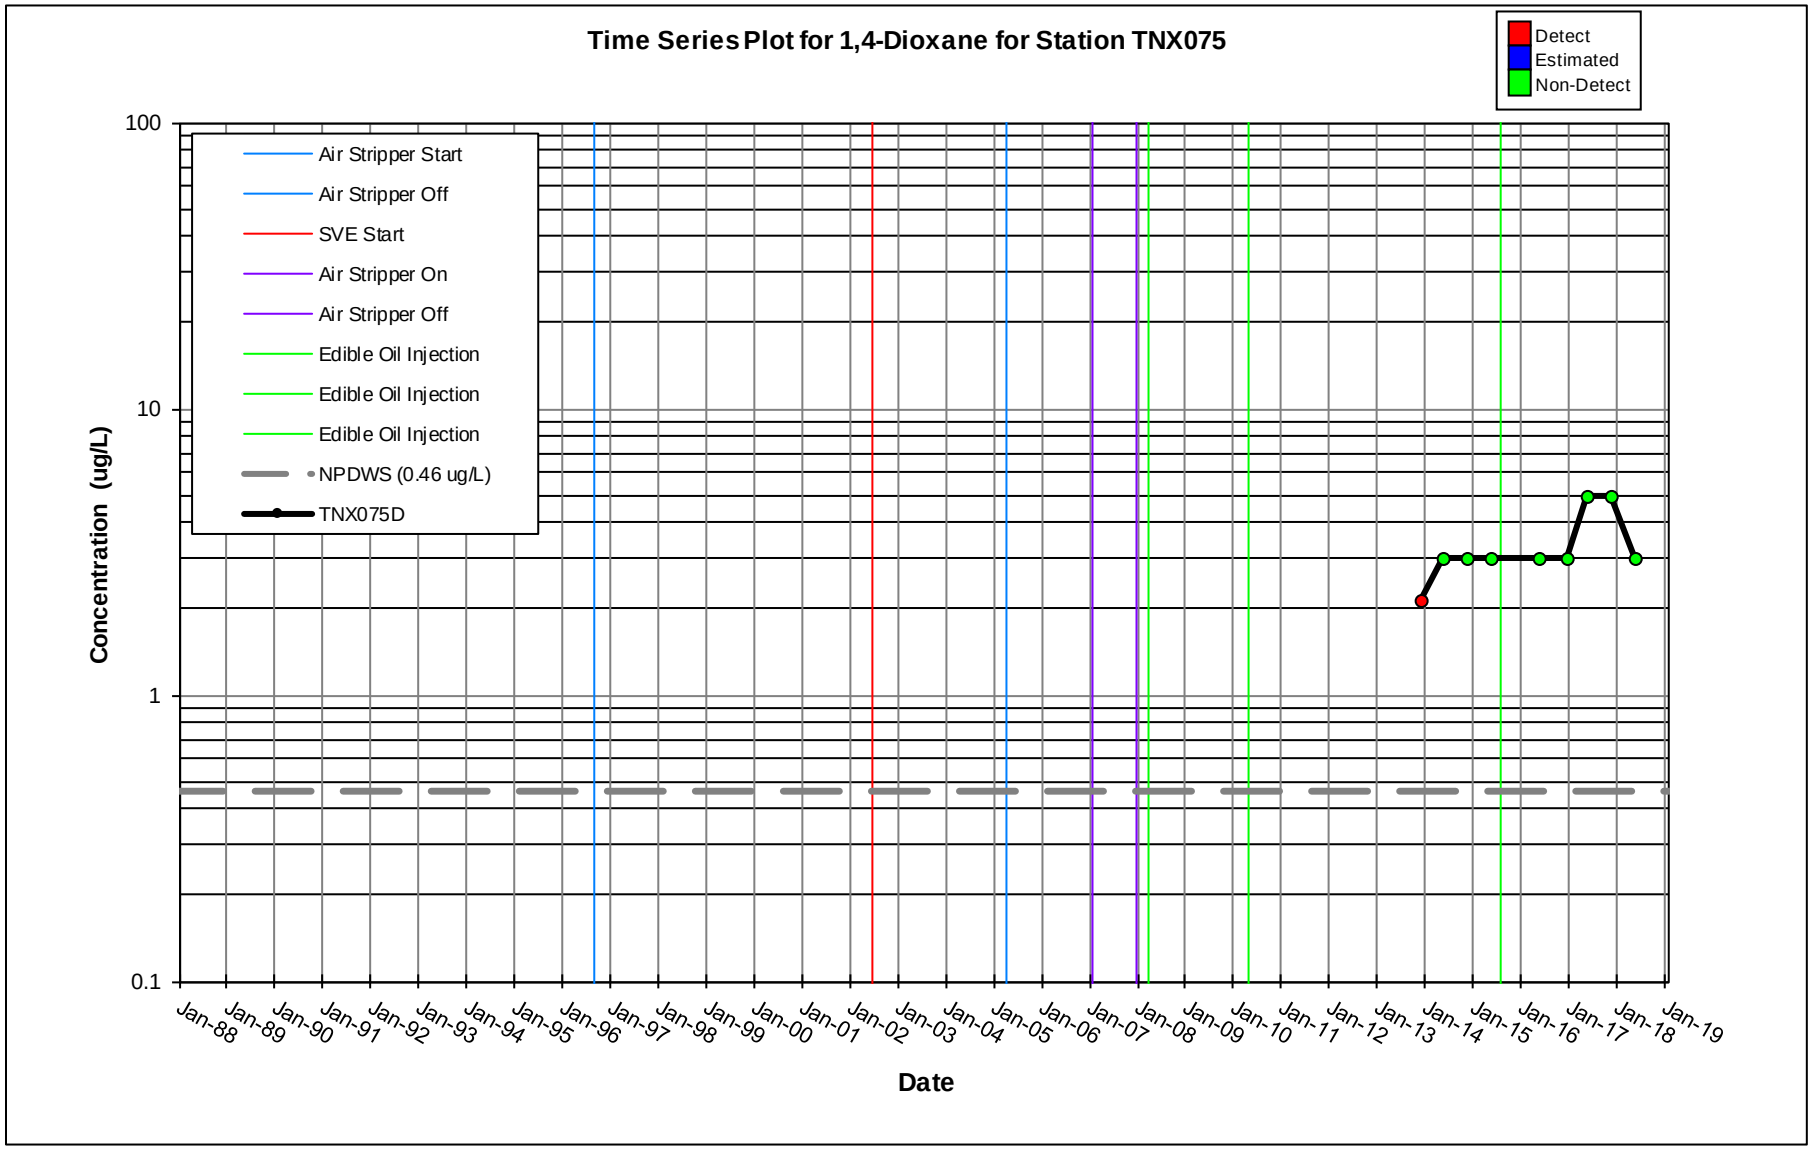
Time Series Plot for 1,4-Dioxane for Station TNX075
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TNX075D
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

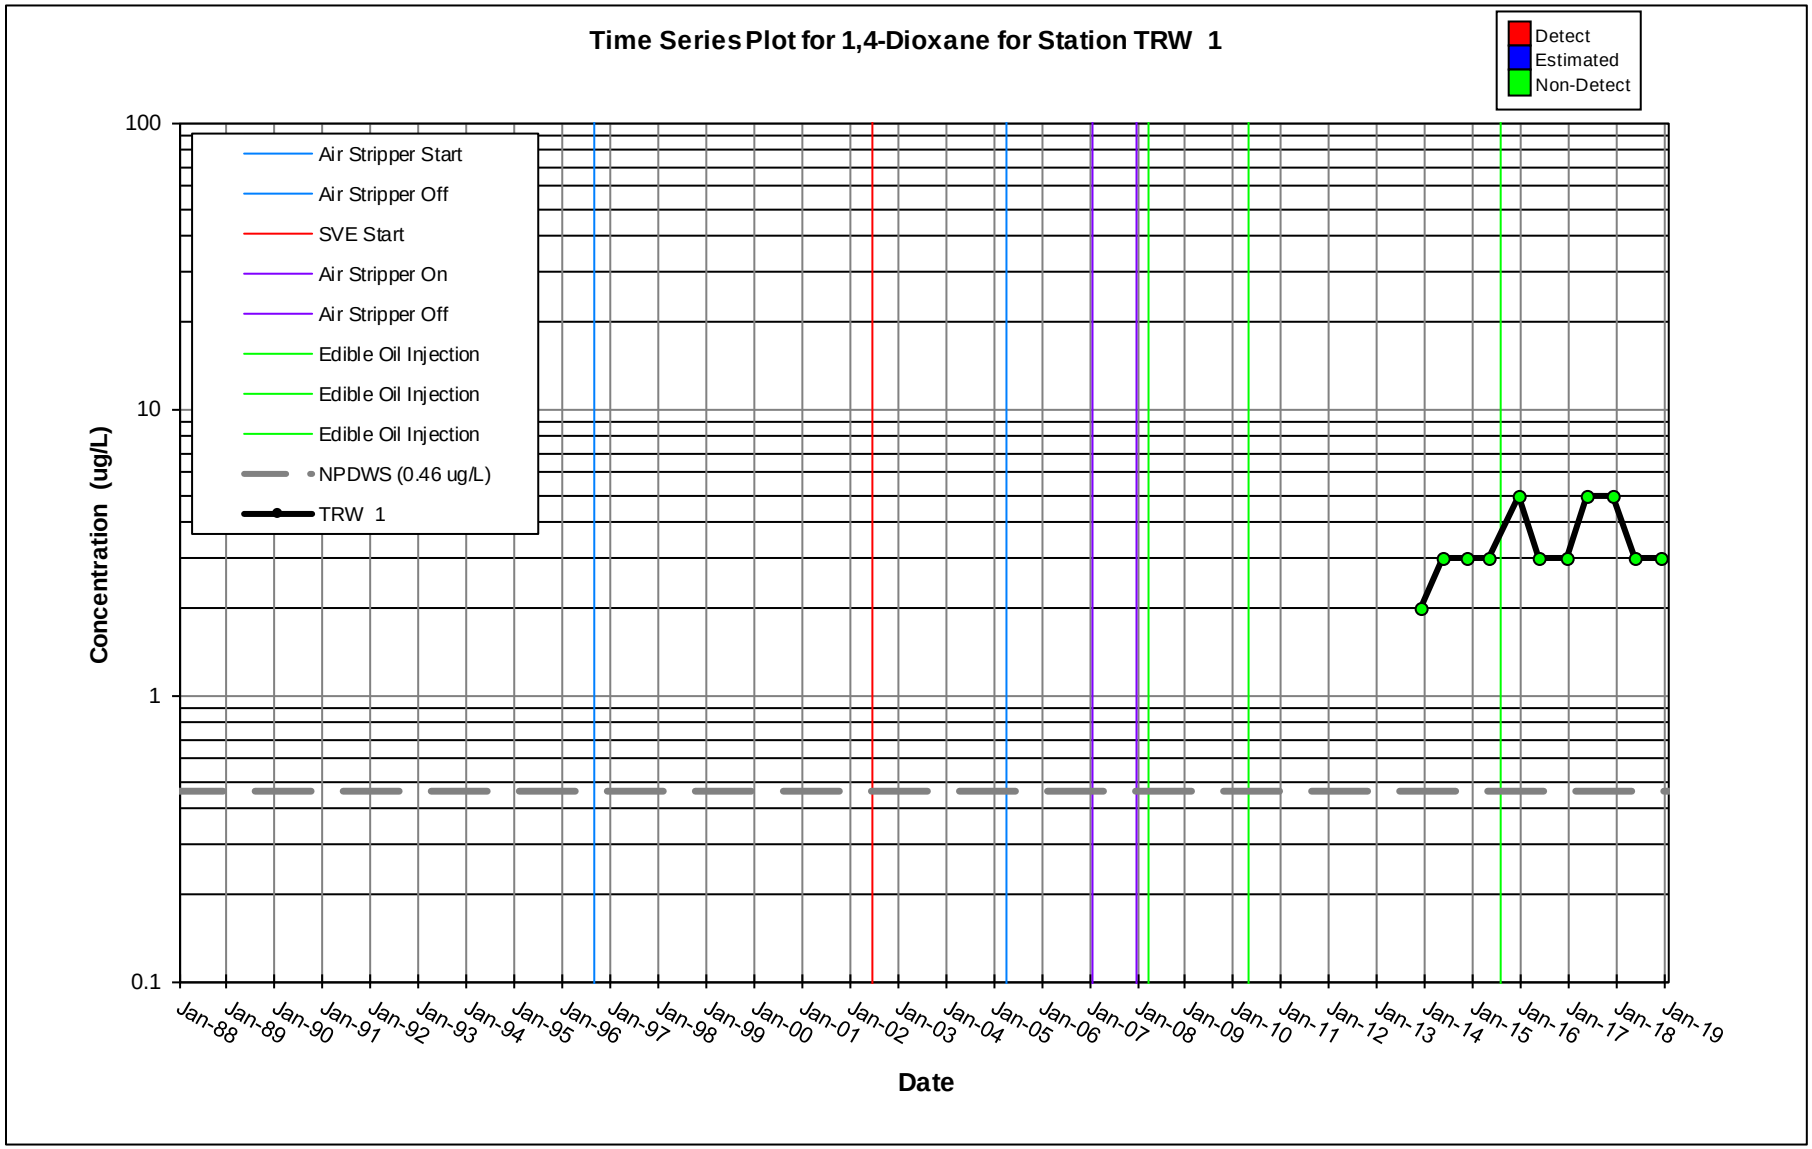
Time Series Plot for 1,4-Dioxane for Station TRW 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TRW 1
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

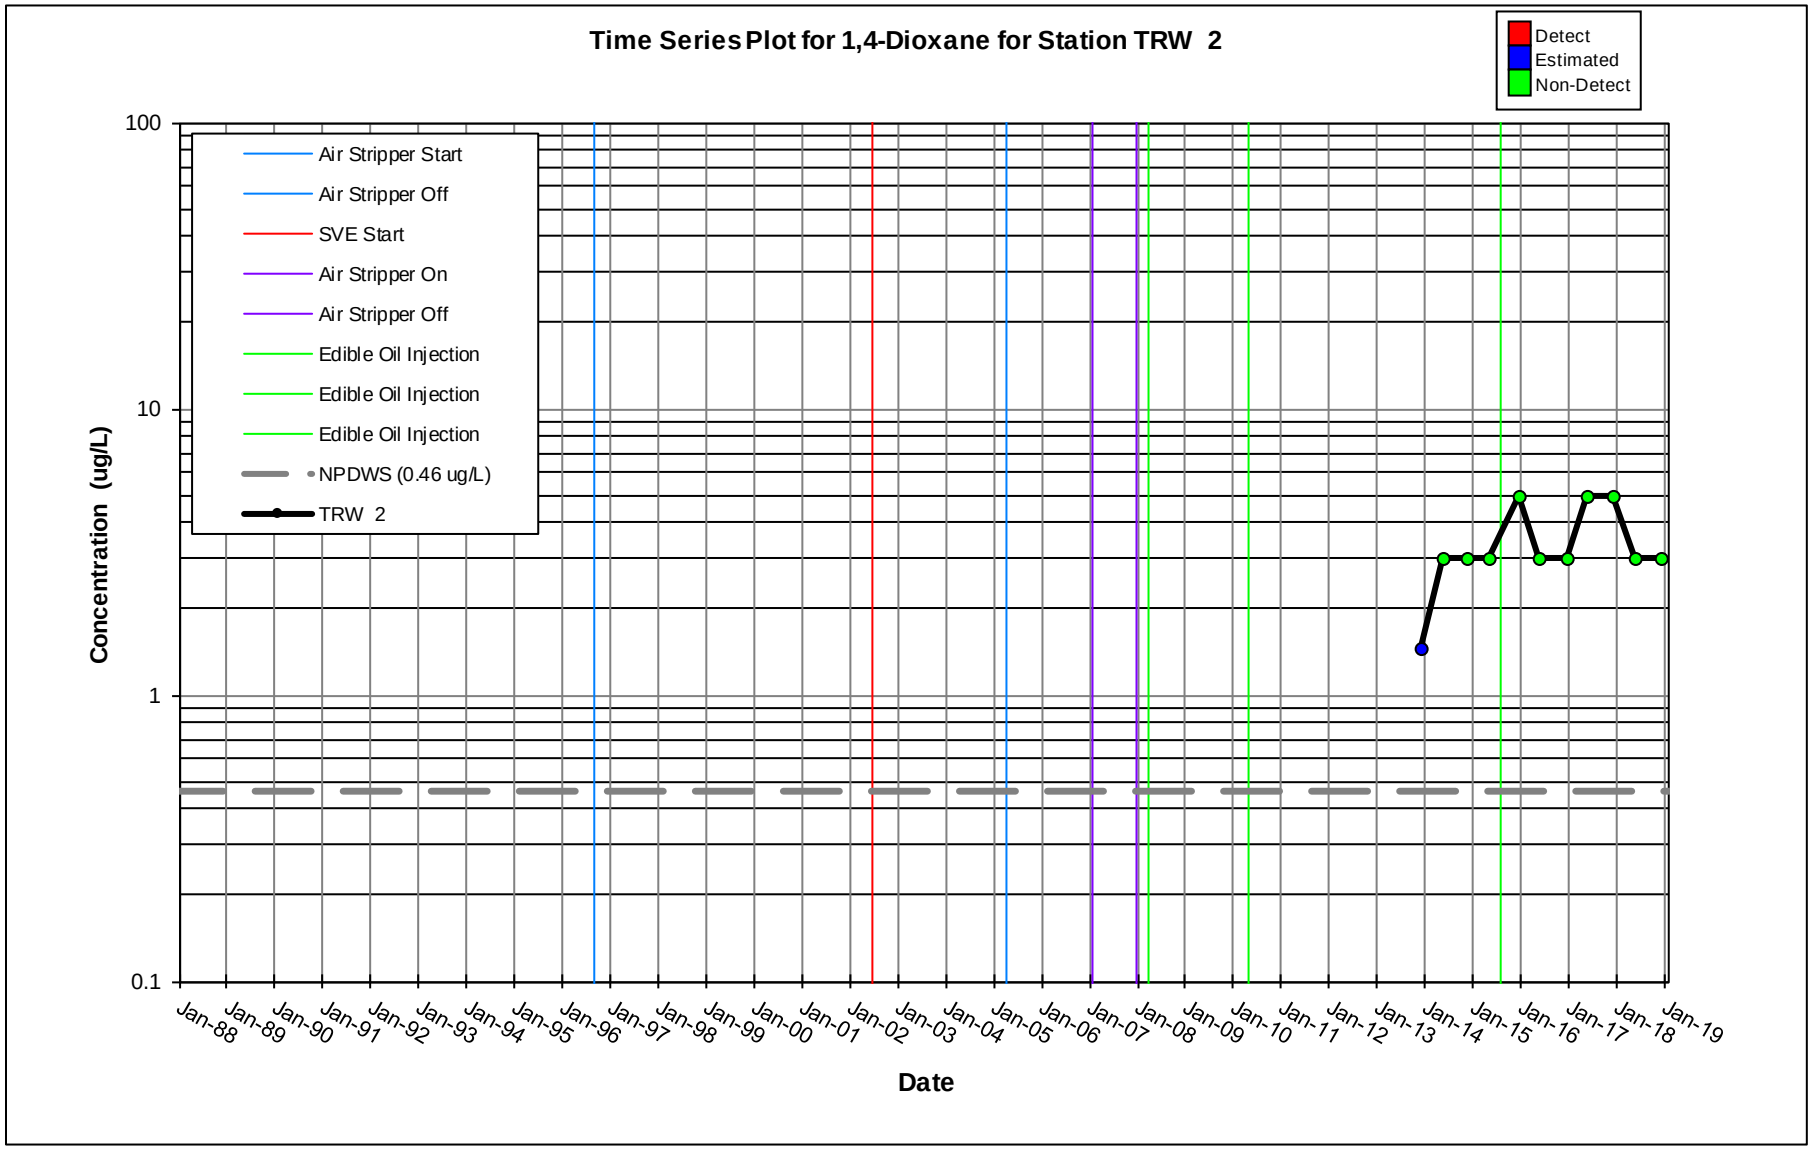
Time Series Plot for 1,4-Dioxane for Station TRW 2
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TRW 2
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

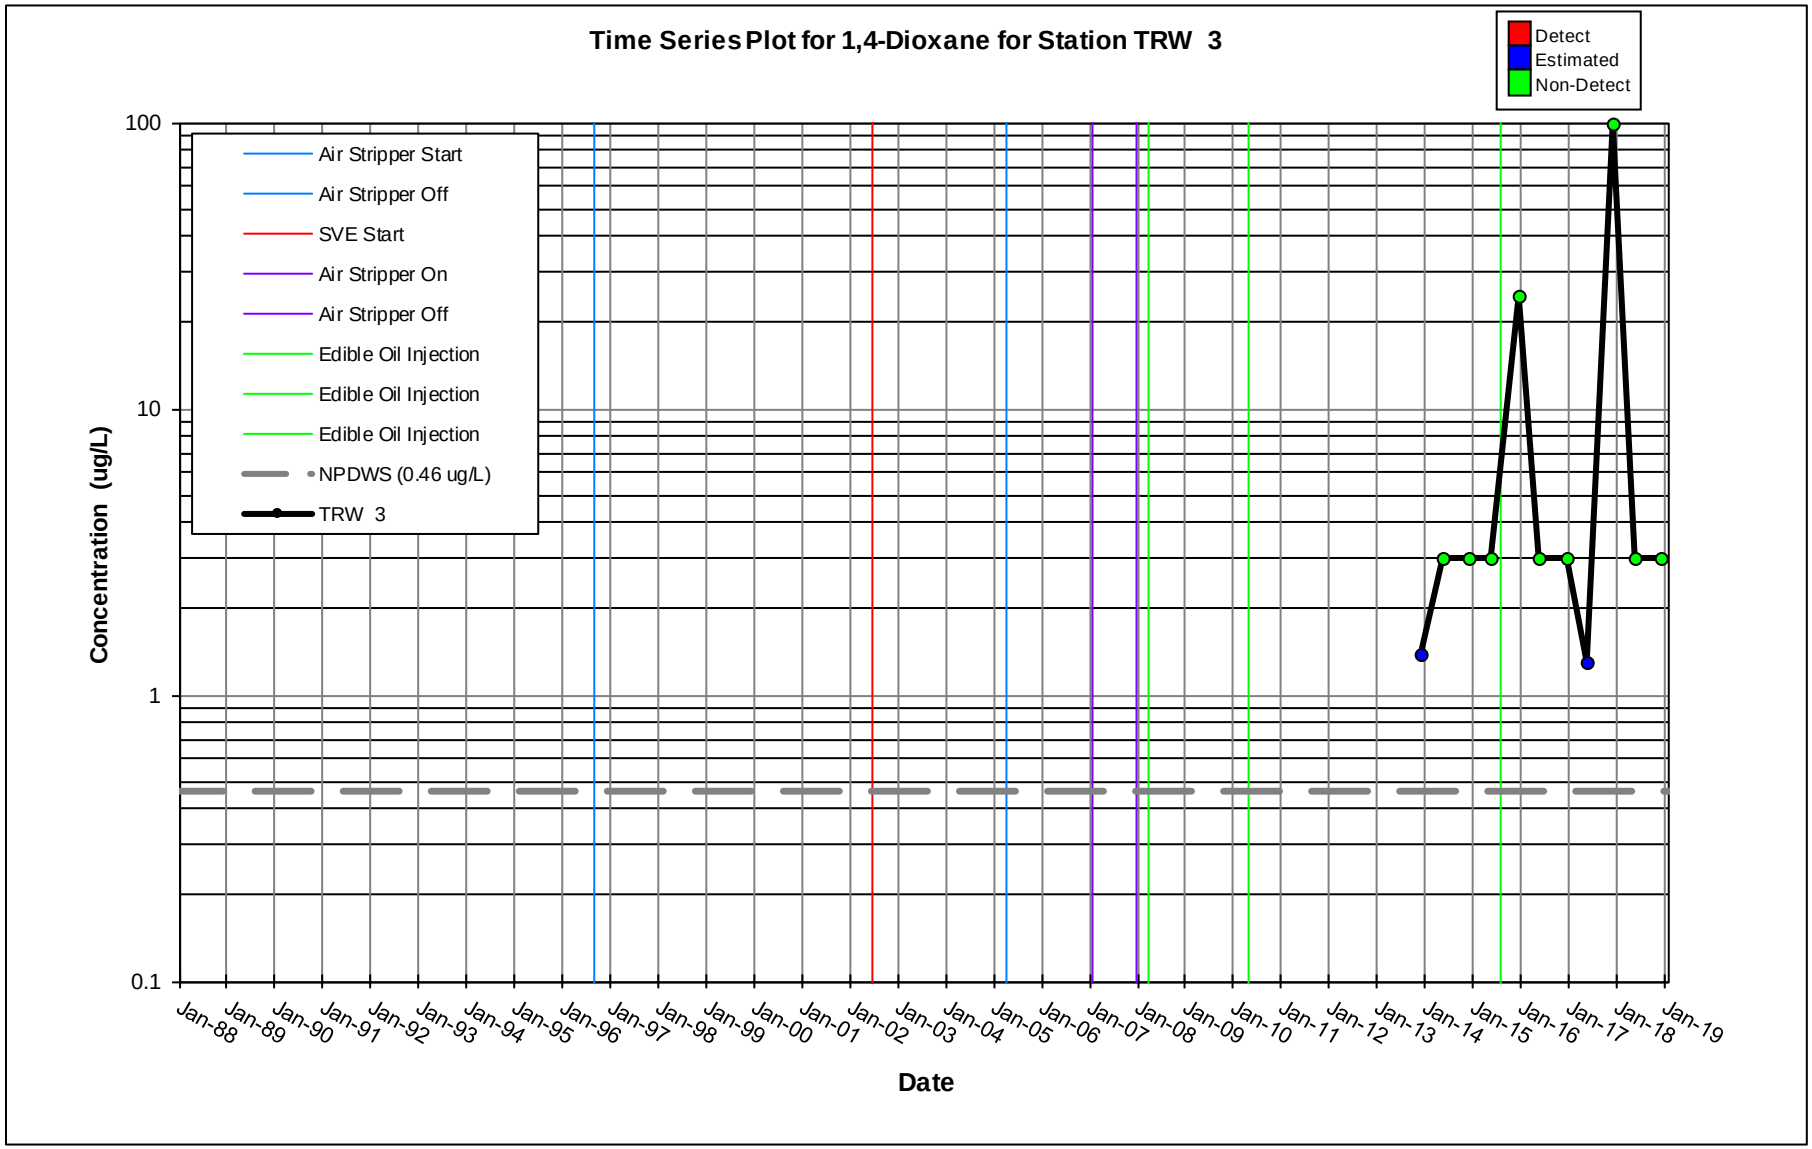
Time Series Plot for 1,4-Dioxane for Station TRW 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TRW 3
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

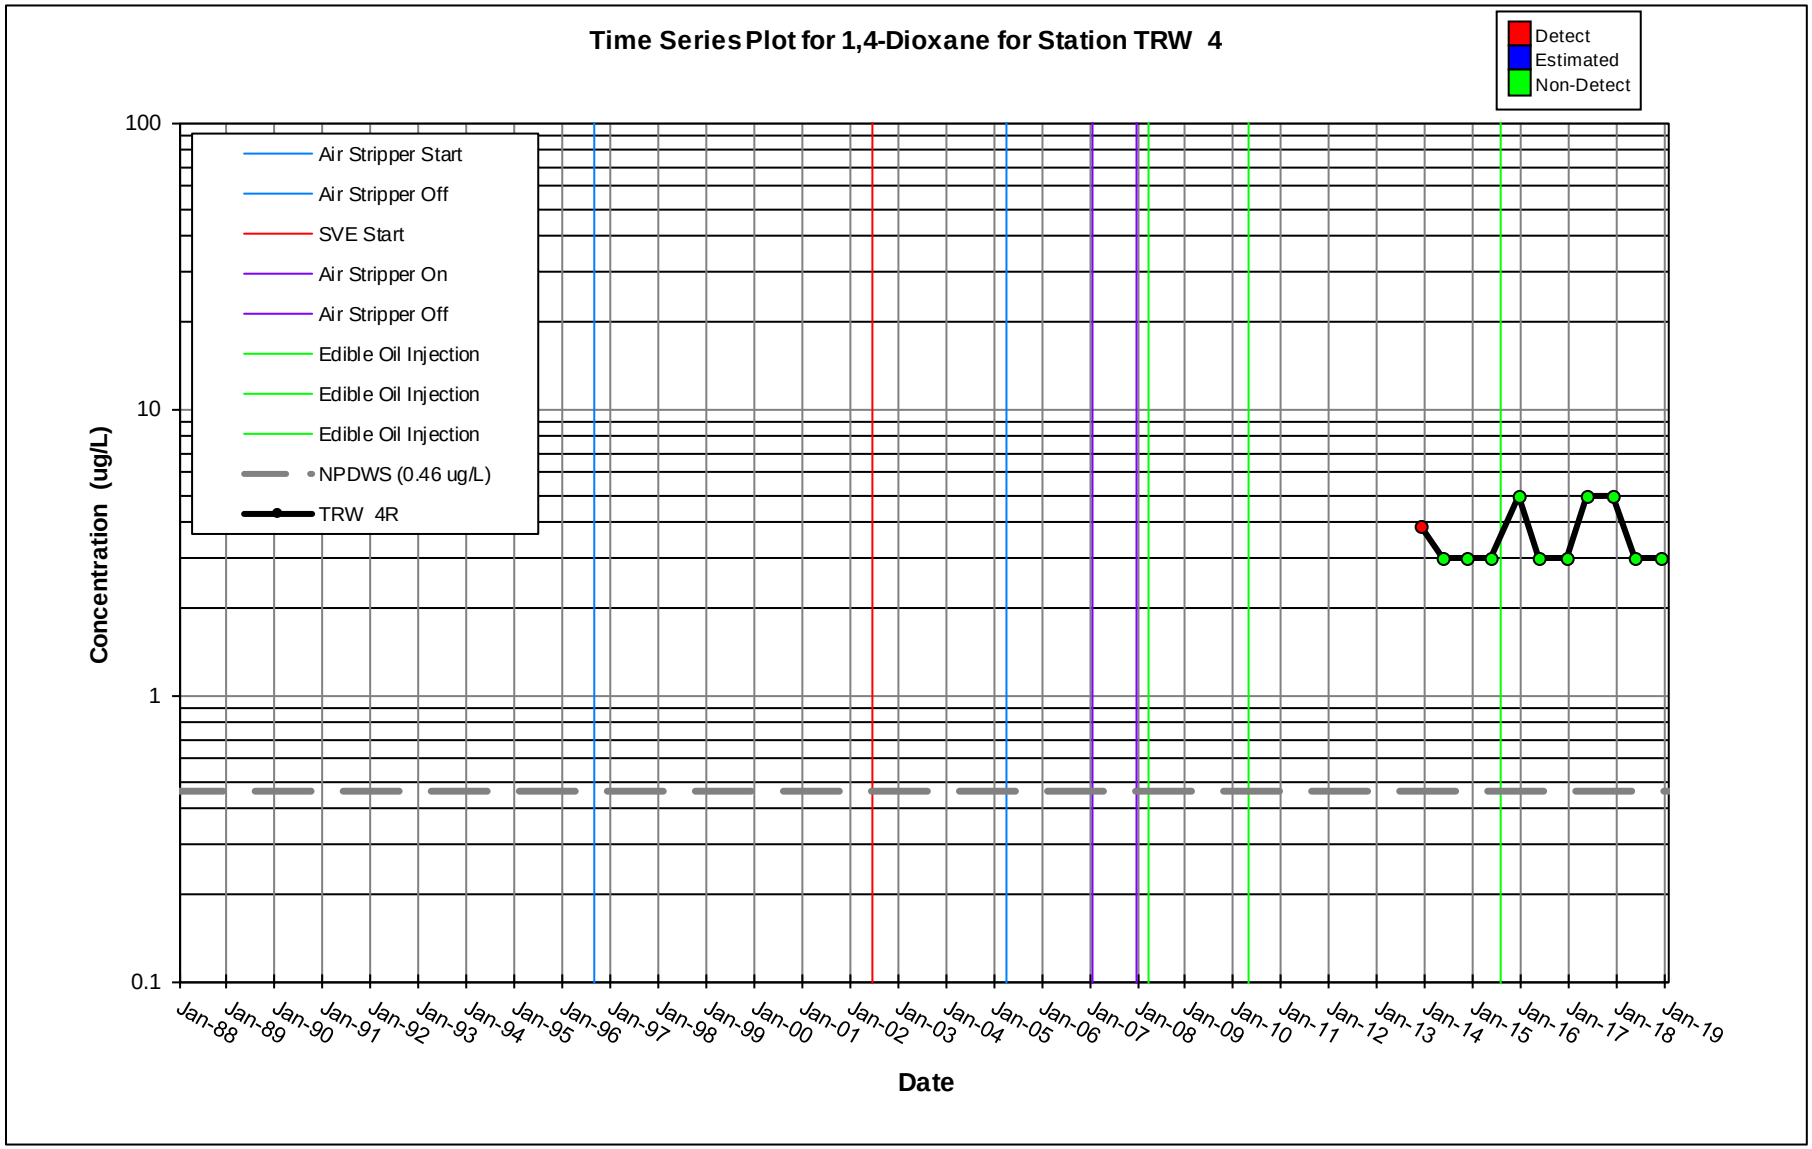
Time Series Plot for 1,4-Dioxane for Station TRW 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TRW 4R
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

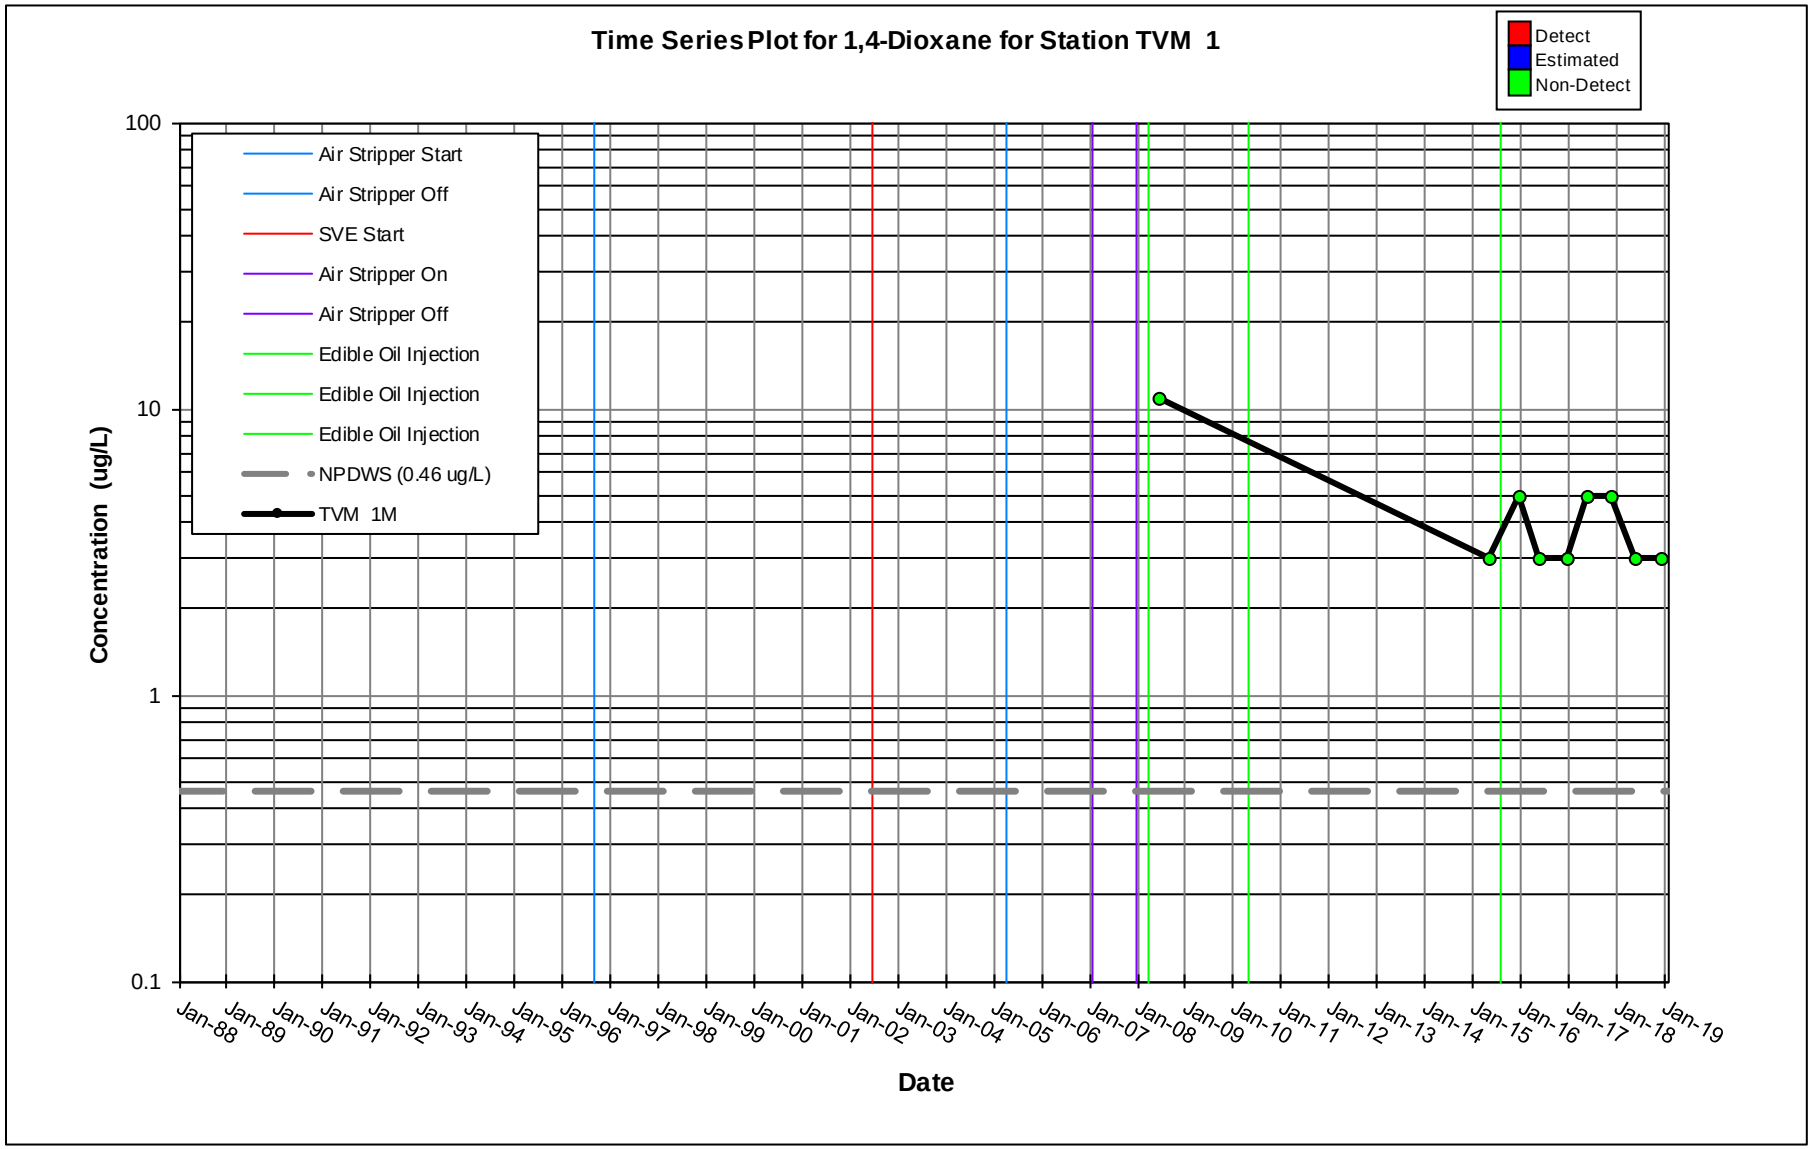
Time Series Plot for 1,4-Dioxane for Station TVM 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TVM 1M
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

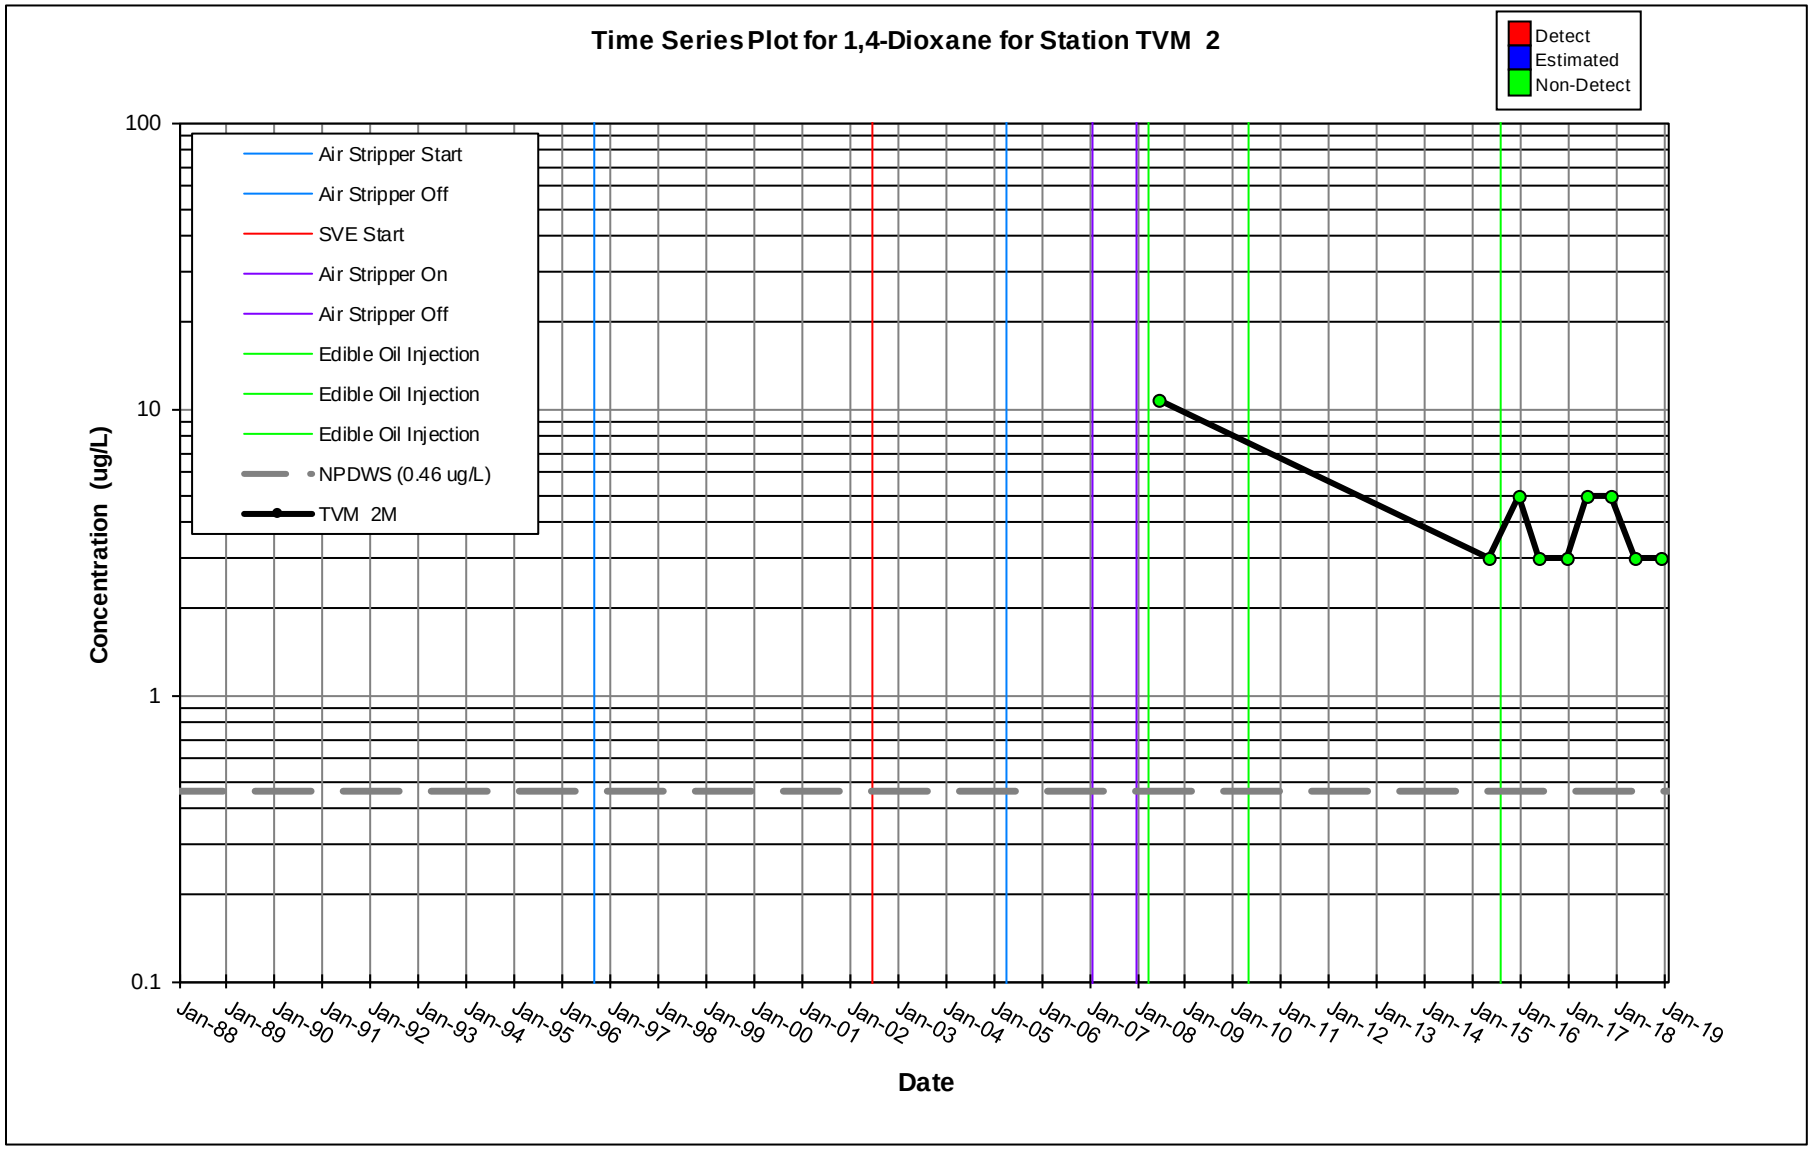
Time Series Plot for 1,4-Dioxane for Station TVM 2
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TVM 2M
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

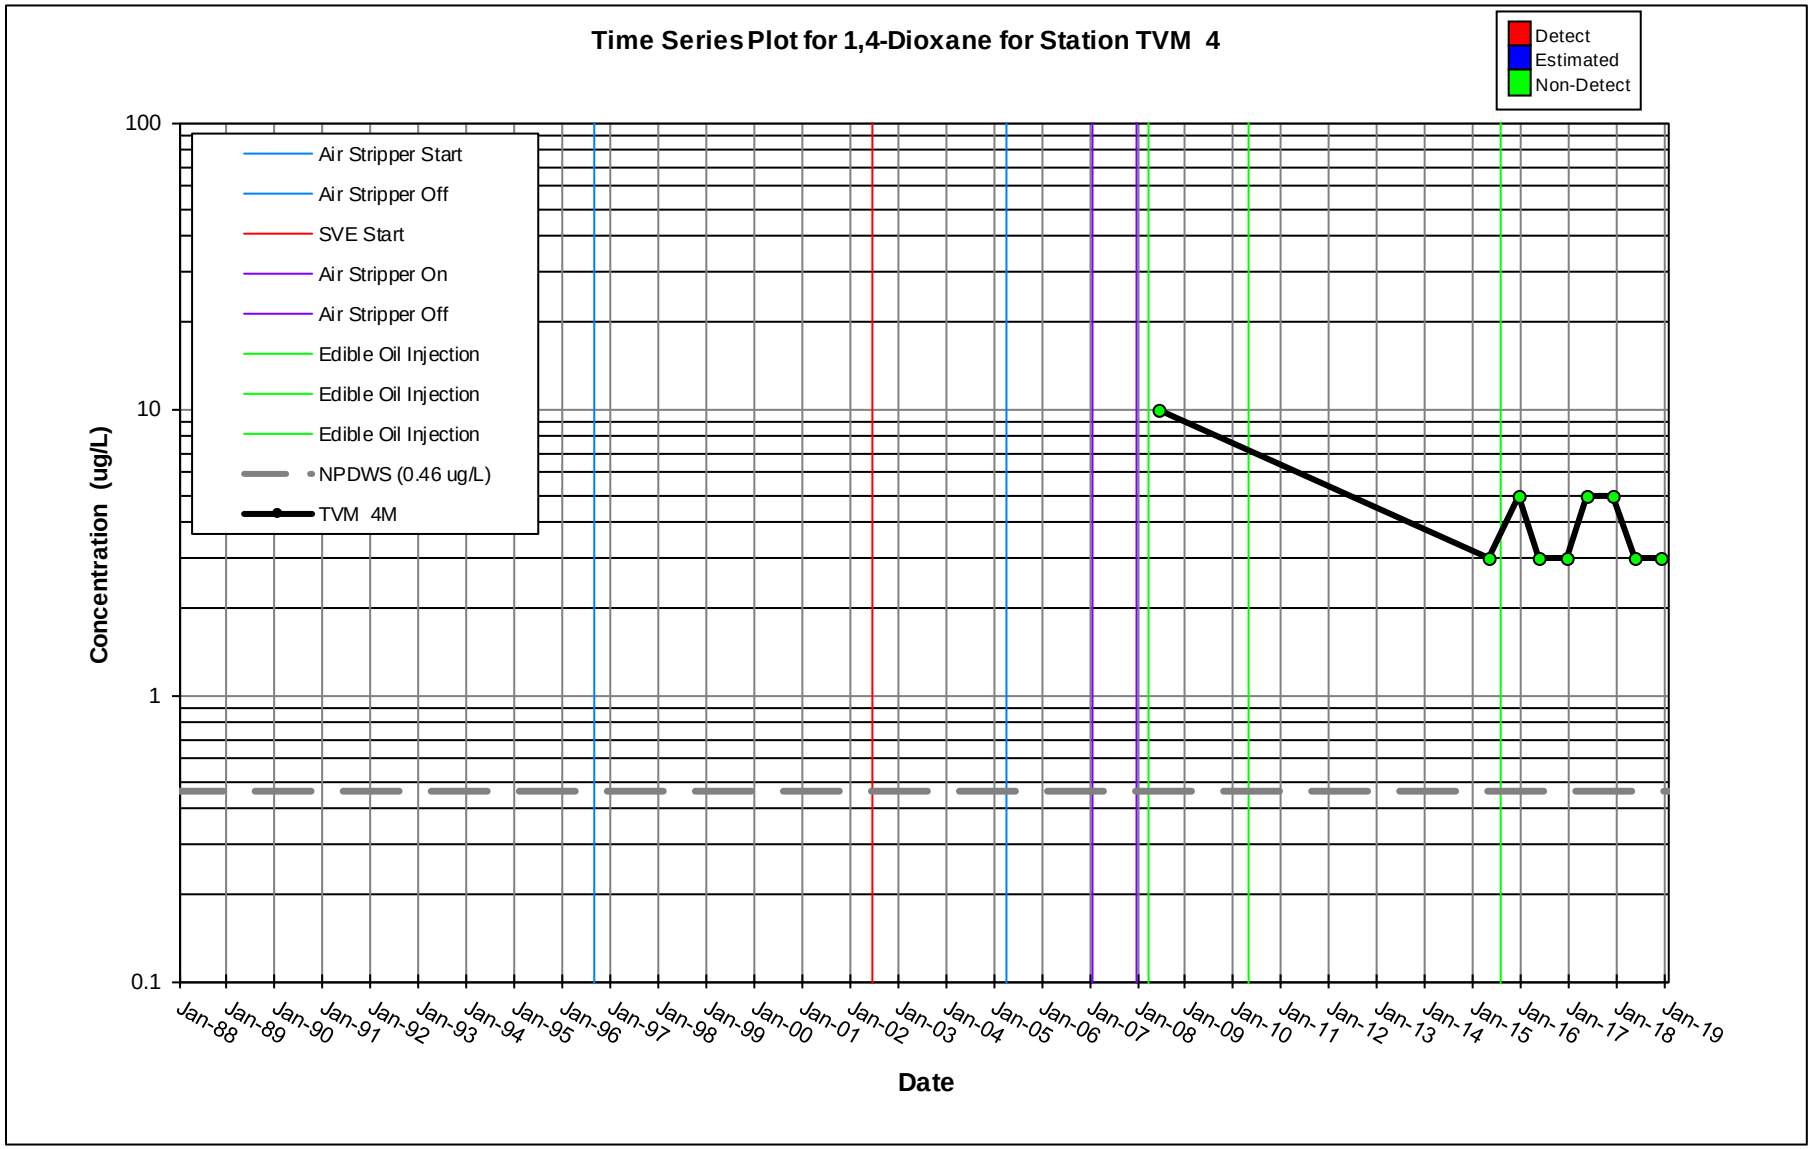
Time Series Plot for 1,4-Dioxane for Station TVM 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TVM 4M
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

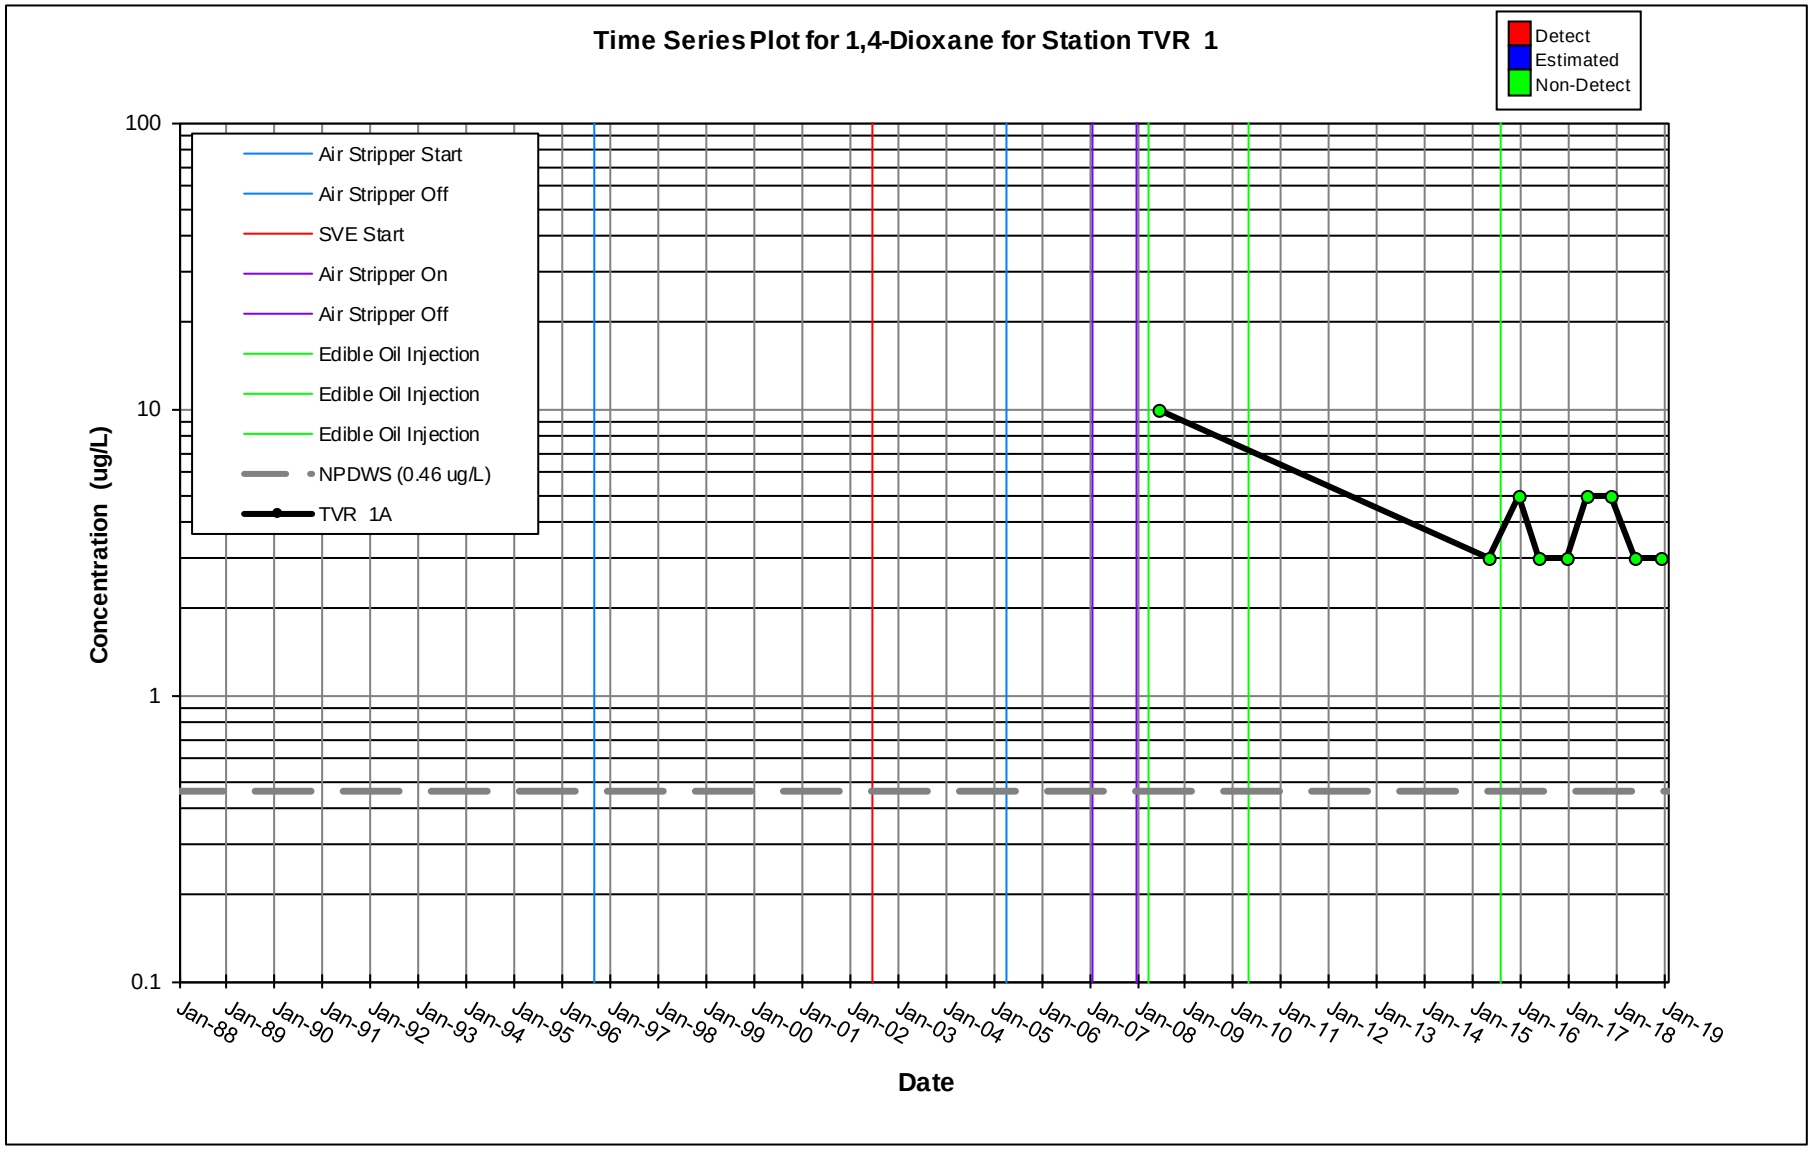
Time Series Plot for 1,4-Dioxane for Station TVR 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (0.46 ug/L)
TVR 1A
Concentration (ug/L)
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

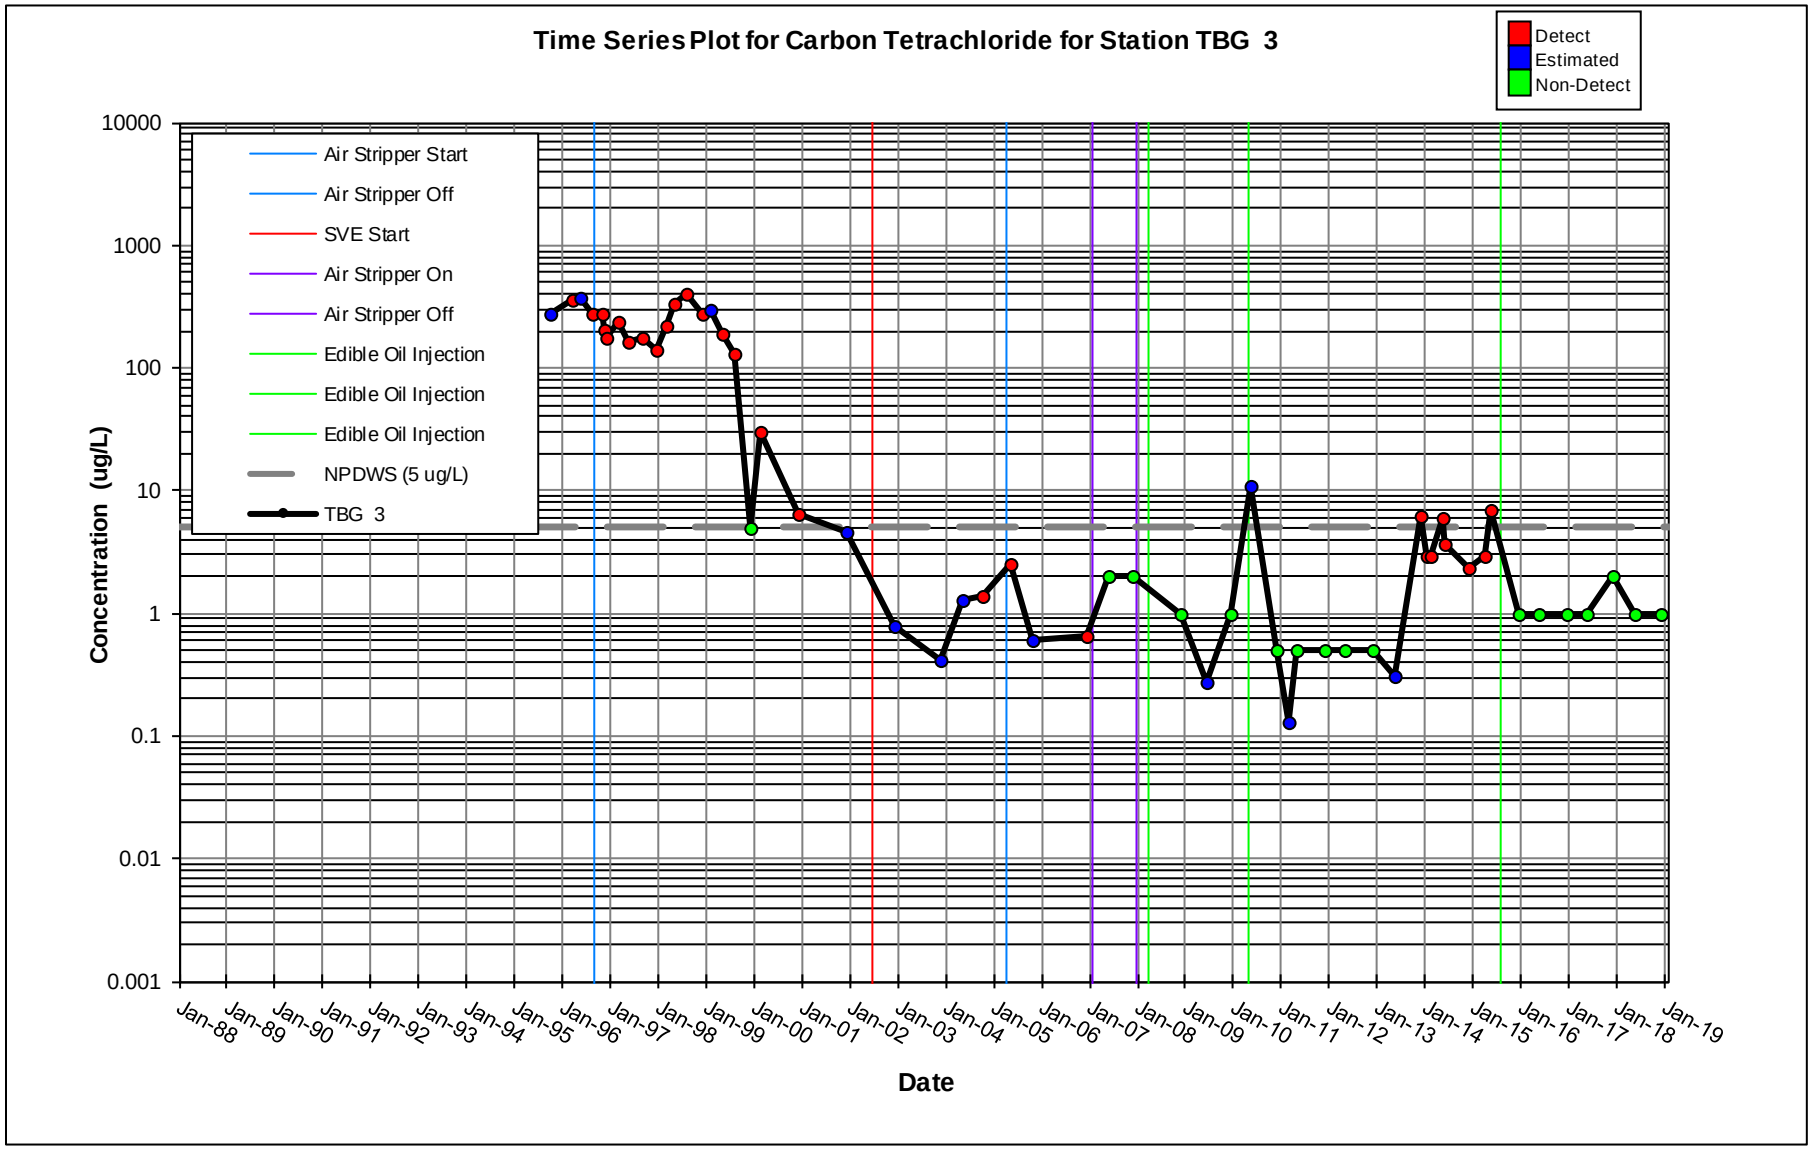
Time Series Plot for Carbon Tetrachloride for Station TBG 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TBG 3
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
0.001
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

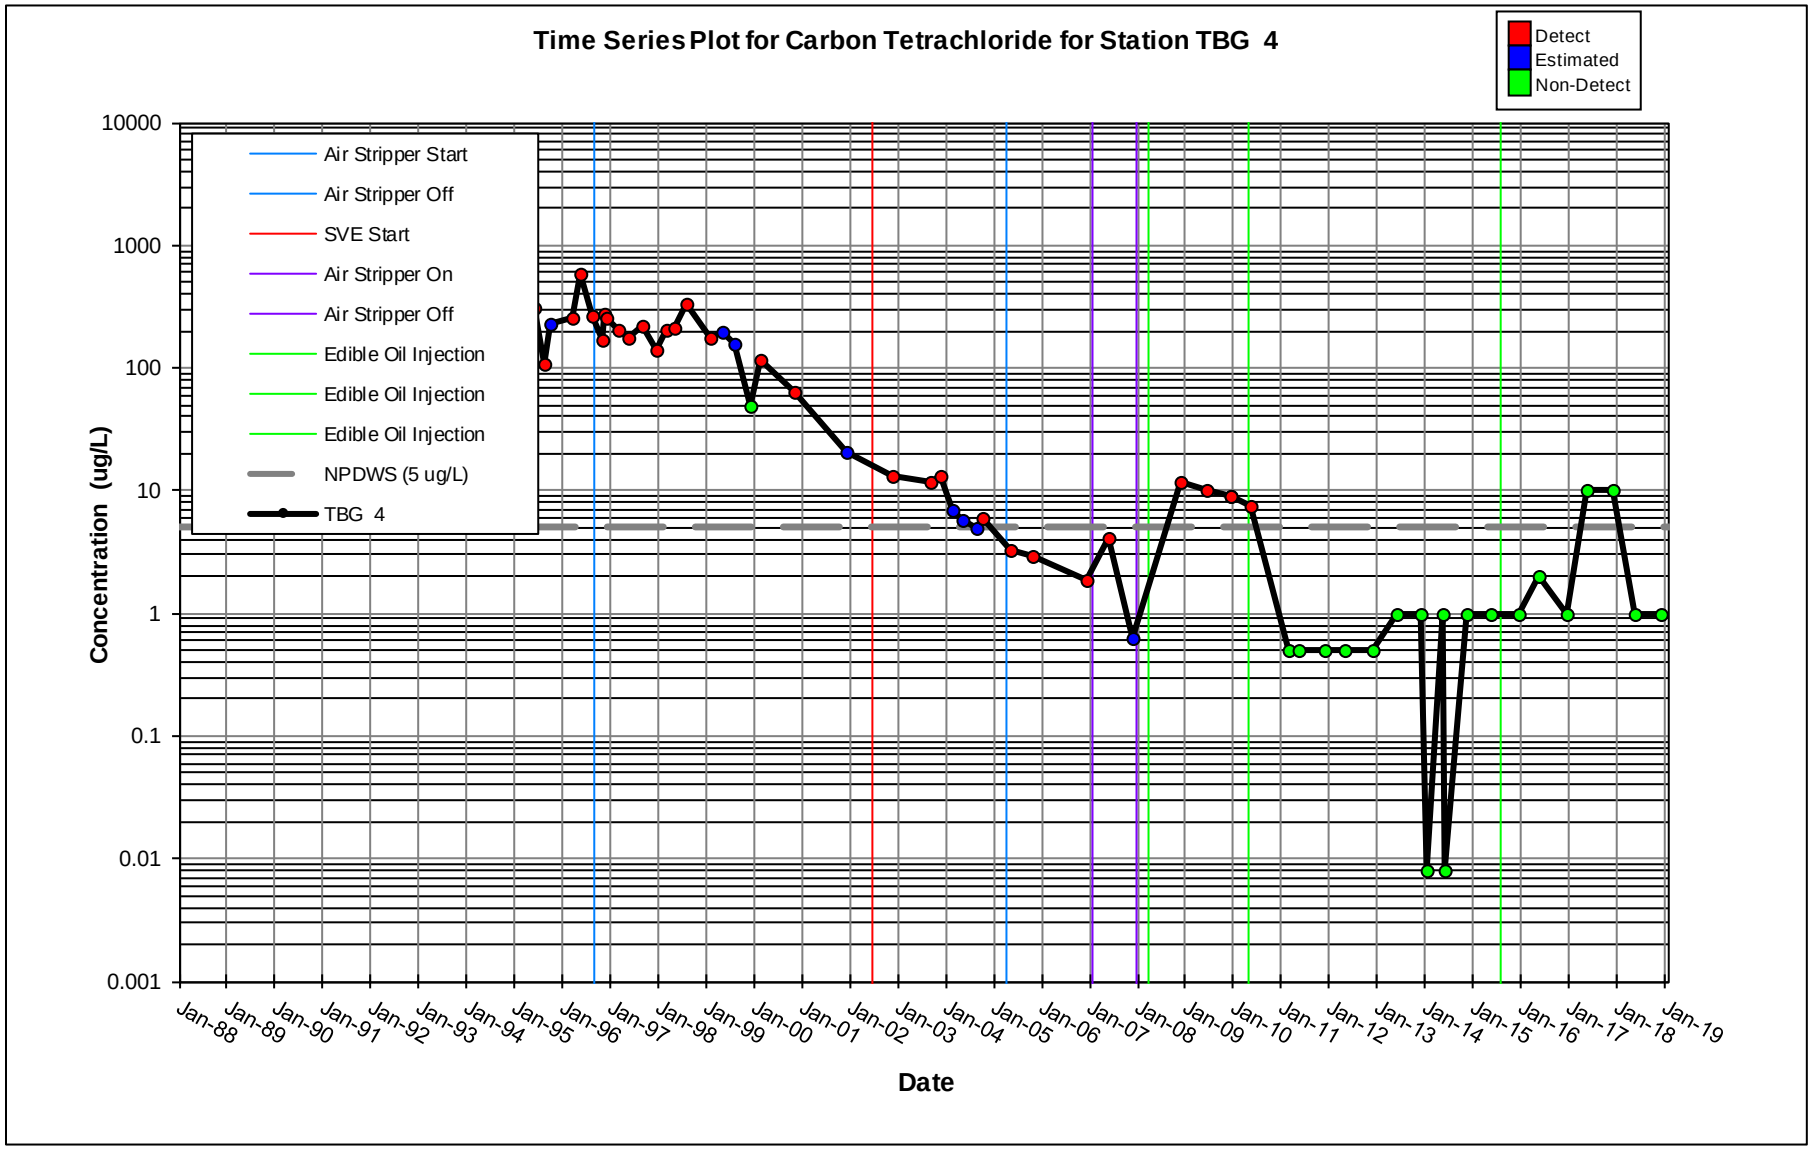
Time Series Plot for Carbon Tetrachloride for Station TBG 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TBG 4
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
0.001
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

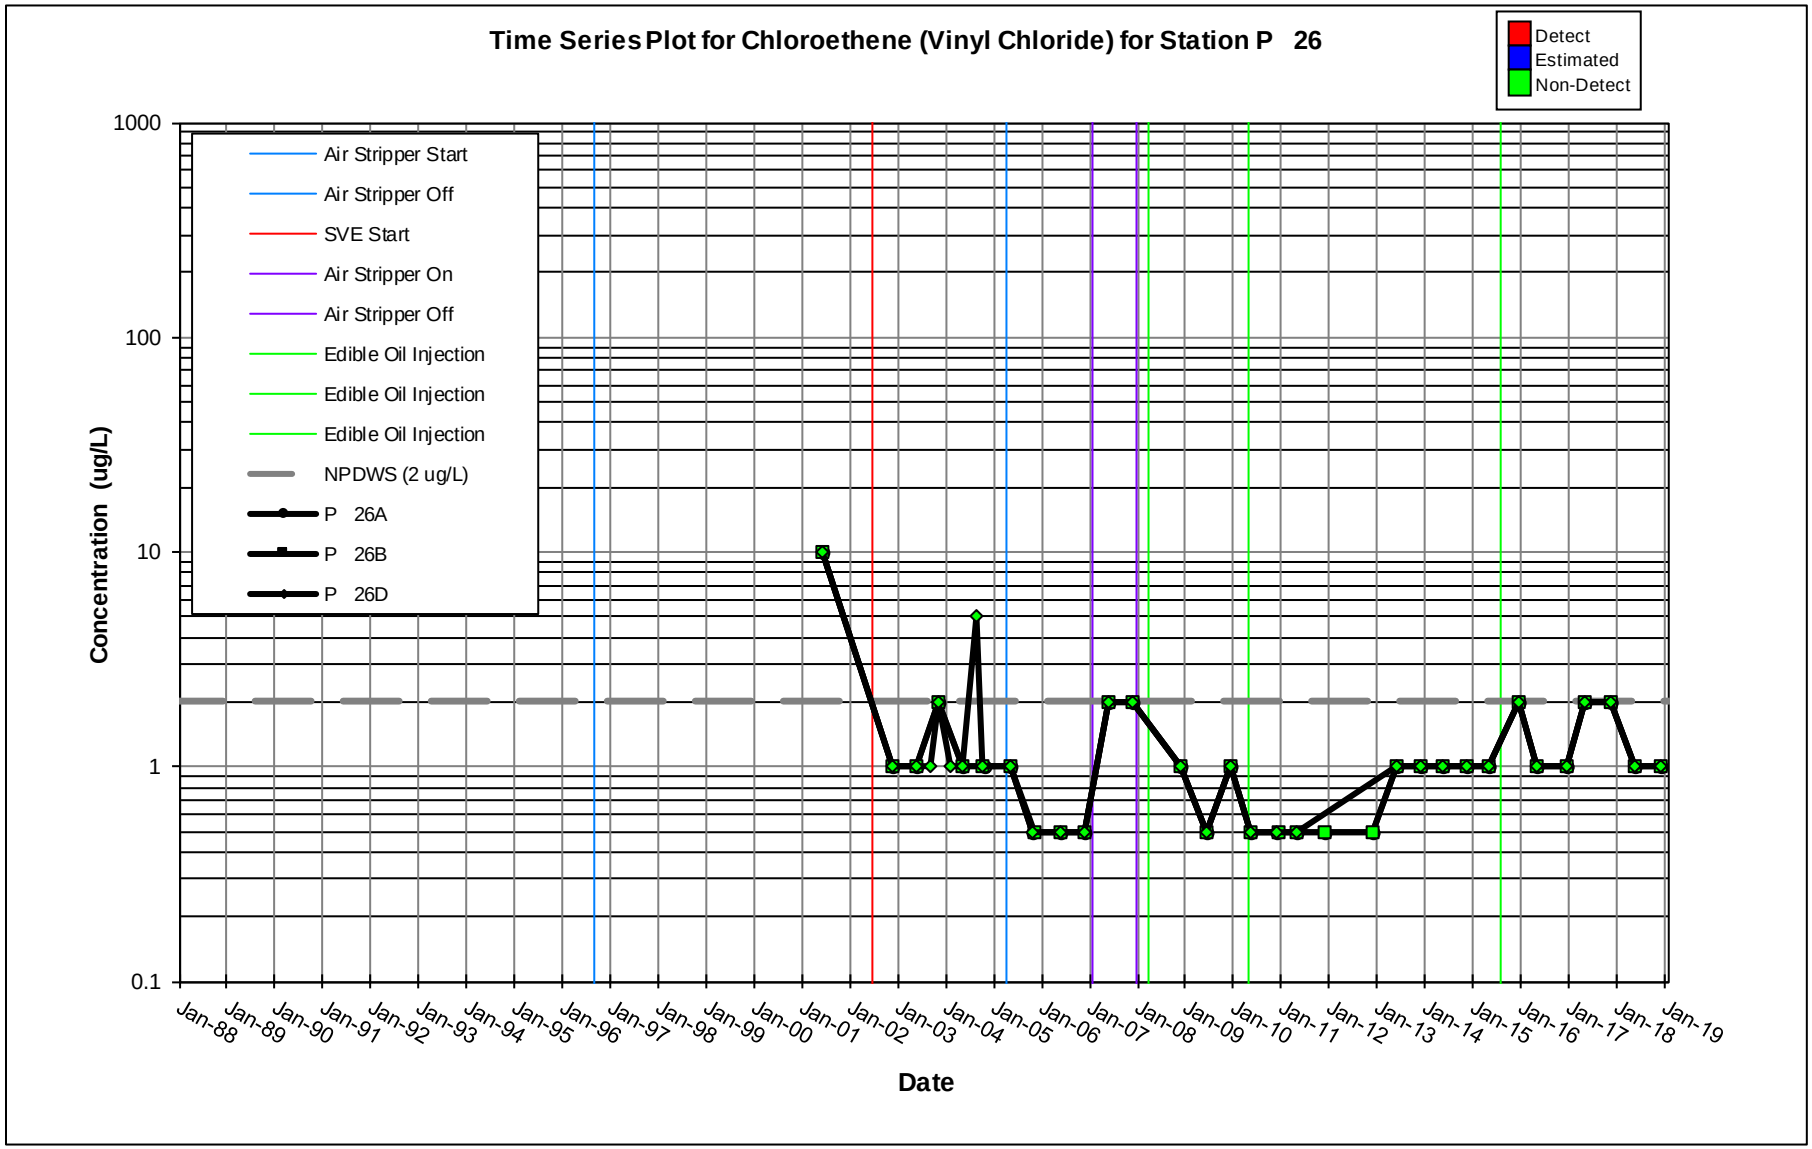
Time Series Plot for Chloroethene (Vinyl Chloride) for Station P 26
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
P 26A
P 26B
P 26D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

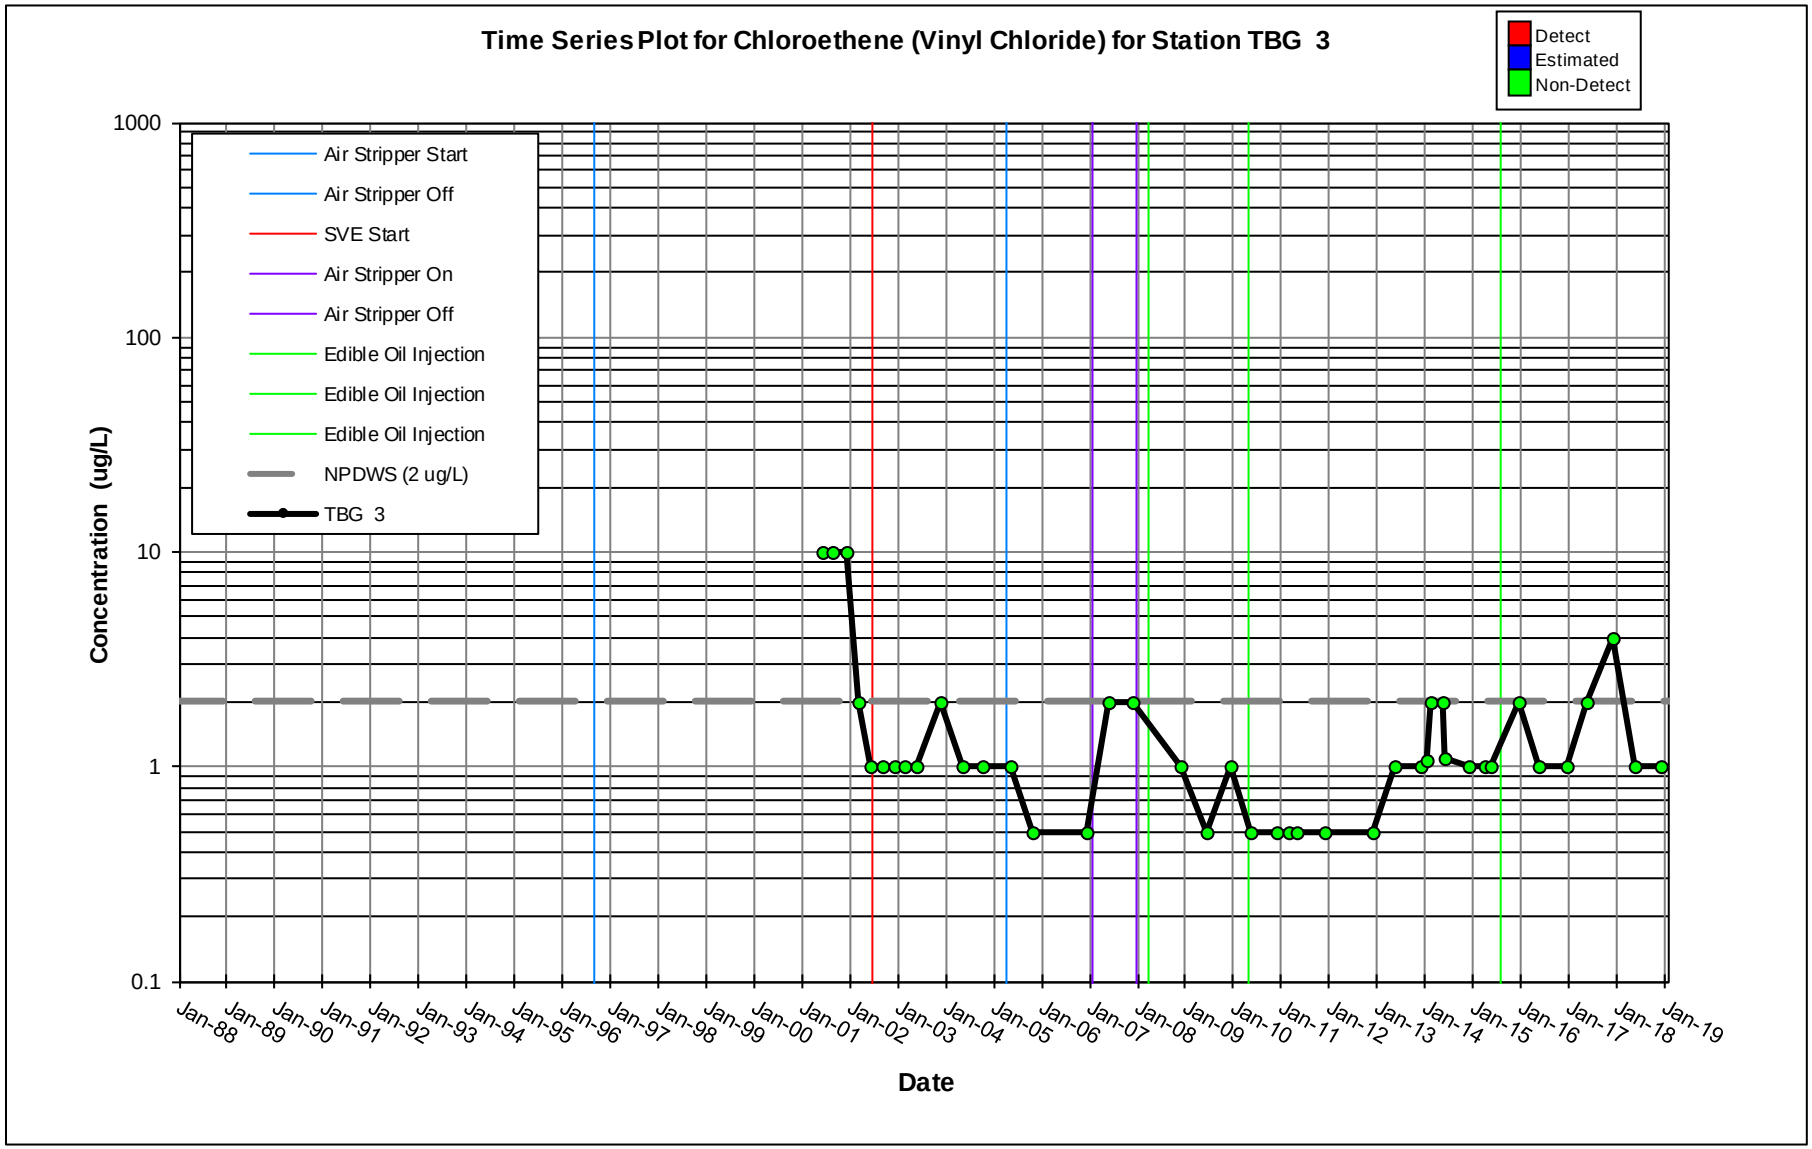
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TBG 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TBG 3
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

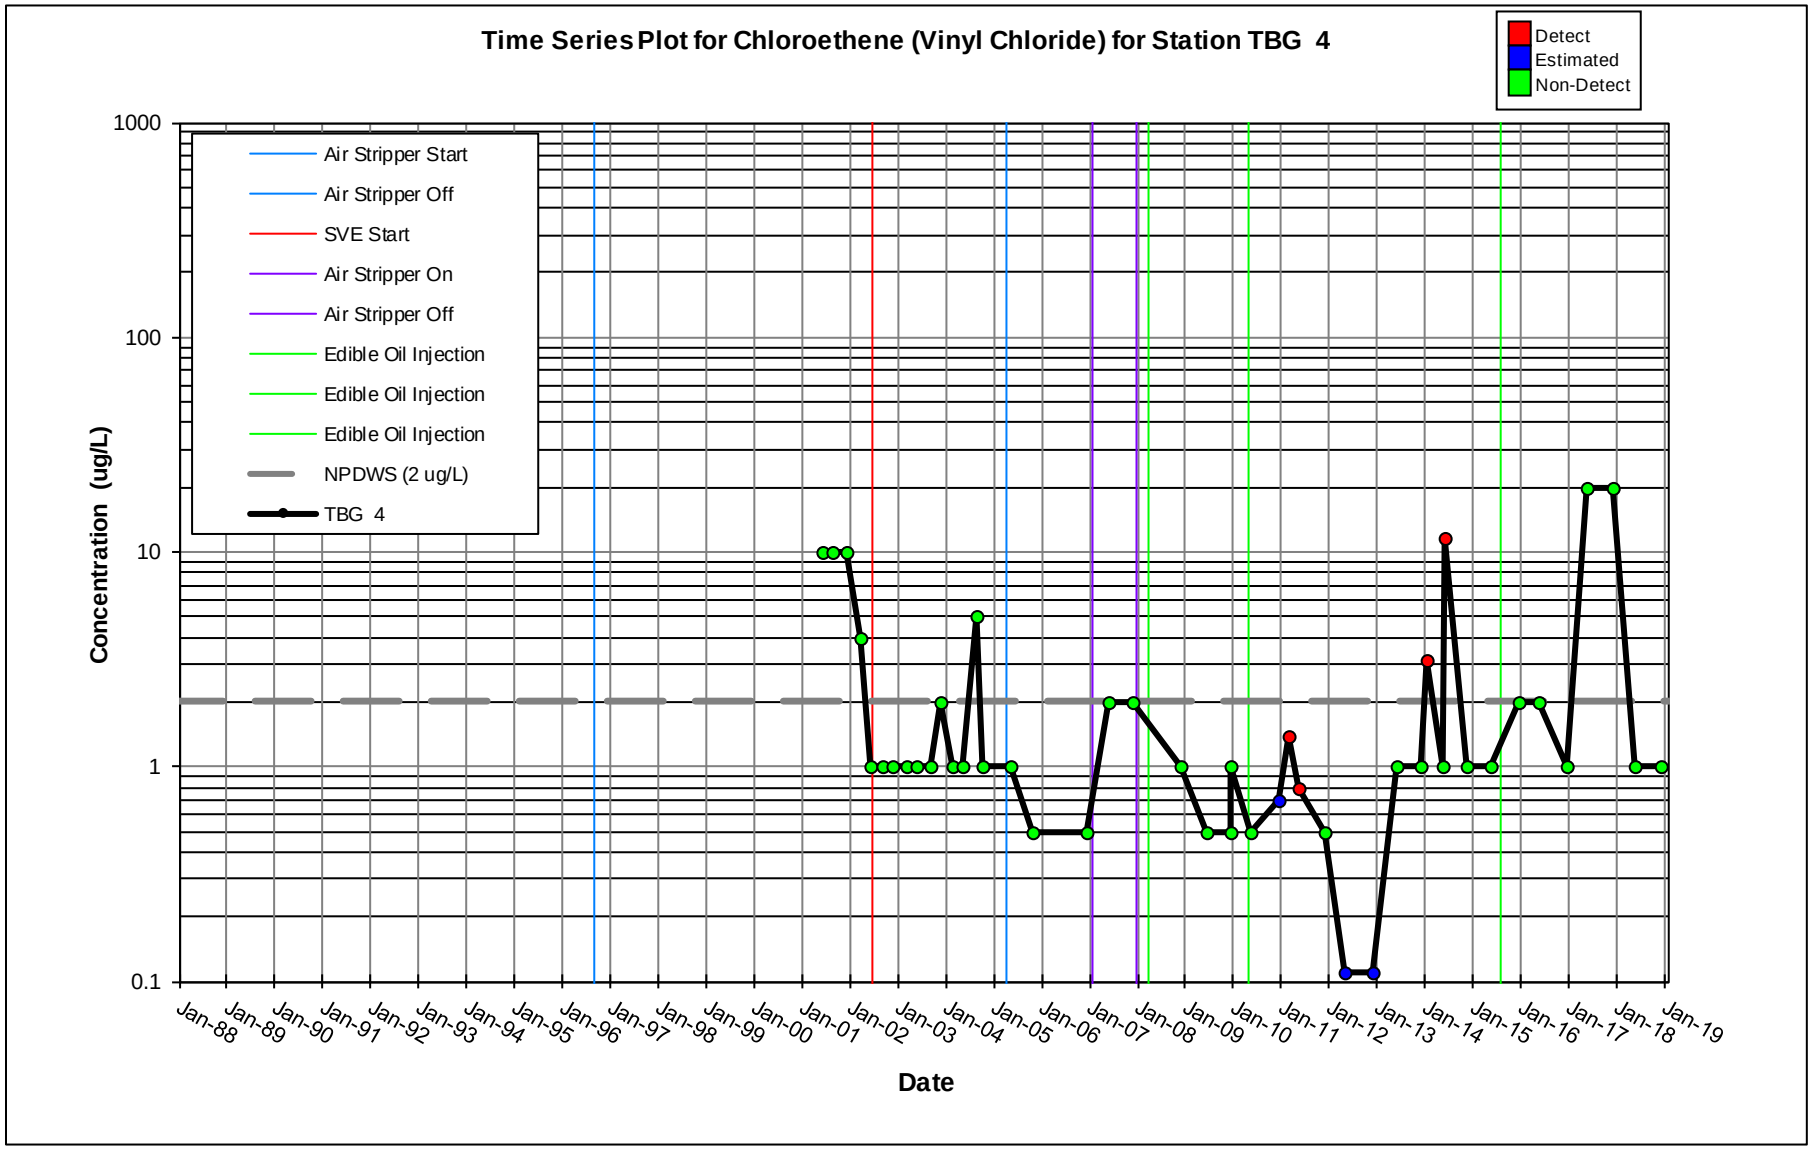
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TBG 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TBG 4
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

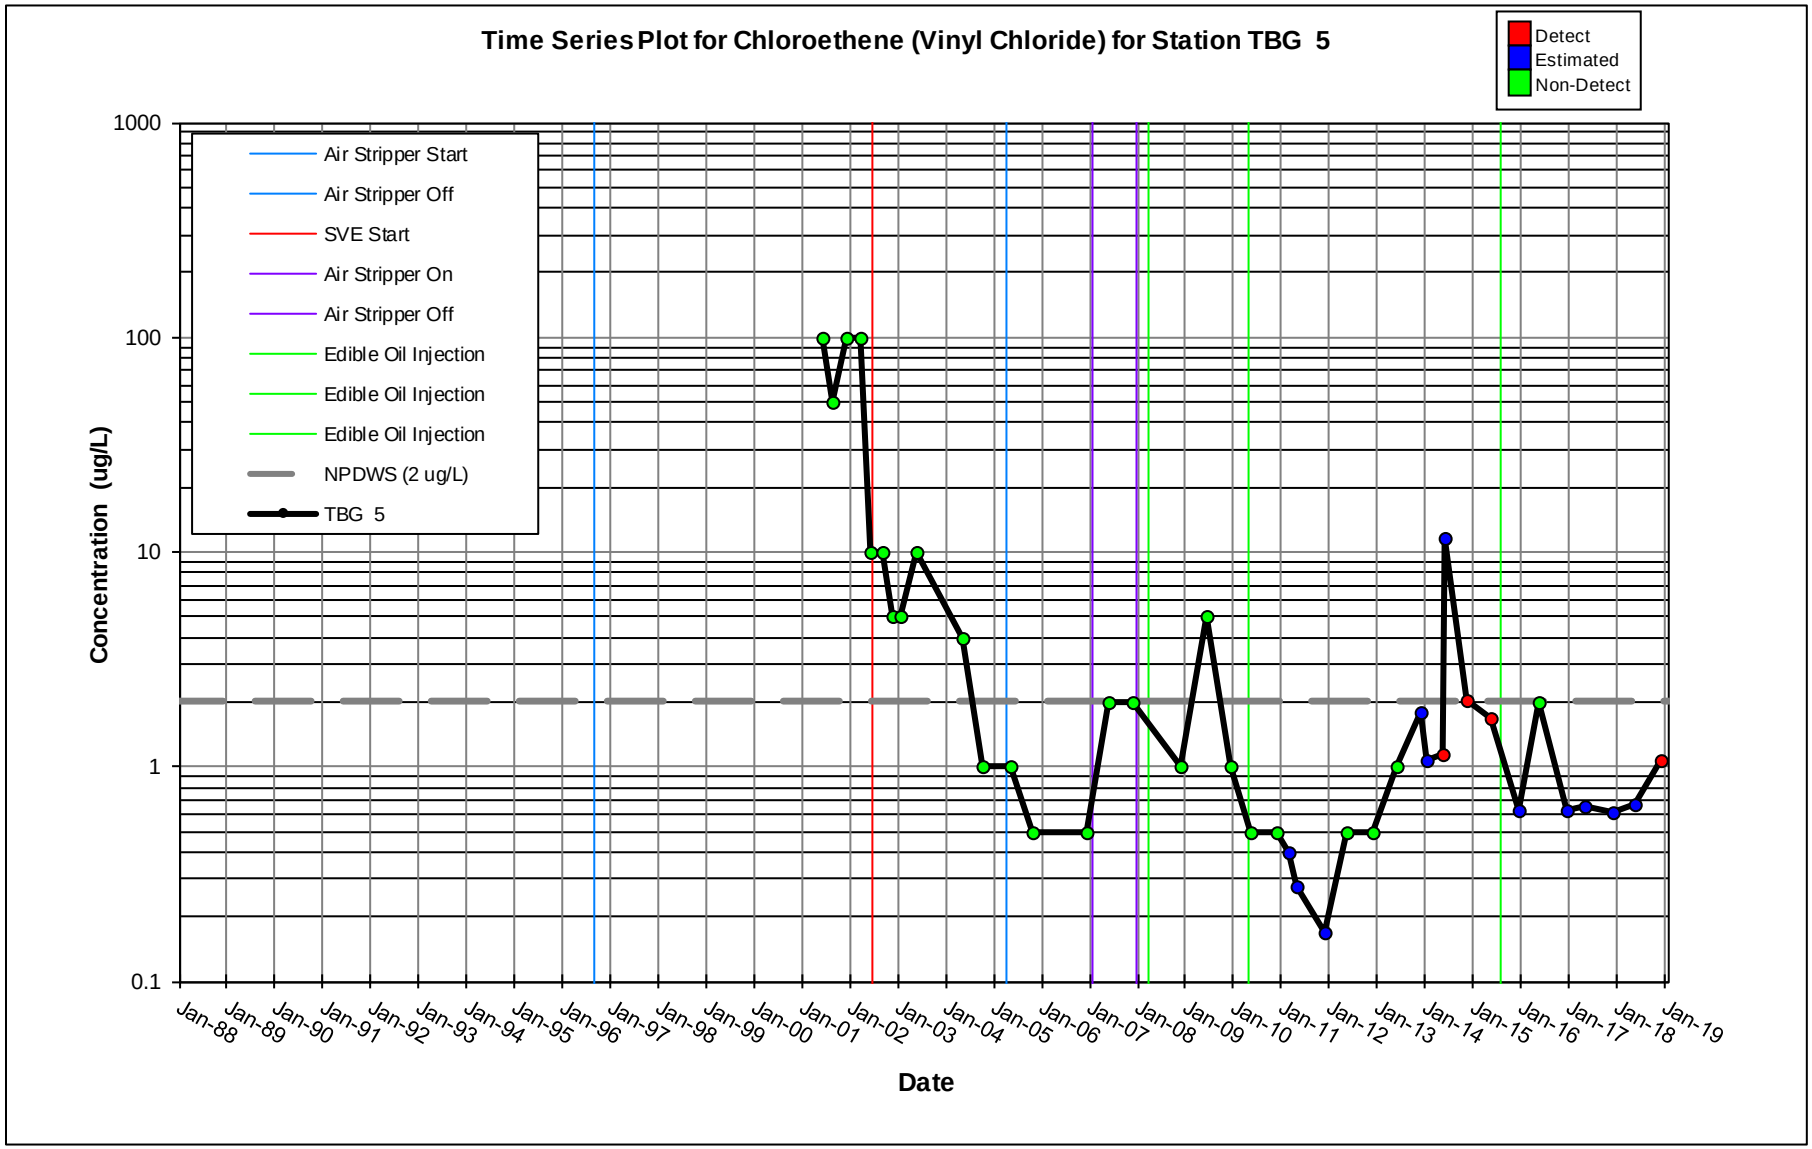
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TBG 5
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TBG 5
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

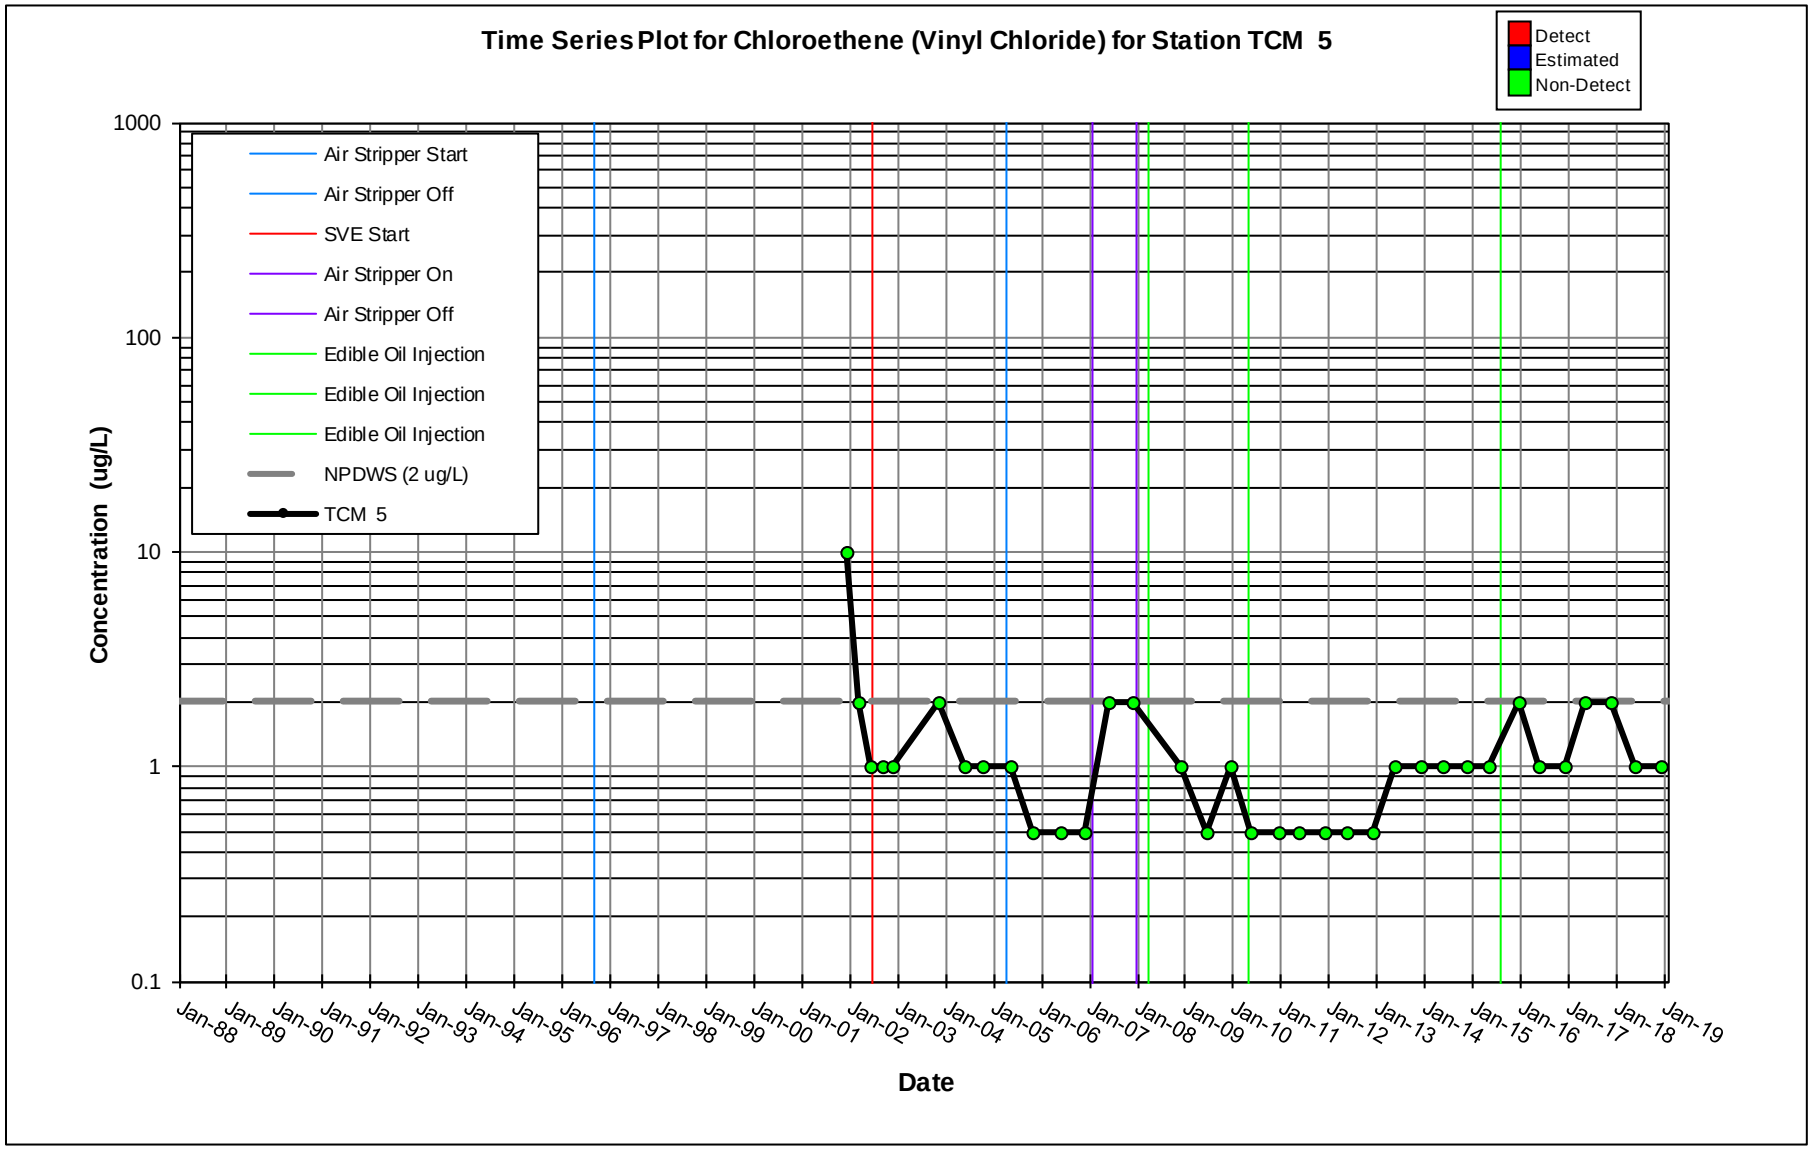
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TCM 5
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TCM 5
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

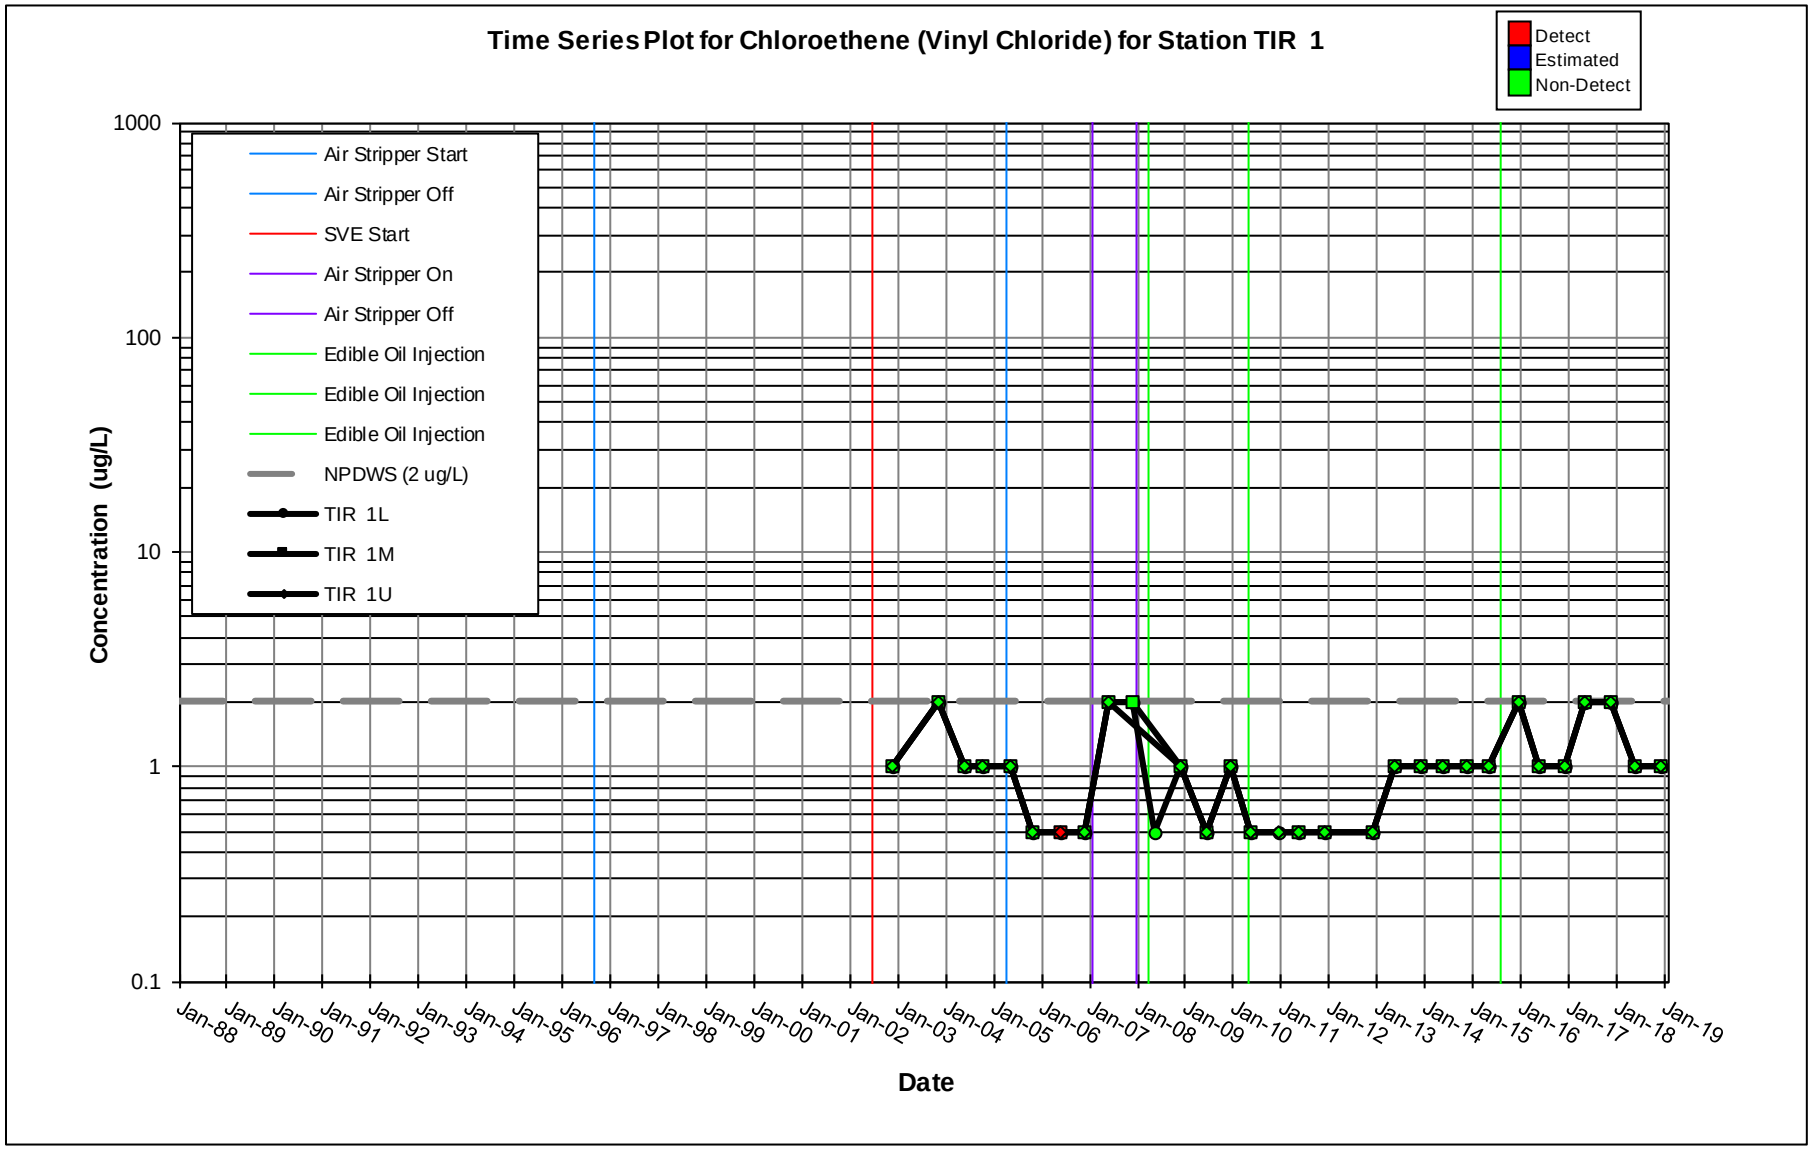
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TIR 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TIR 1L
TIR 1M
TIR 1U
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

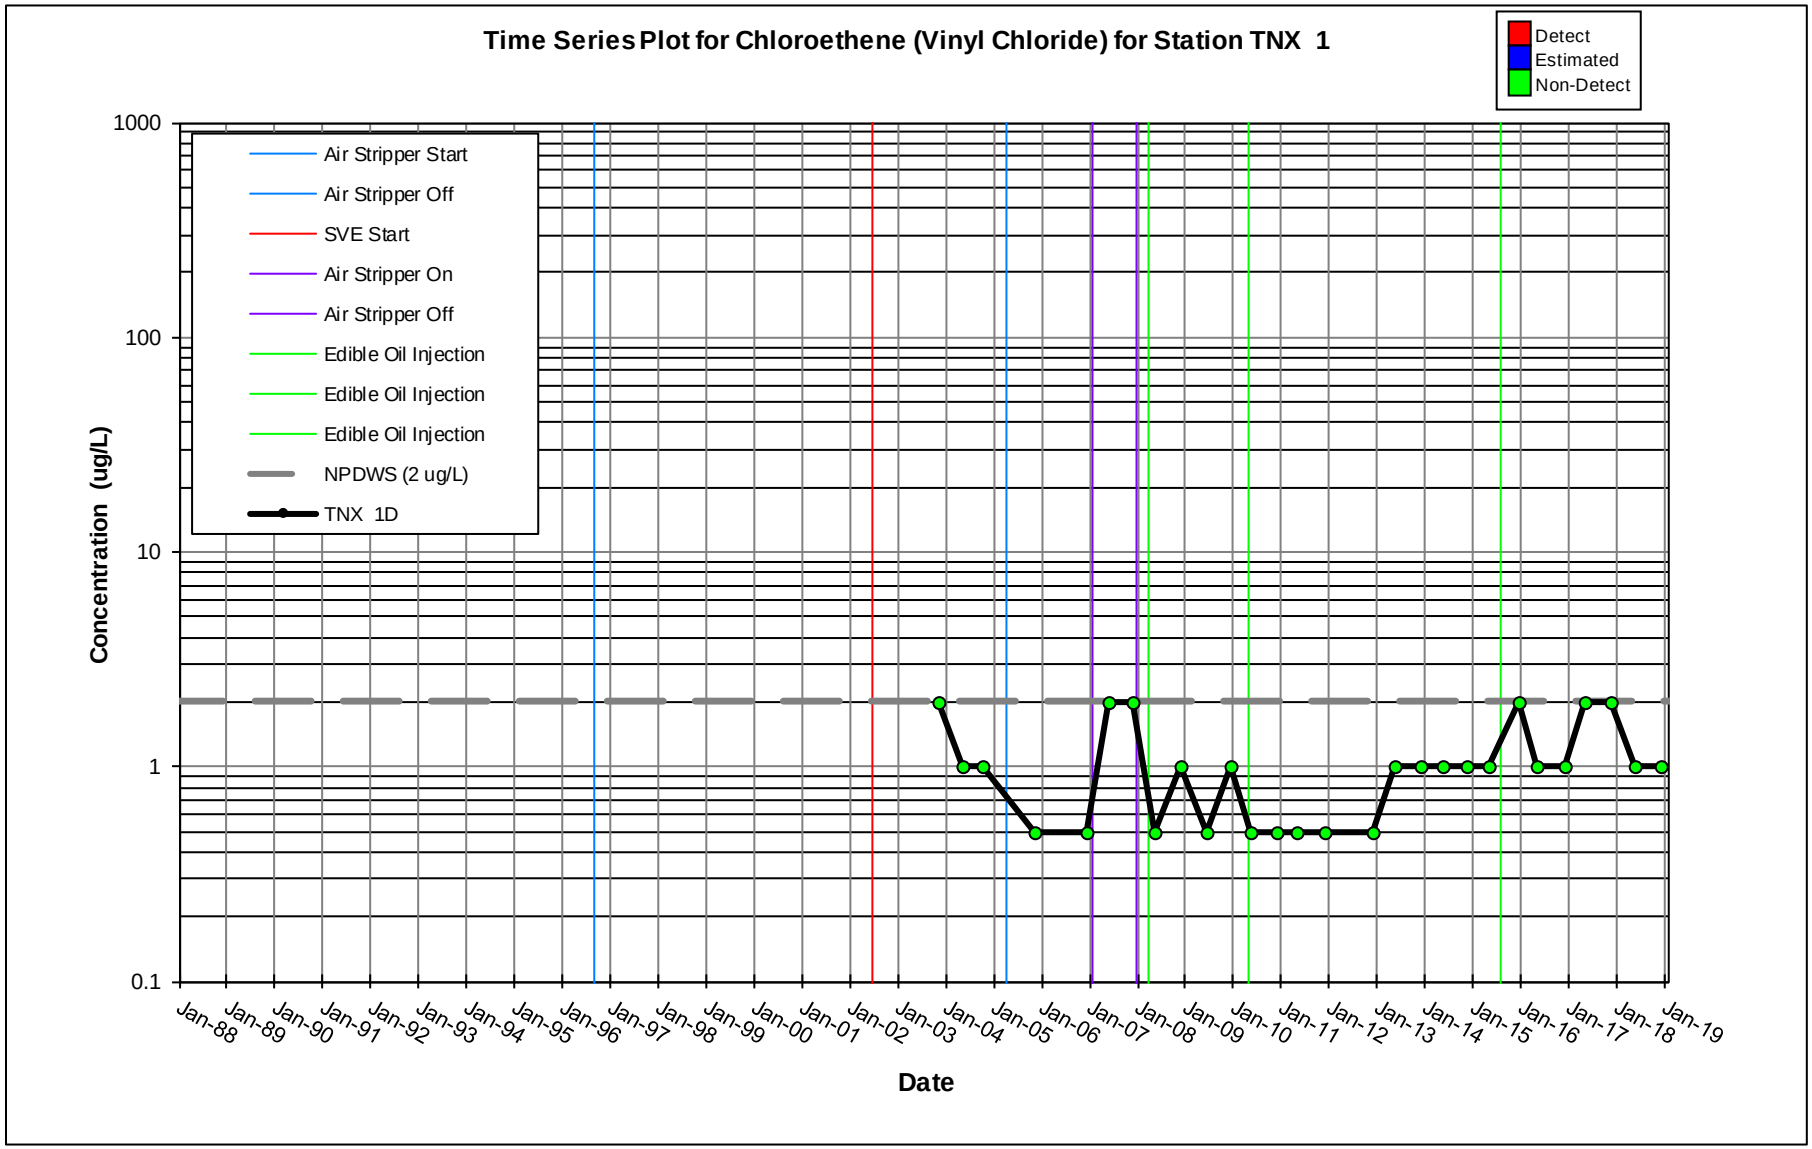
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX 1D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

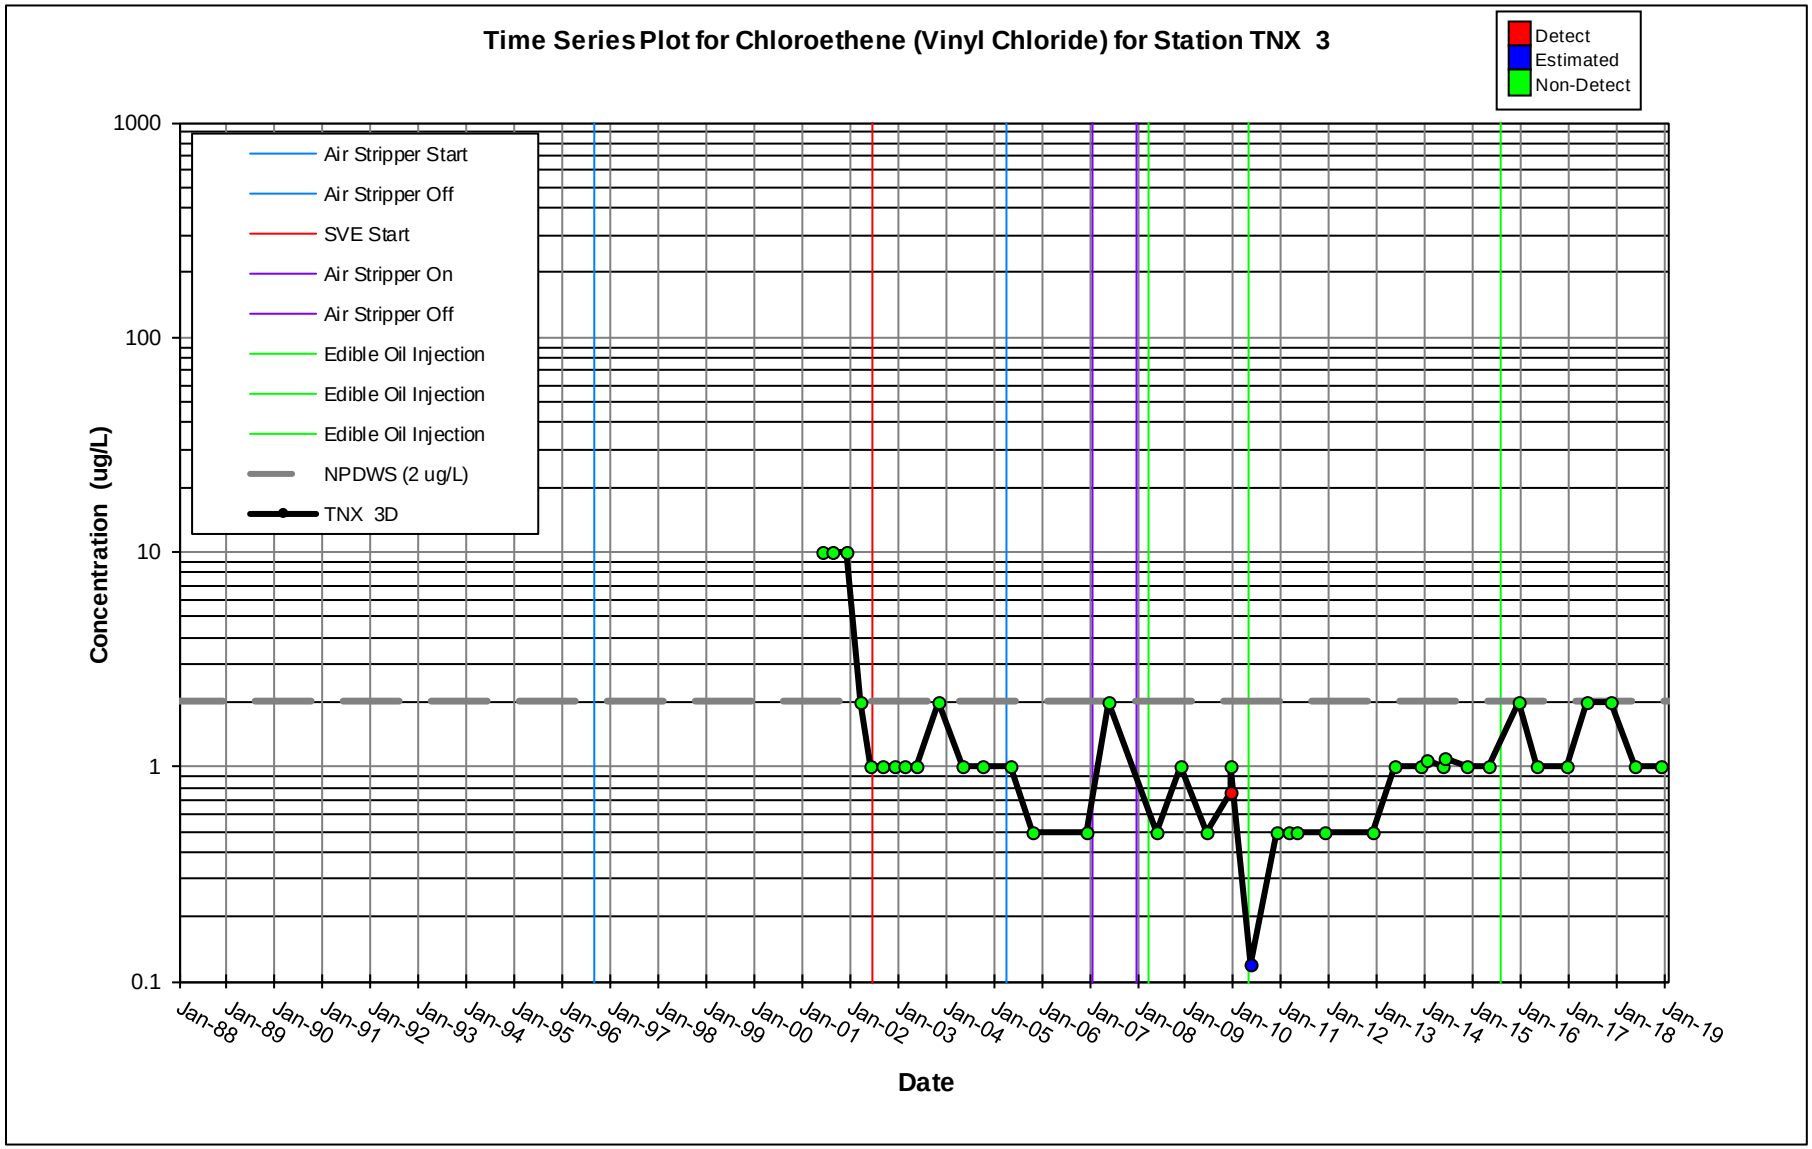
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX 3D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

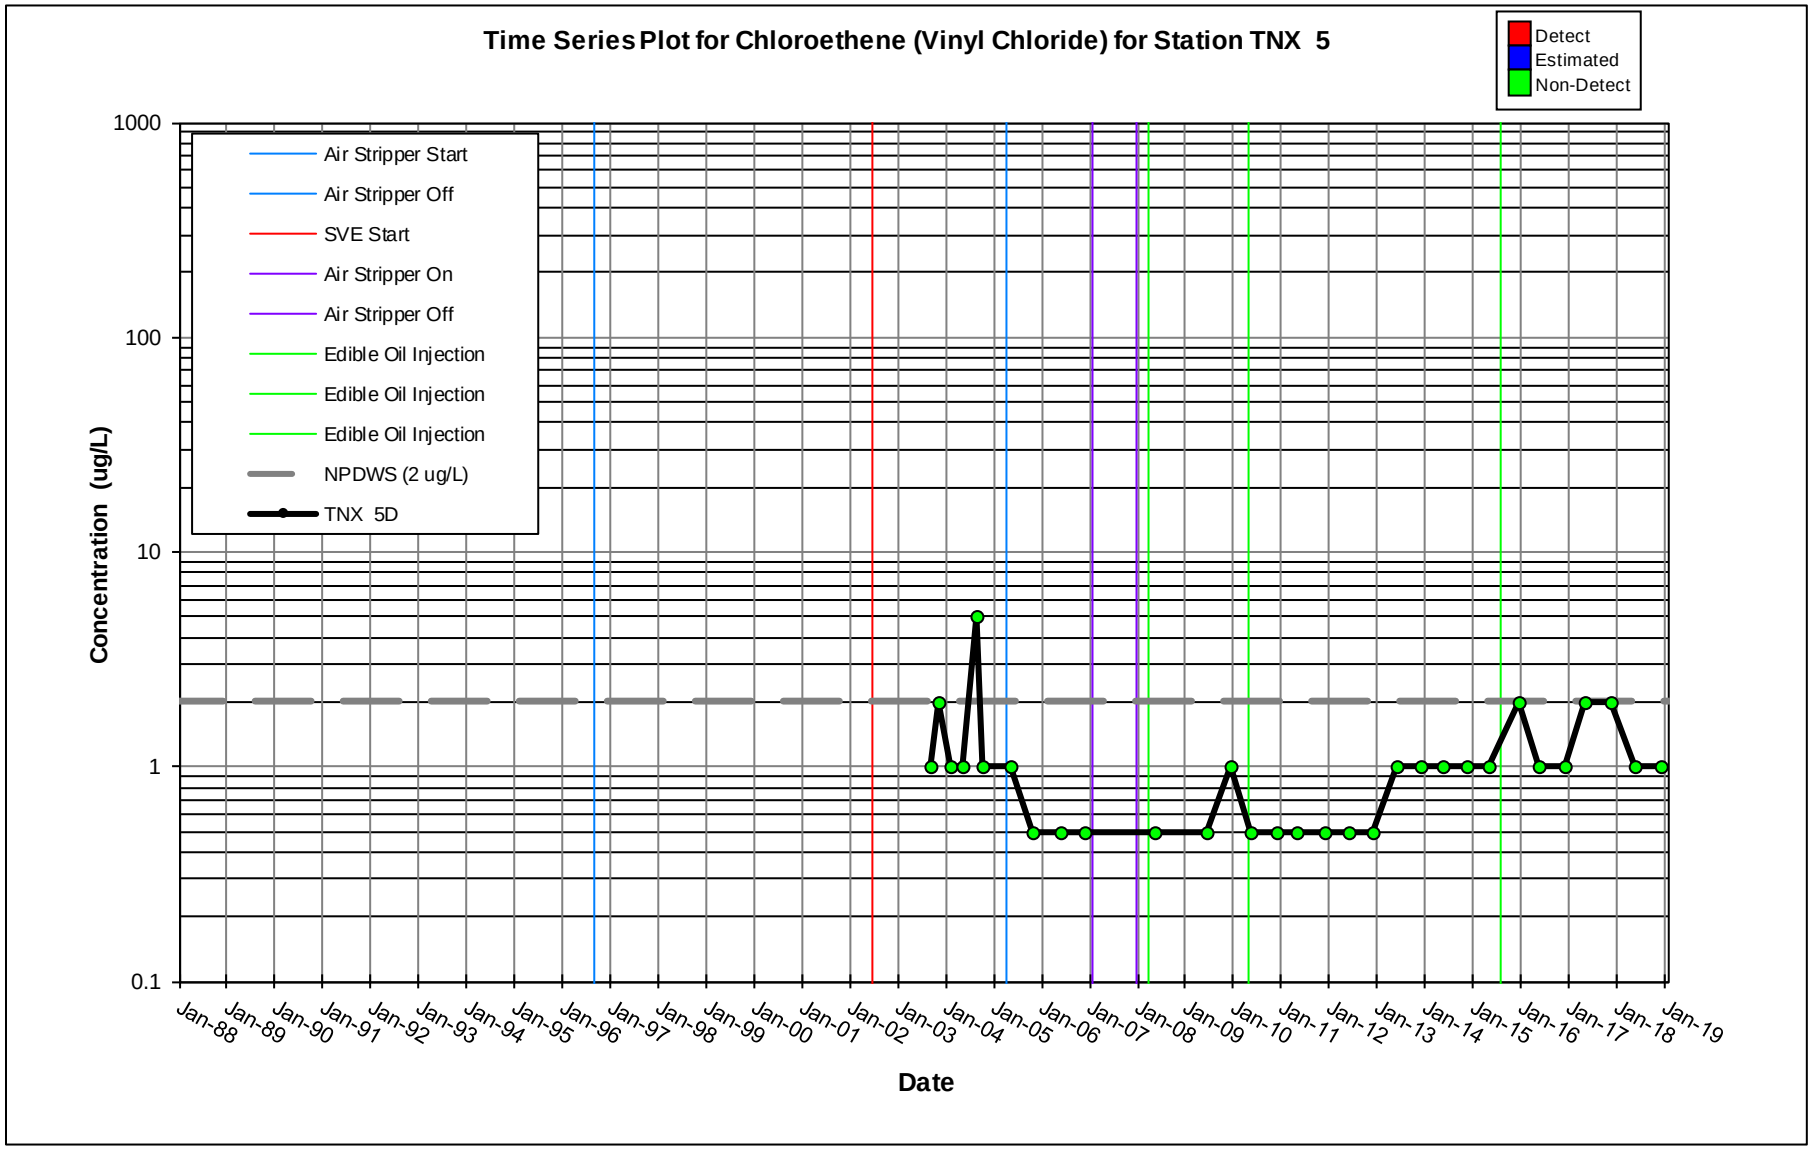
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX 5
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX 5D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

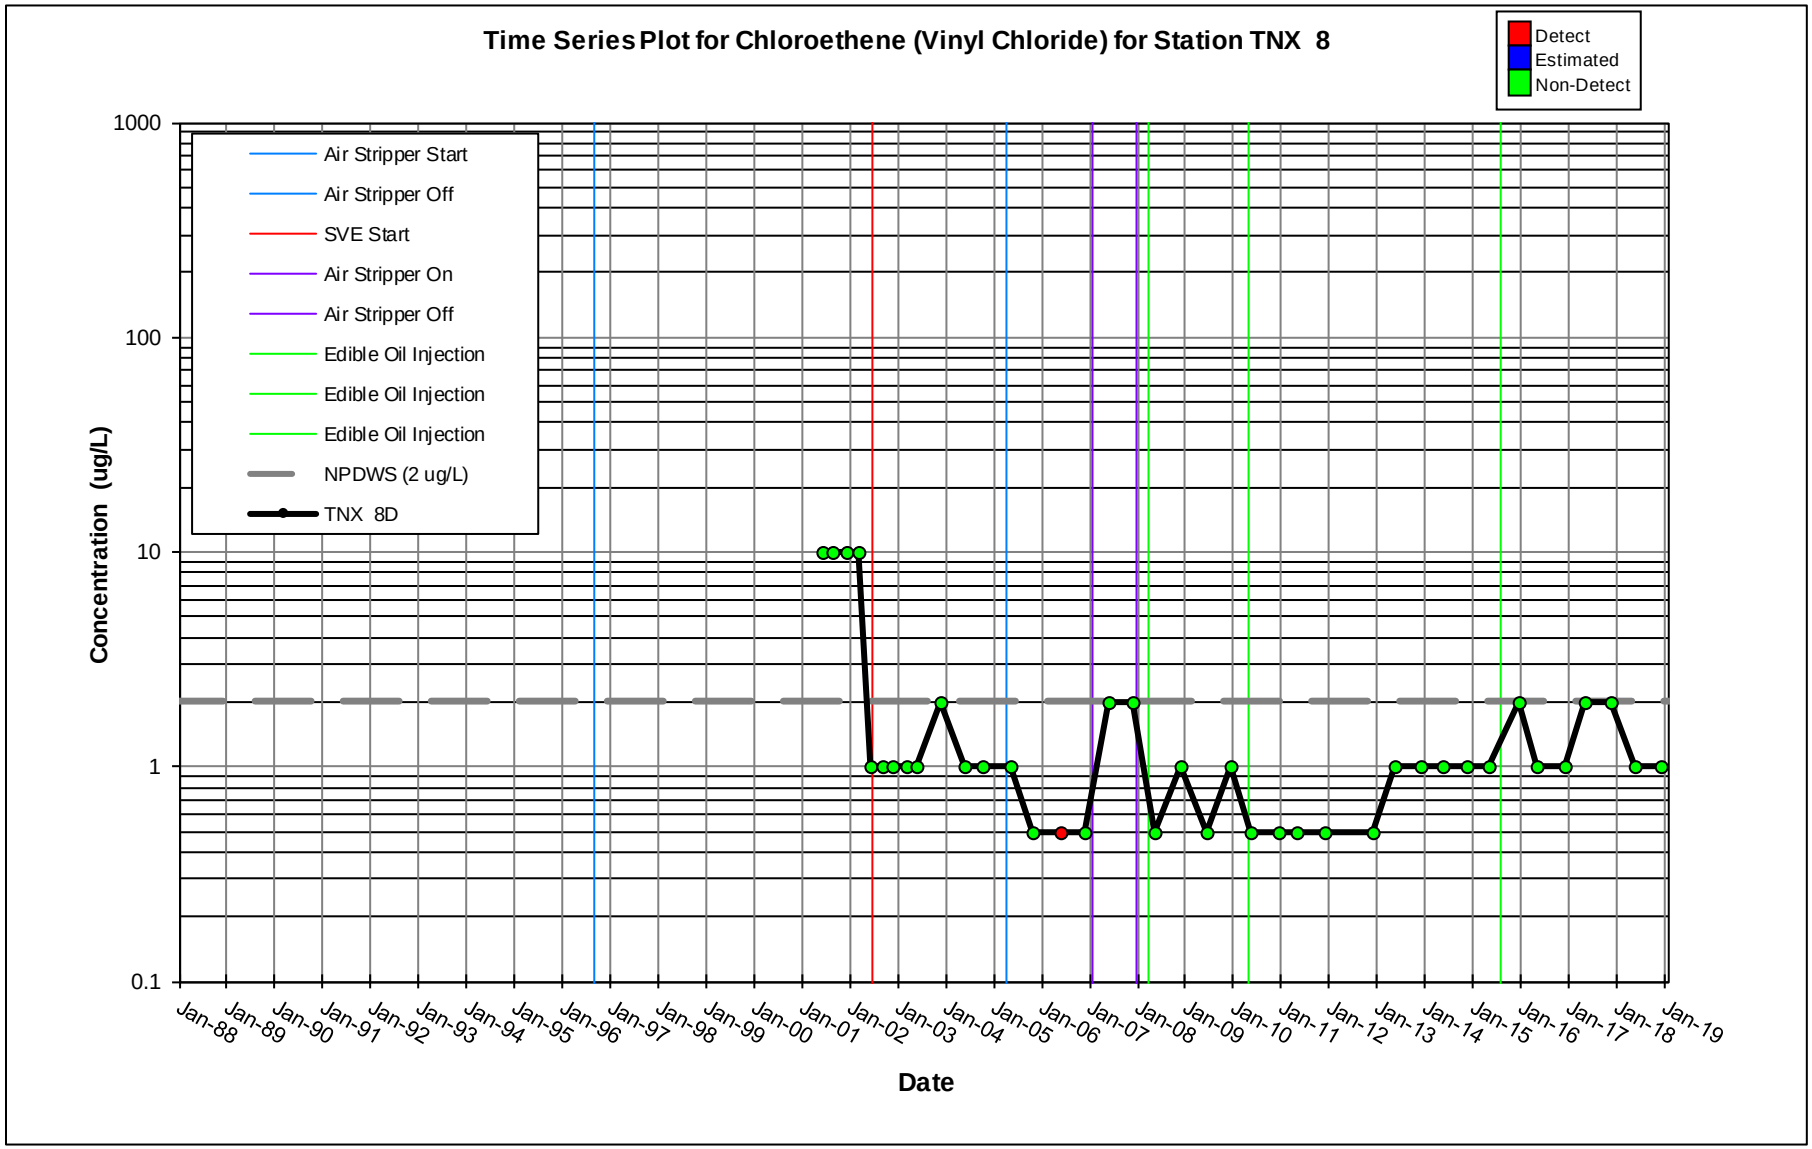
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX 8
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX 8D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

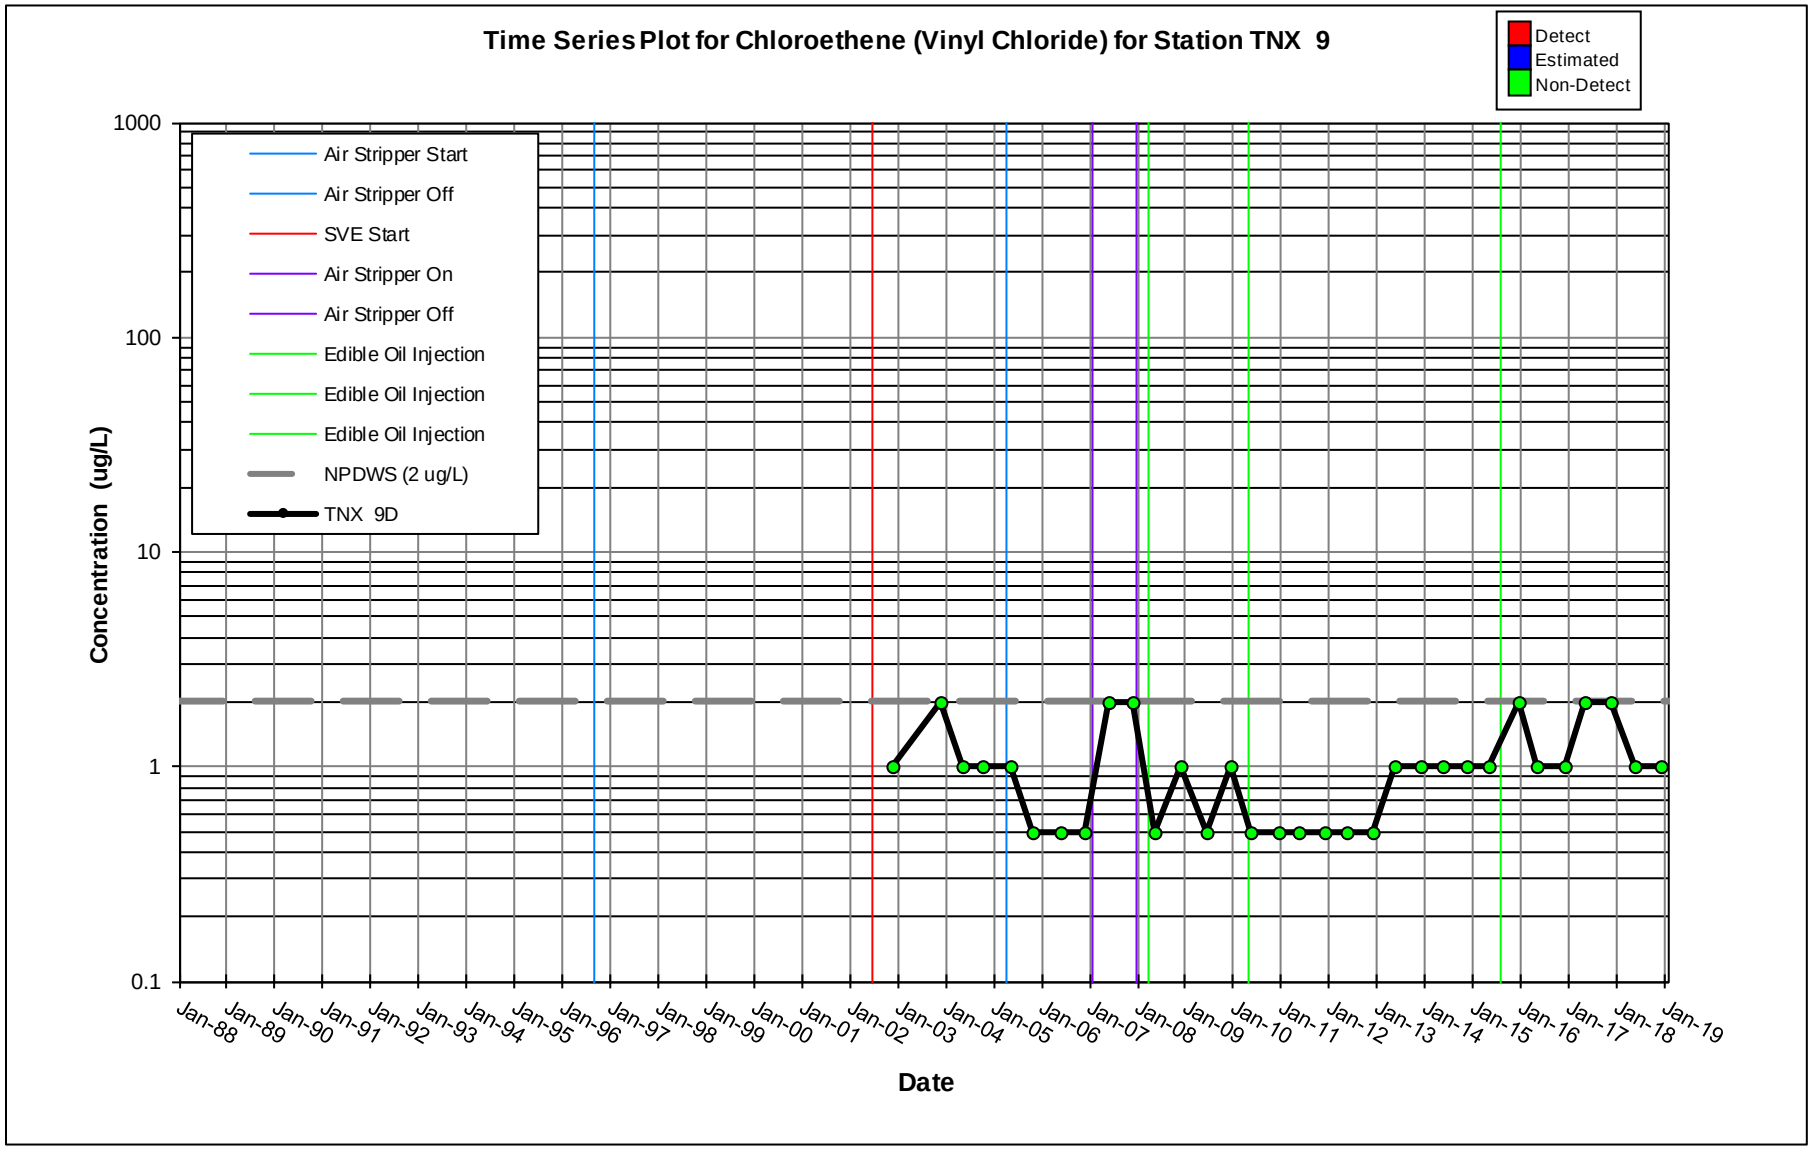
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX 9
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX 9D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

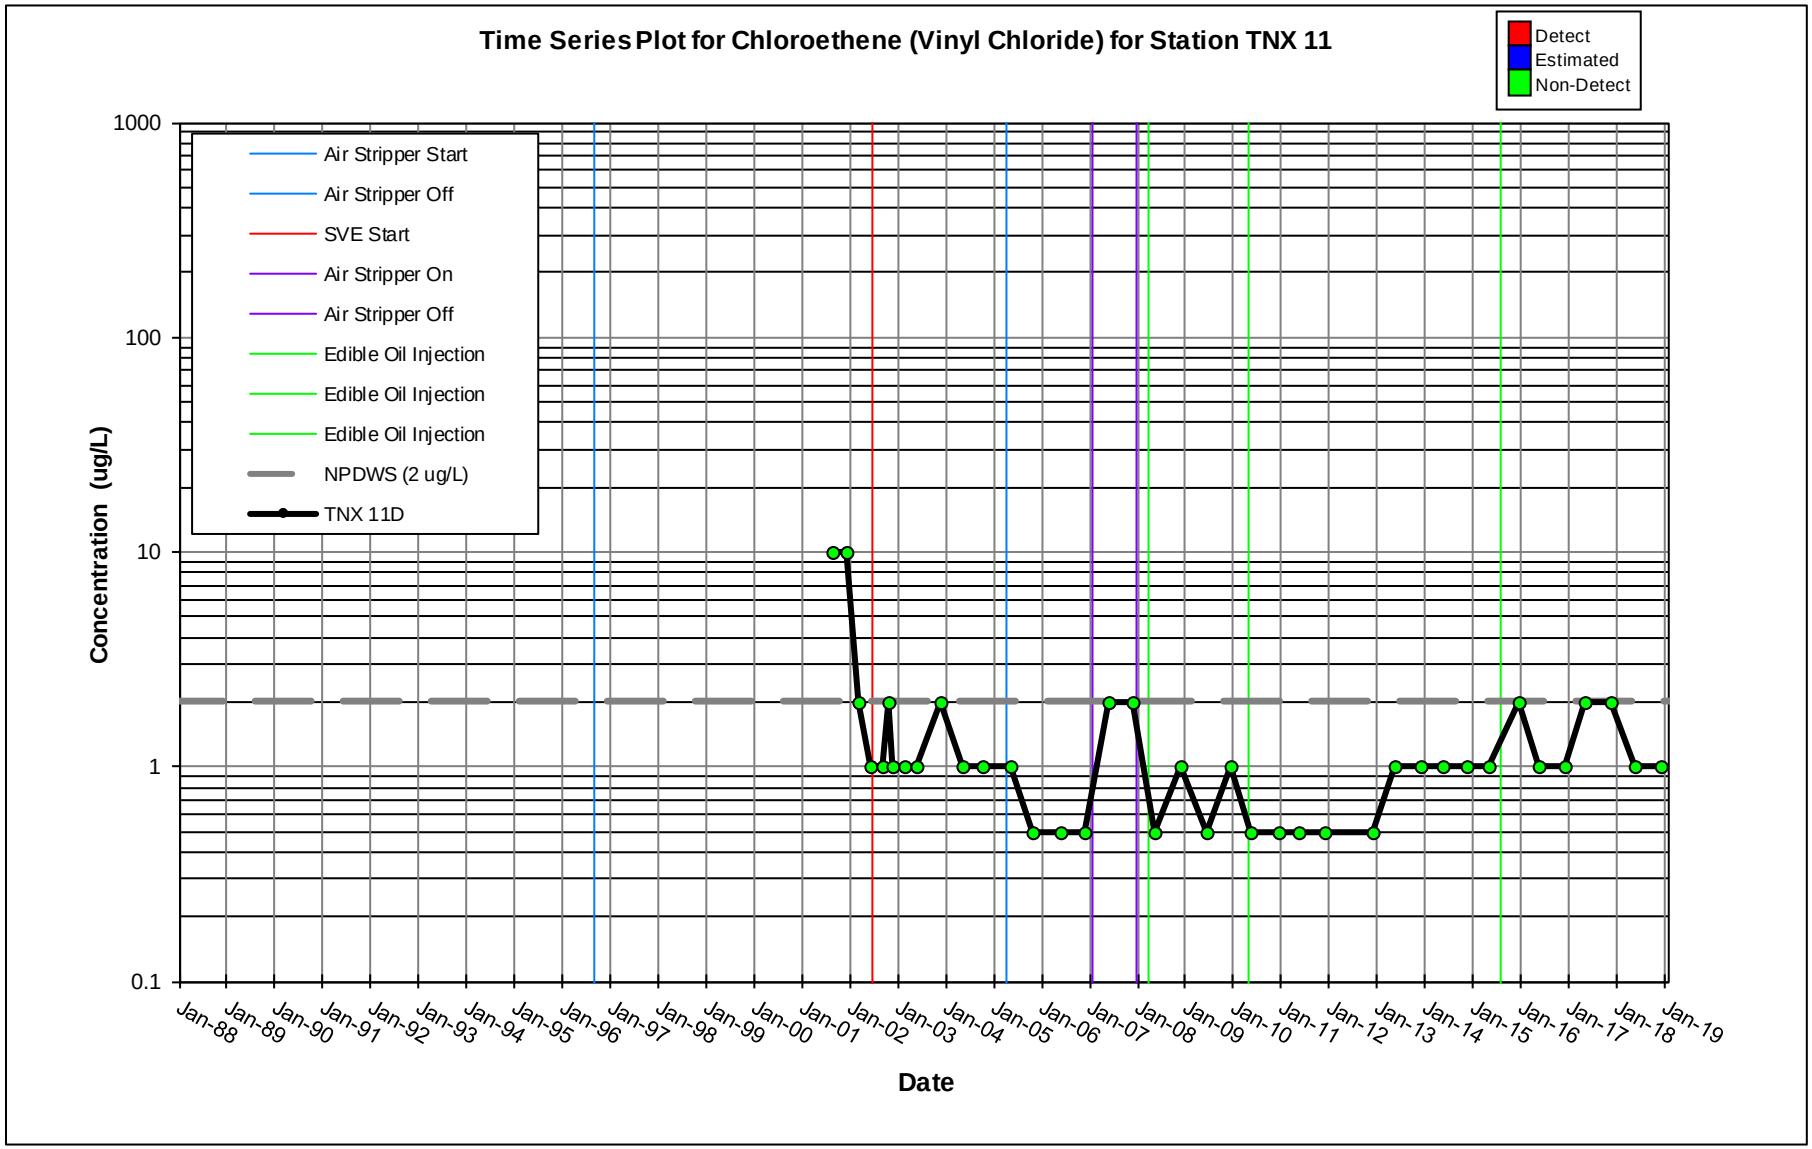
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX 11
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX 11D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

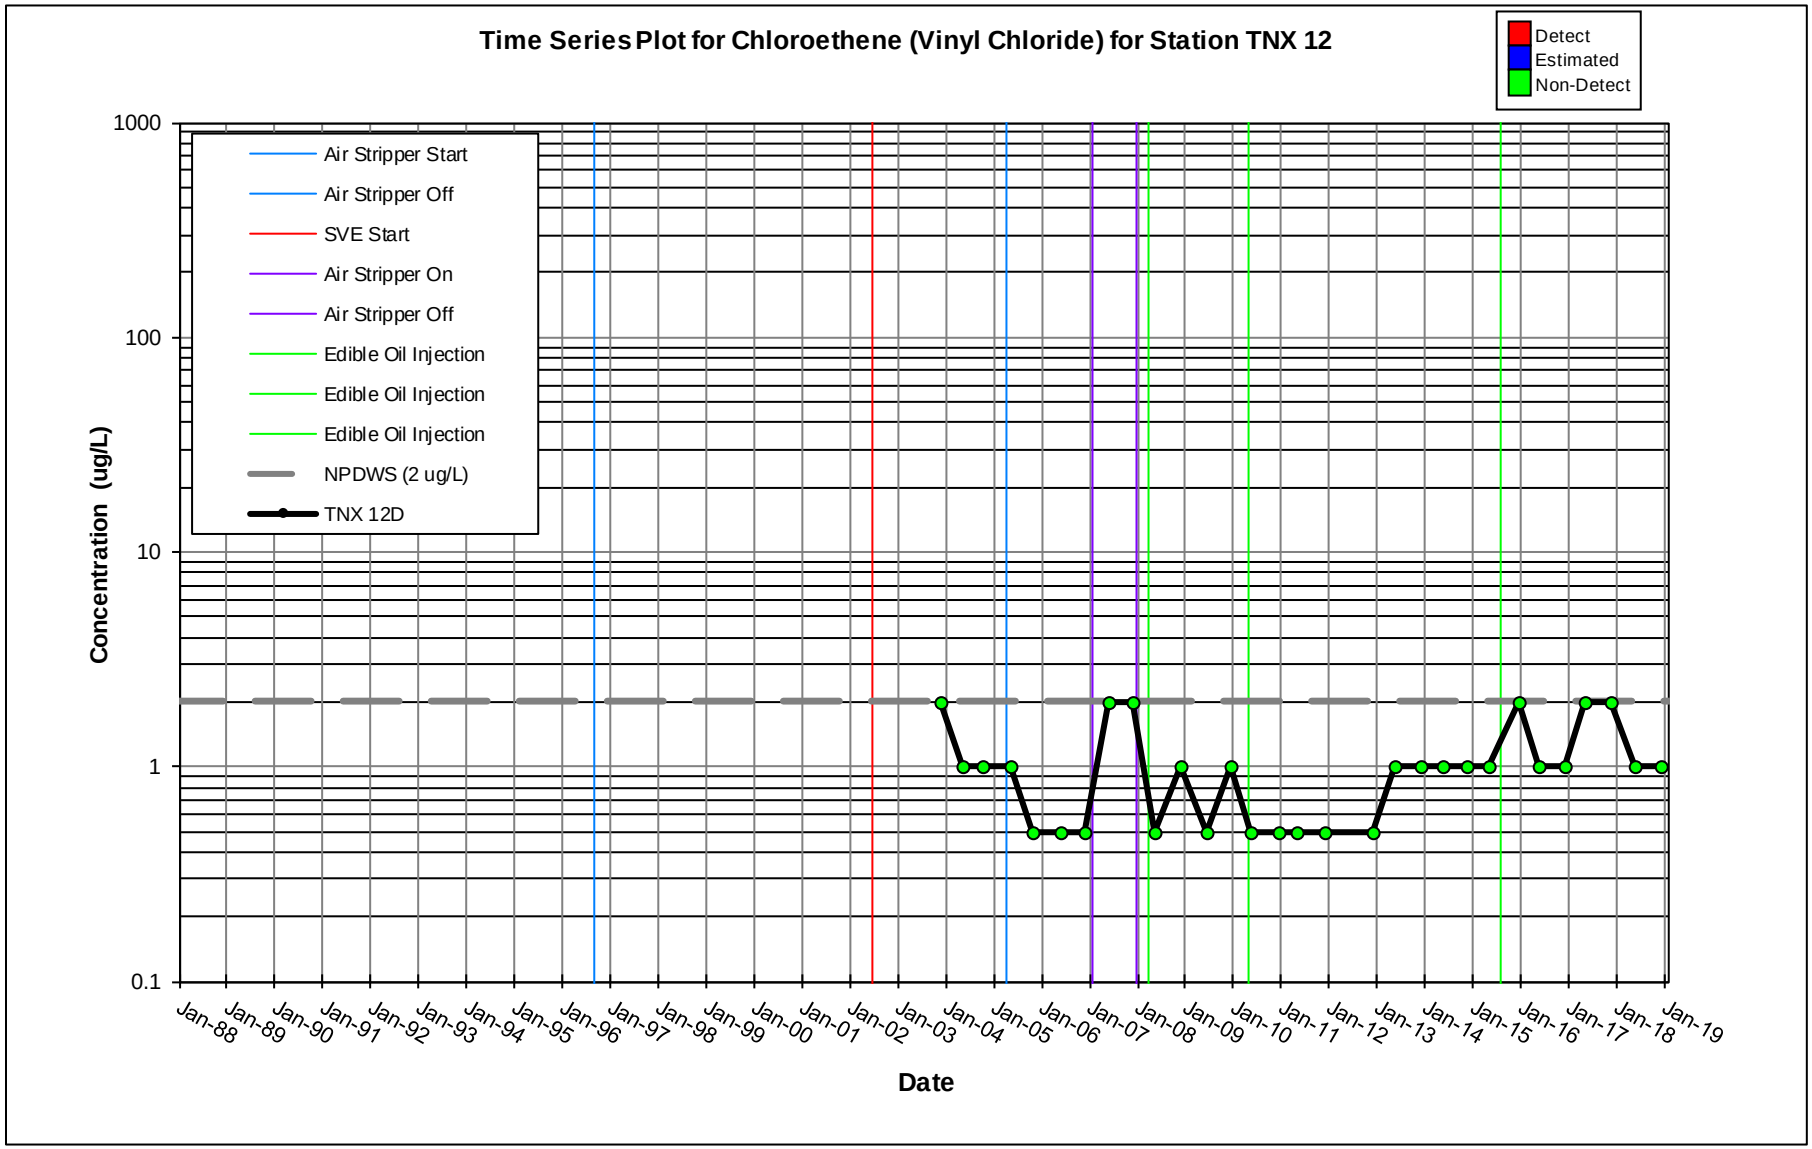
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX 12
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX 12D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

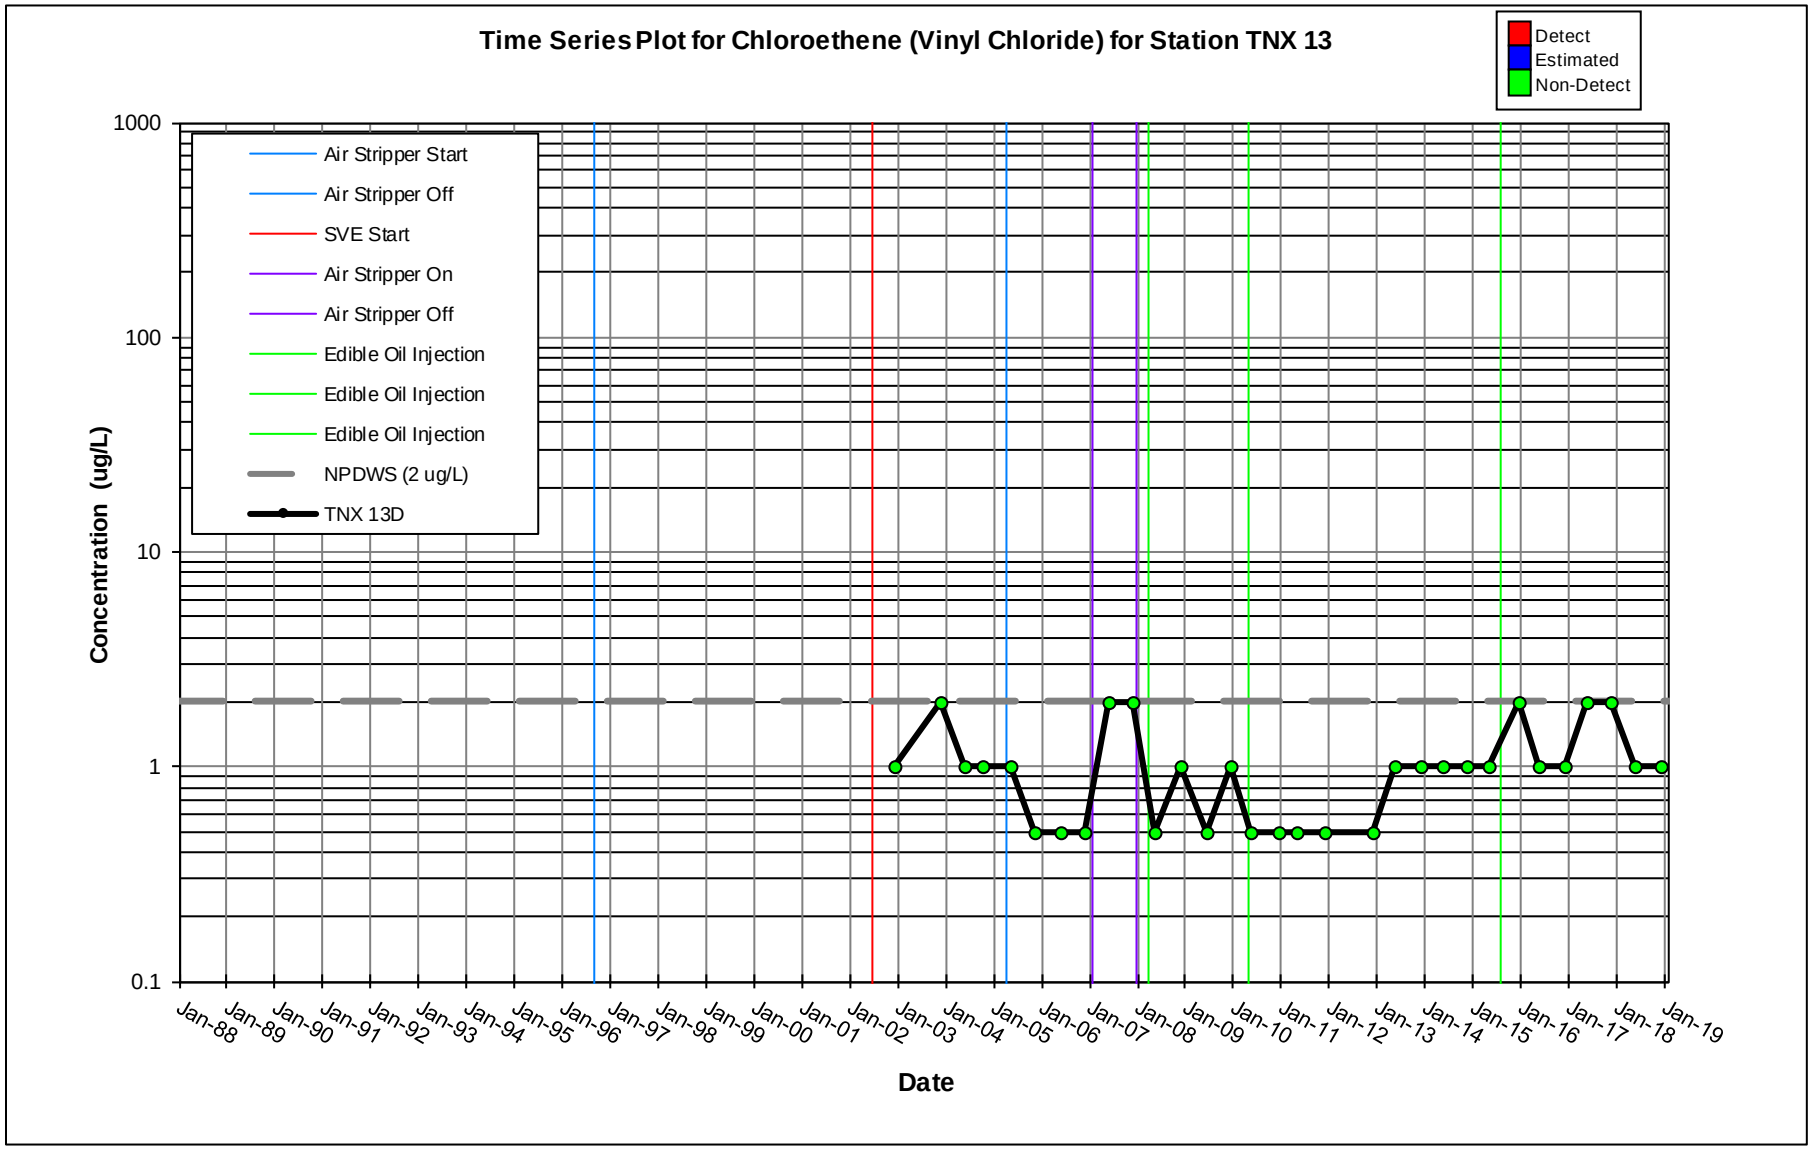
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX 13
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX 13D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

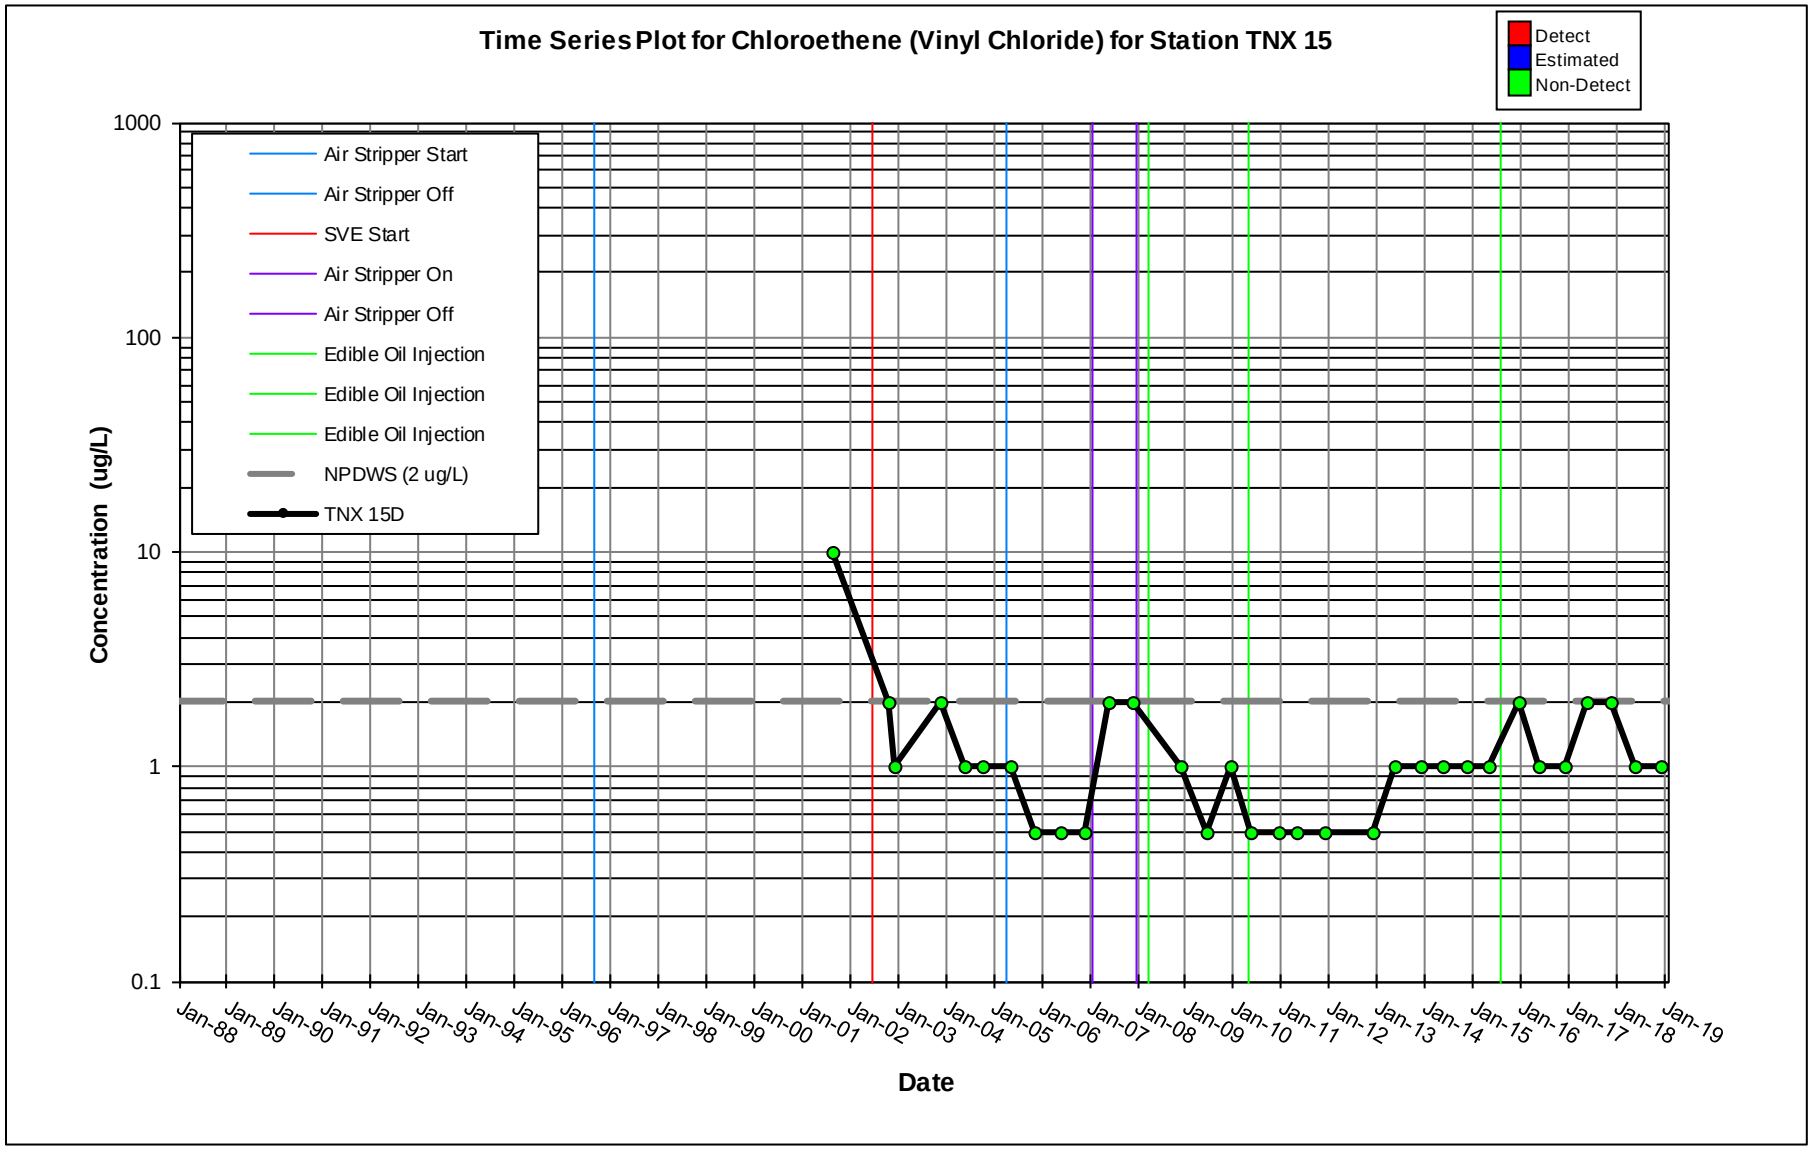
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX 15
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX 15D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

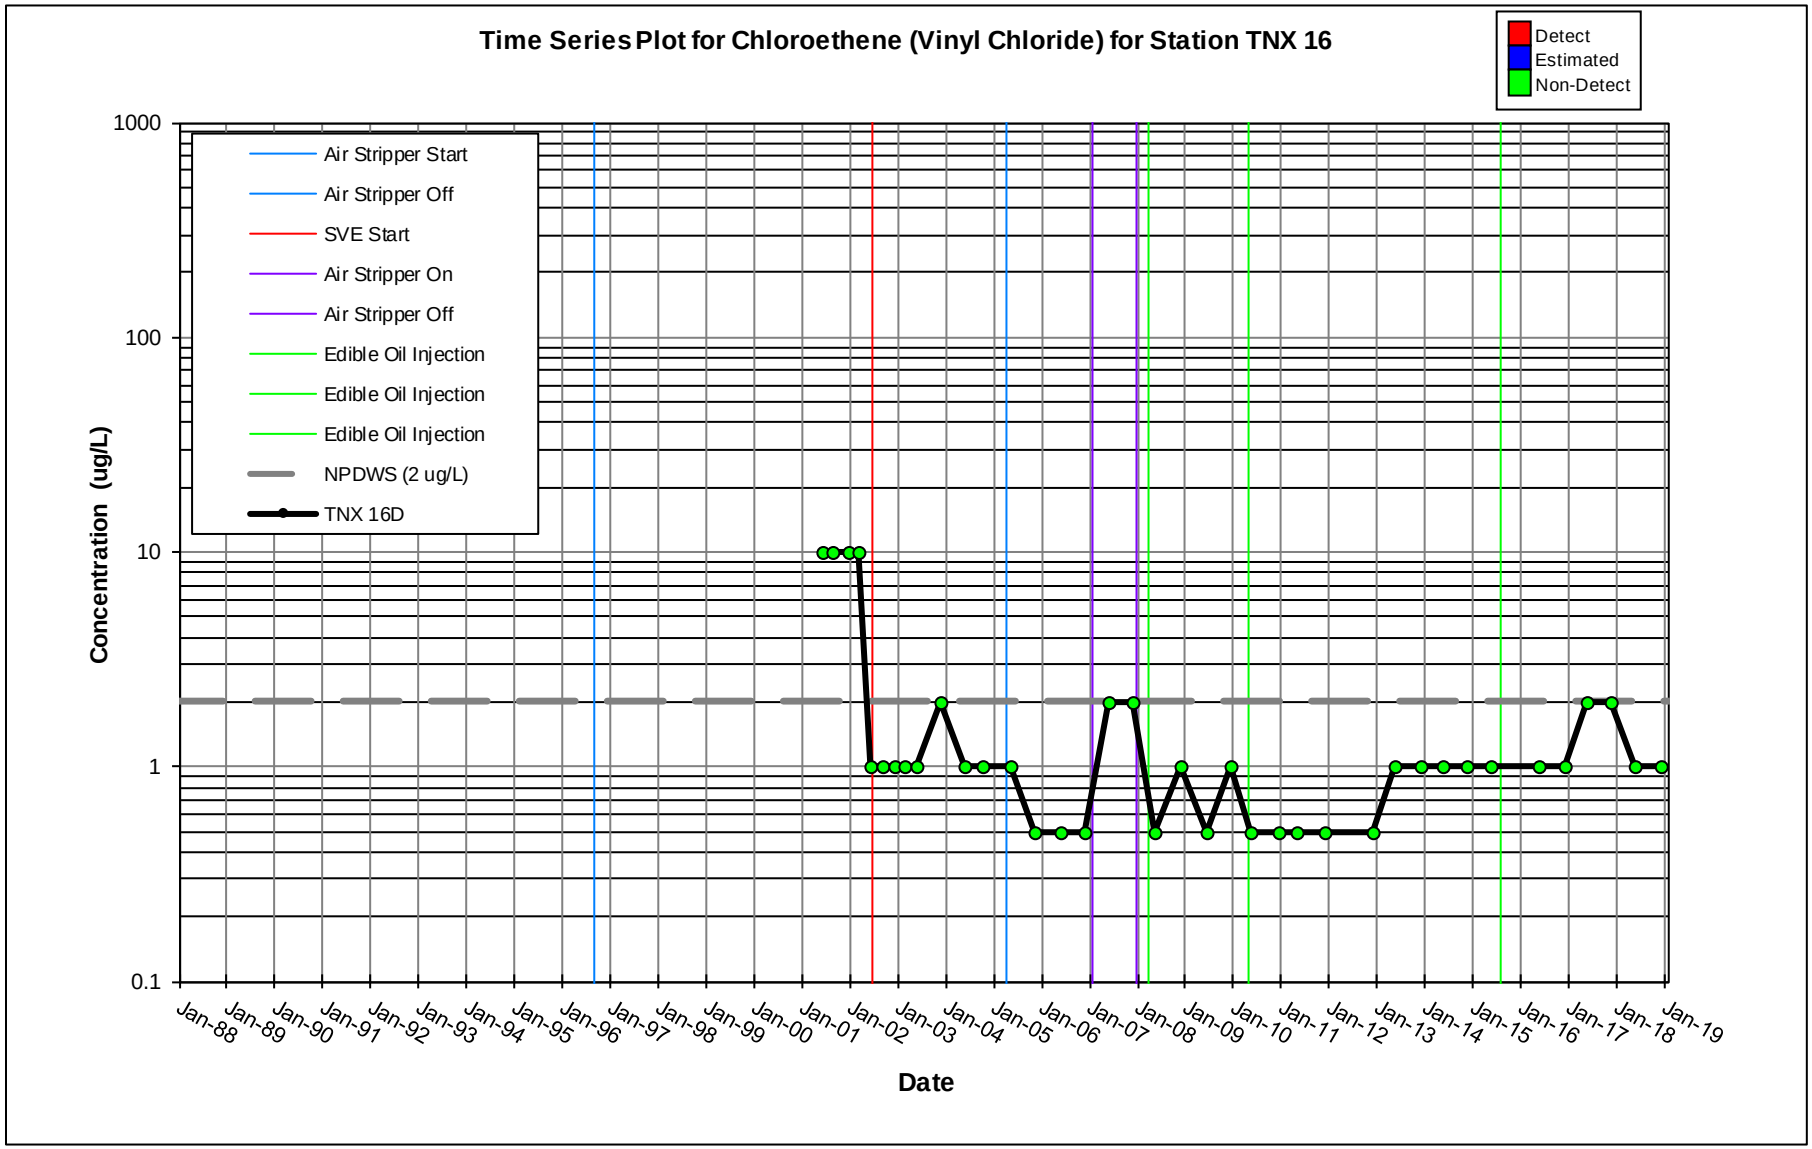
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX 16
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX 16D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

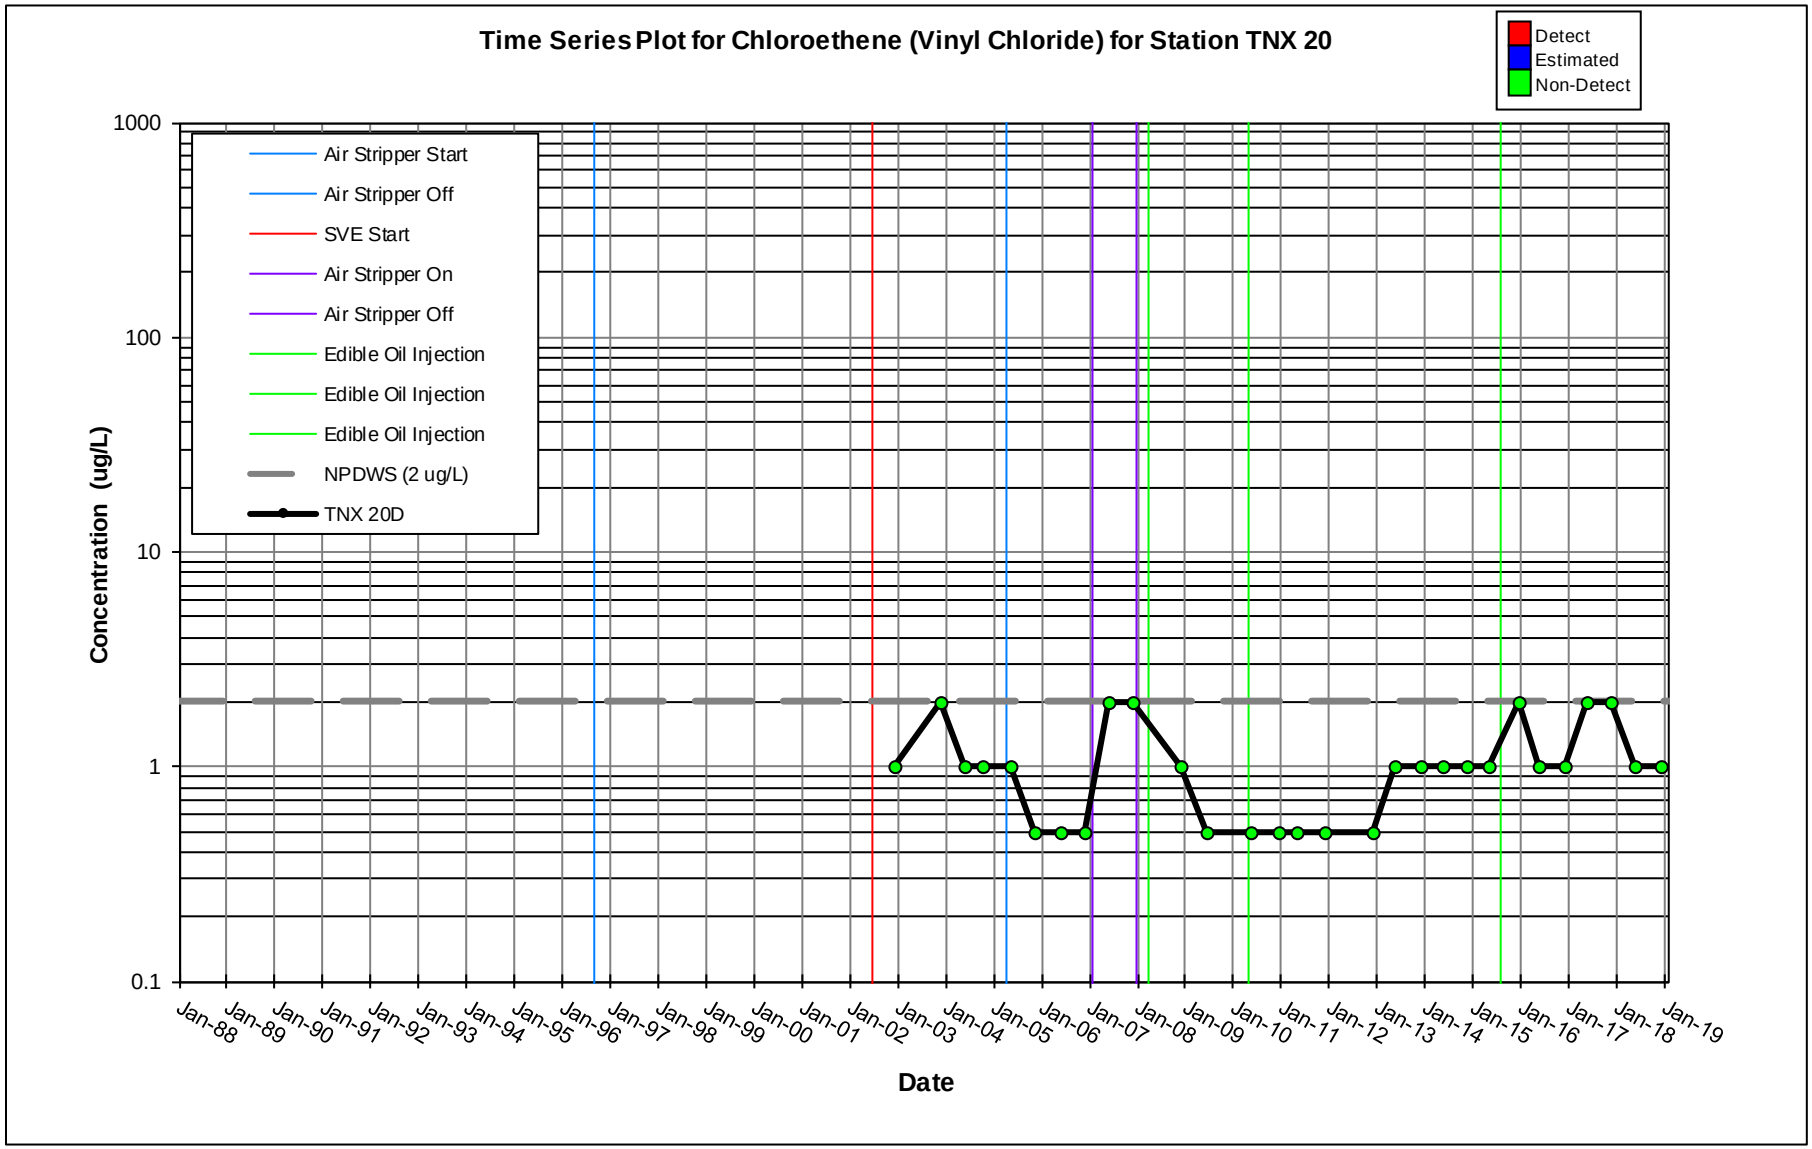
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX 20
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX 20D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

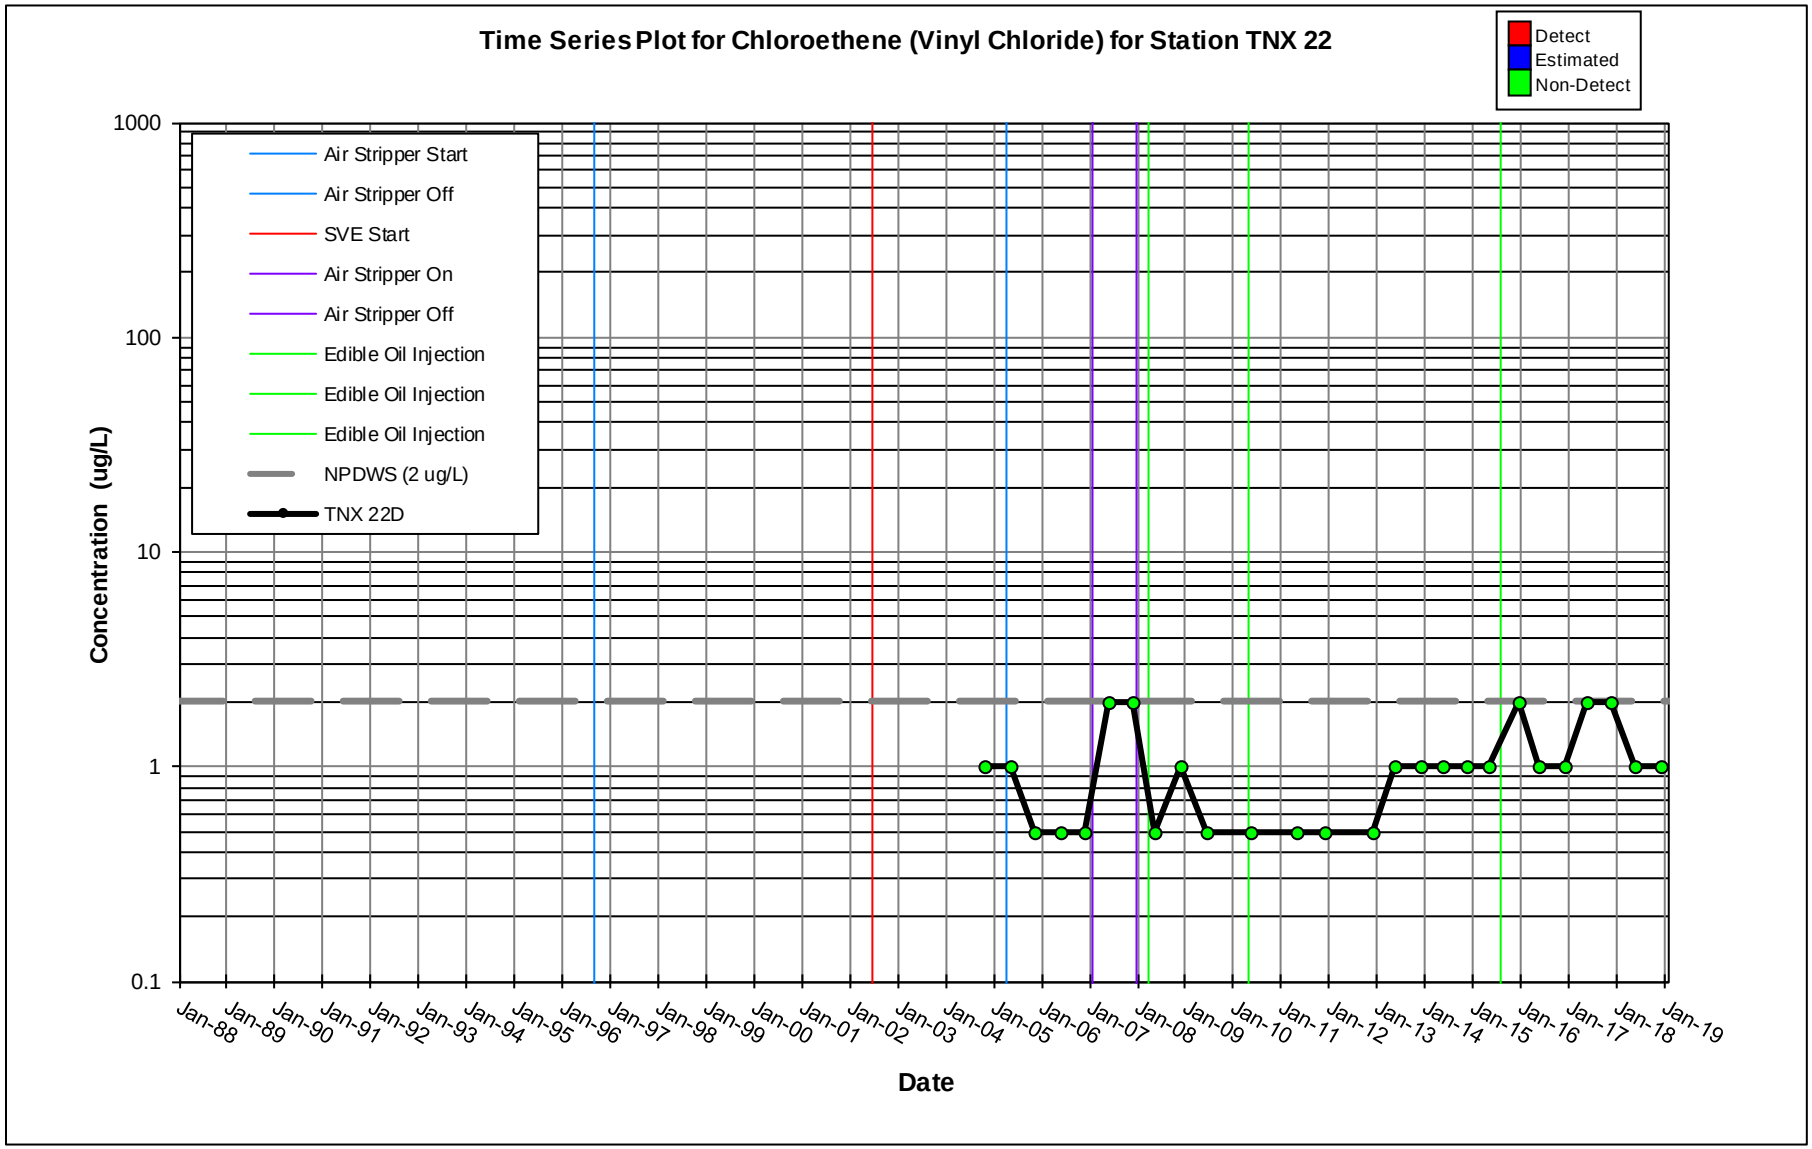
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX 22
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX 22D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

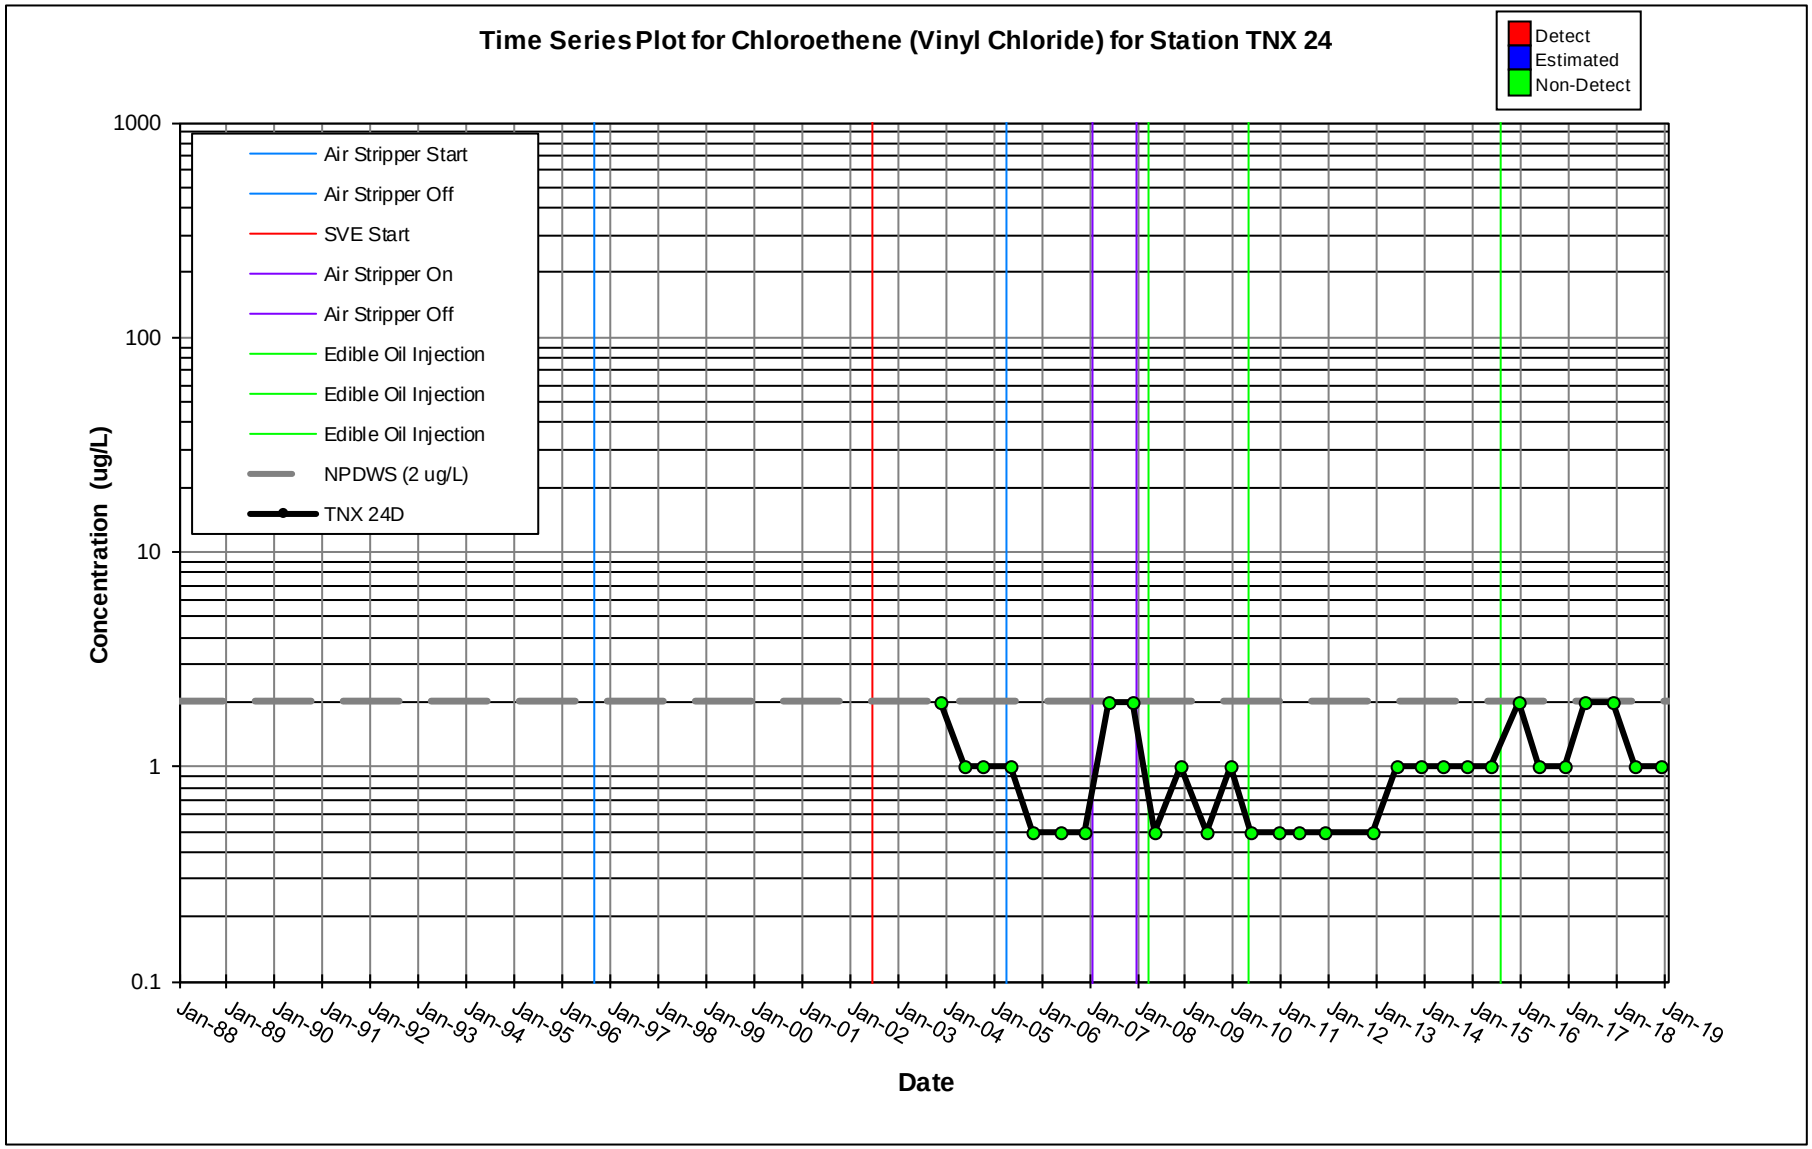
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX 24
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX 24D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

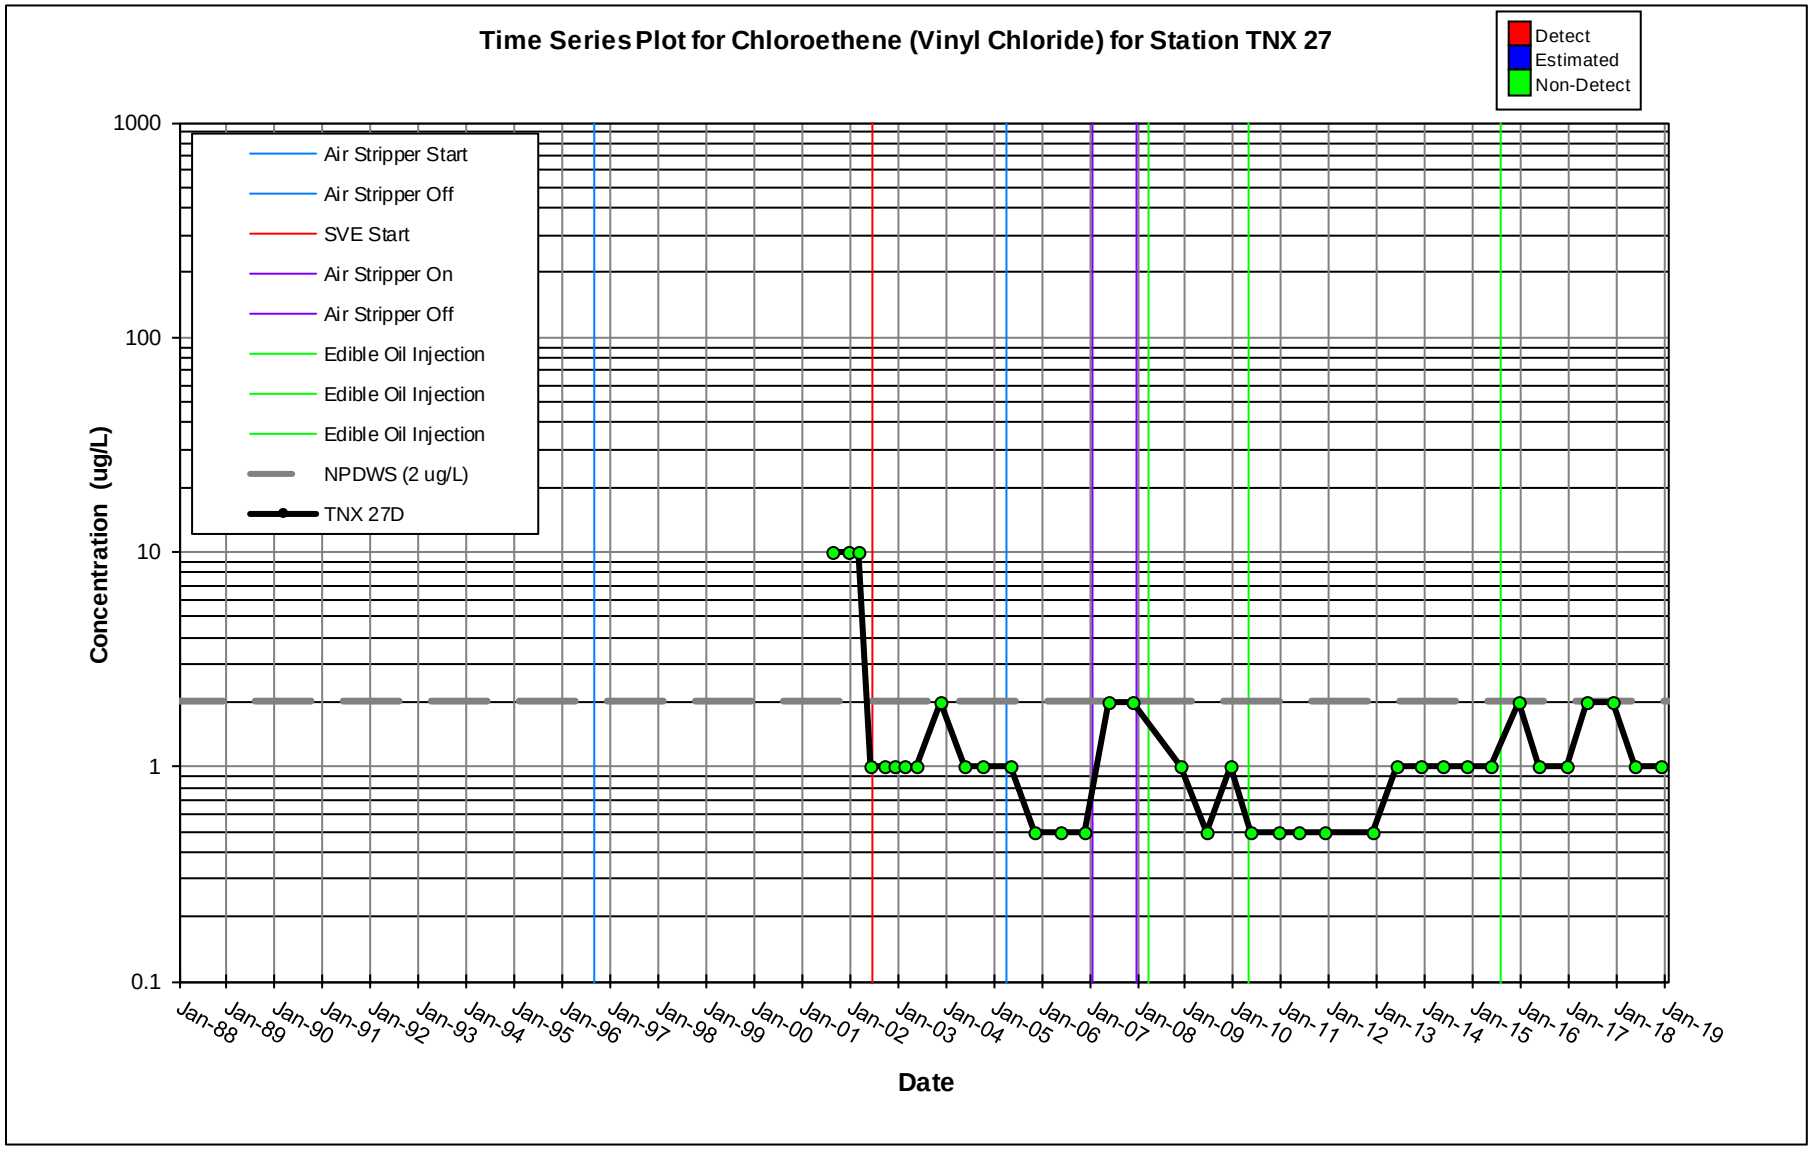
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX 27
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX 27D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

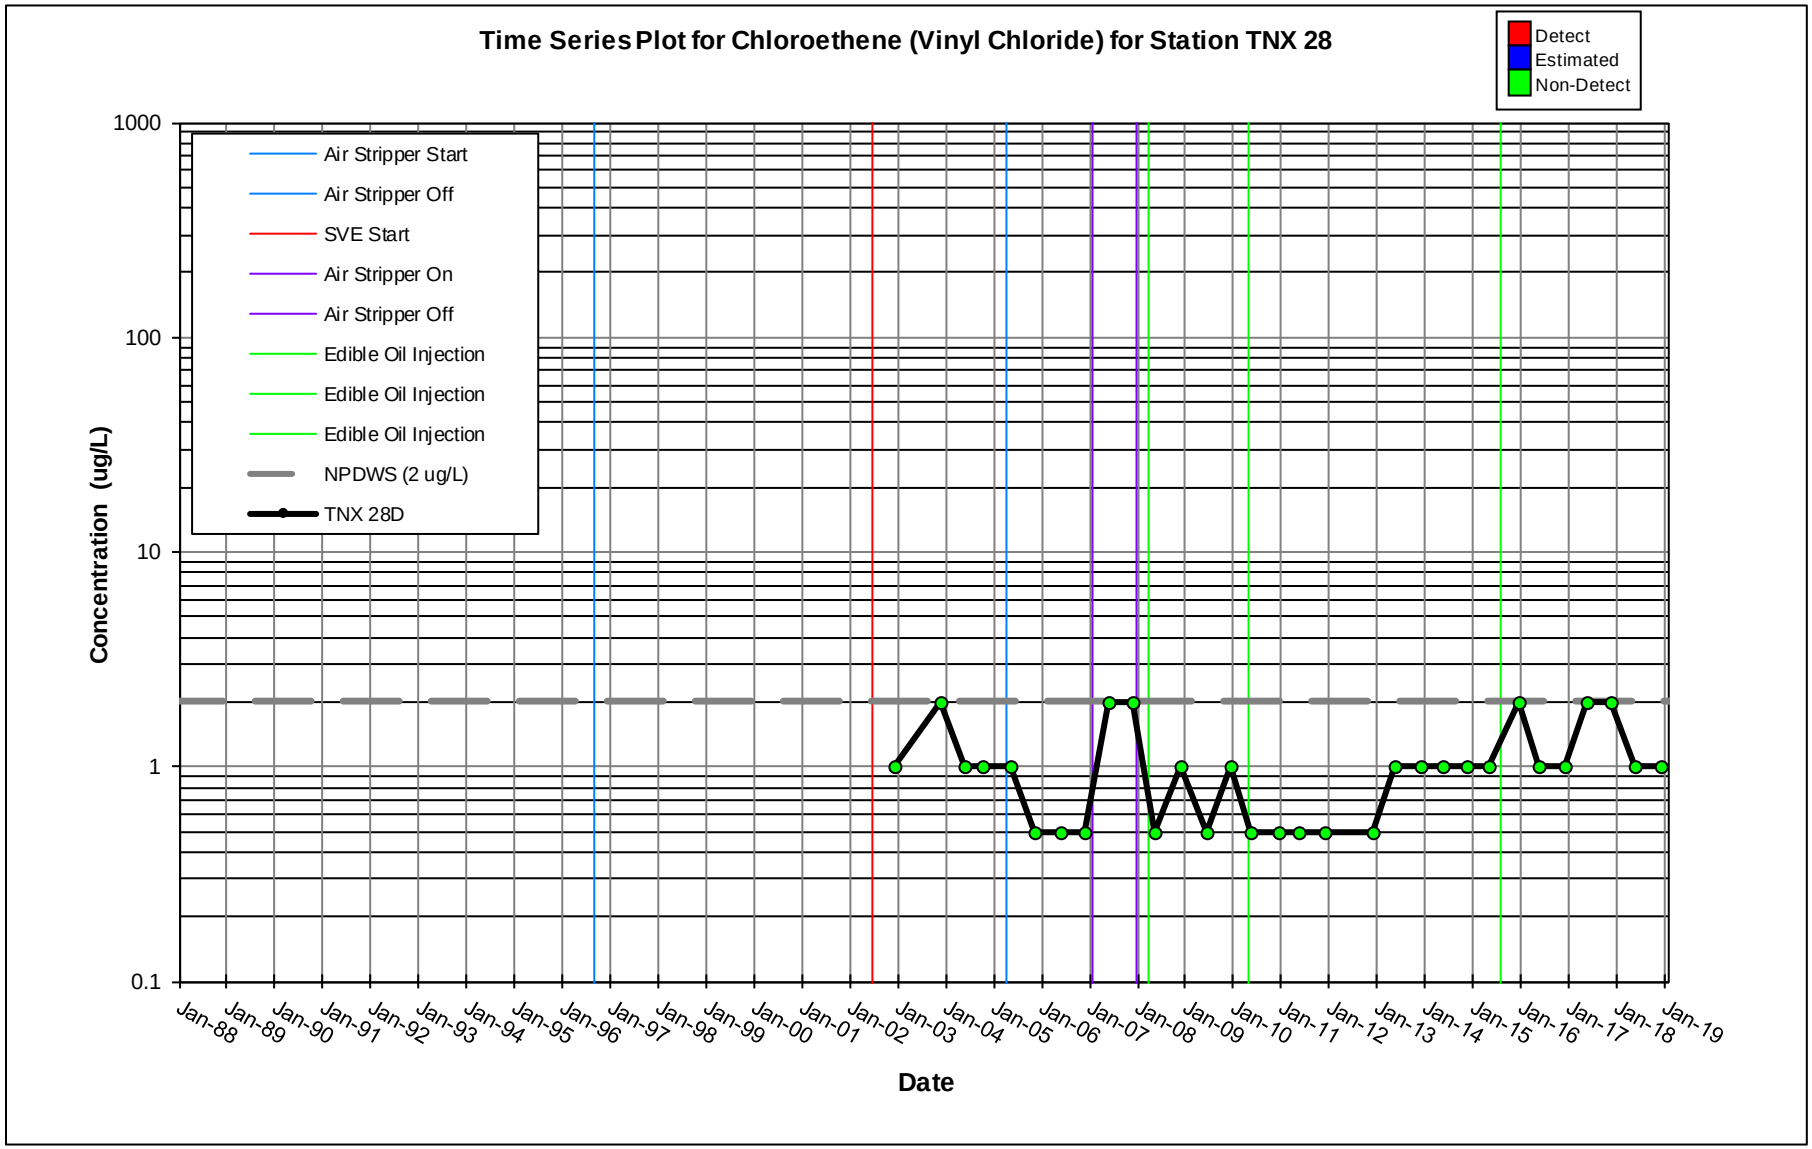
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX 28
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX 28D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

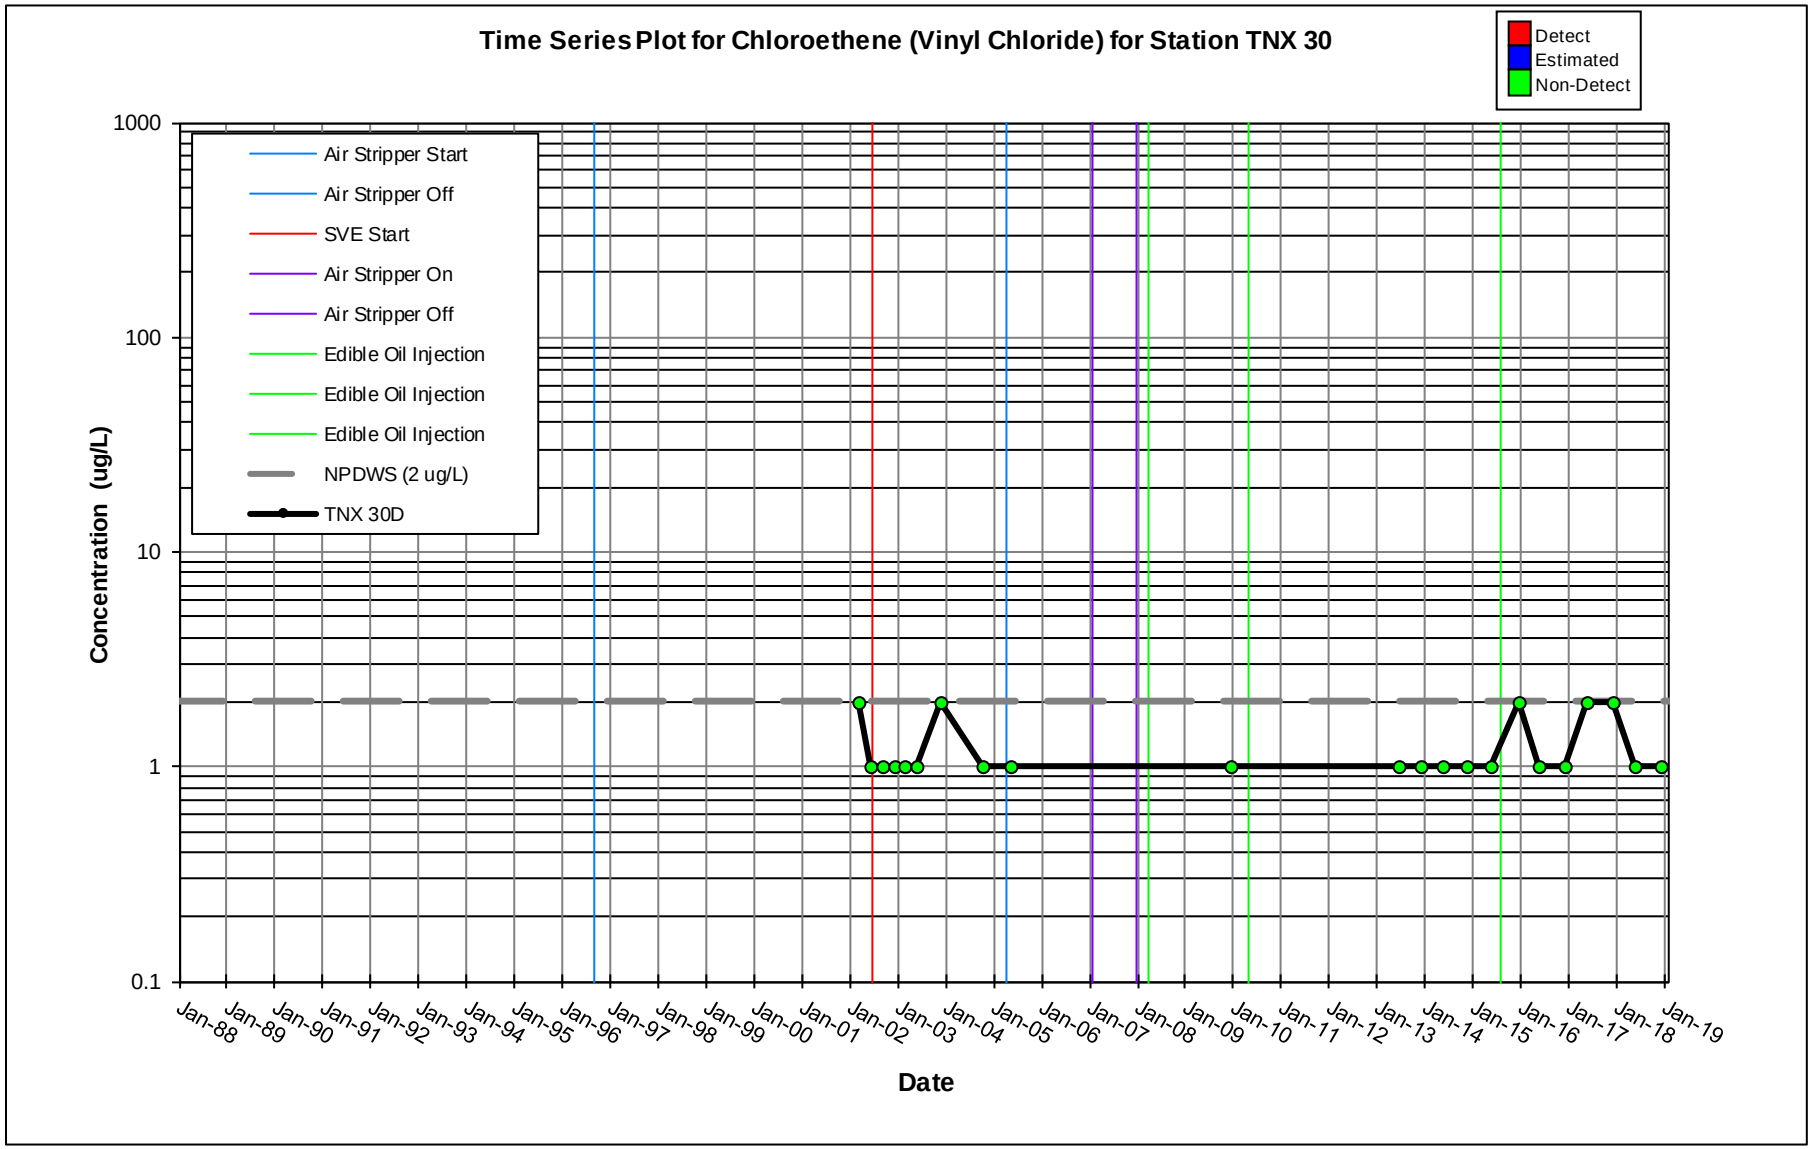
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX 30
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX 30D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

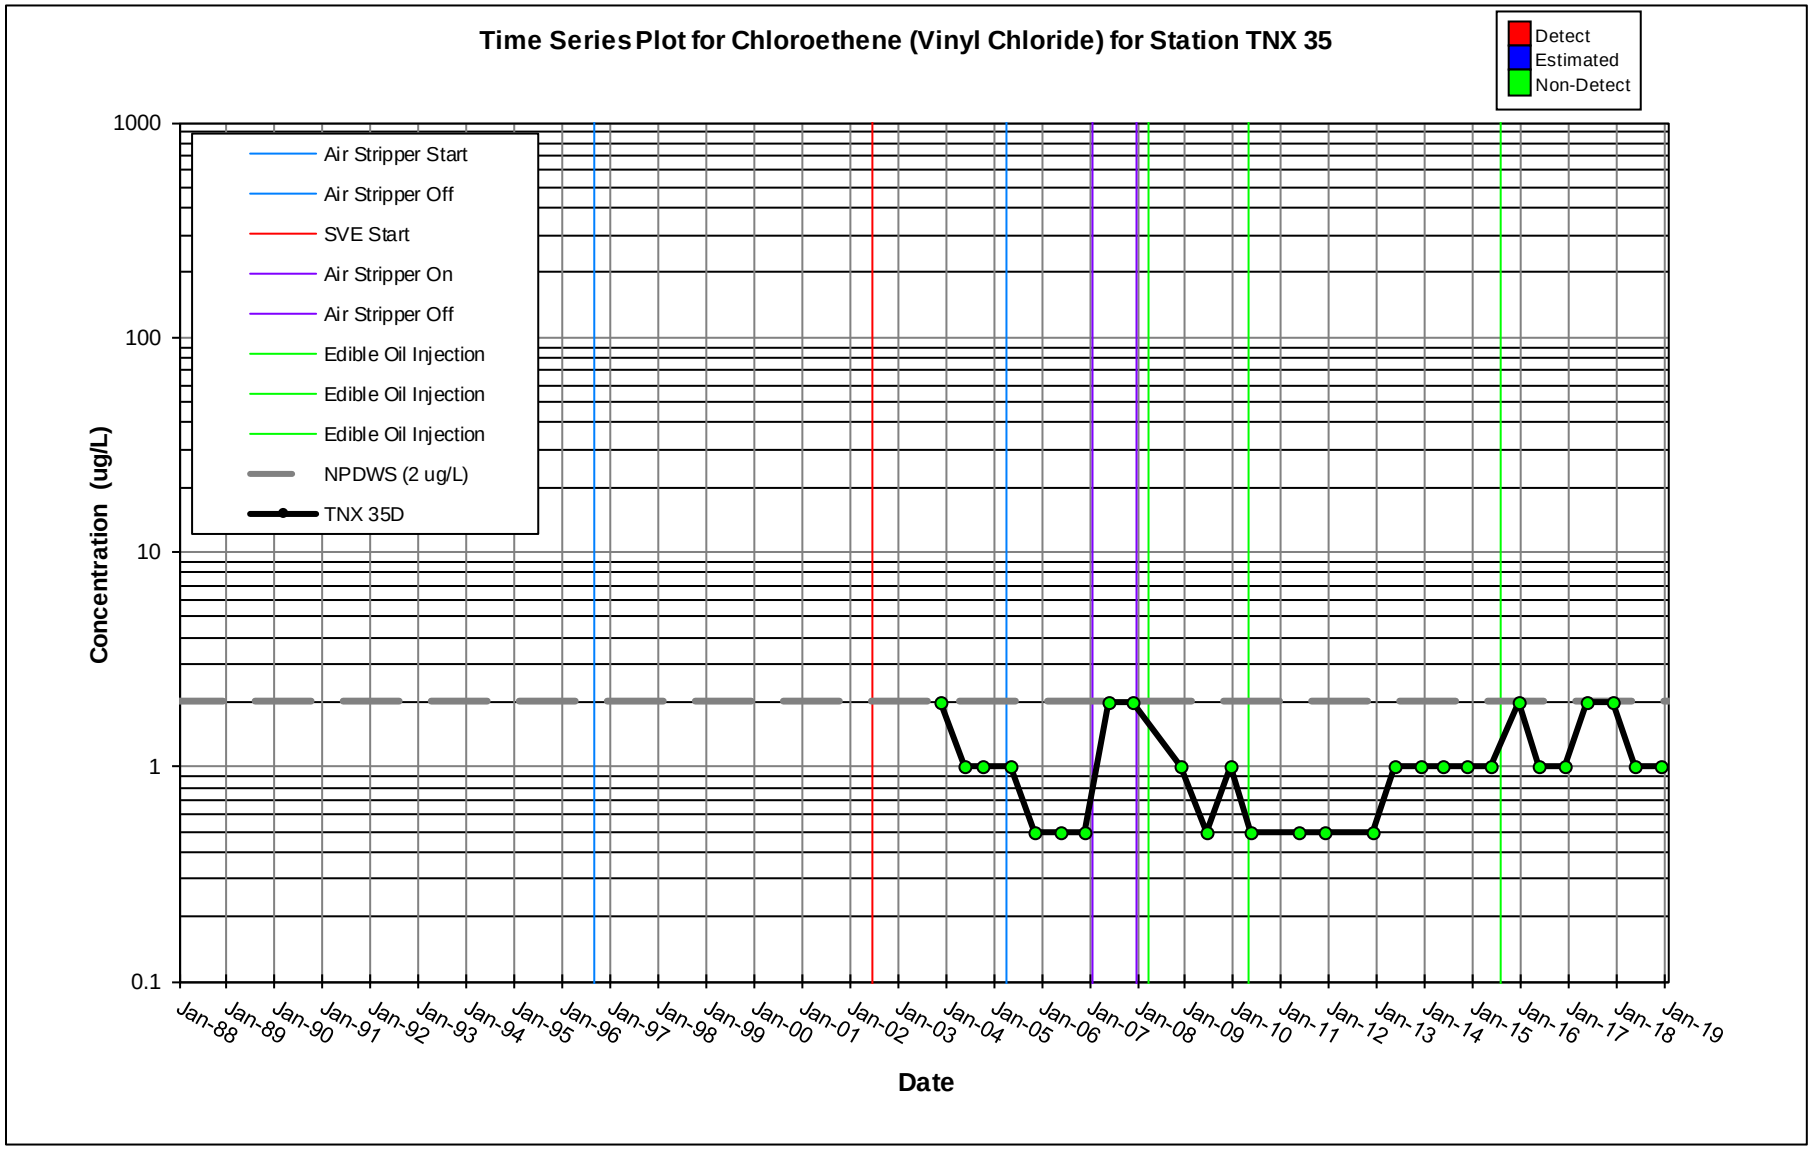
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX 35
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX 35D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

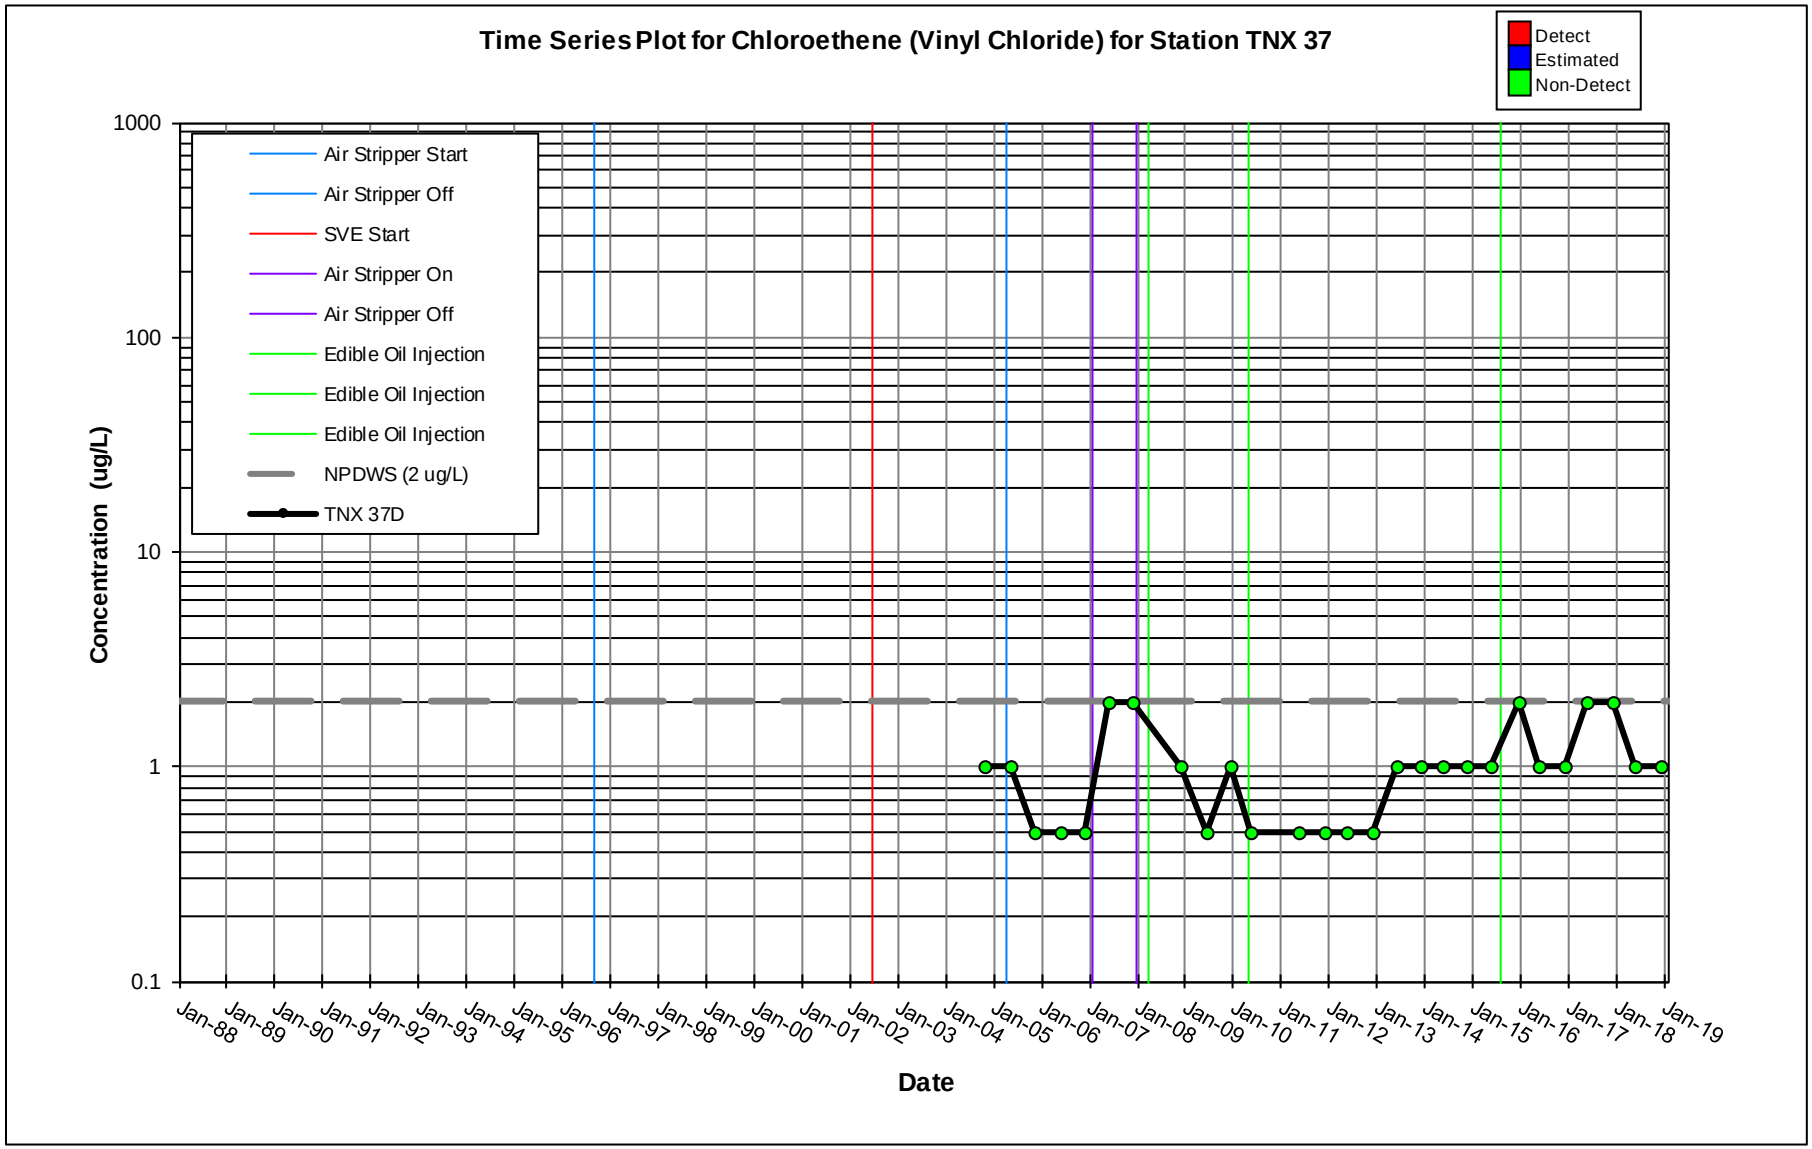
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX 37
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX 37D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

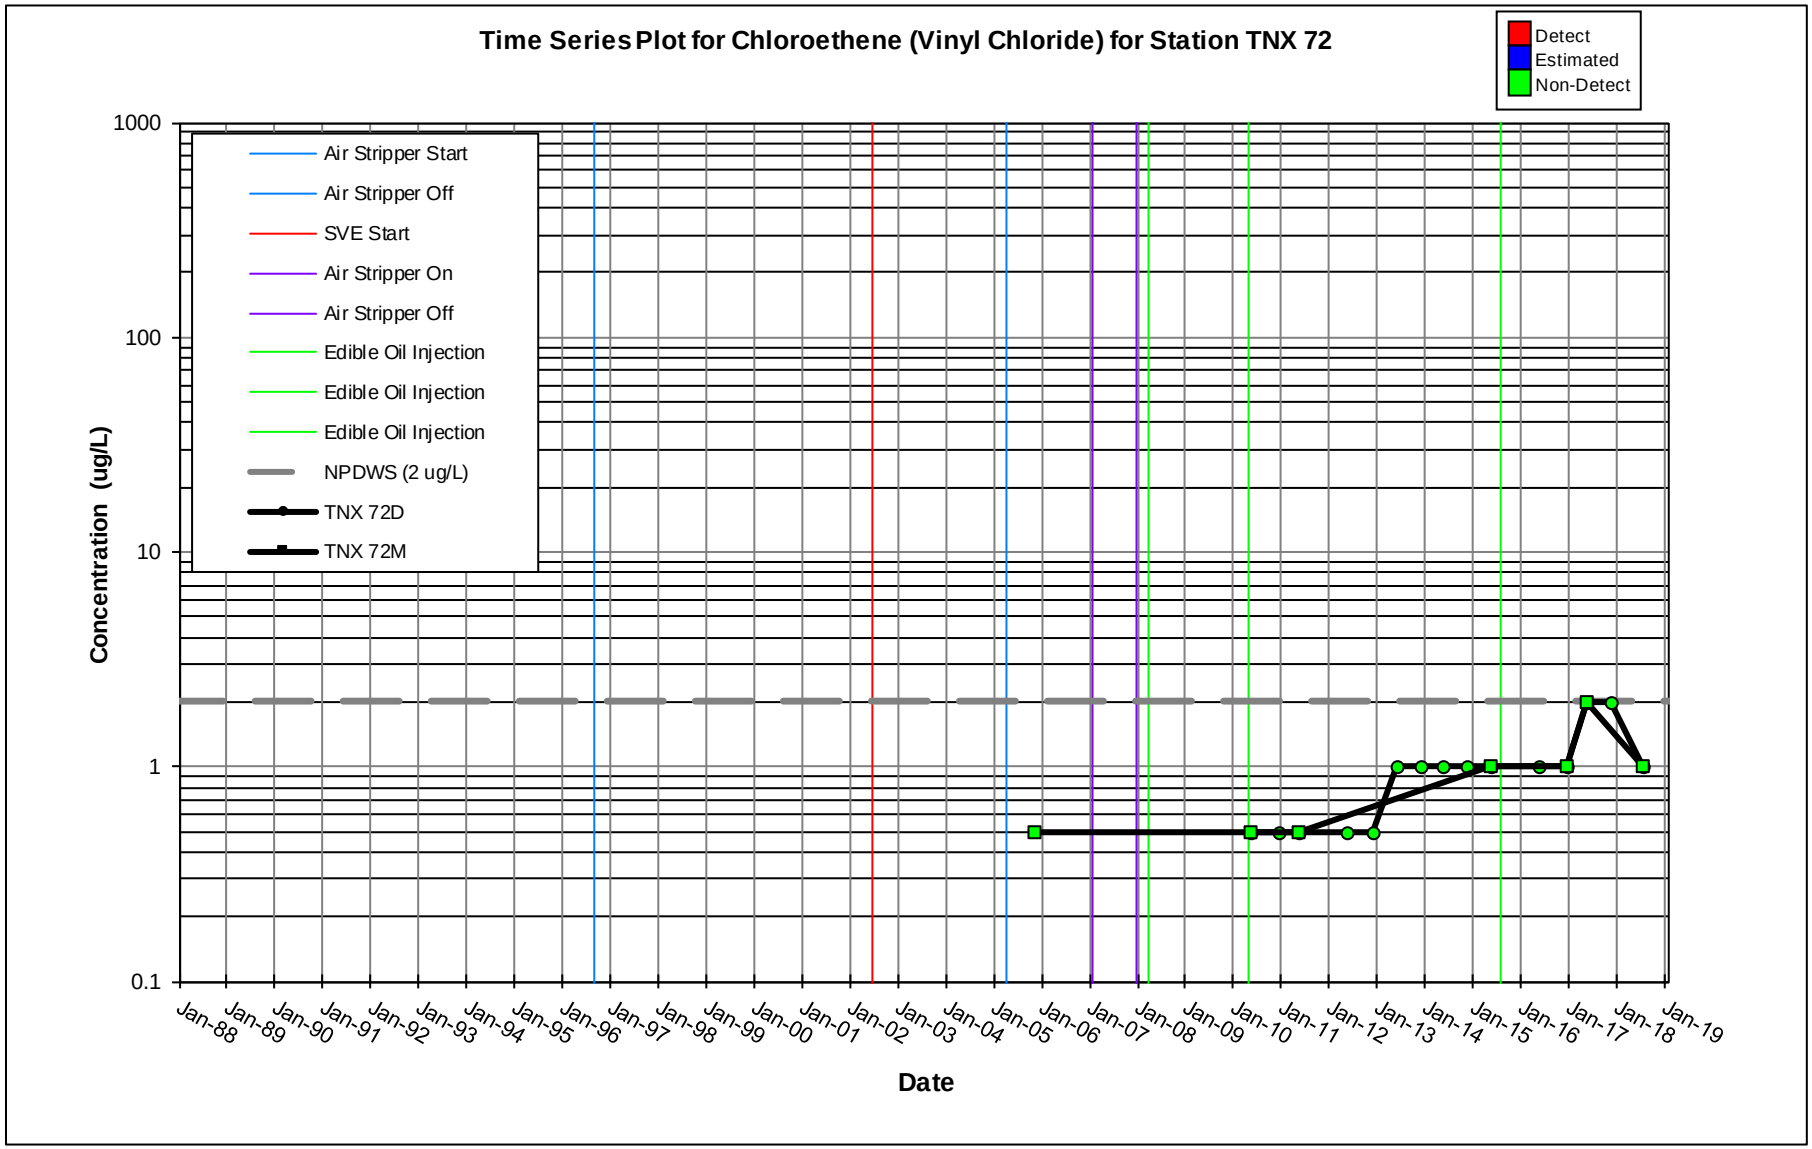
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX 72
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX 72D
TNX 72M
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

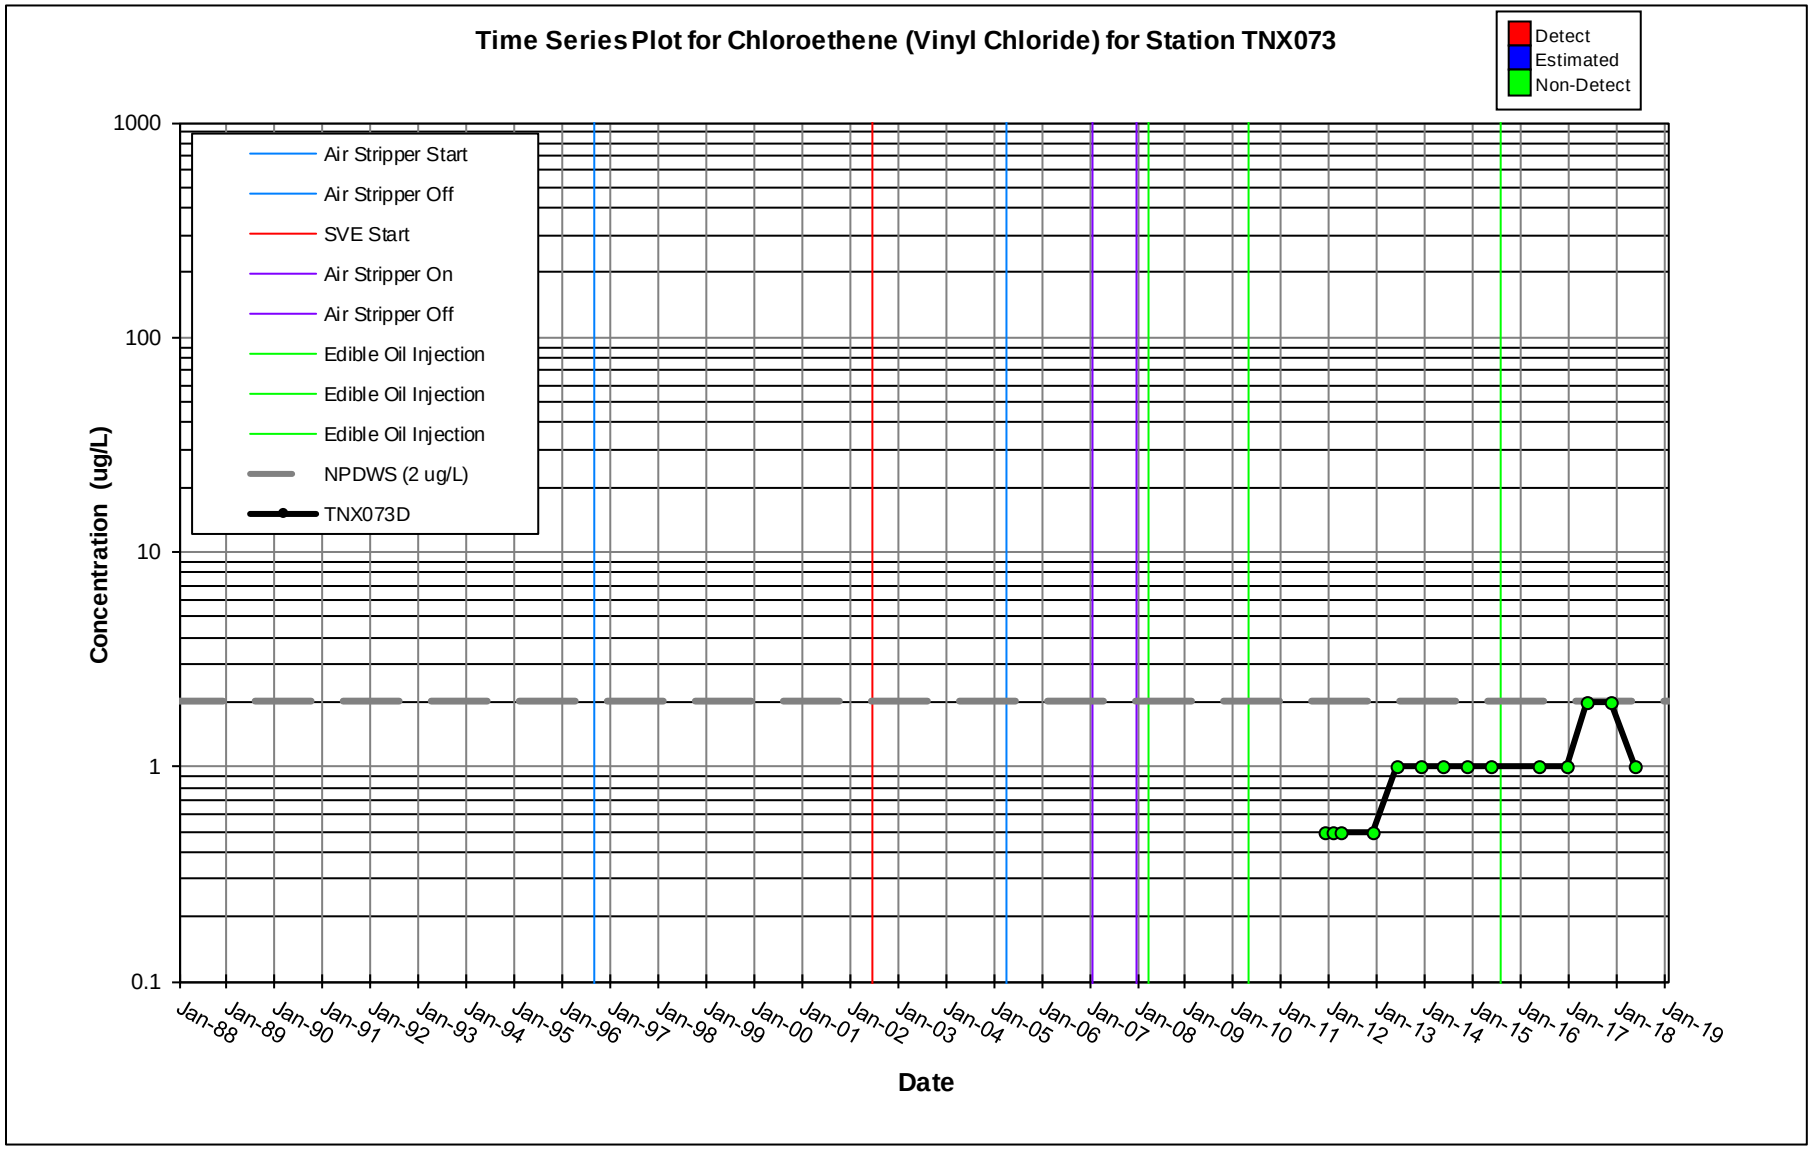
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX073
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX073D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

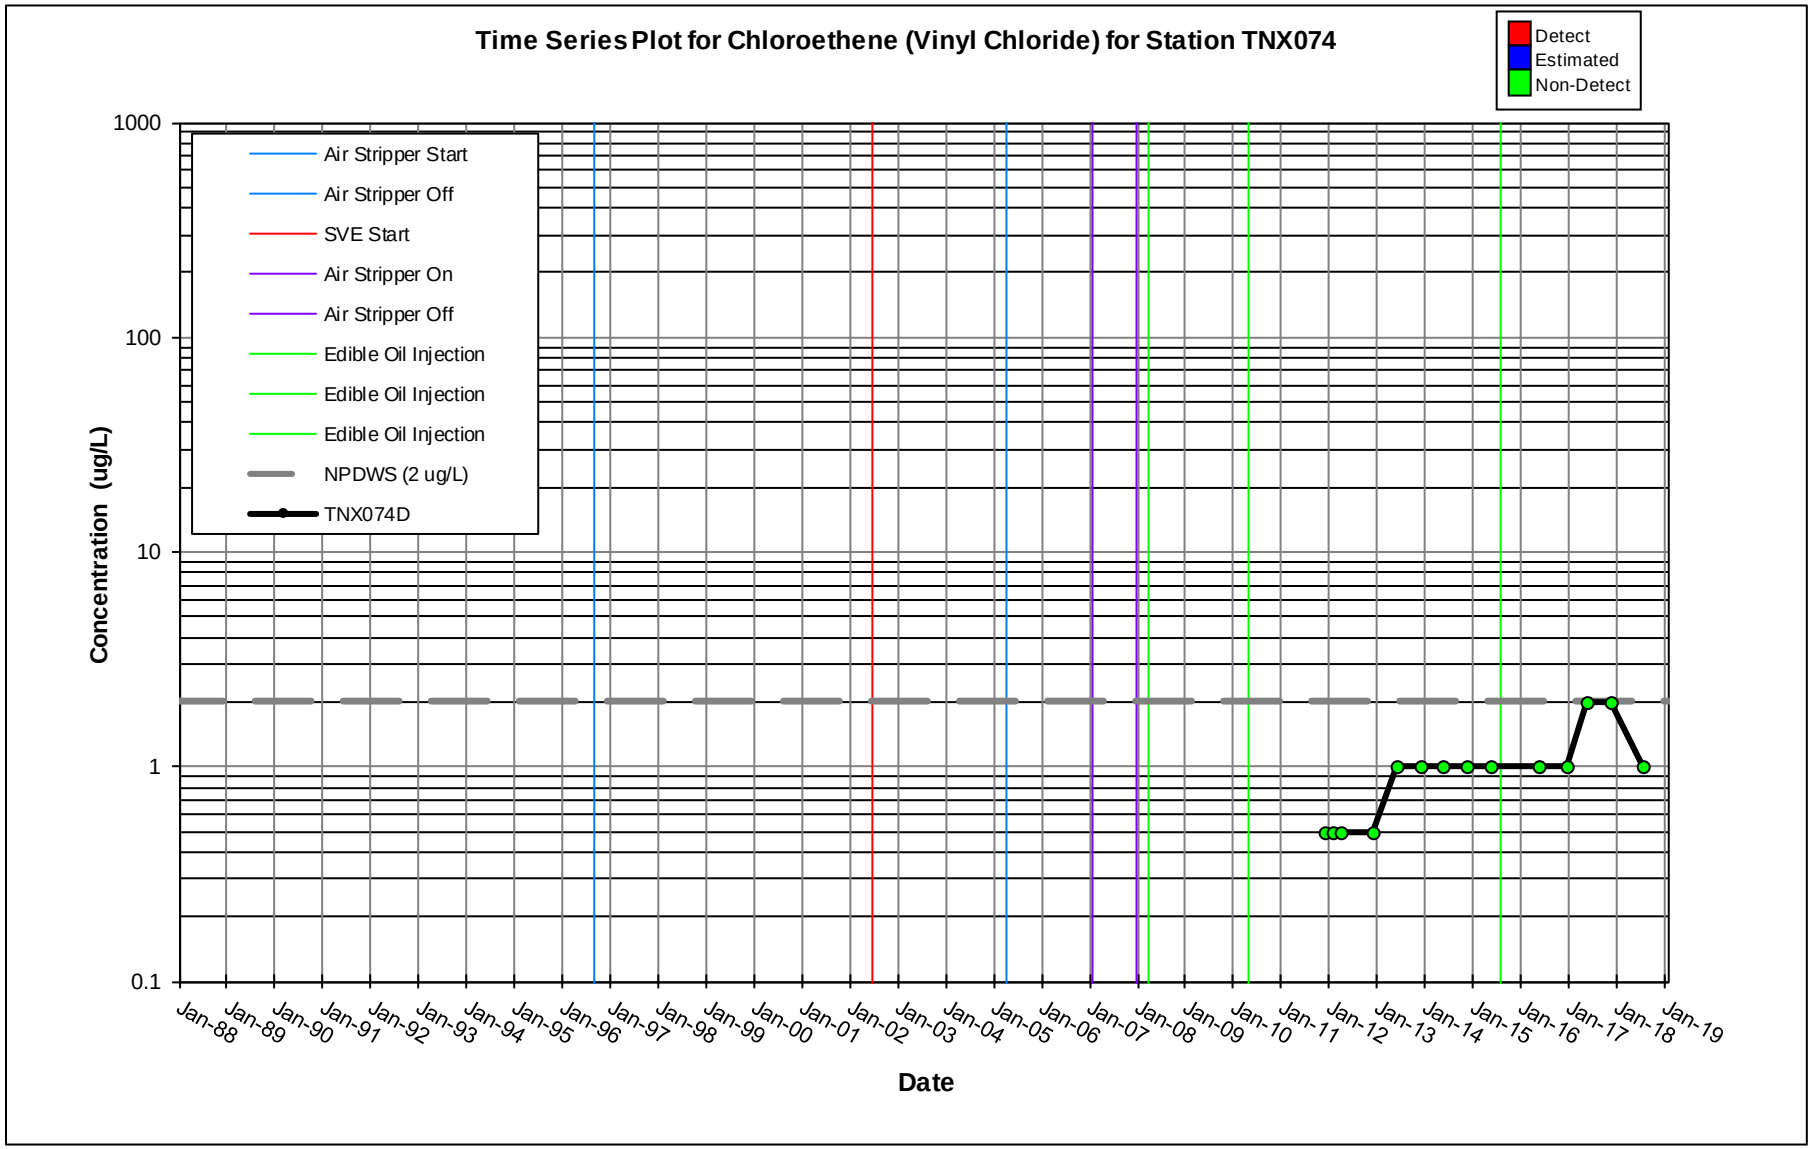
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX074
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX074D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

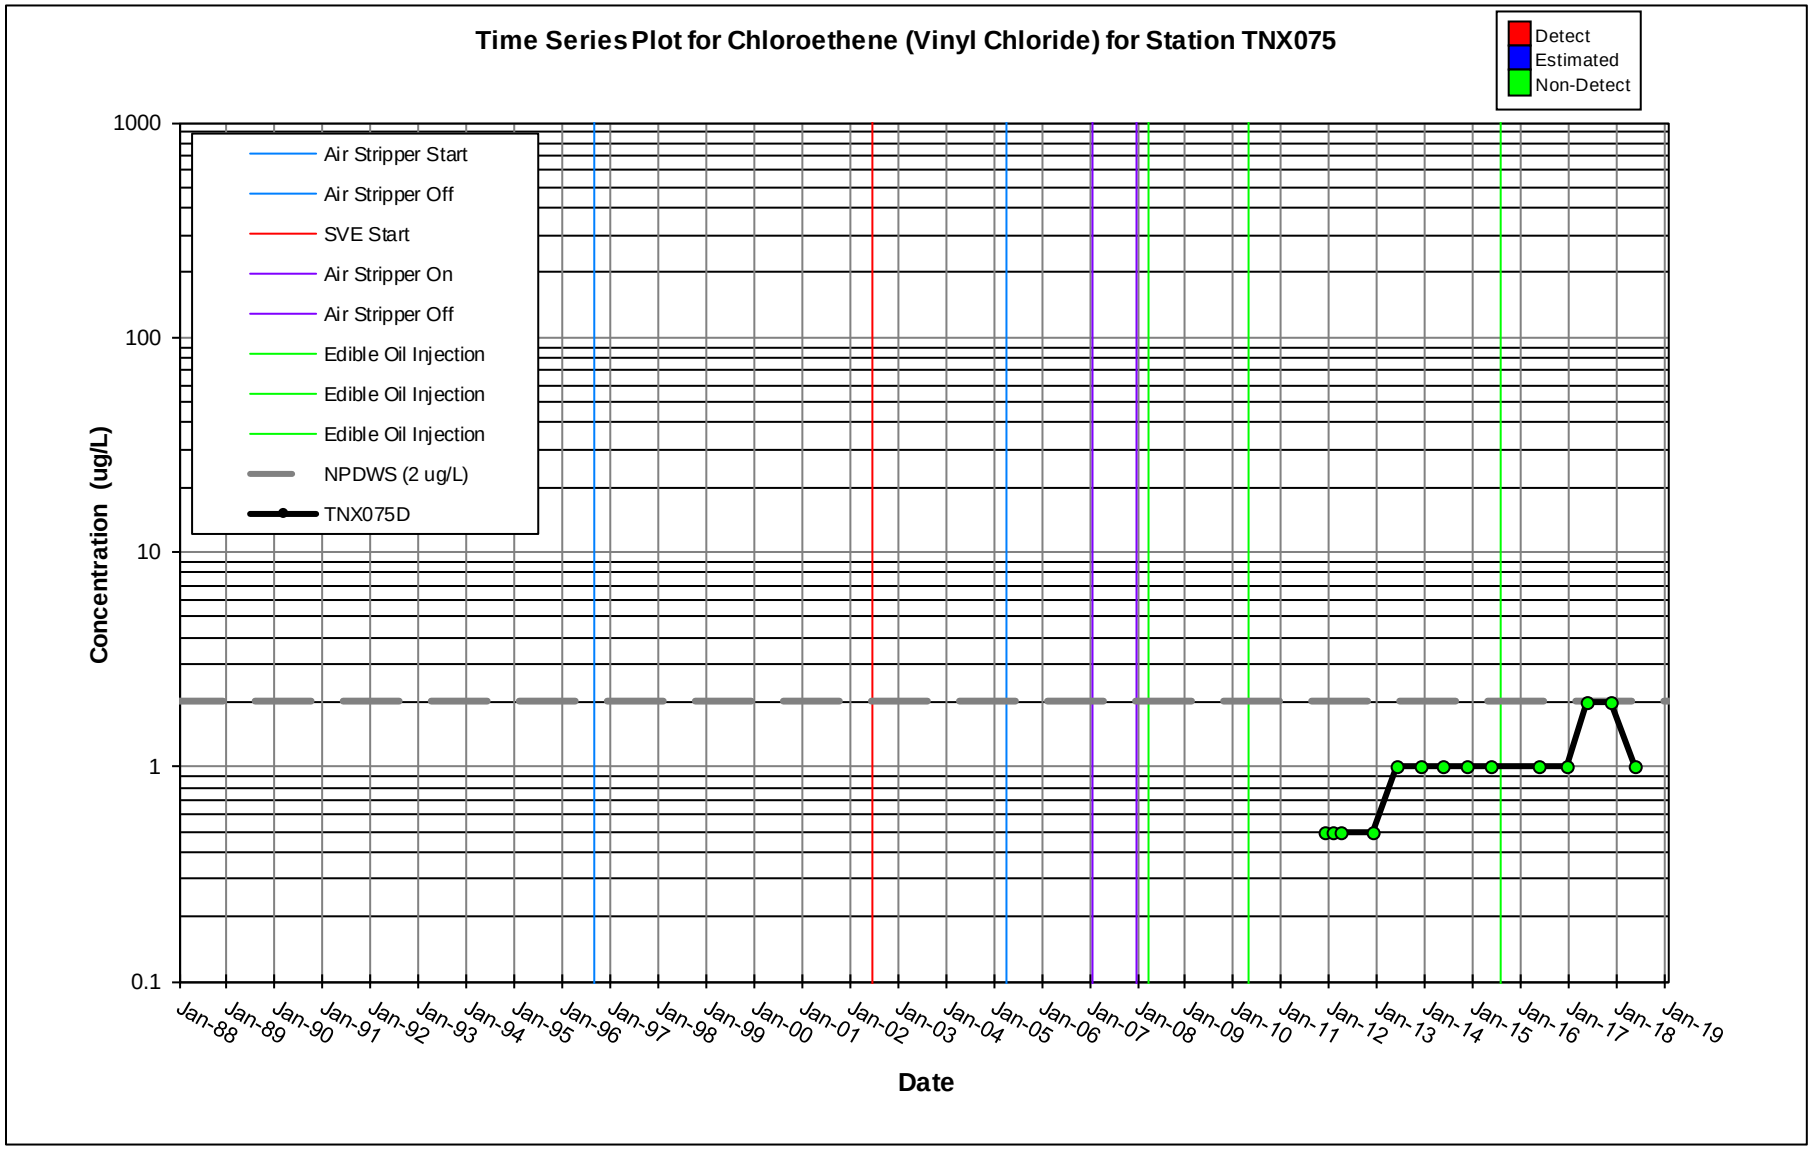
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TNX075
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TNX075D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

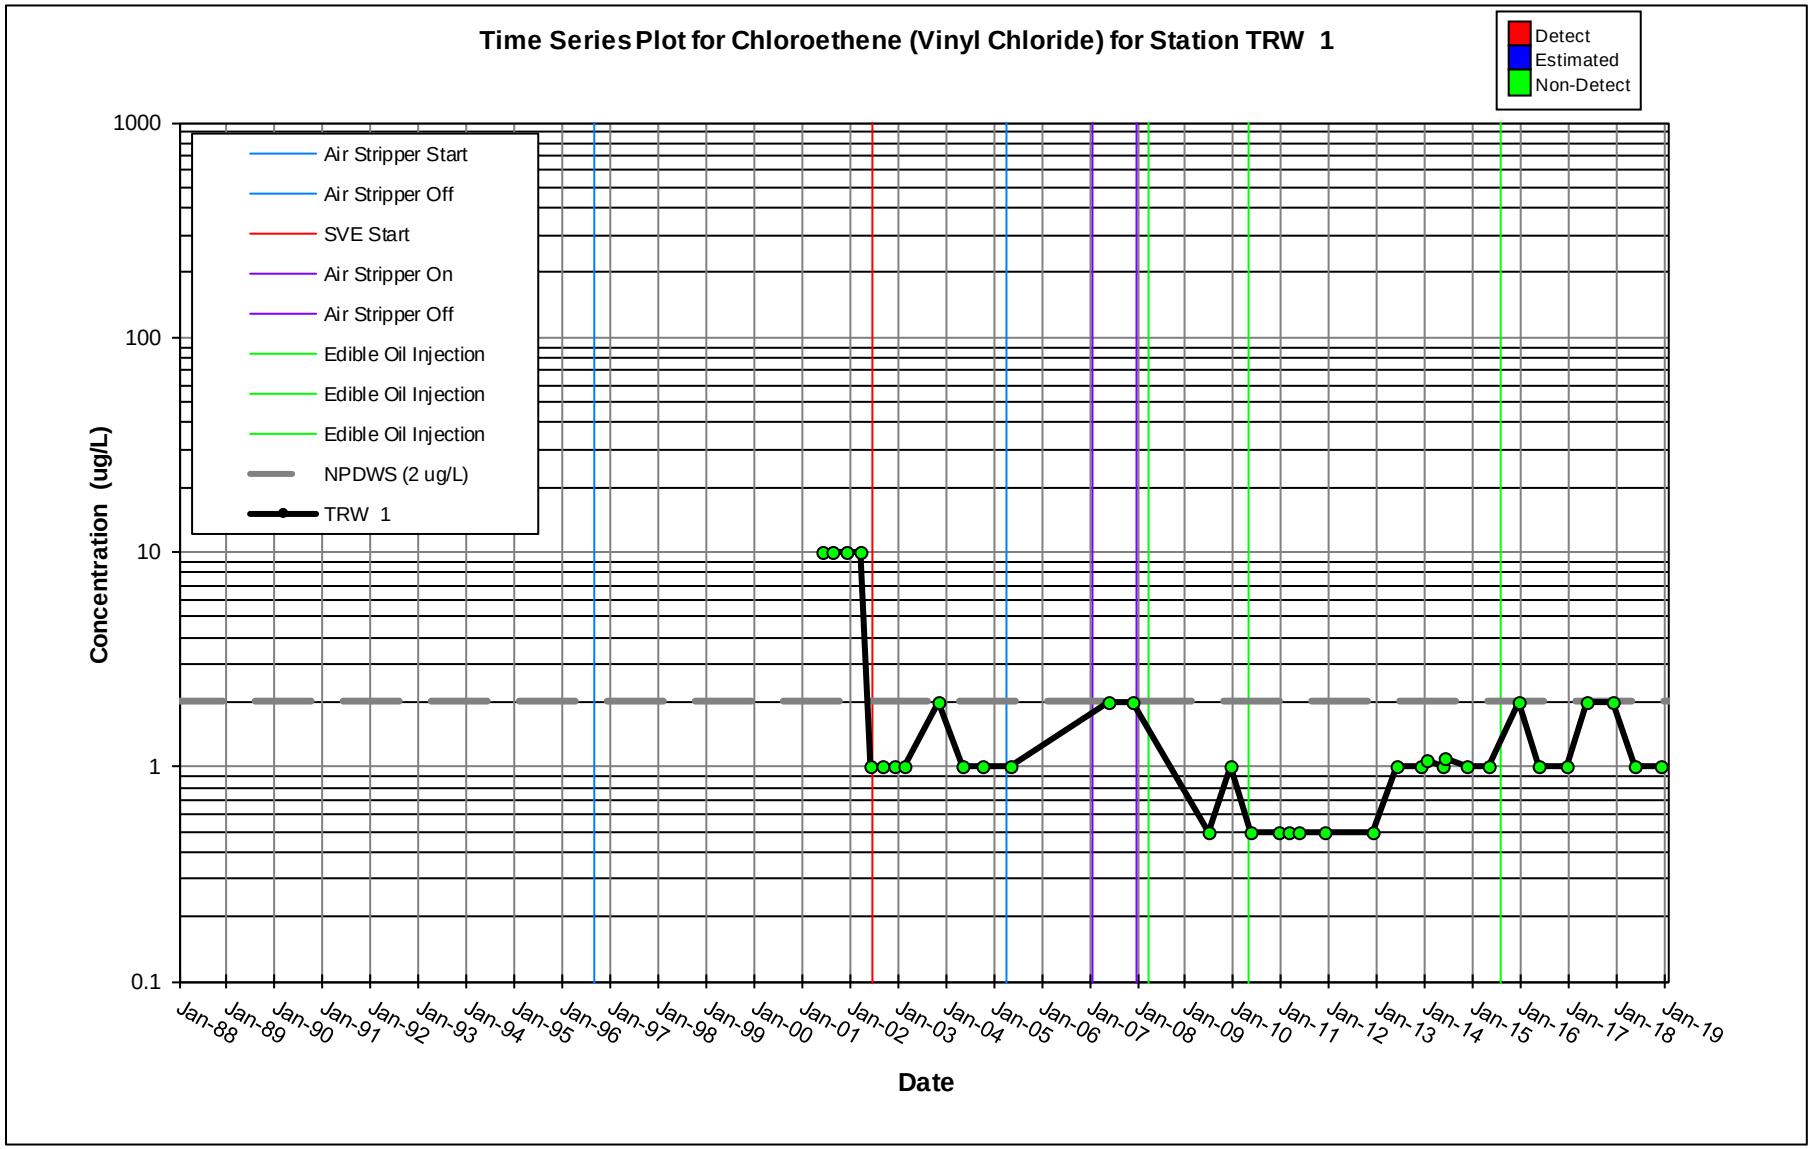
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TRW 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TRW 1
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

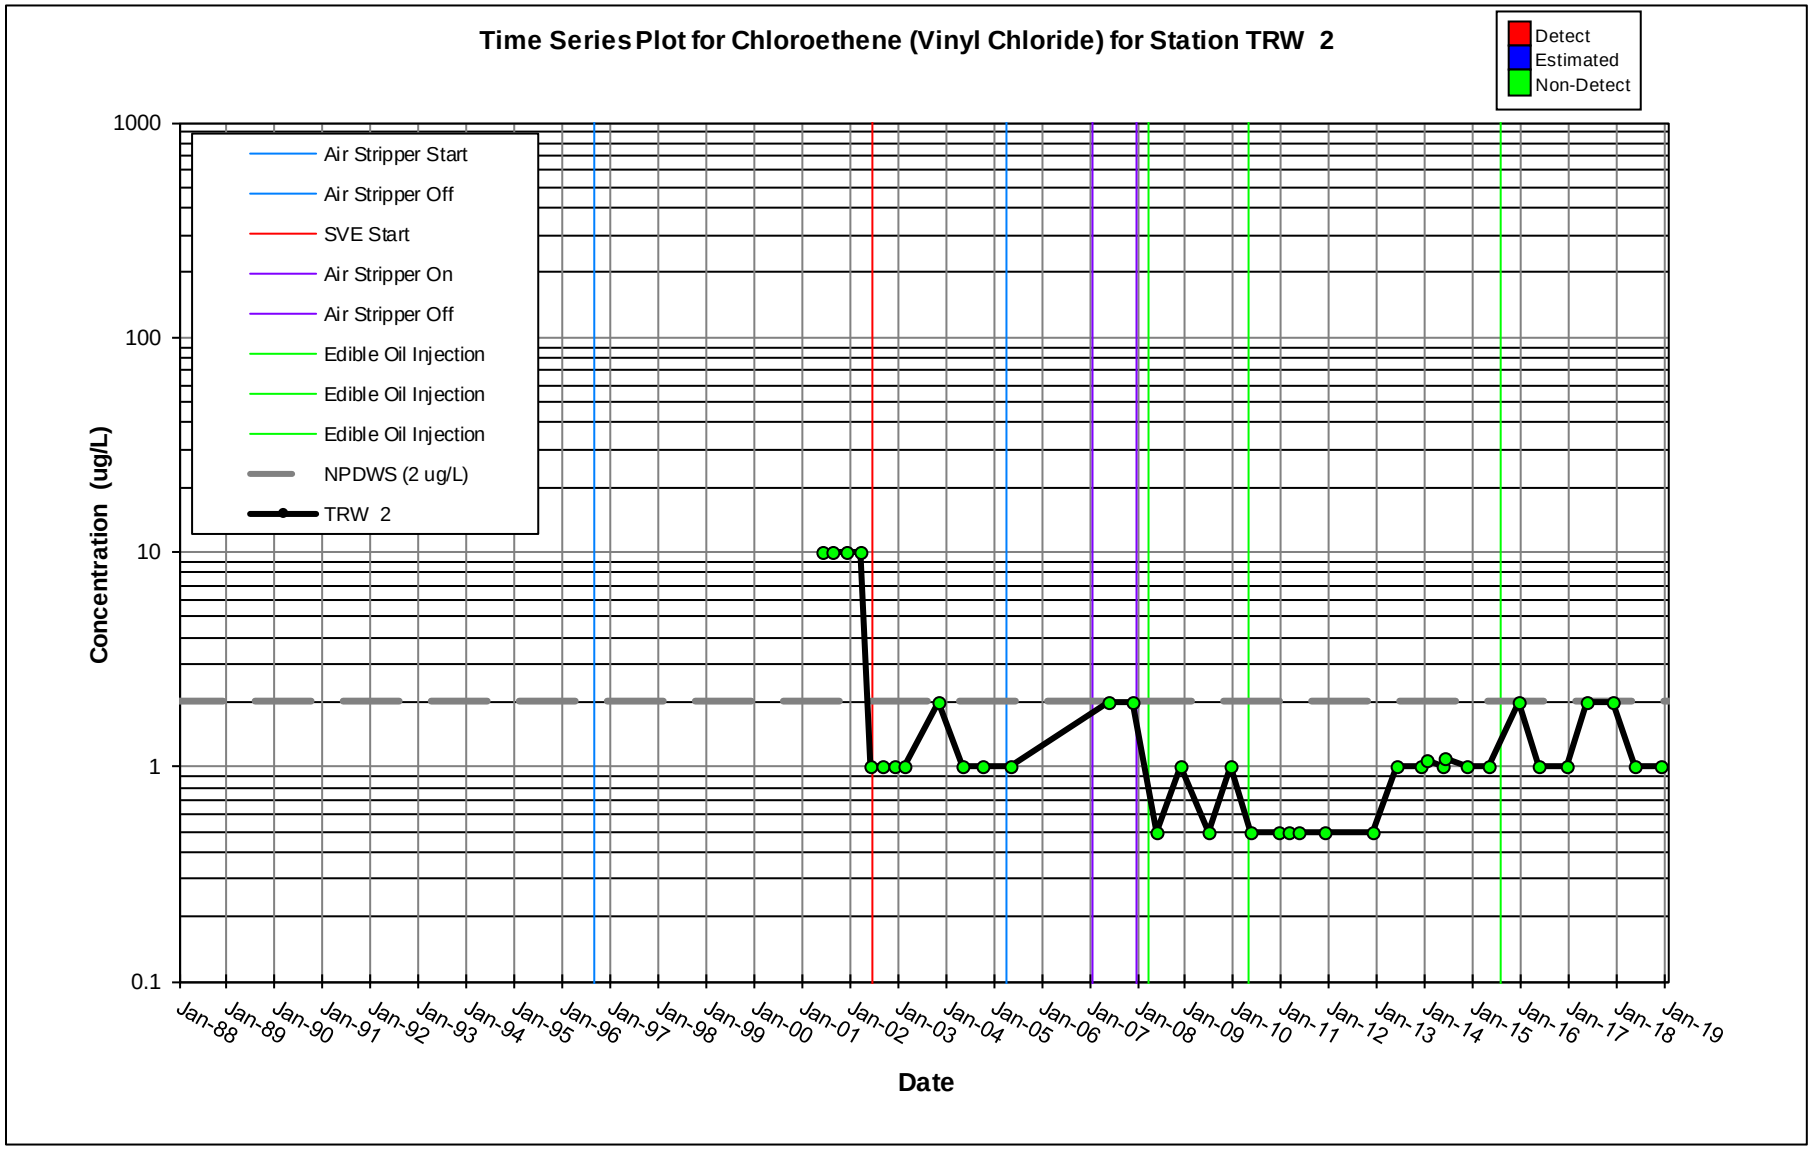
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TRW 2
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TRW 2
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

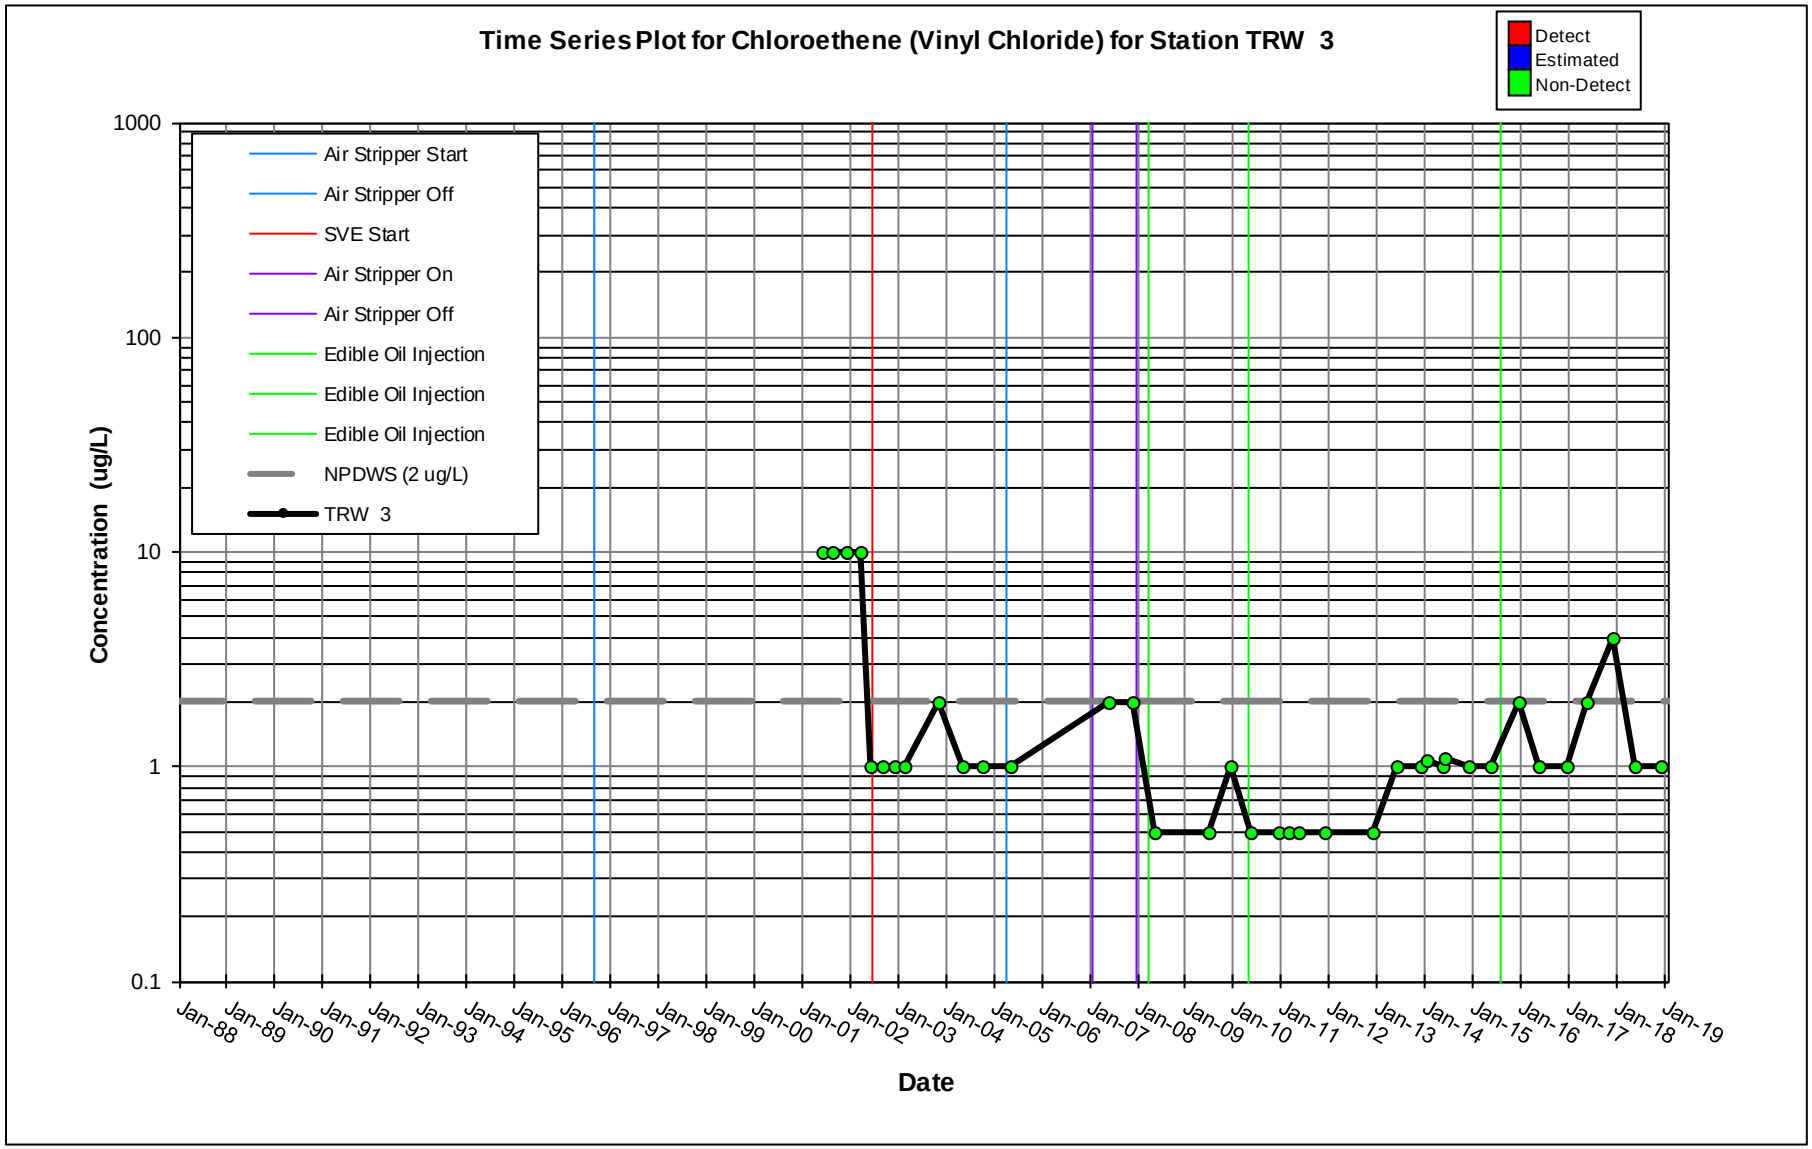
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TRW 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TRW 3
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

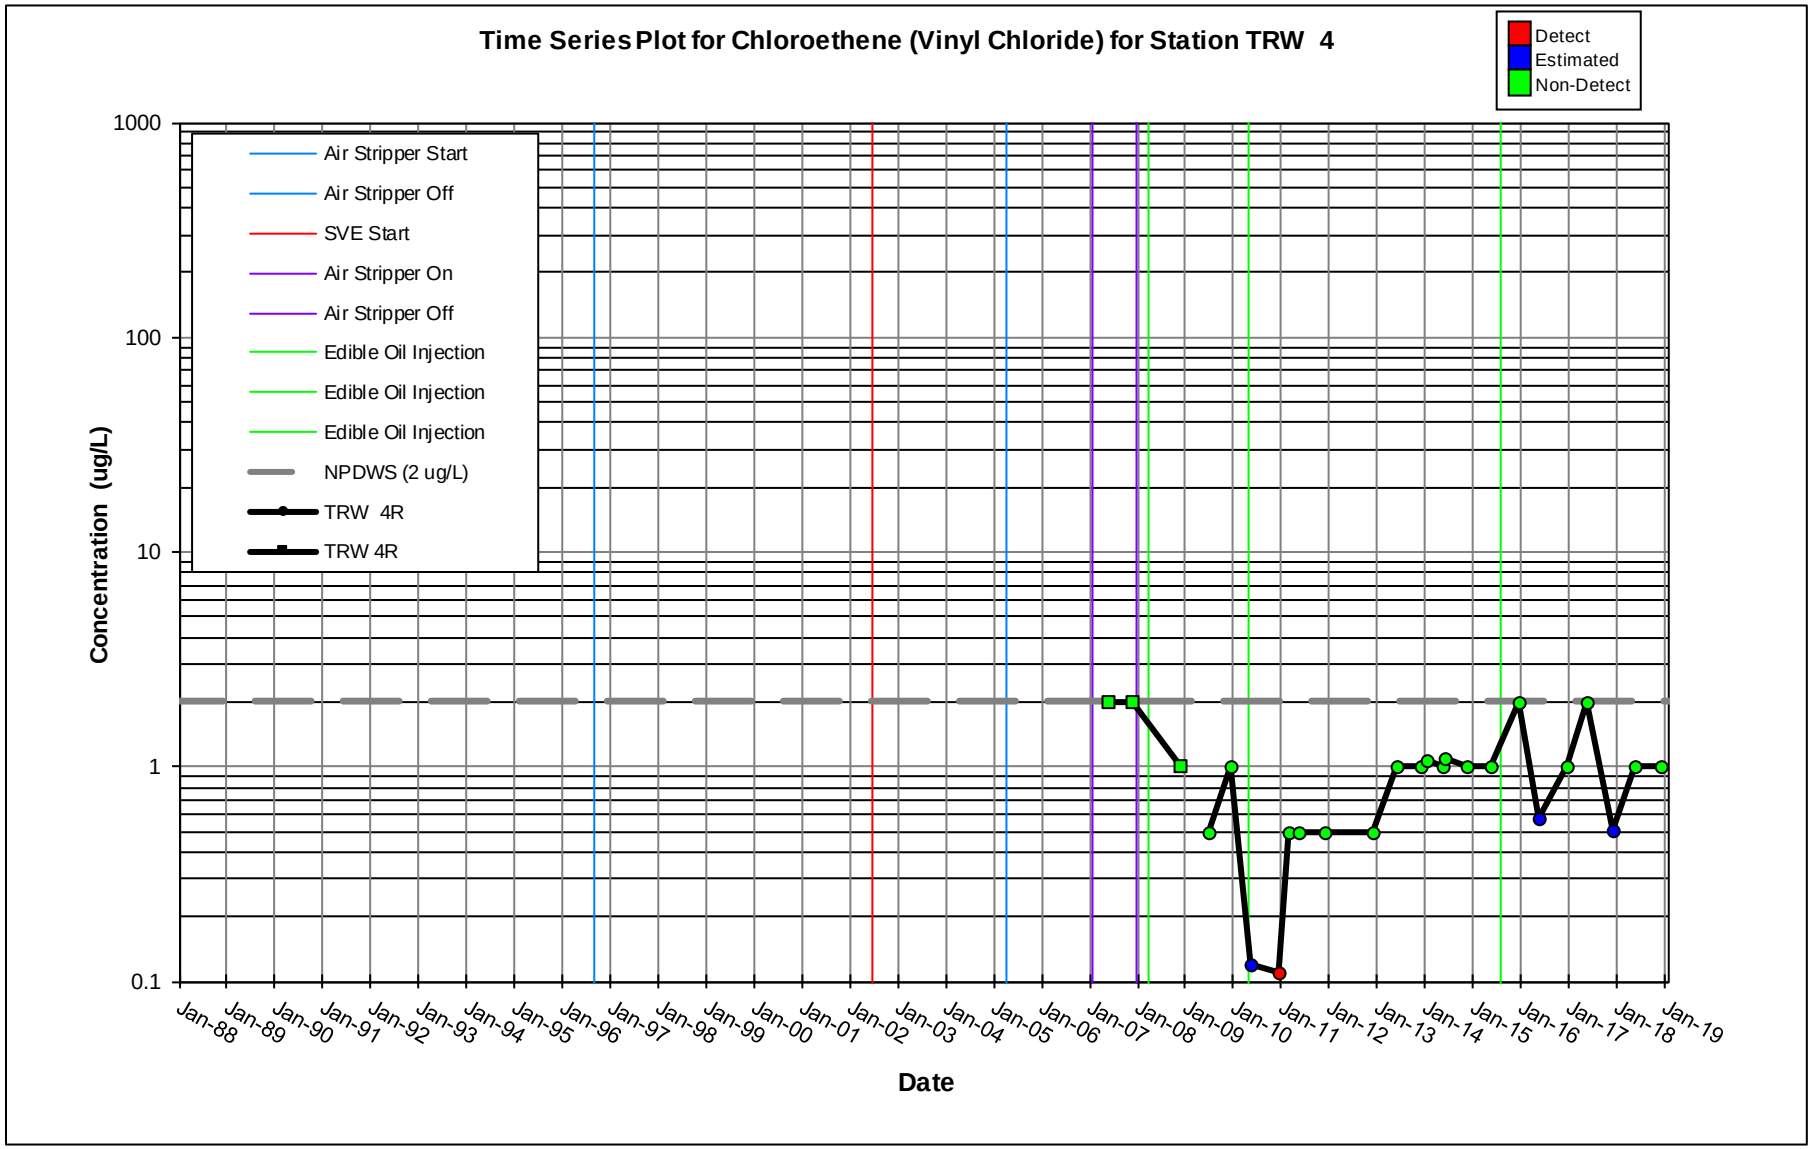
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TRW 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TRW 4R
TRW 4R
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

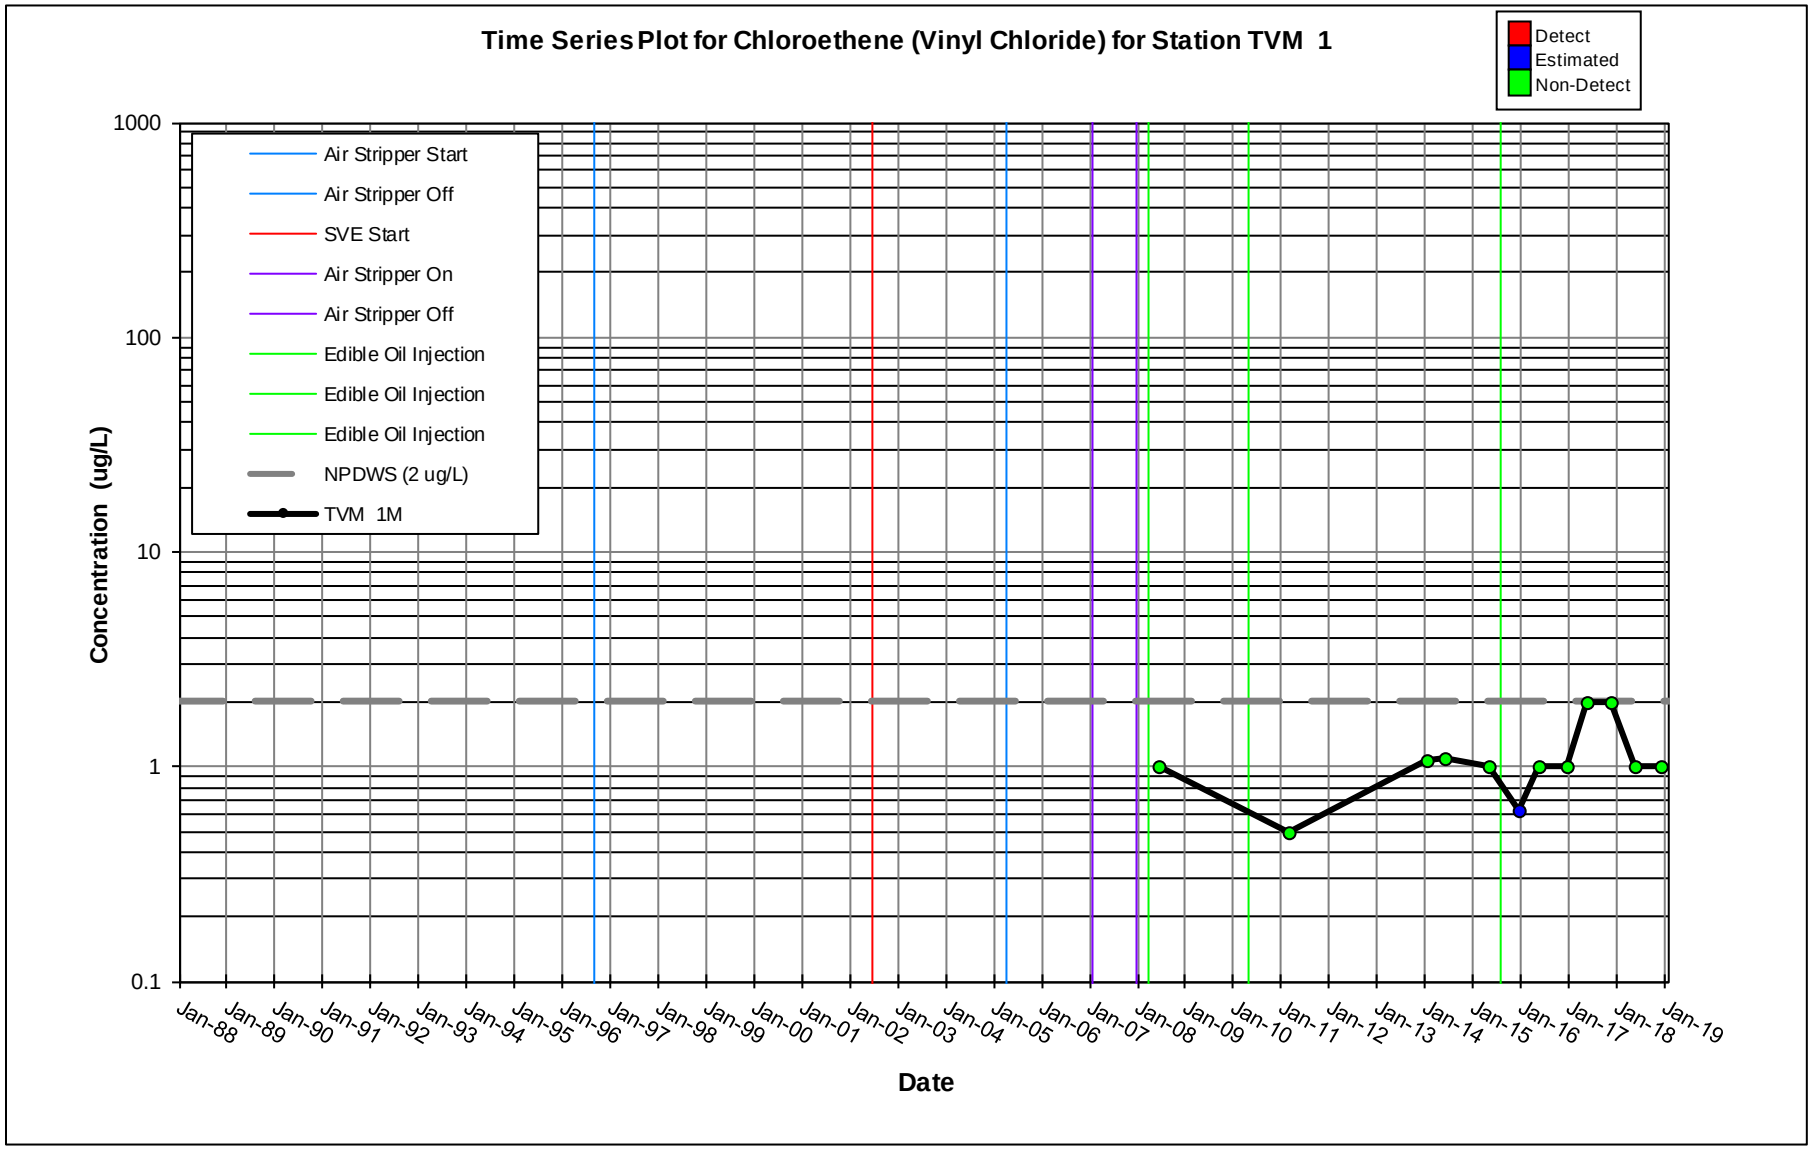
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TVM 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TVM 1M
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

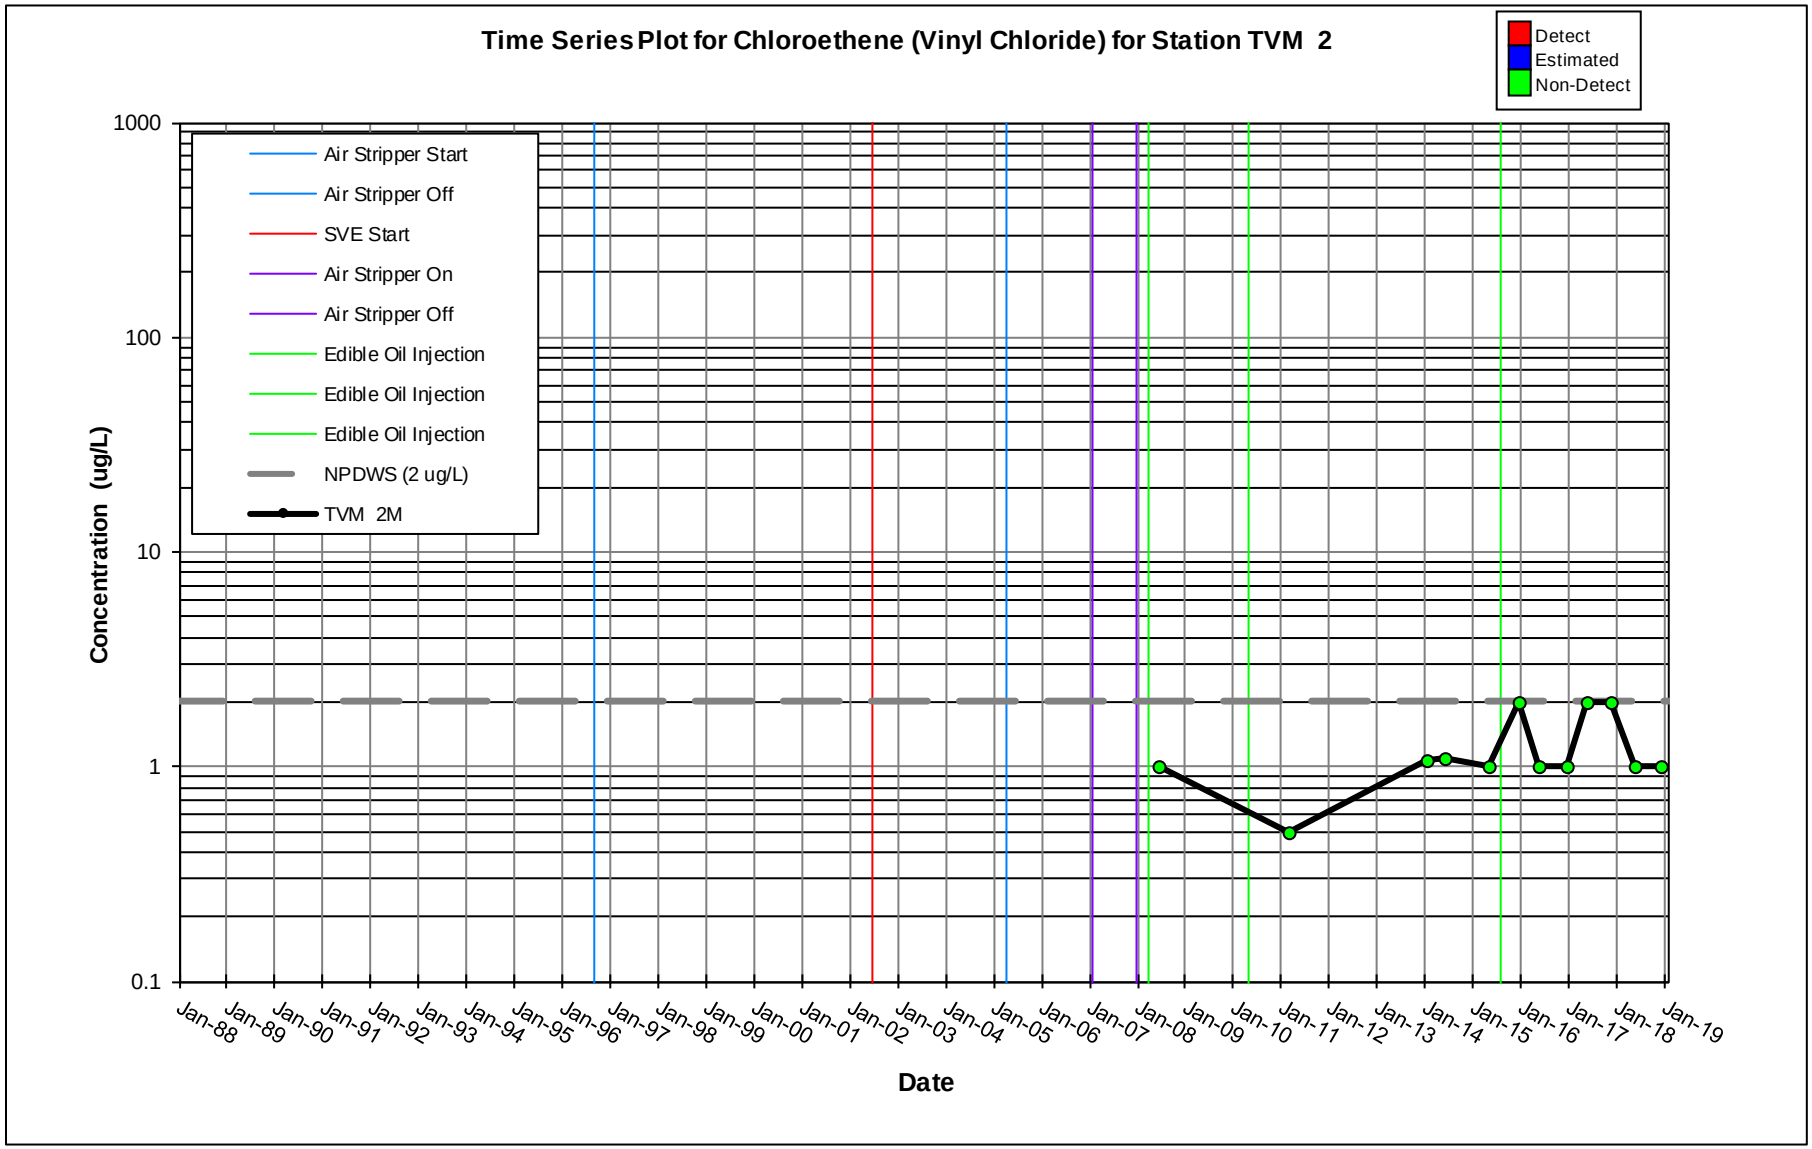
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TVM 2
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TVM 2M
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

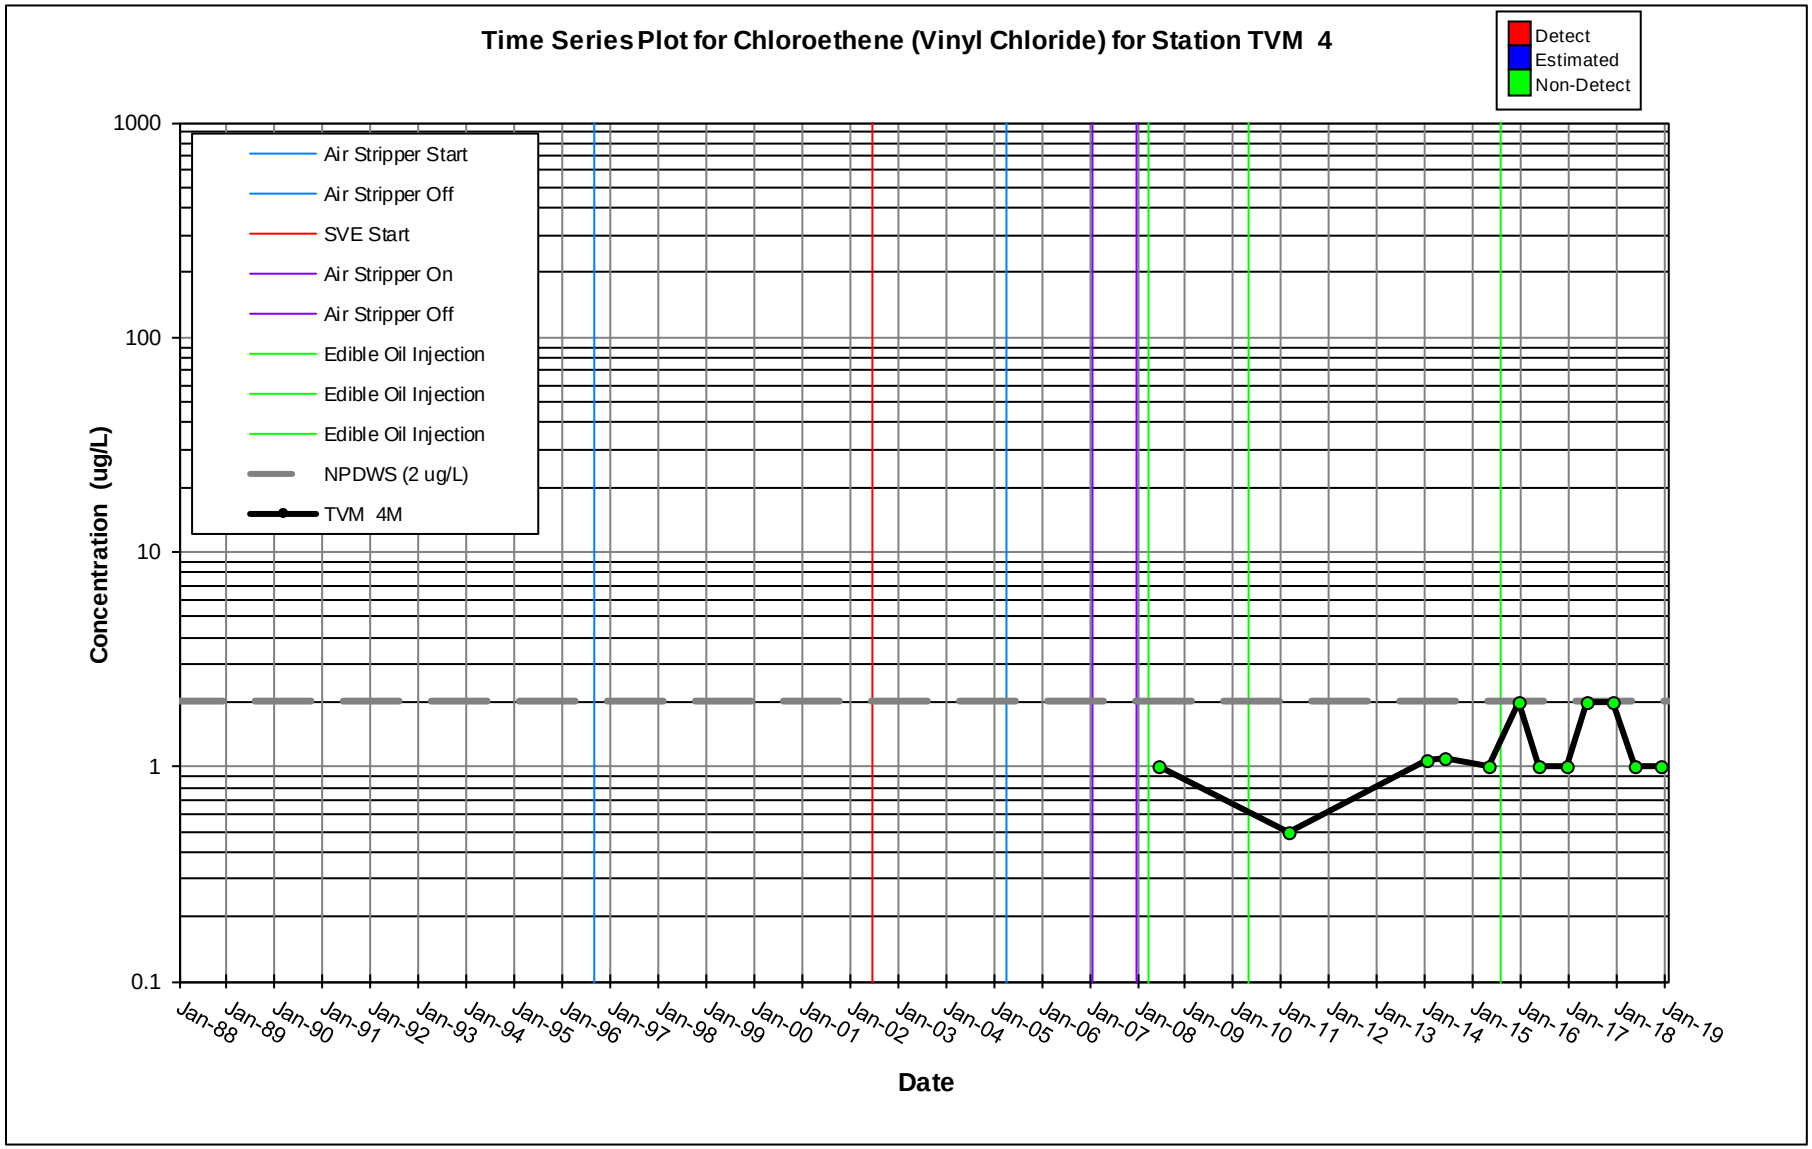
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TVM 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TVM 4M
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

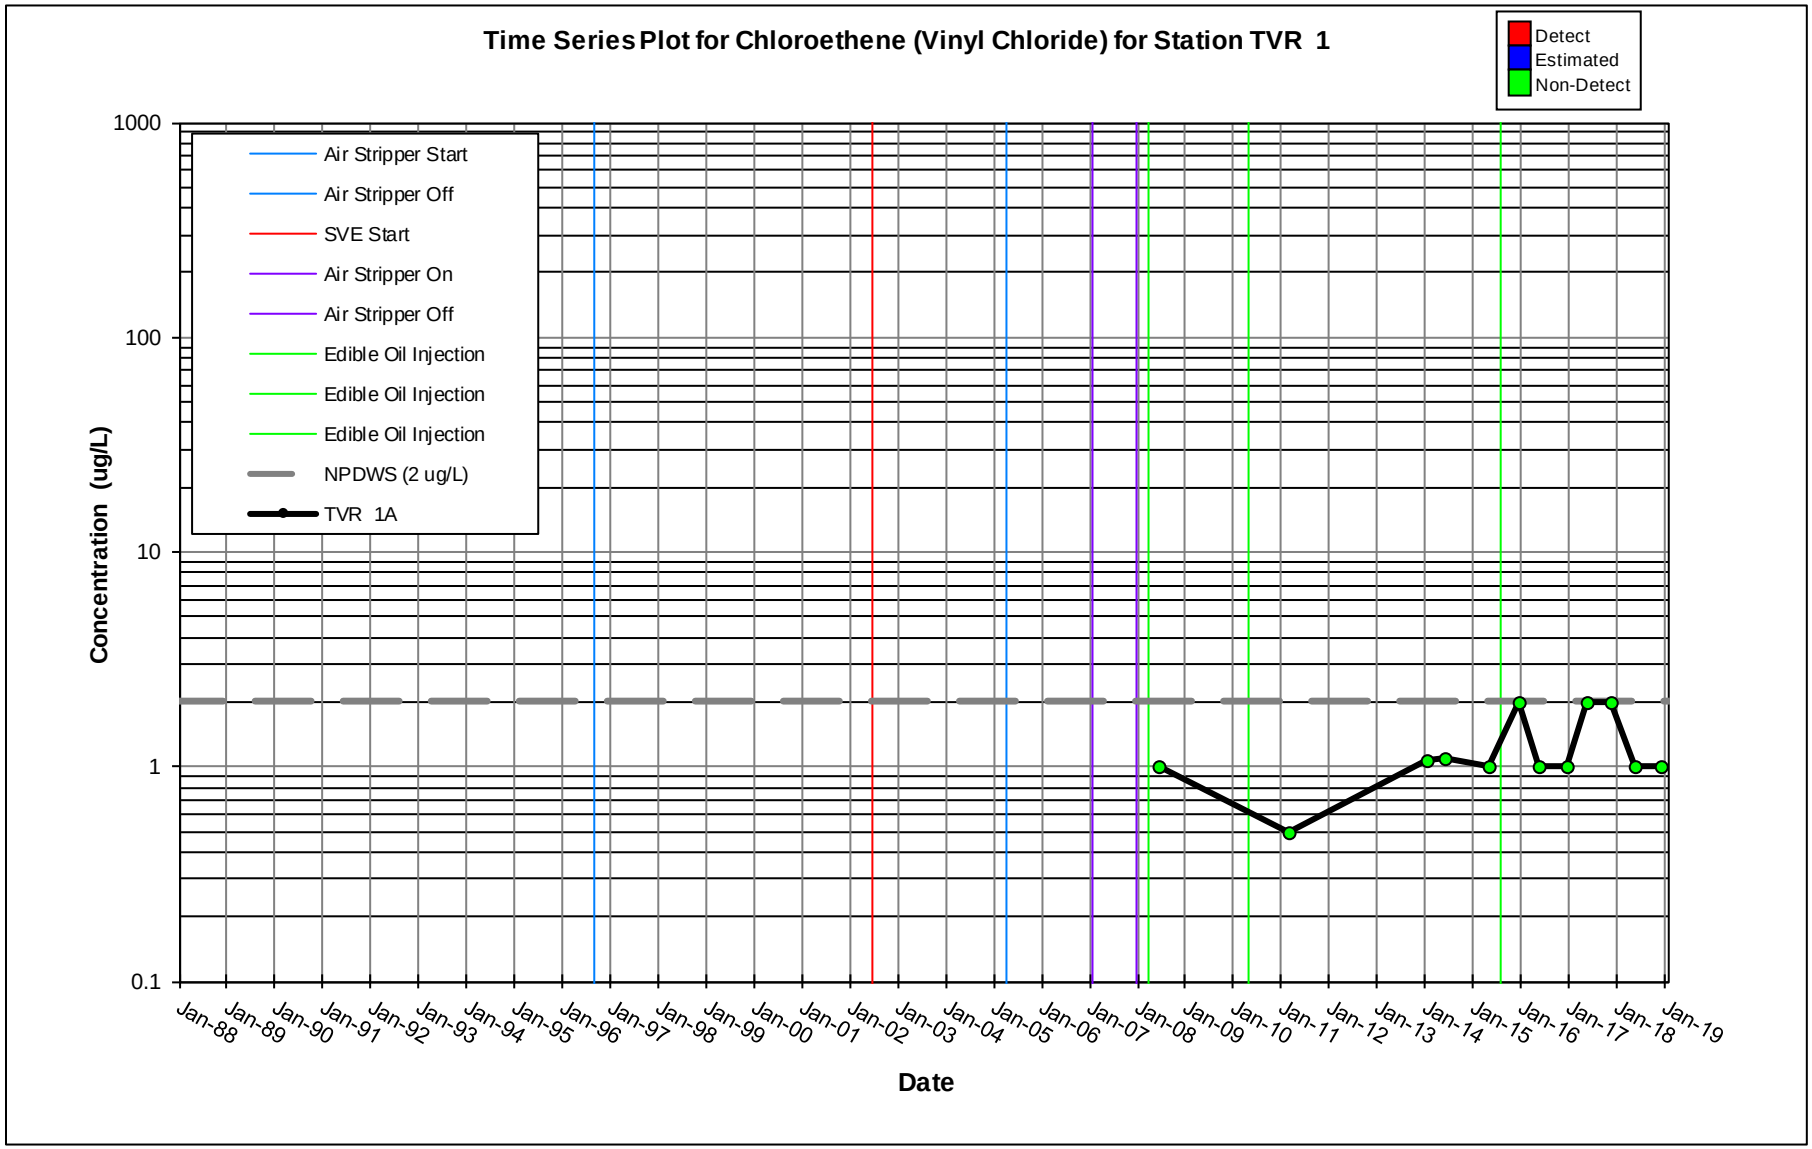
Time Series Plot for Chloroethene (Vinyl Chloride) for Station TVR 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
TVR 1A
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

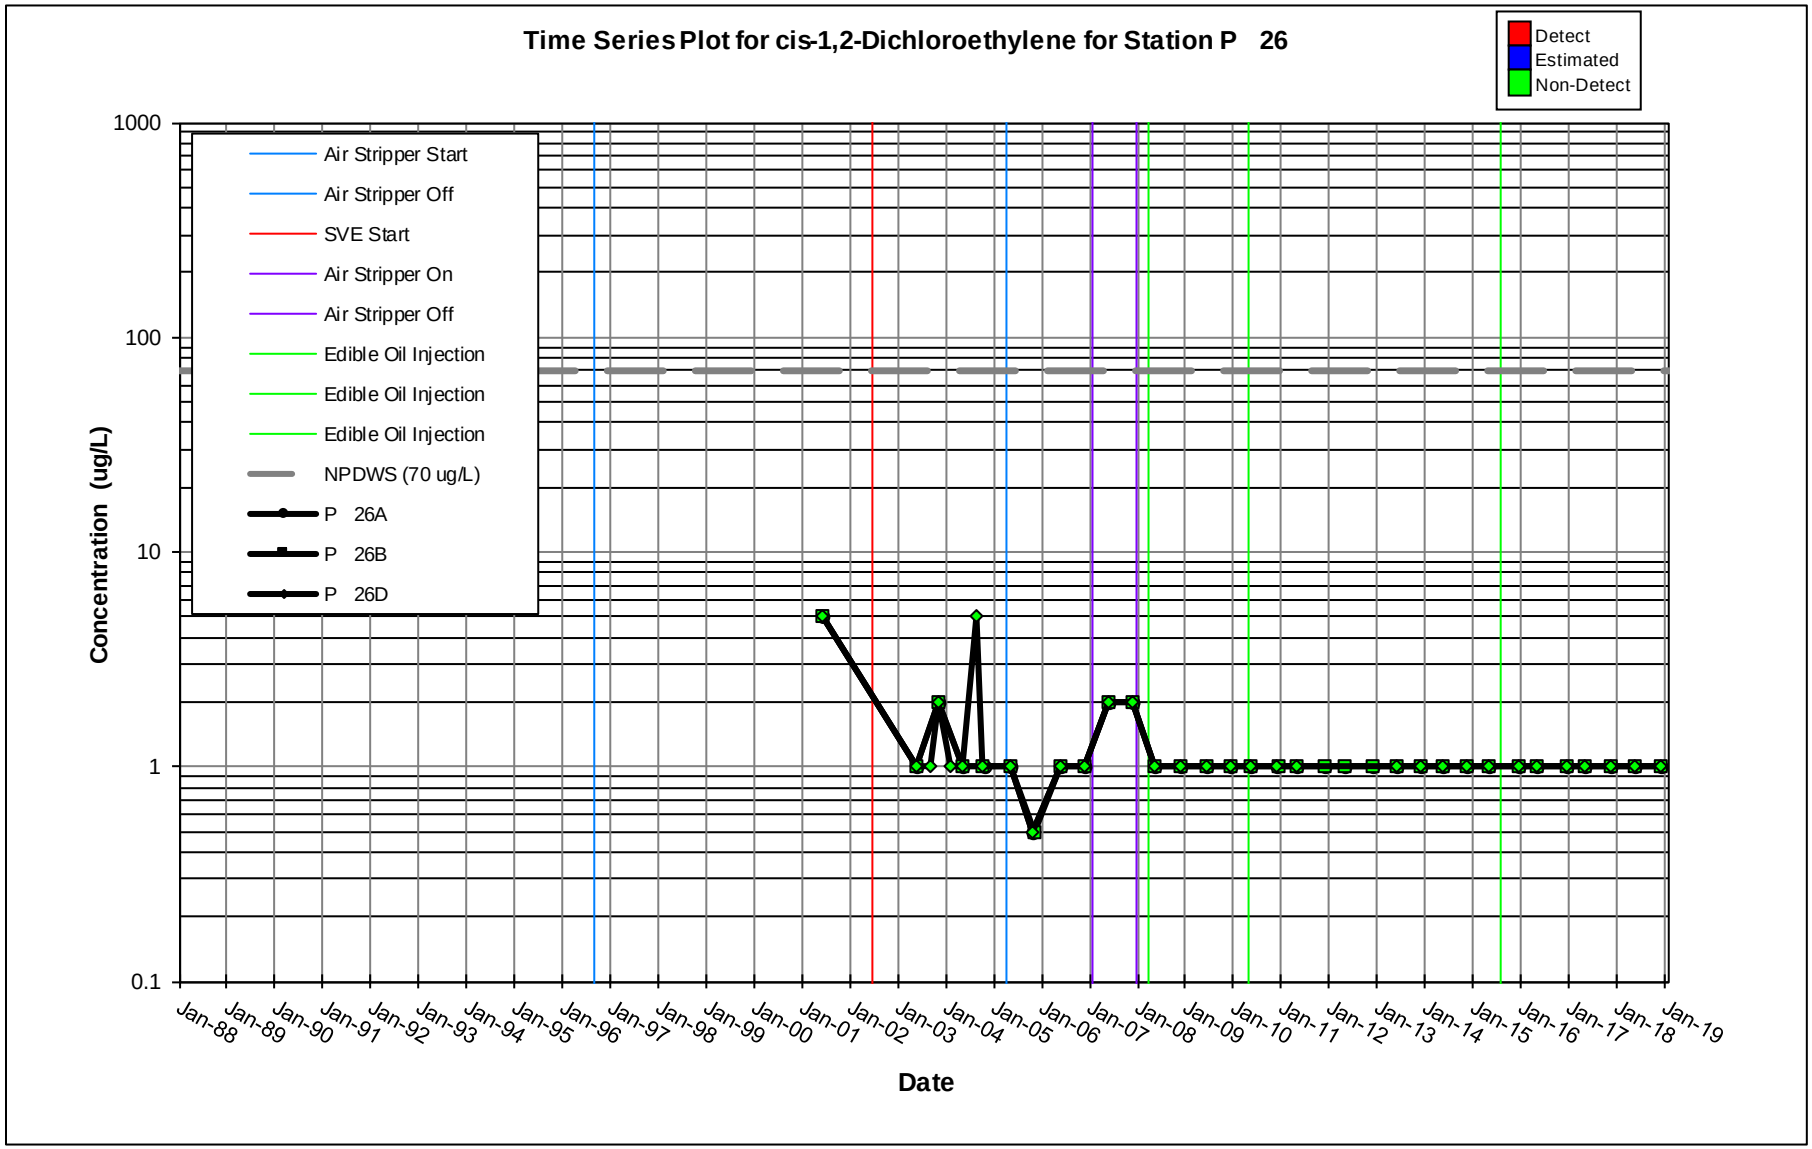
Time Series Plot for cis-1,2-Dichloroethylene for Station P 26
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
P 26A
P 26B
P 26D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

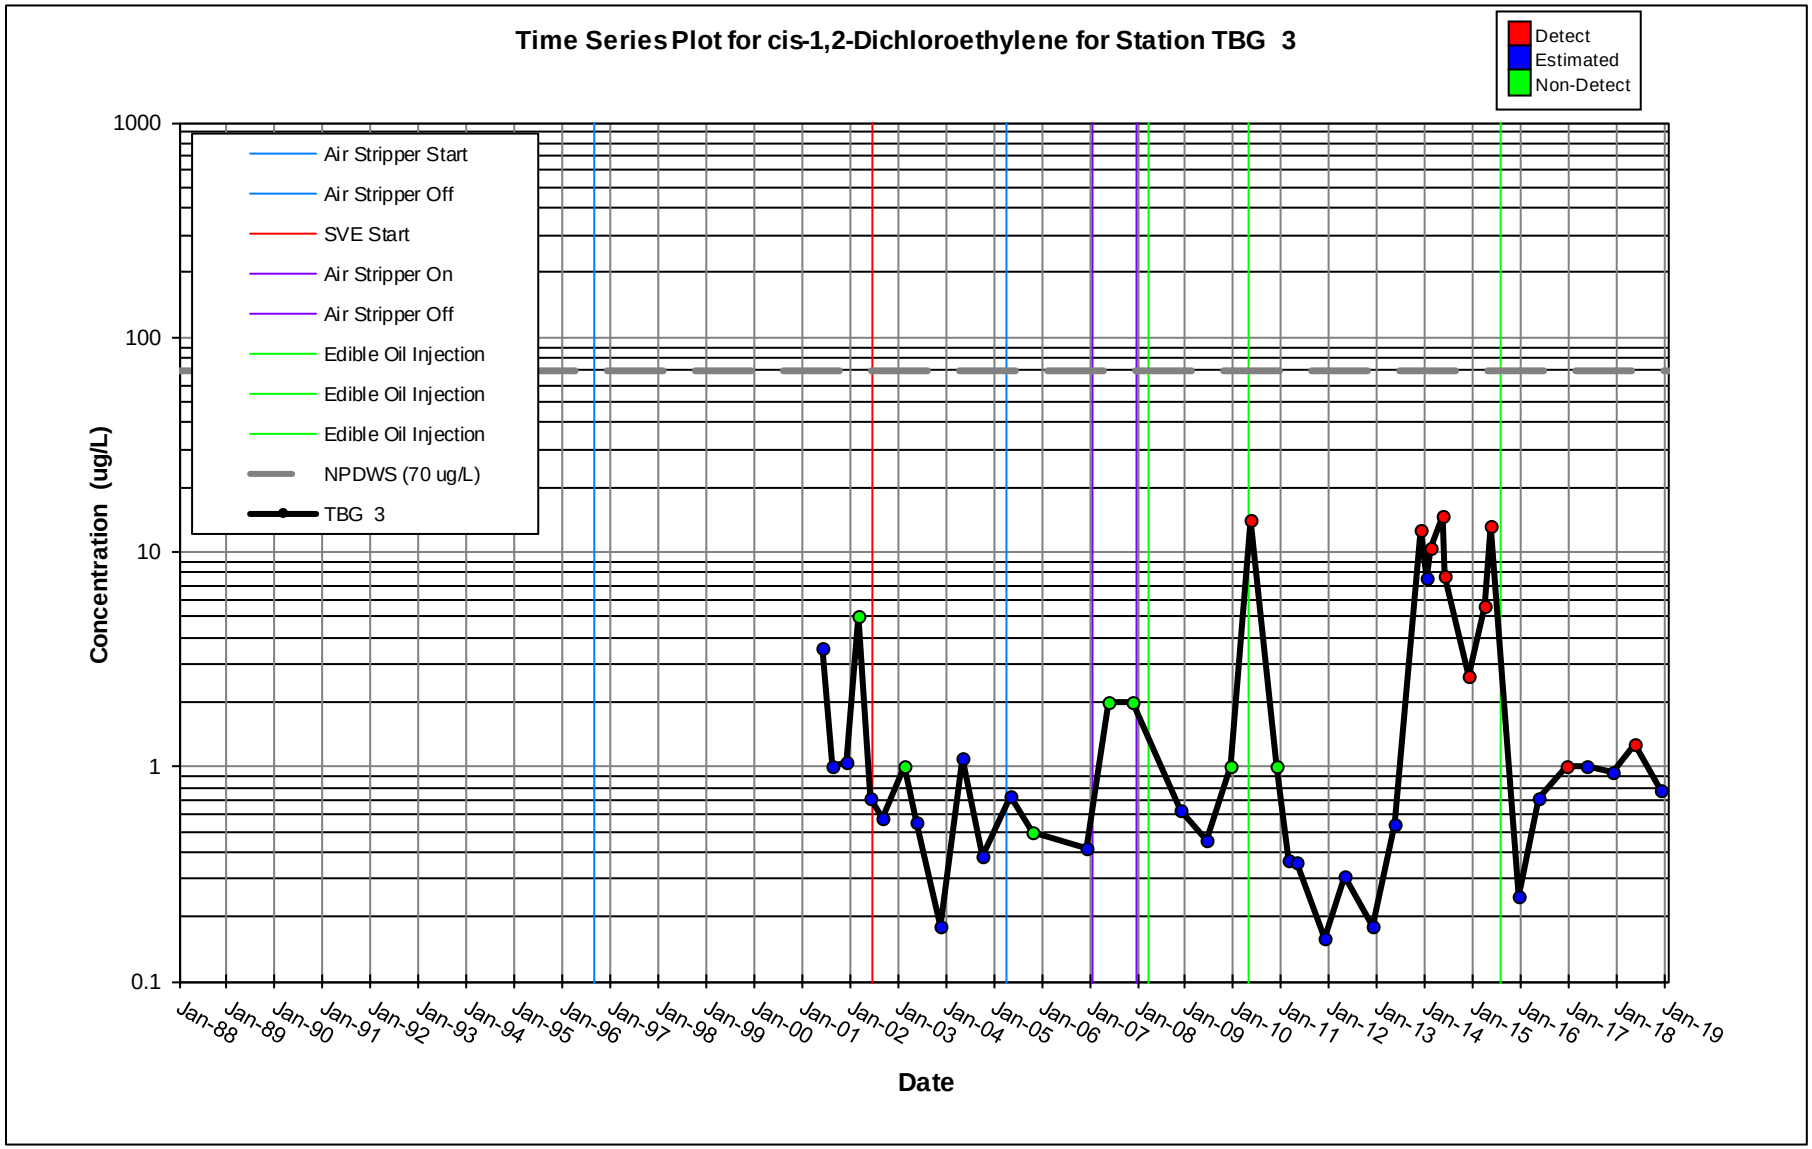
Time Series Plot for cis-1,2-Dichloroethylene for Station TBG 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TBG 3
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

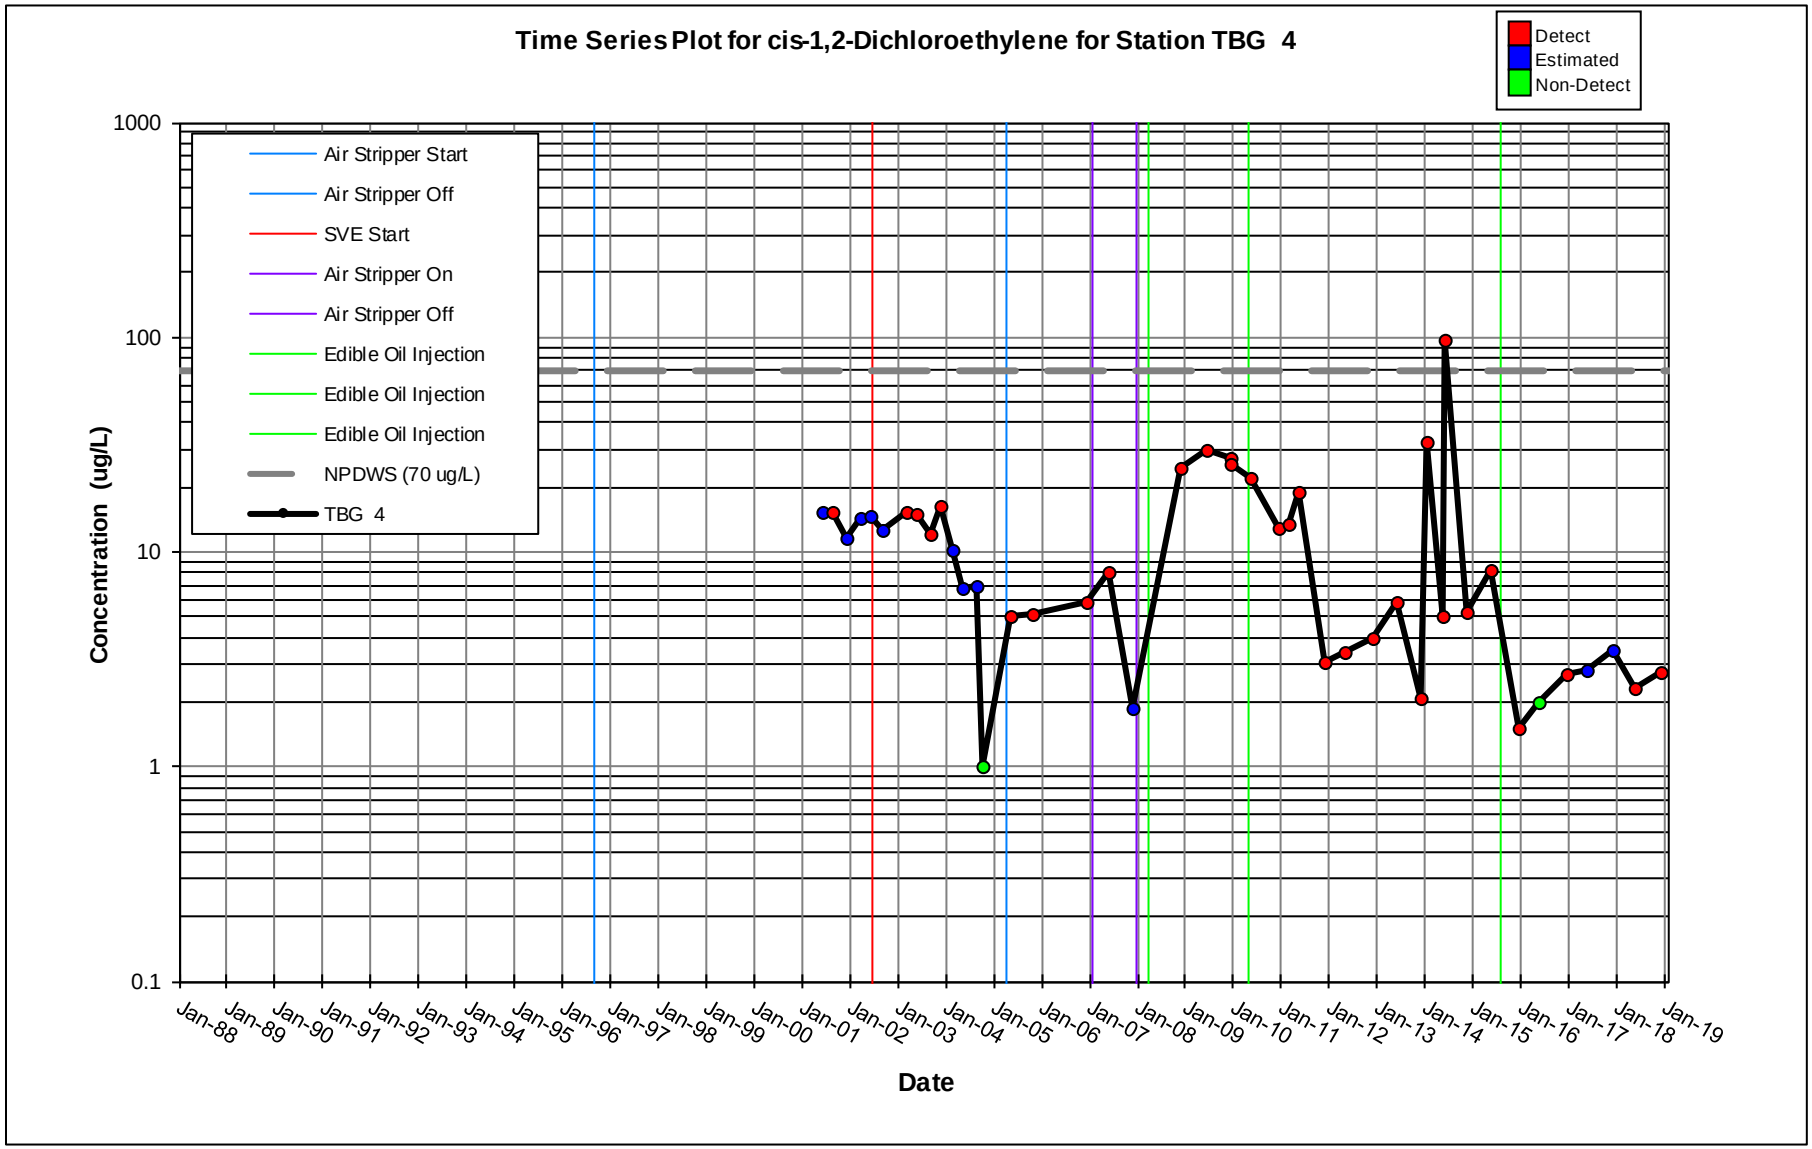
Time Series Plot for cis-1,2-Dichloroethylene for Station TBG 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TBG 4
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

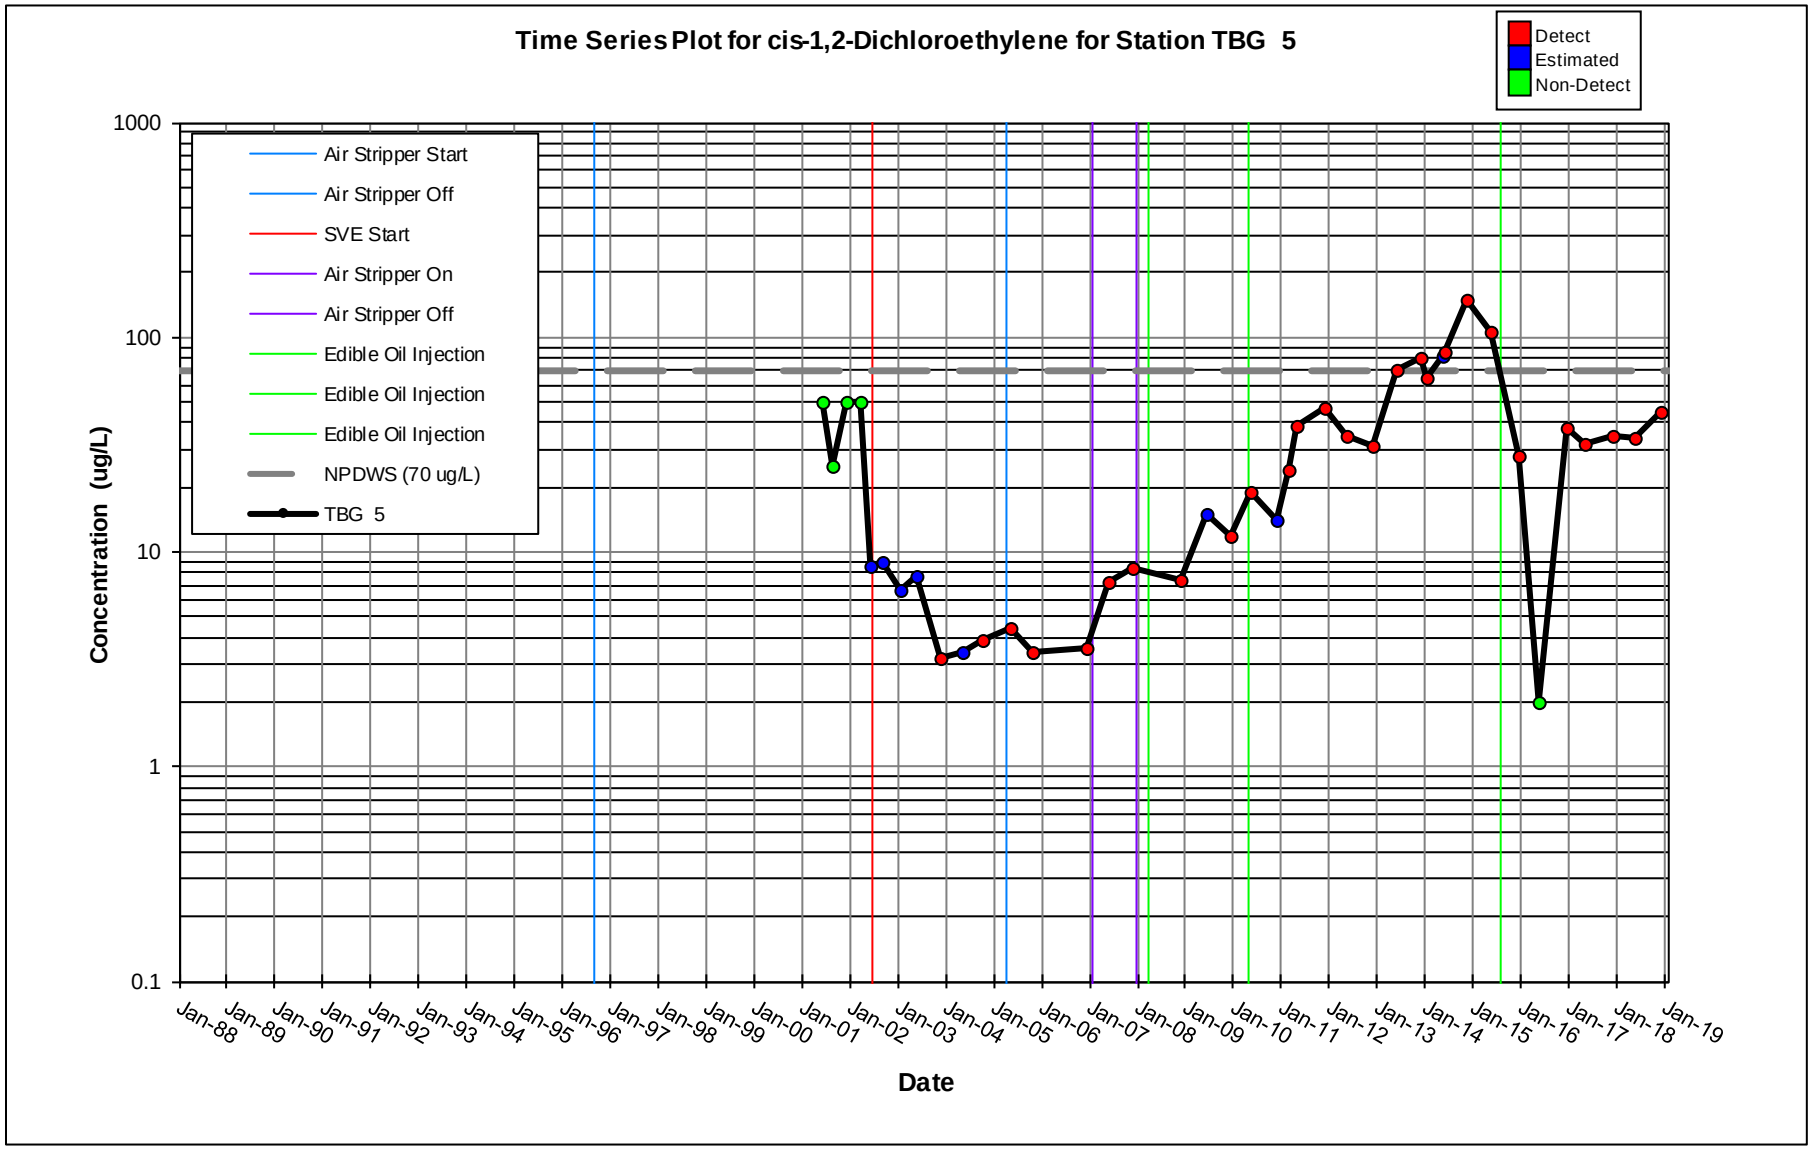
Time Series Plot for cis-1,2-Dichloroethylene for Station TBG 5
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TBG 5
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

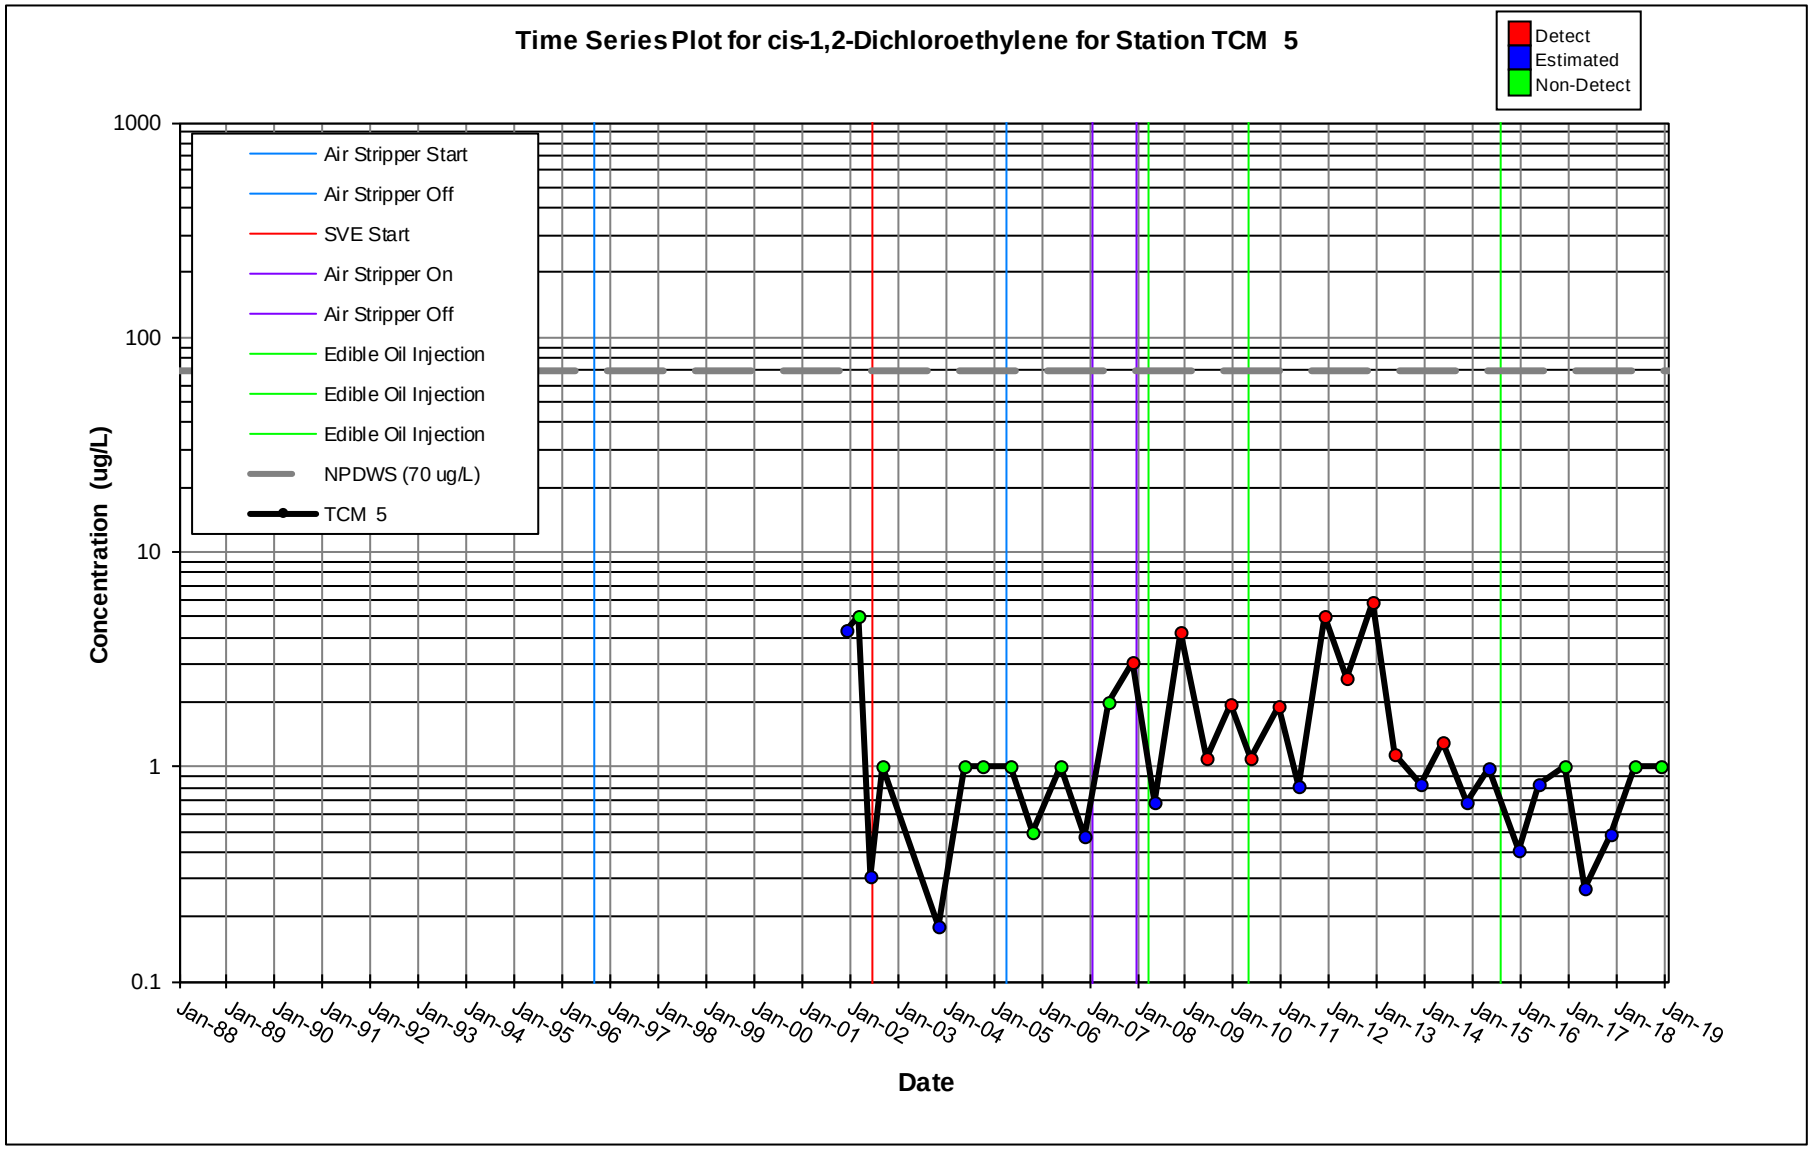
Time Series Plot for cis-1,2-Dichloroethylene for Station TCM 5
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TCM 5
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

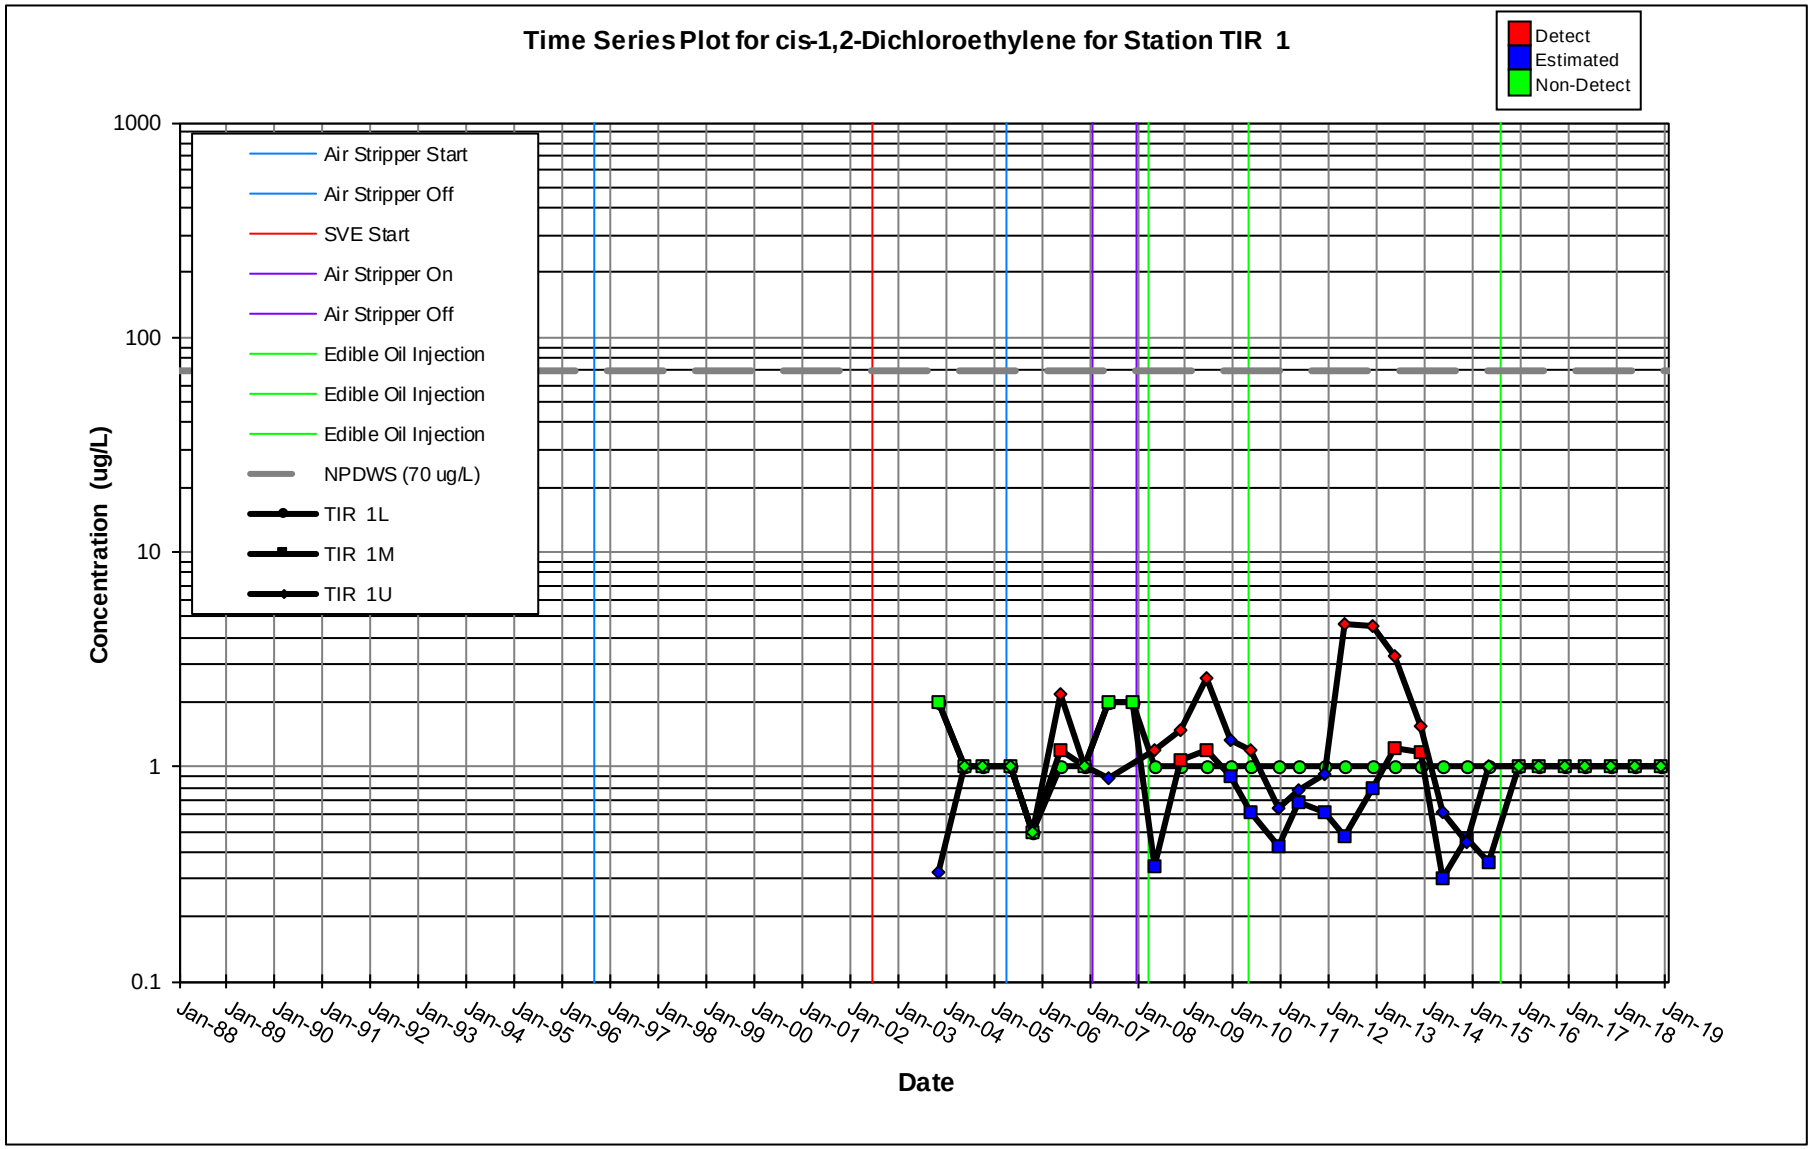
Time Series Plot for cis-1,2-Dichloroethylene for Station TIR 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TIR 1L
TIR 1M
TIR 1U
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

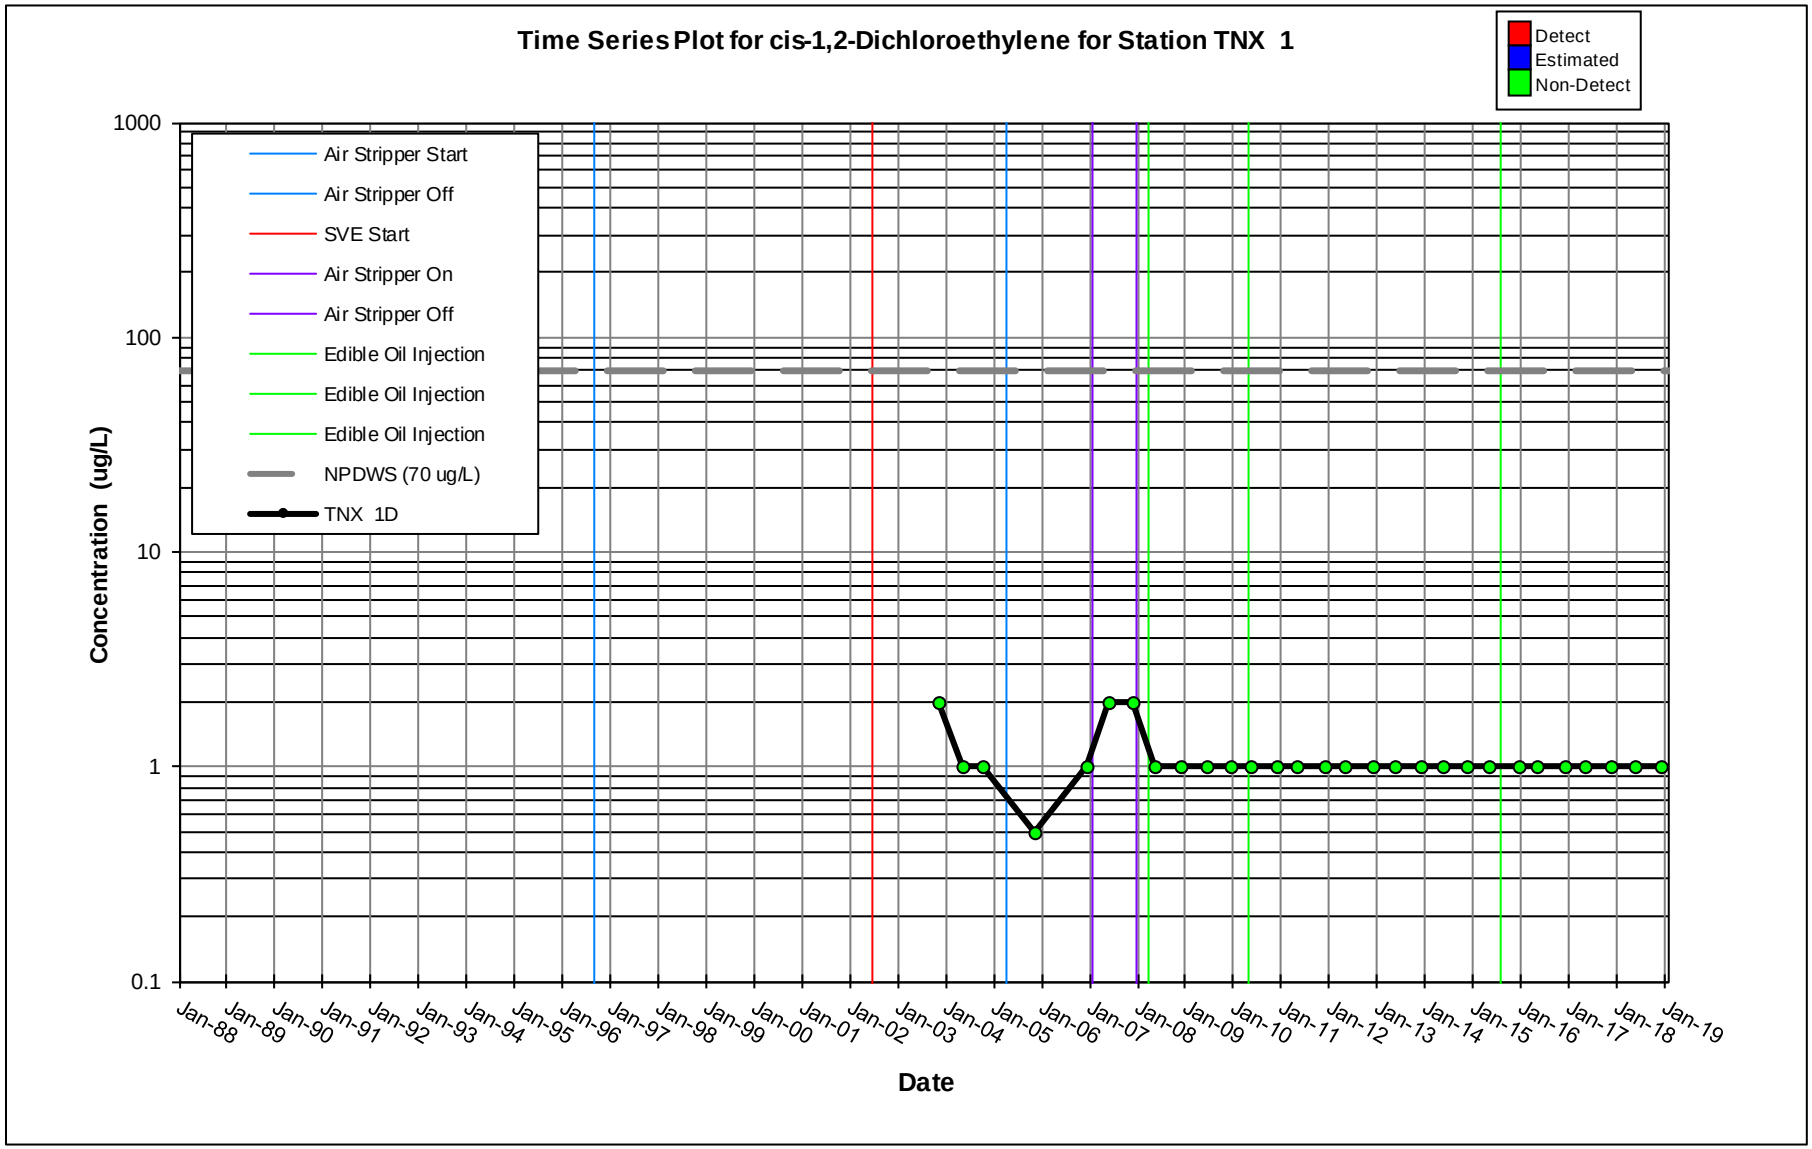
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX 1D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

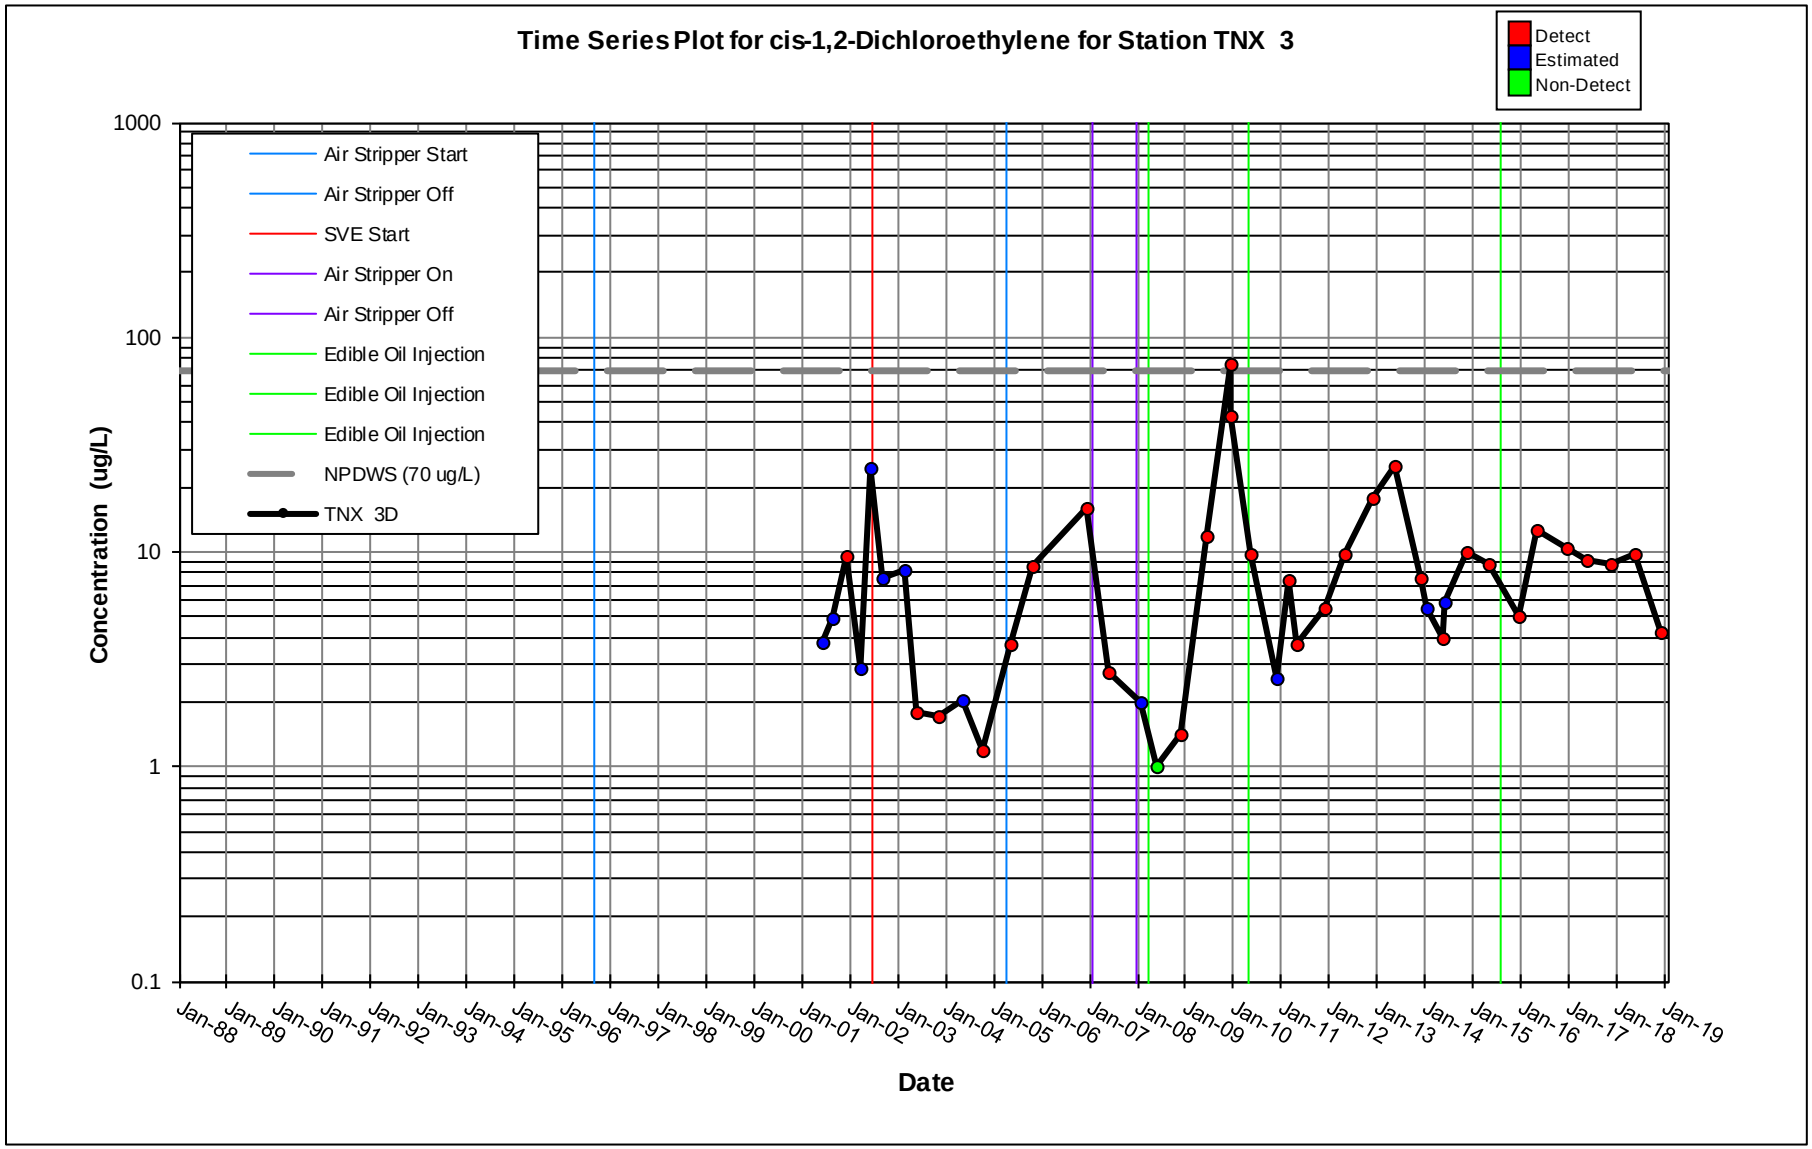
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX 3D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

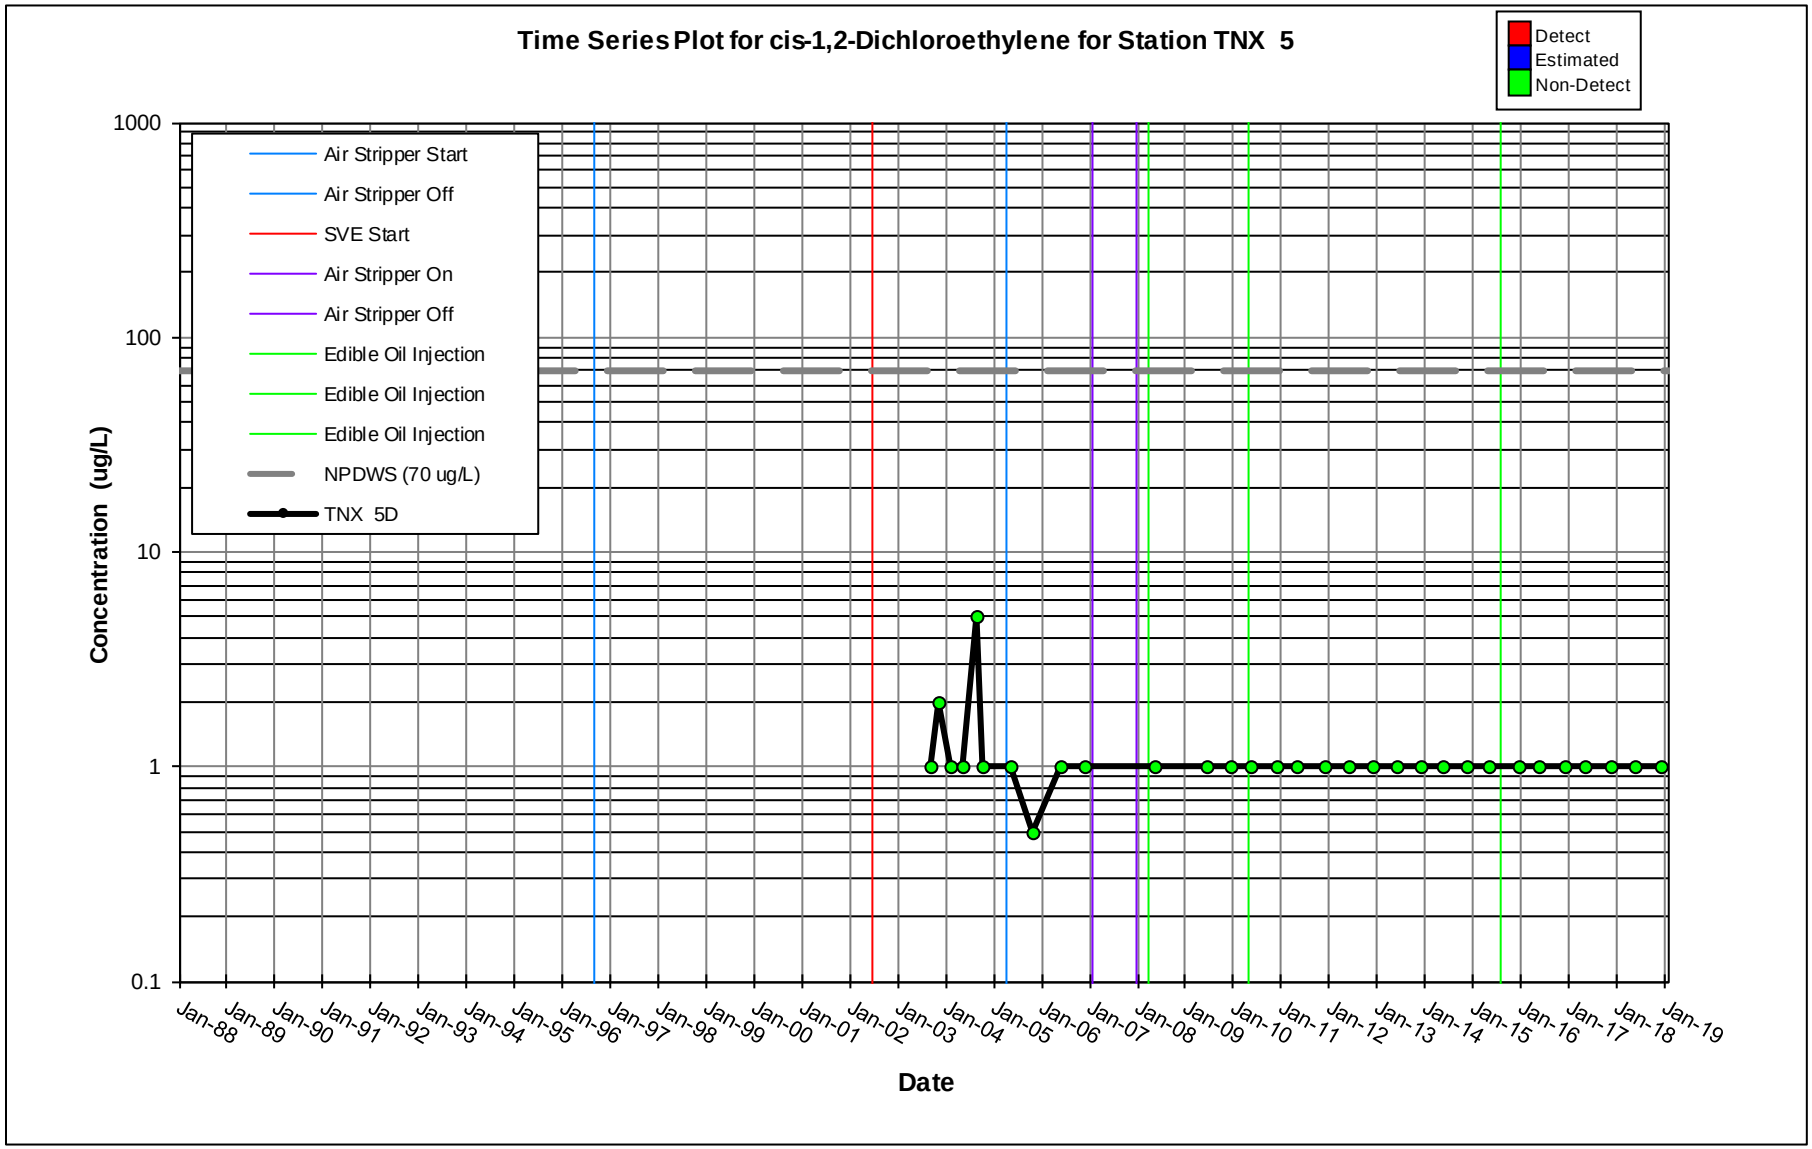
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX 5
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX 5D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

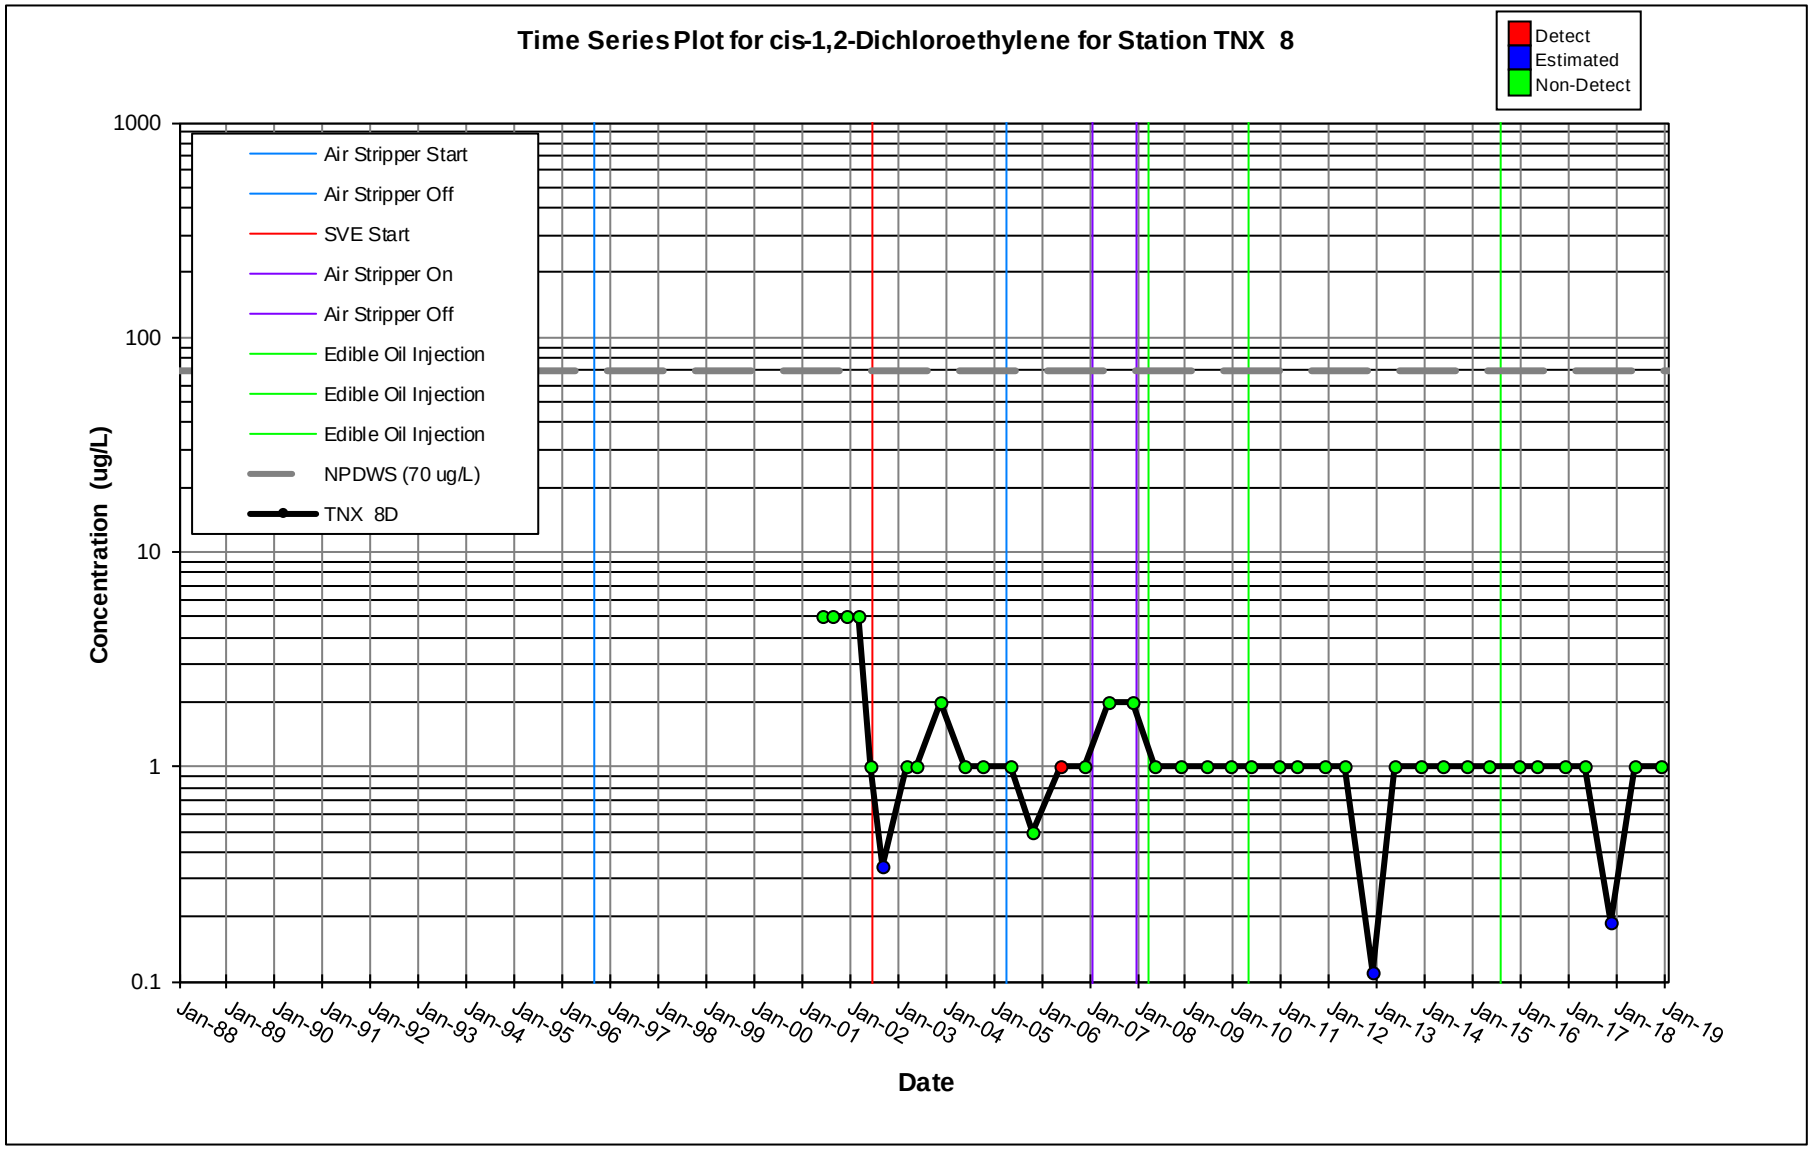
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX 8
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX 8D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

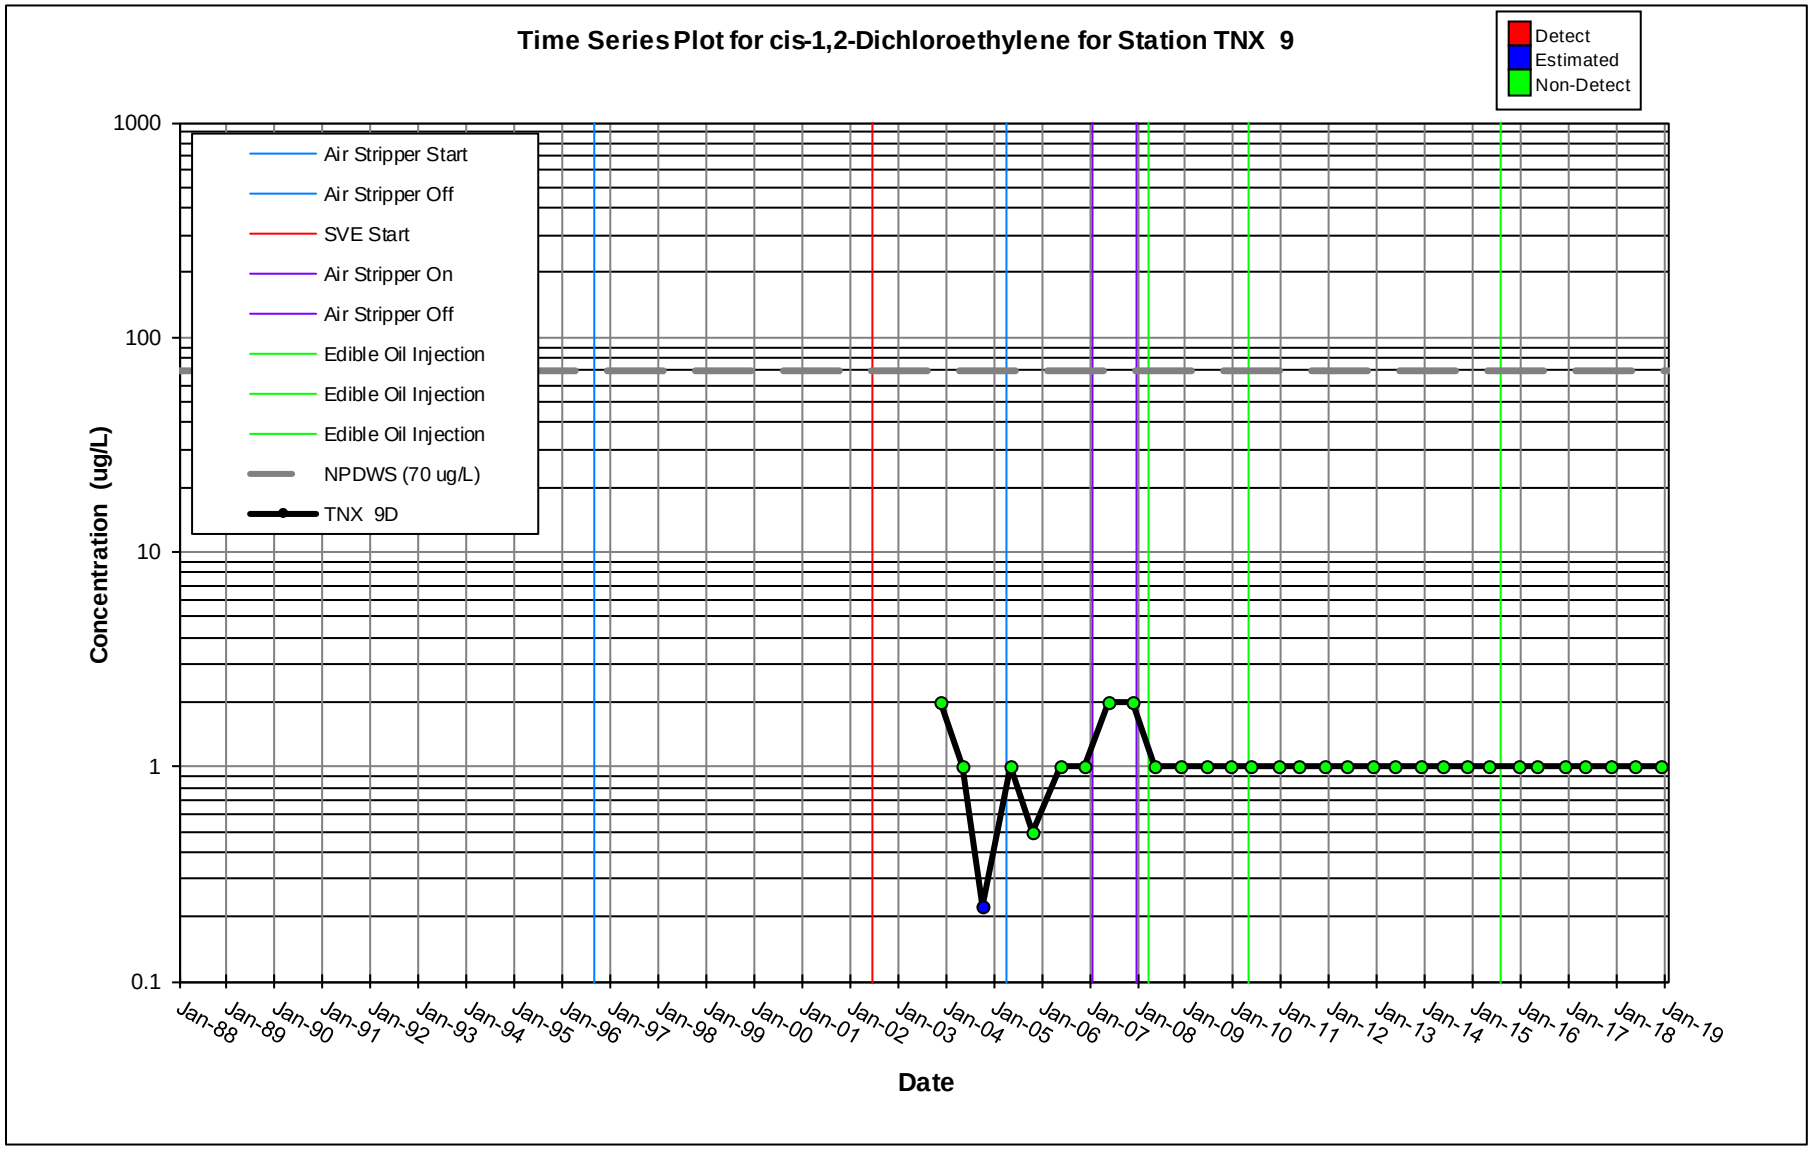
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX 9
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX 9D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

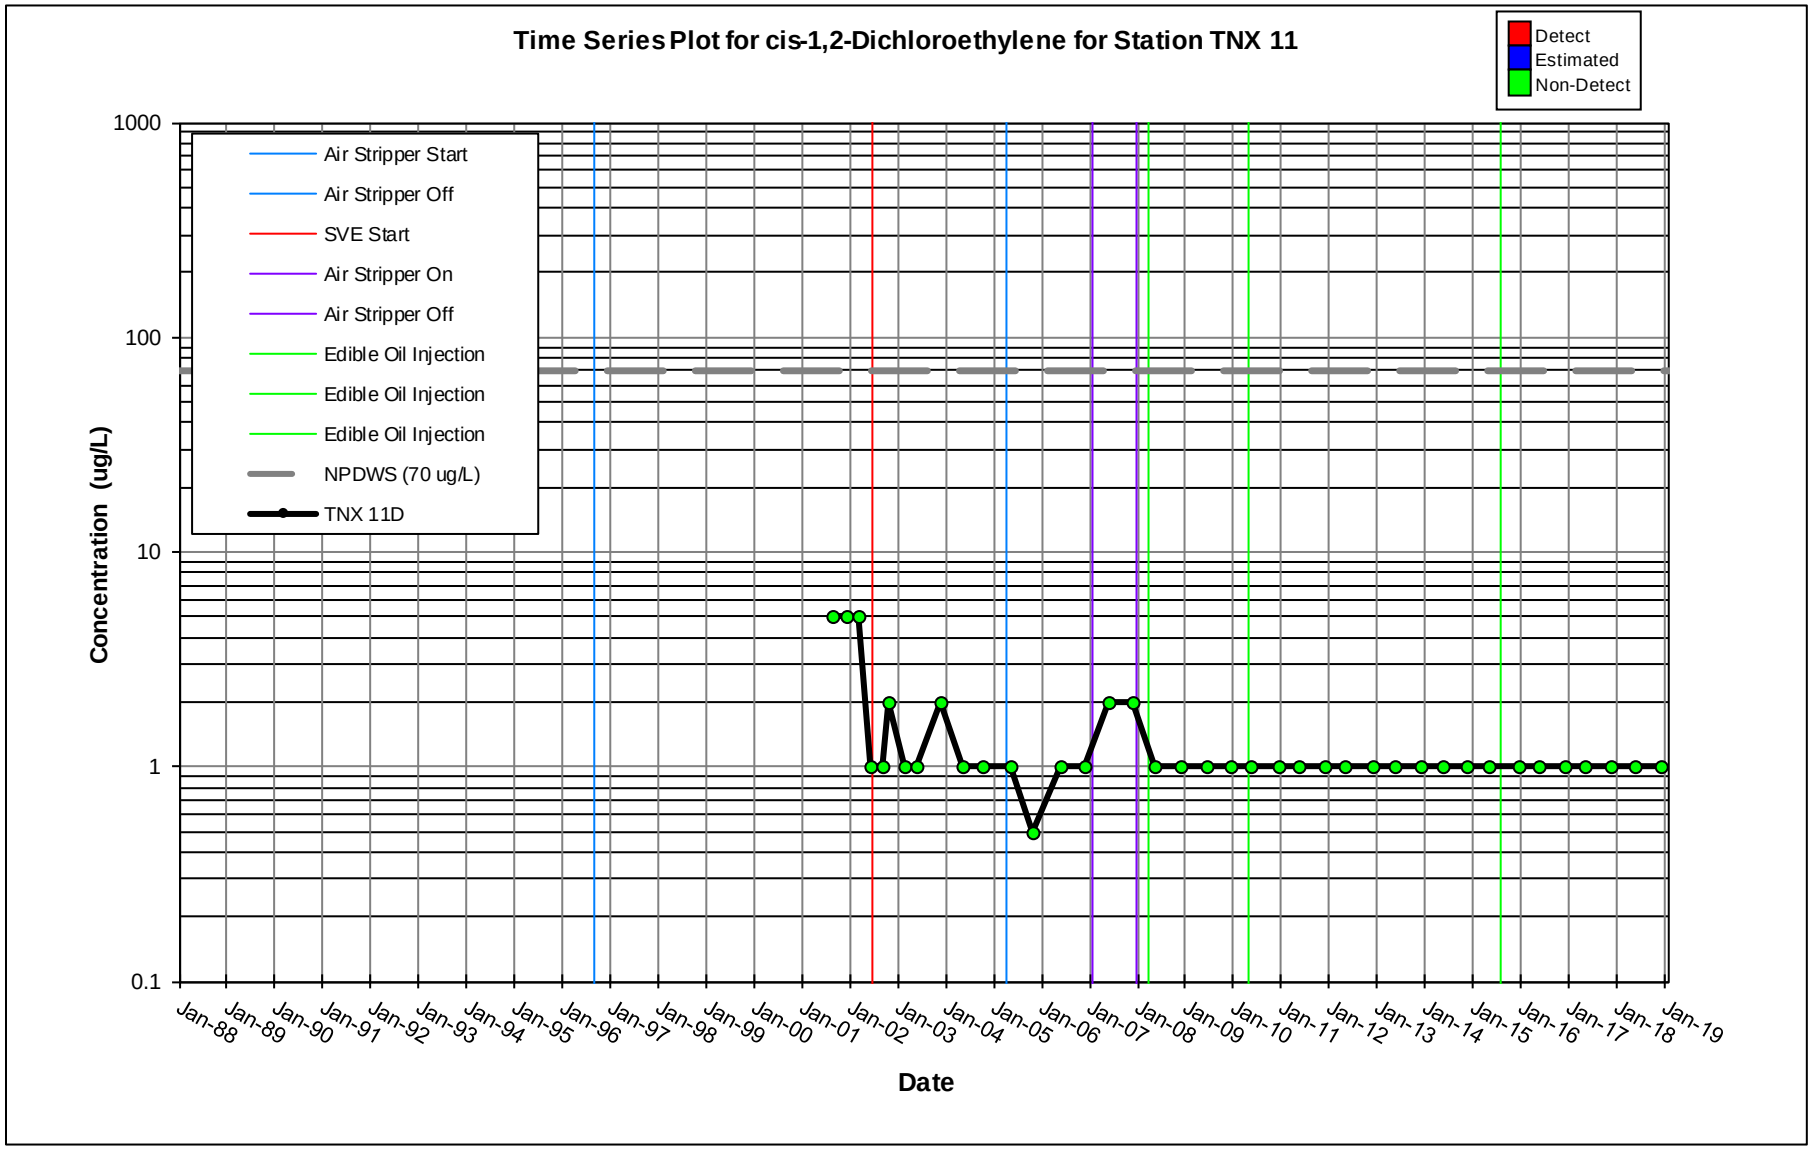
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX 11
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX 11D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

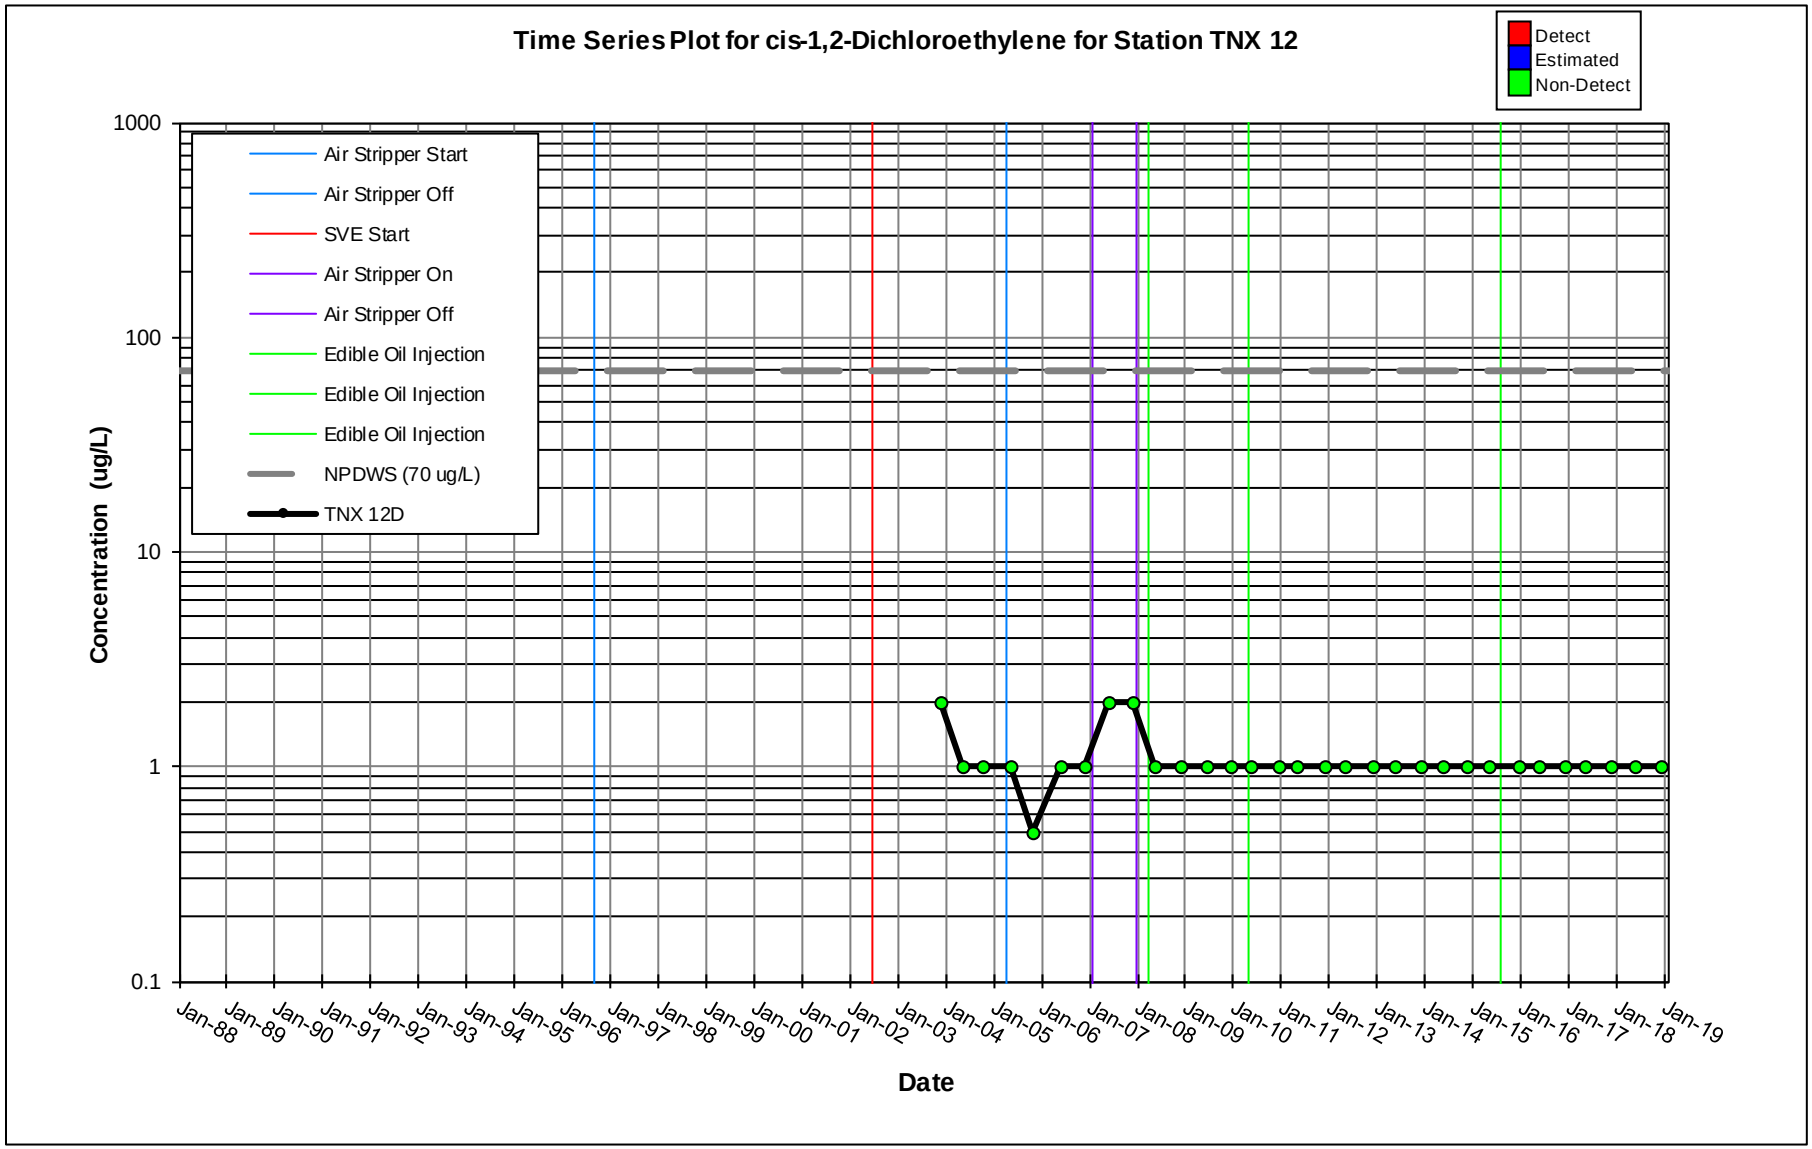
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX 12
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX 12D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

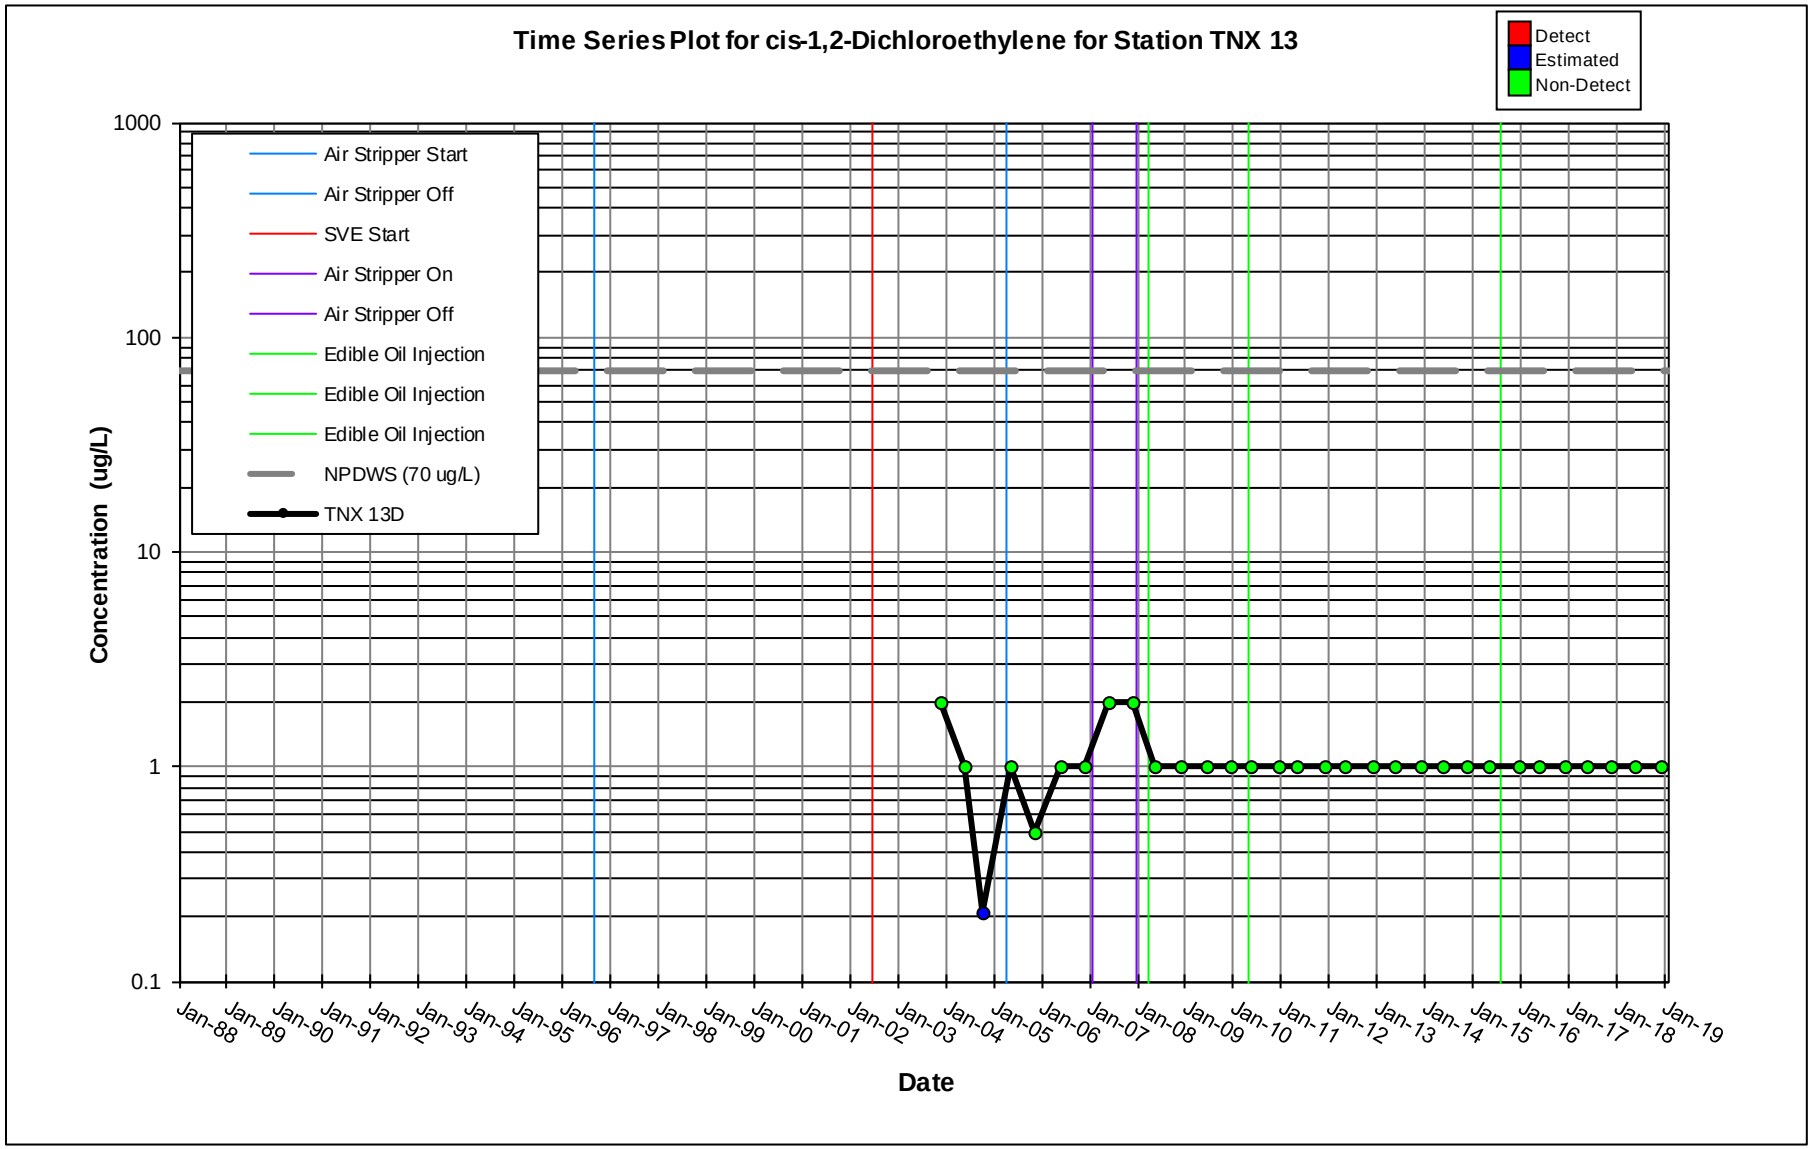
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX 13
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX 13D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

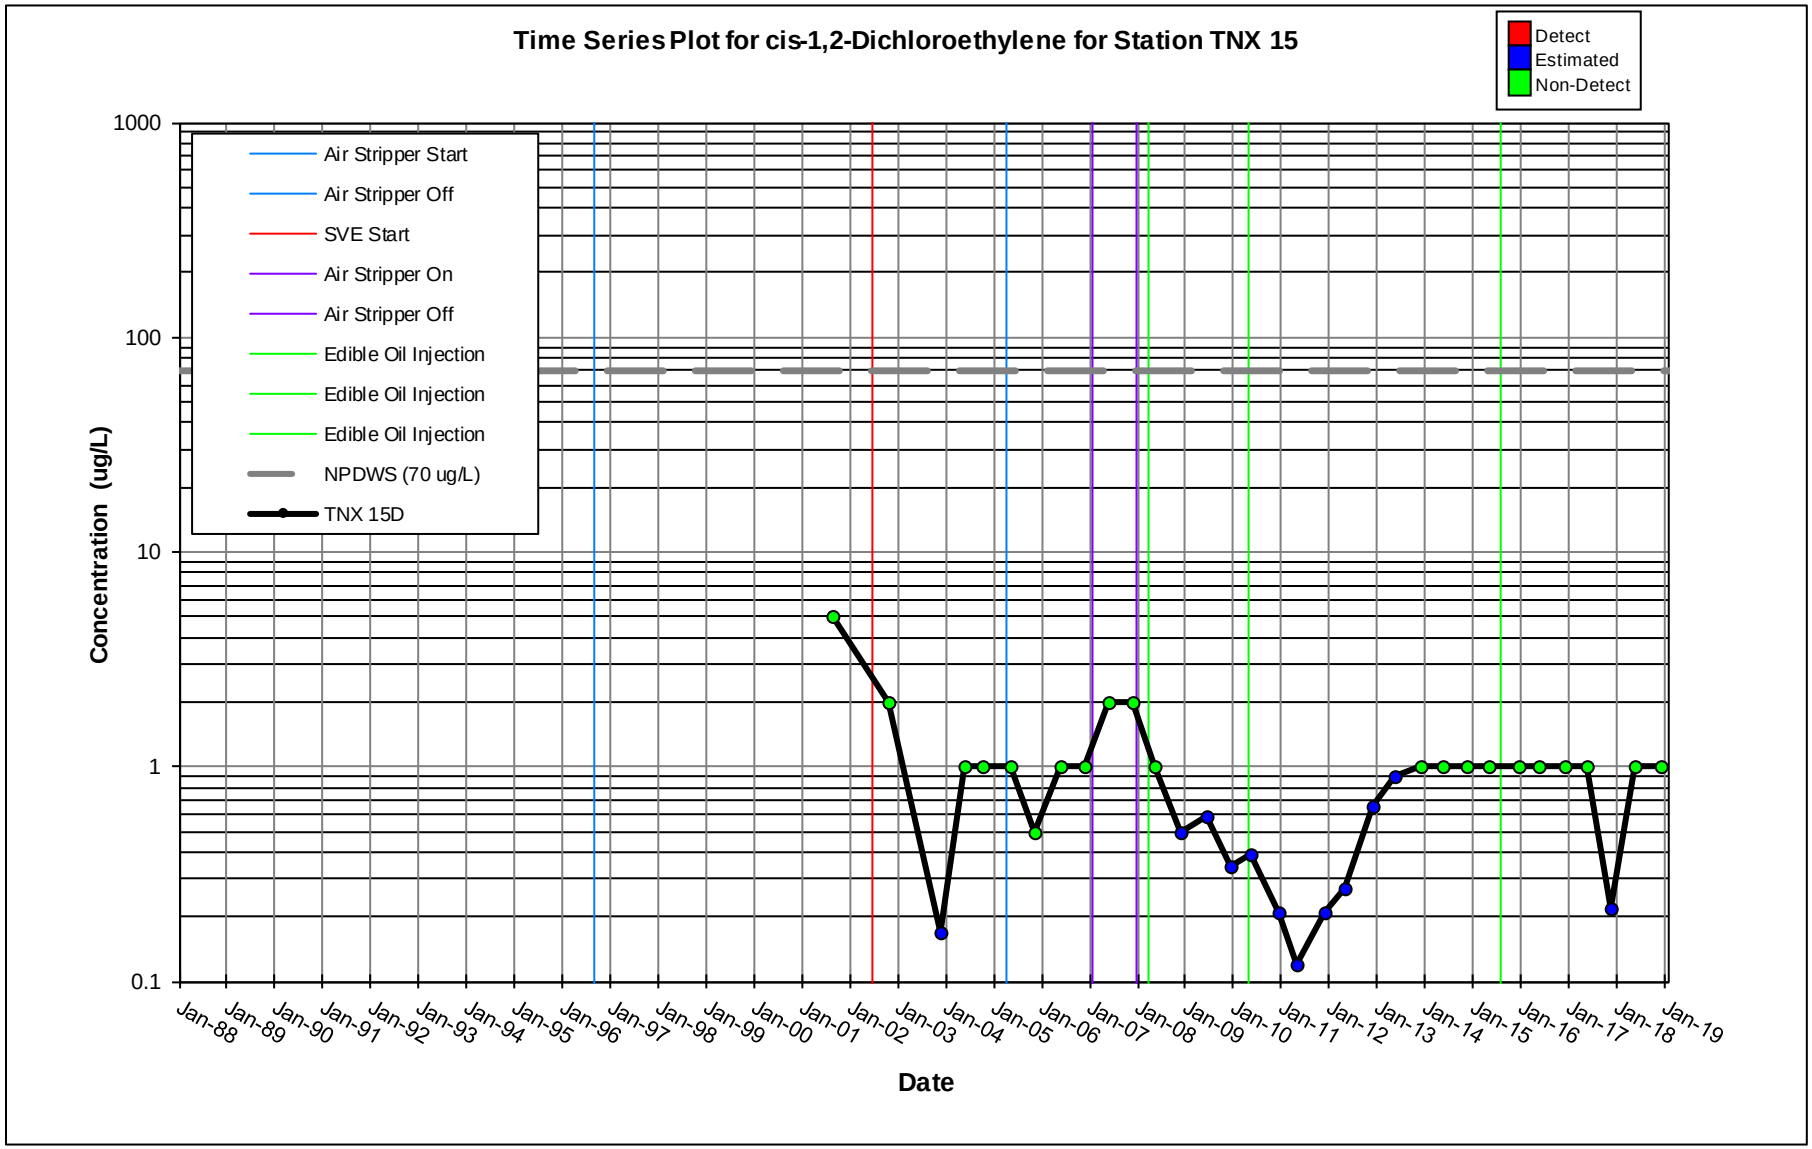
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX 15
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX 15D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

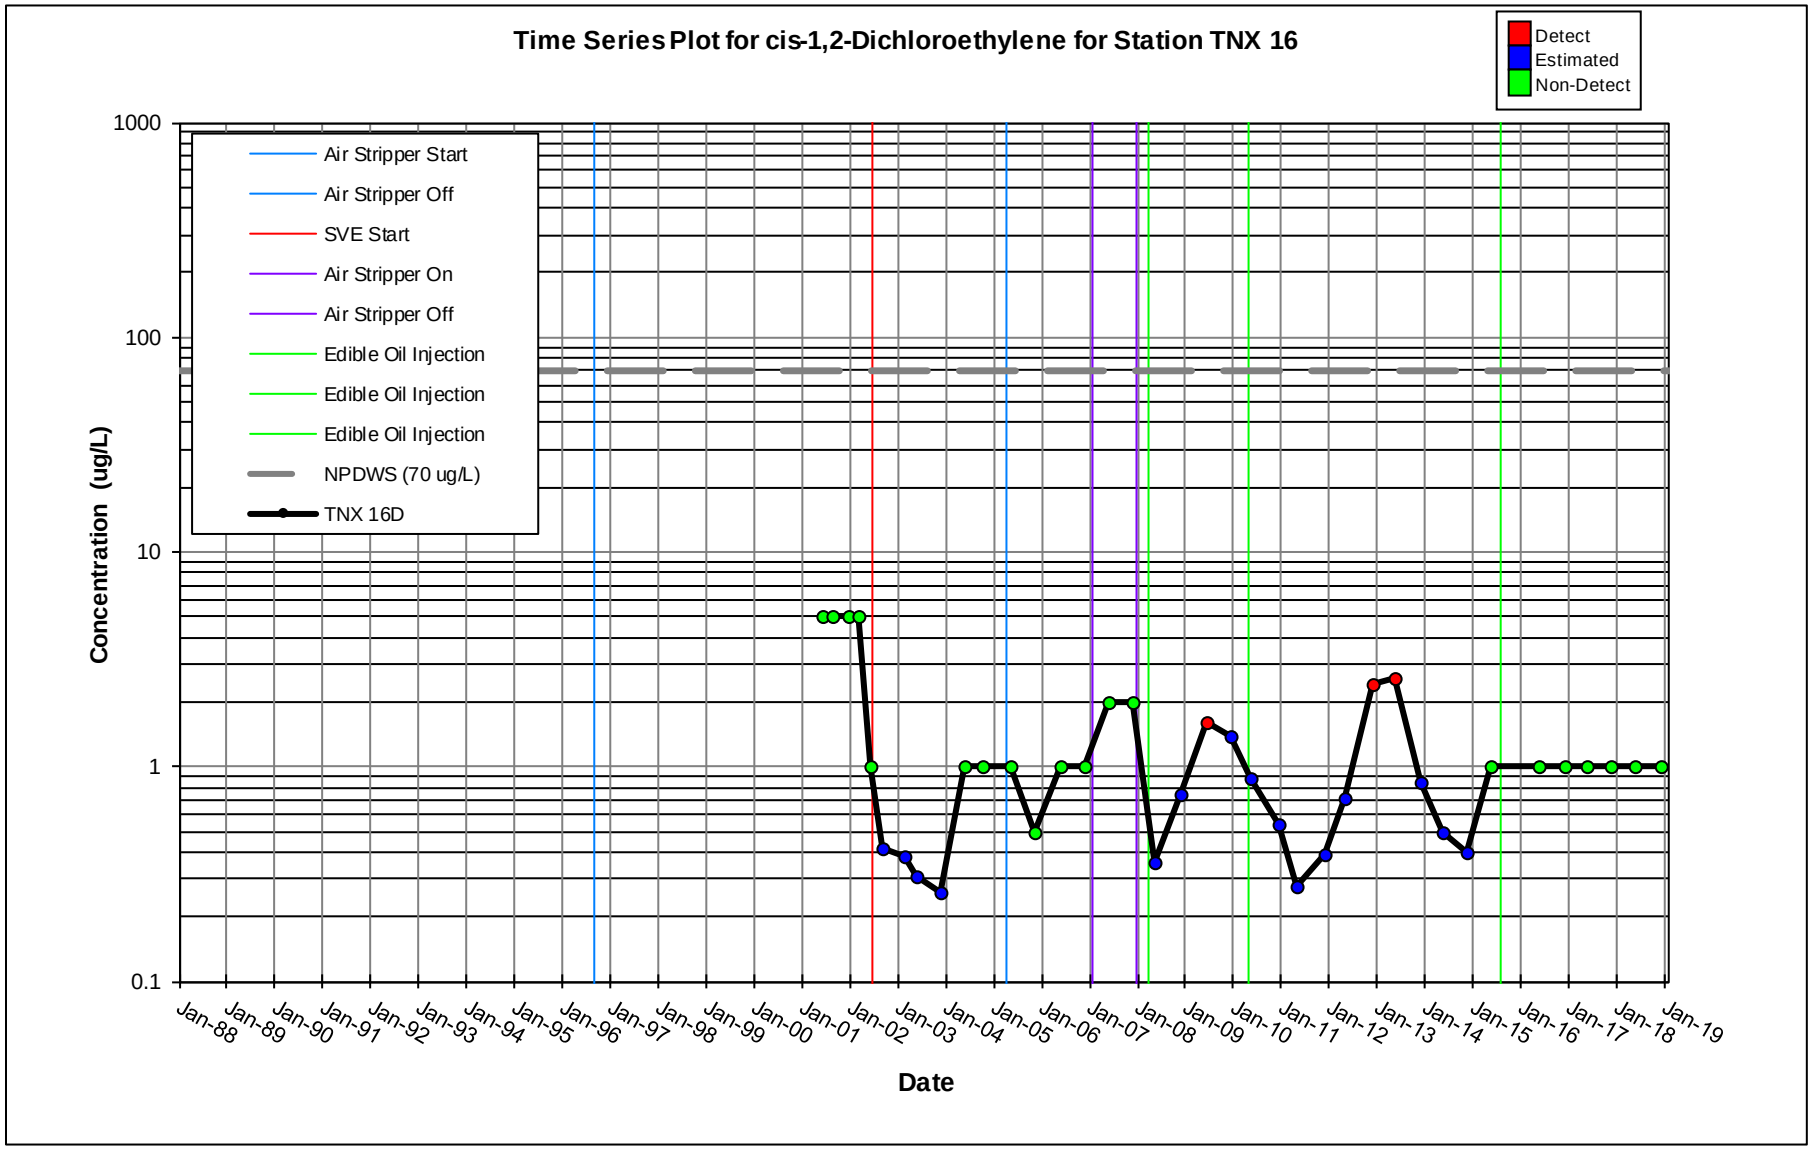
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX 16
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX 16D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

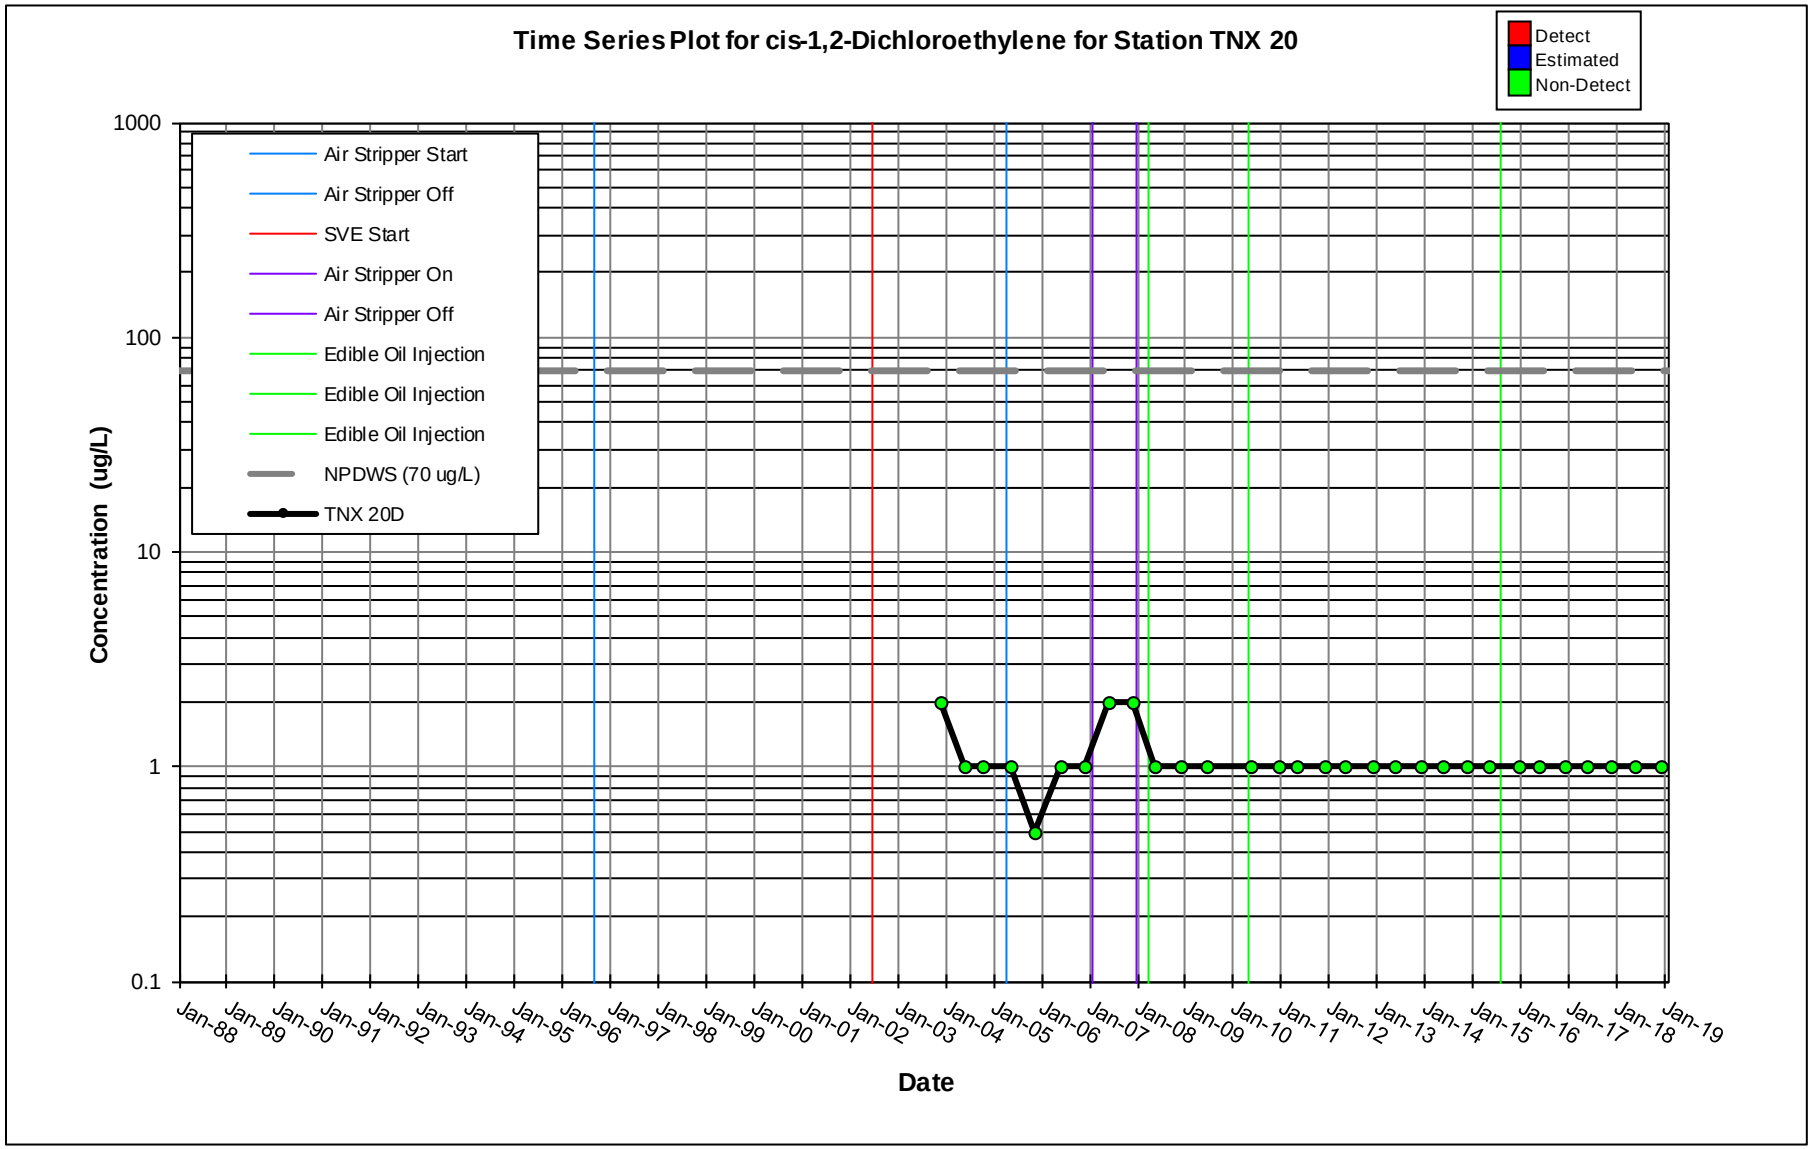
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX 20
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX 20D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

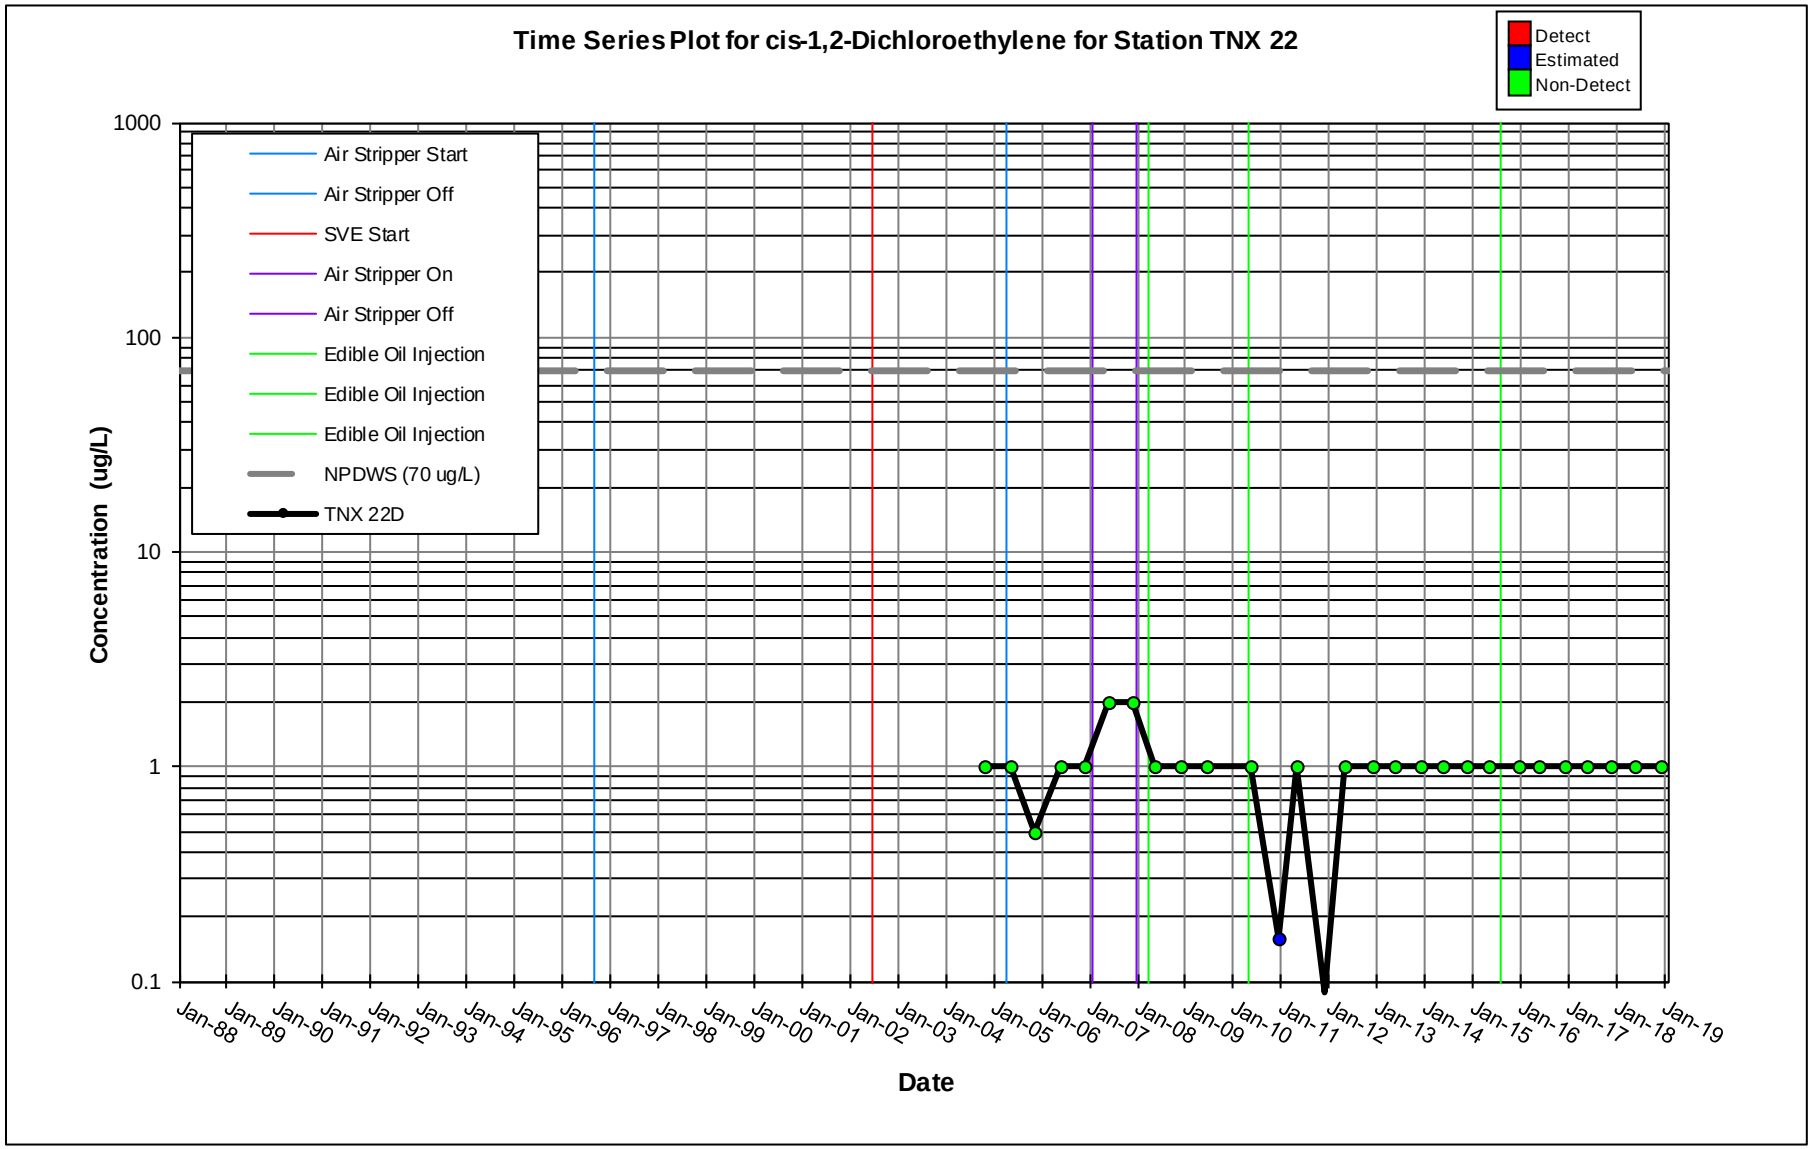
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX 22
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX 22D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

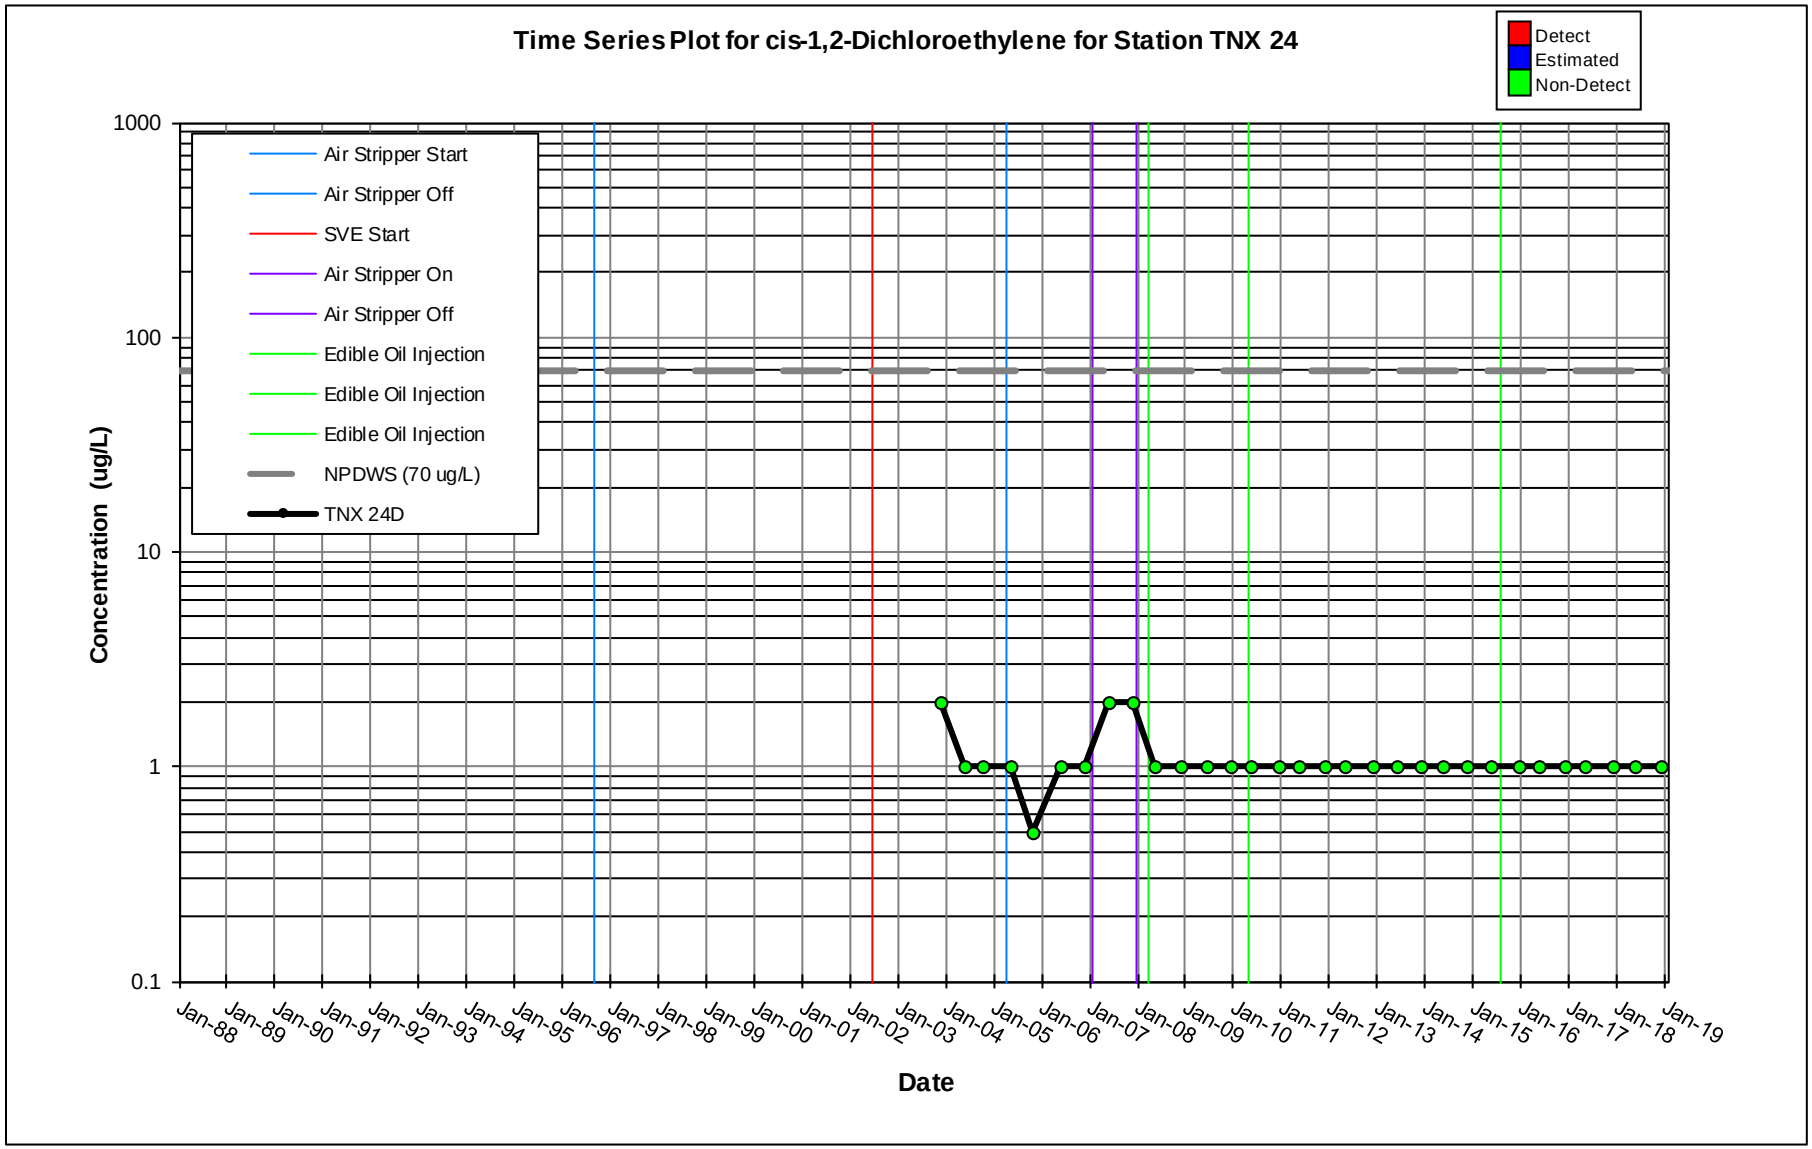
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX 24
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX 24D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

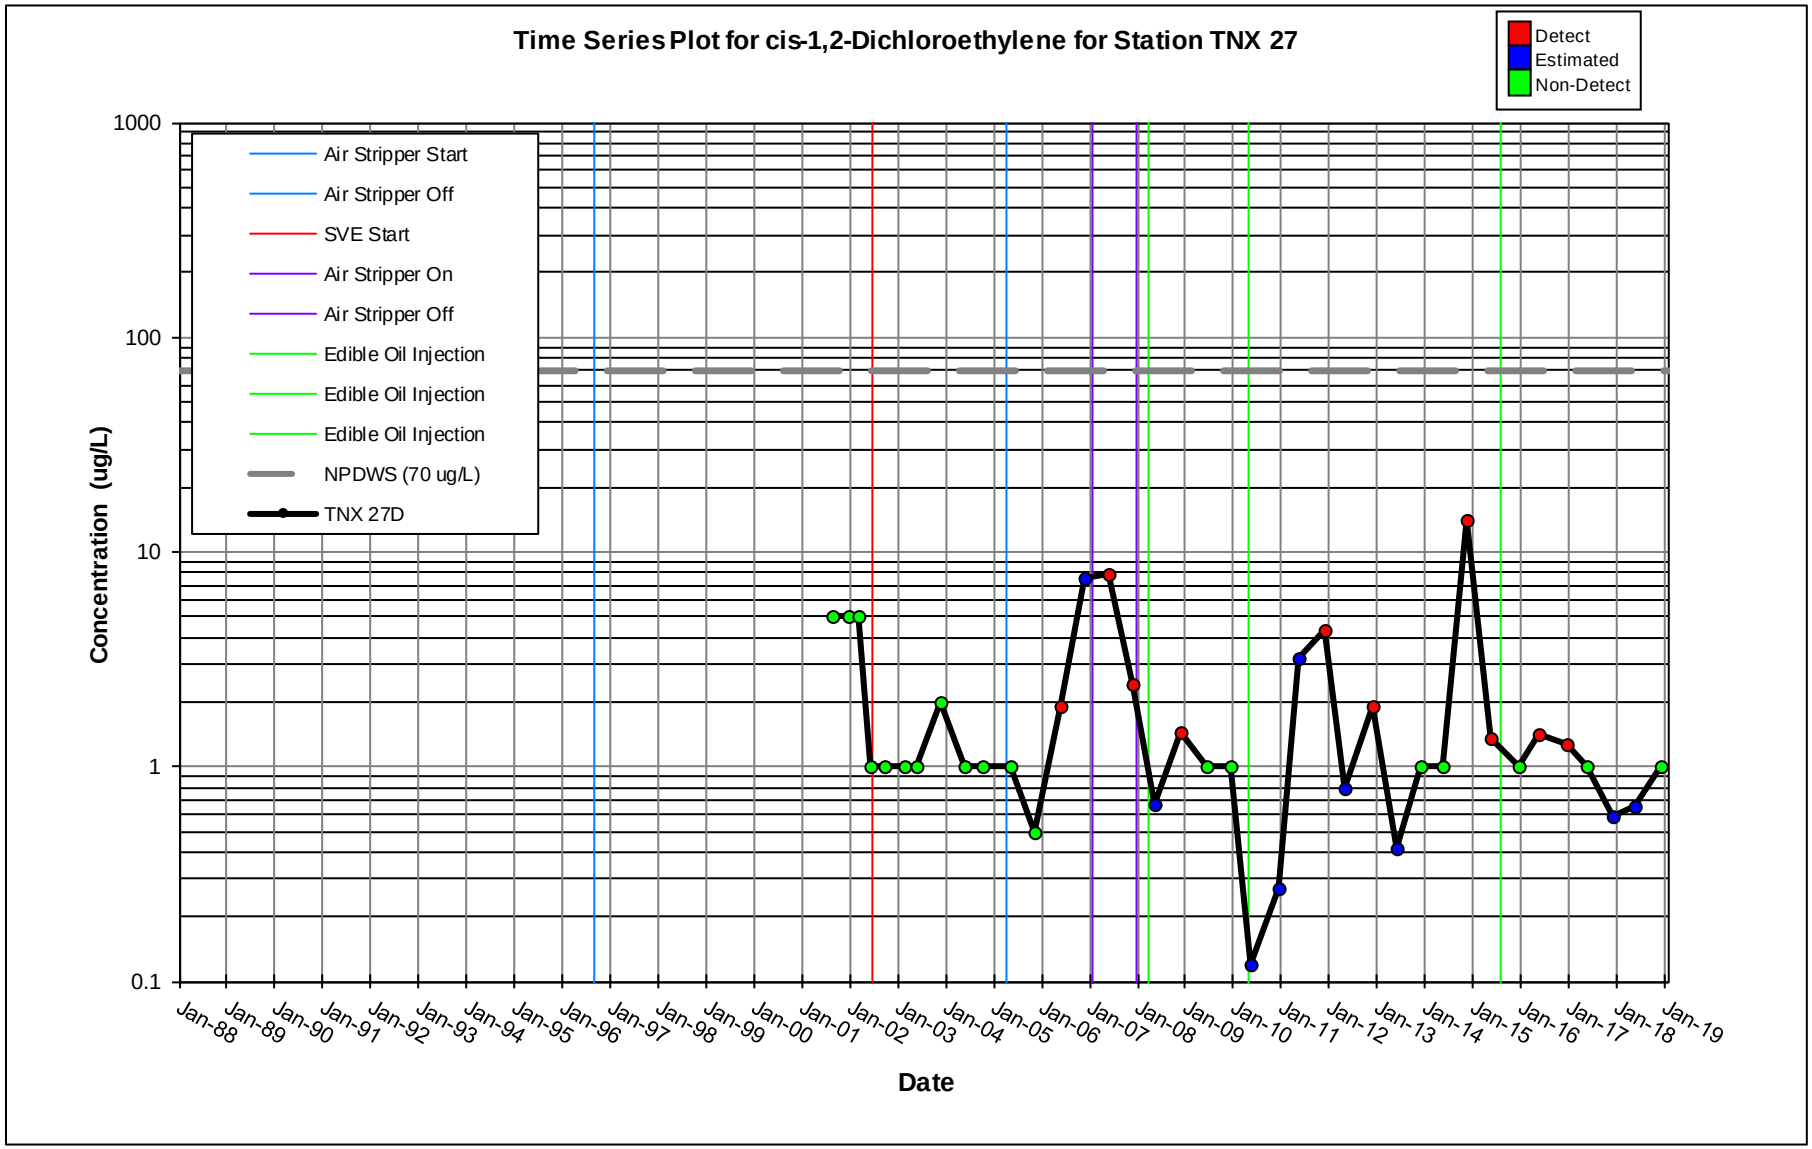
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX 27
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX 27D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

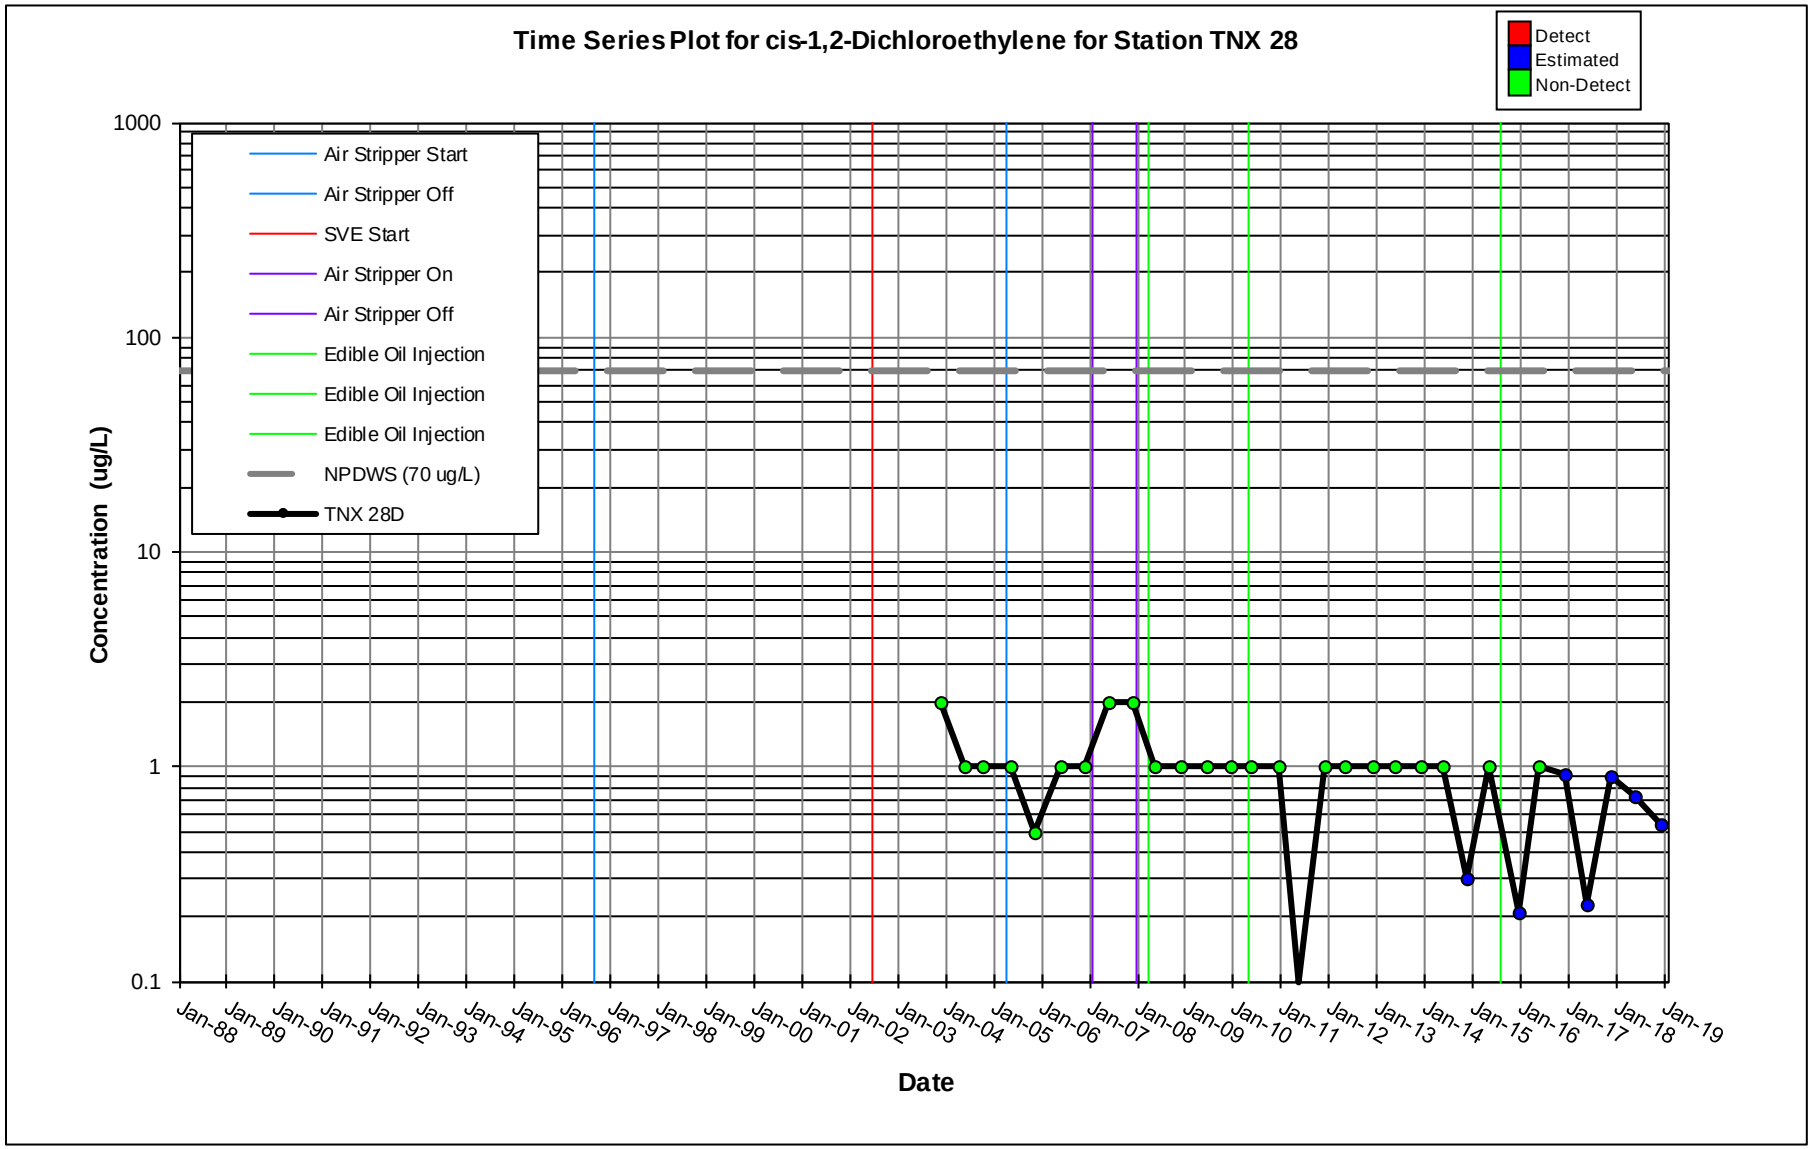
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX 28
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX 28D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

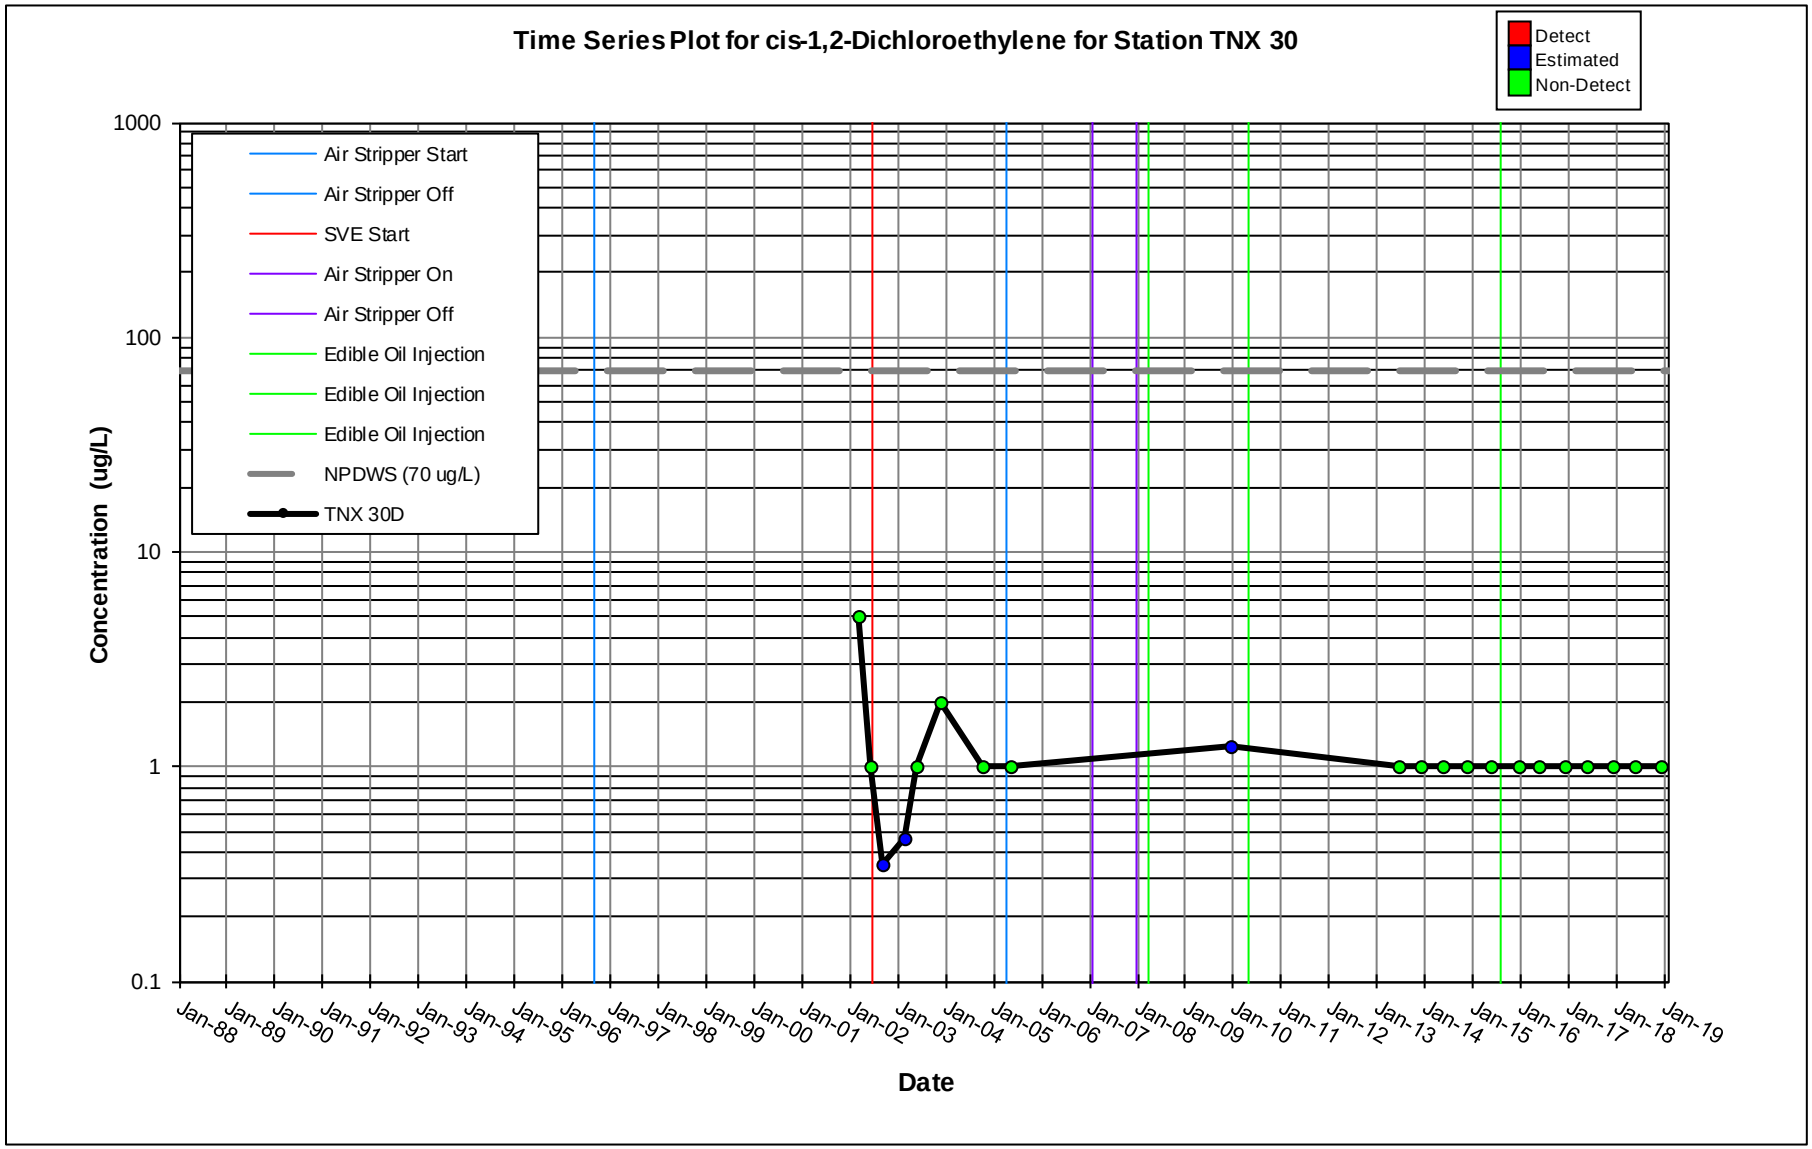
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX 30
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX 30D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

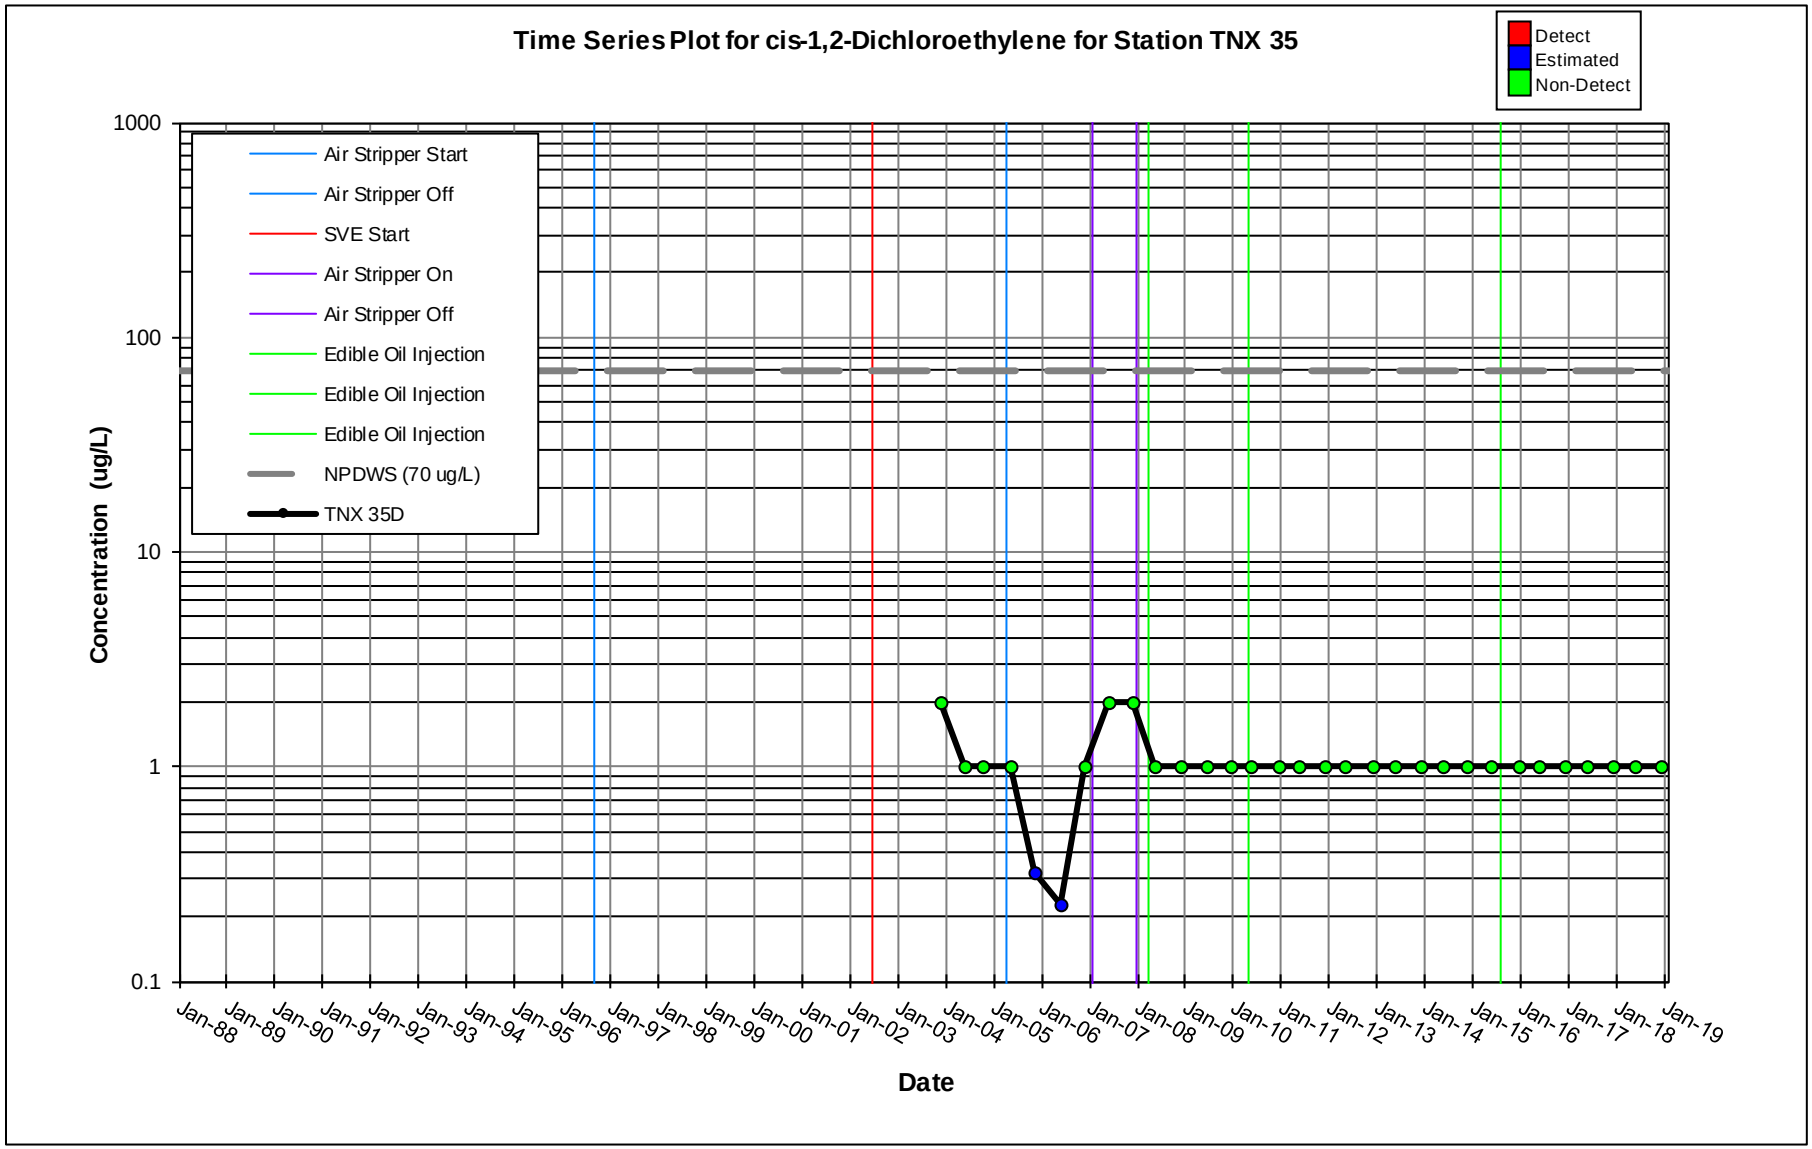
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX 35
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX 35D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

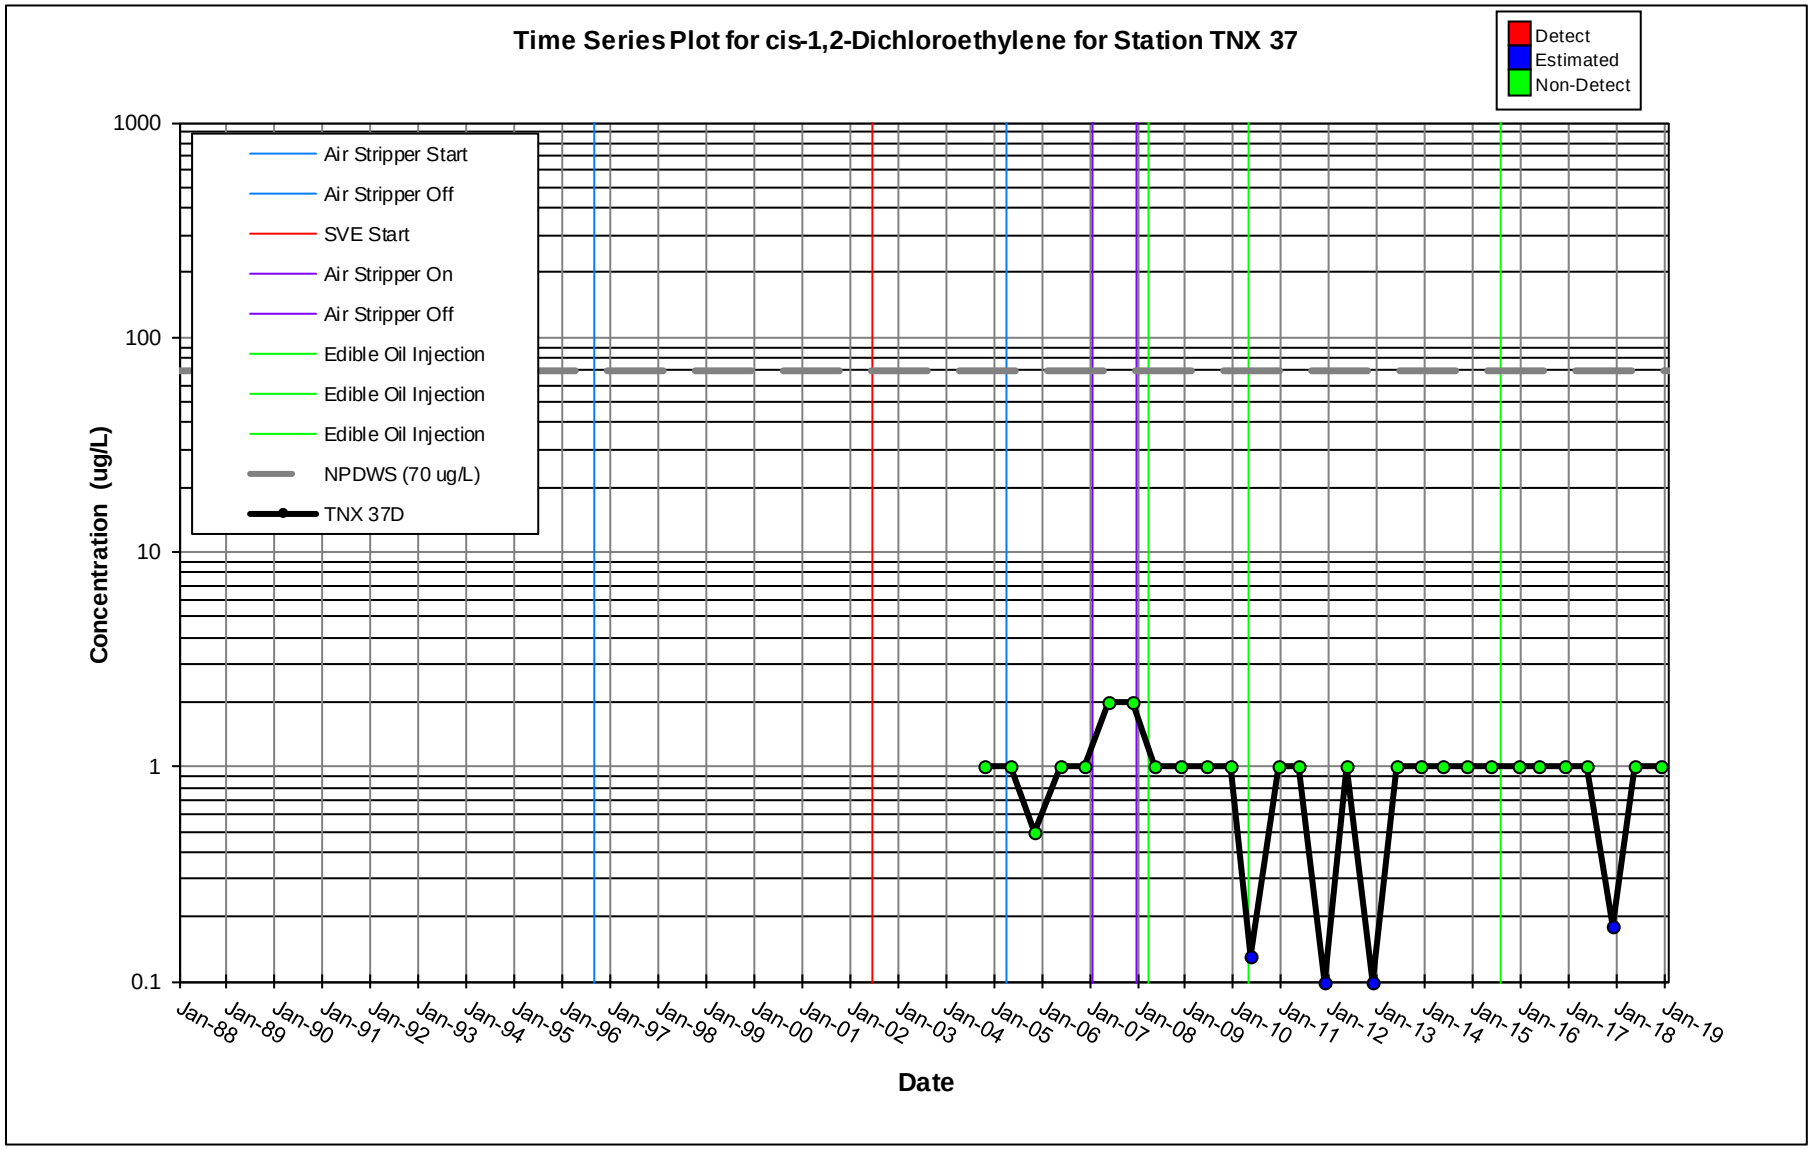
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX 37
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX 37D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

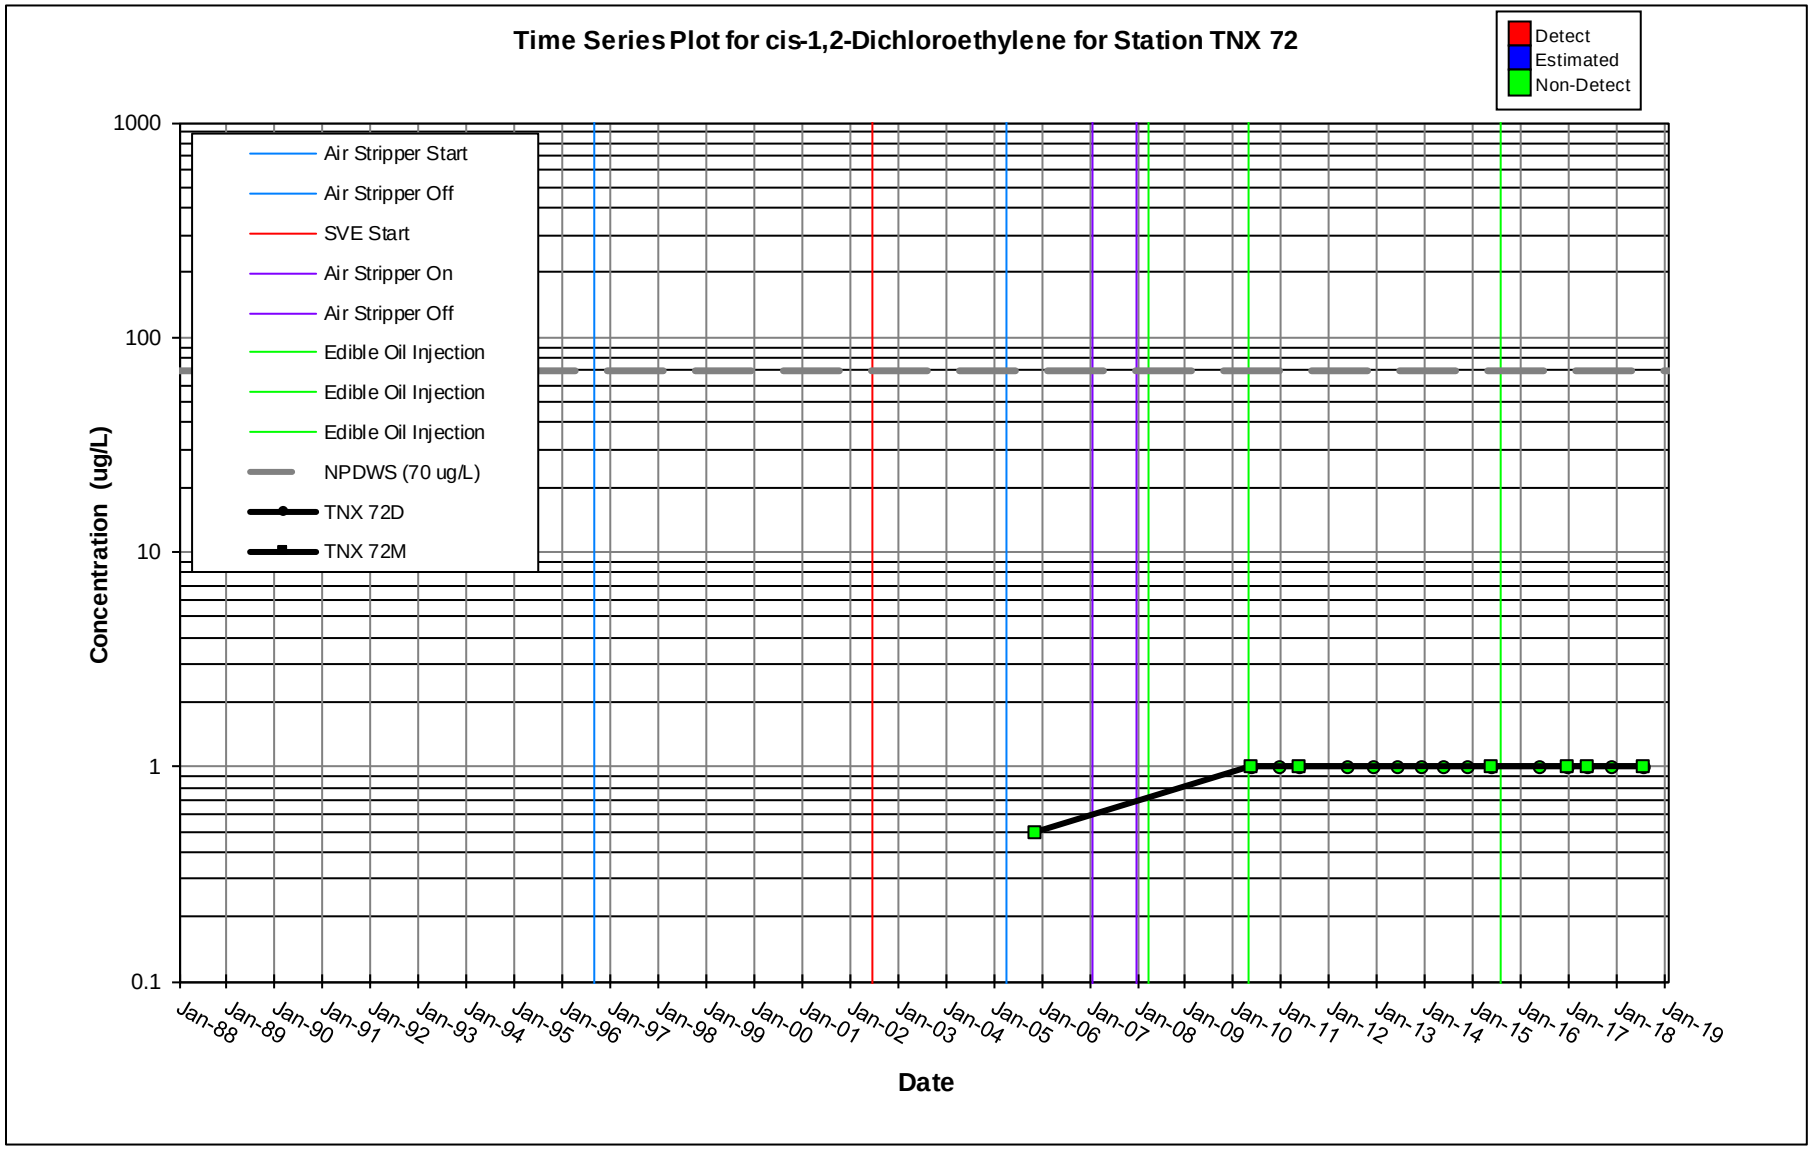
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX 72
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX 72D
TNX 72M
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

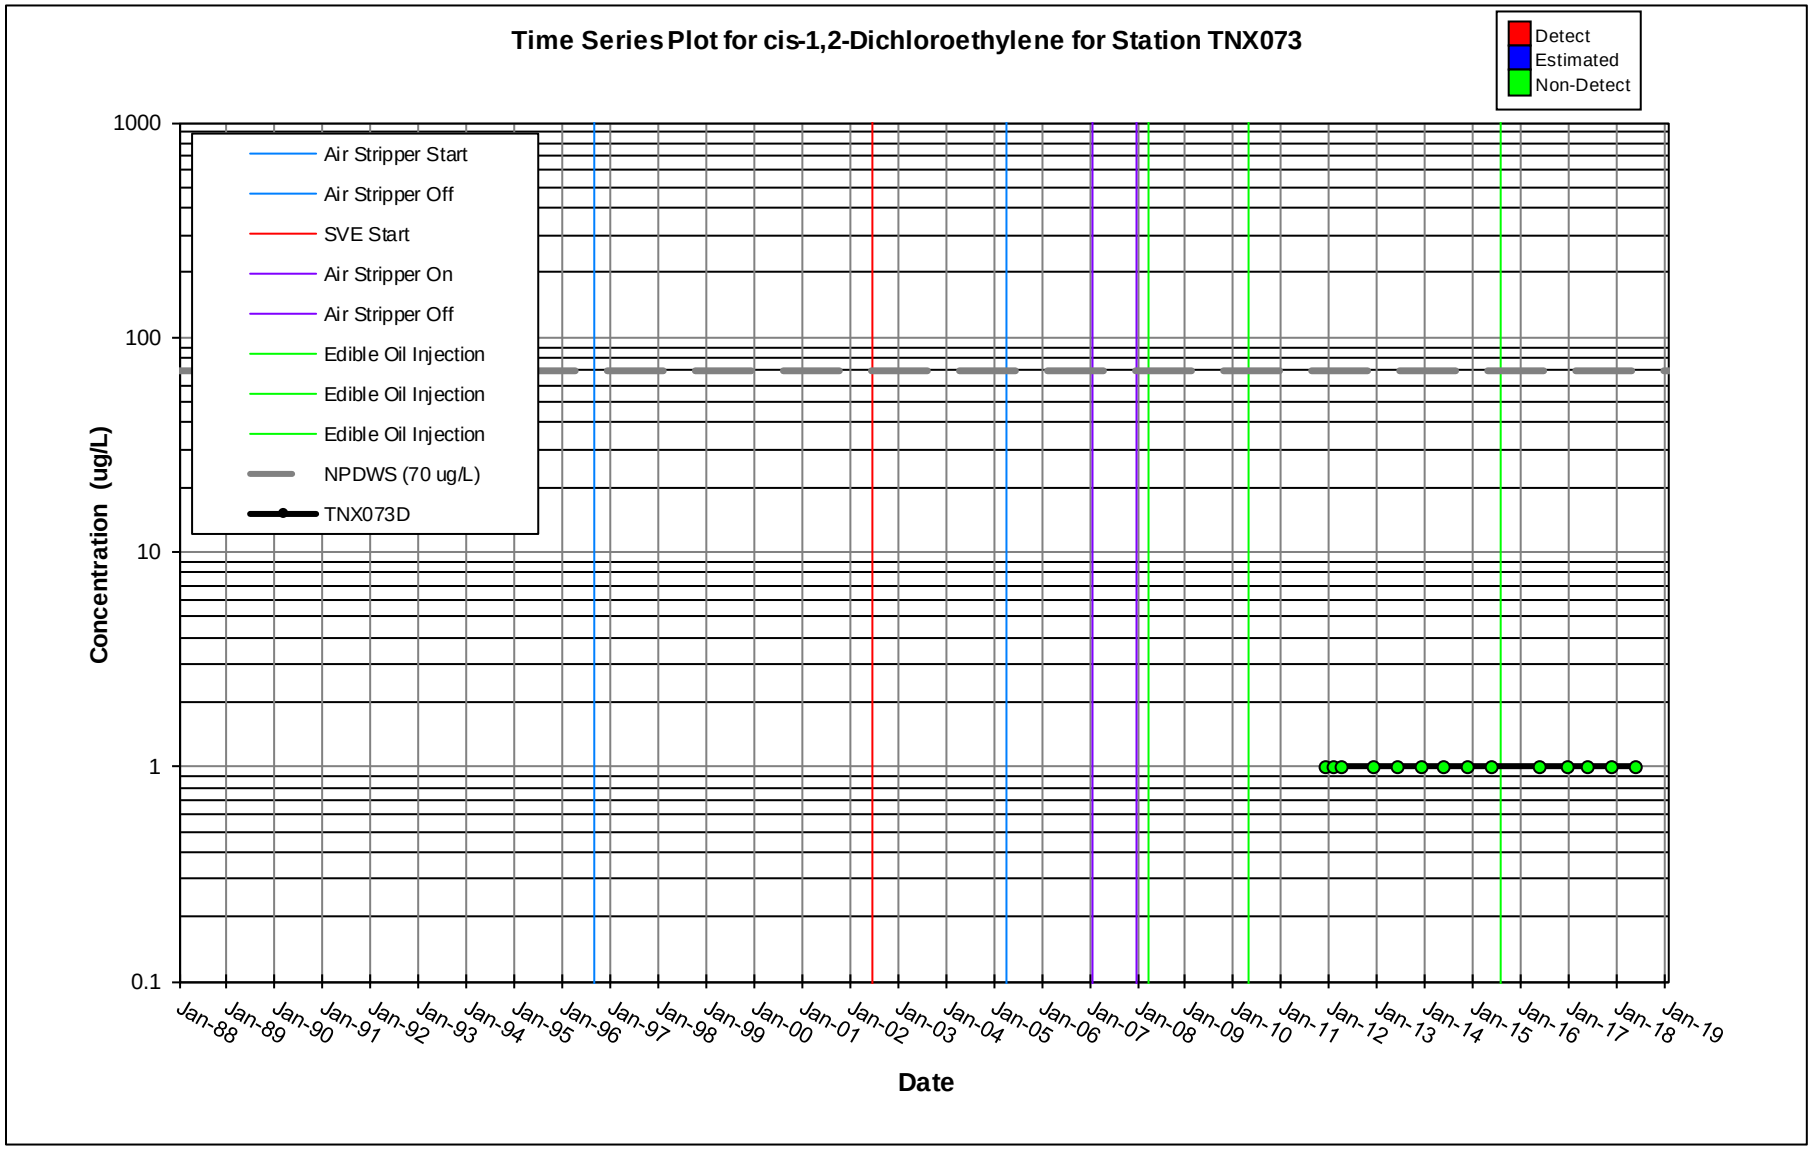
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX073
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX073D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

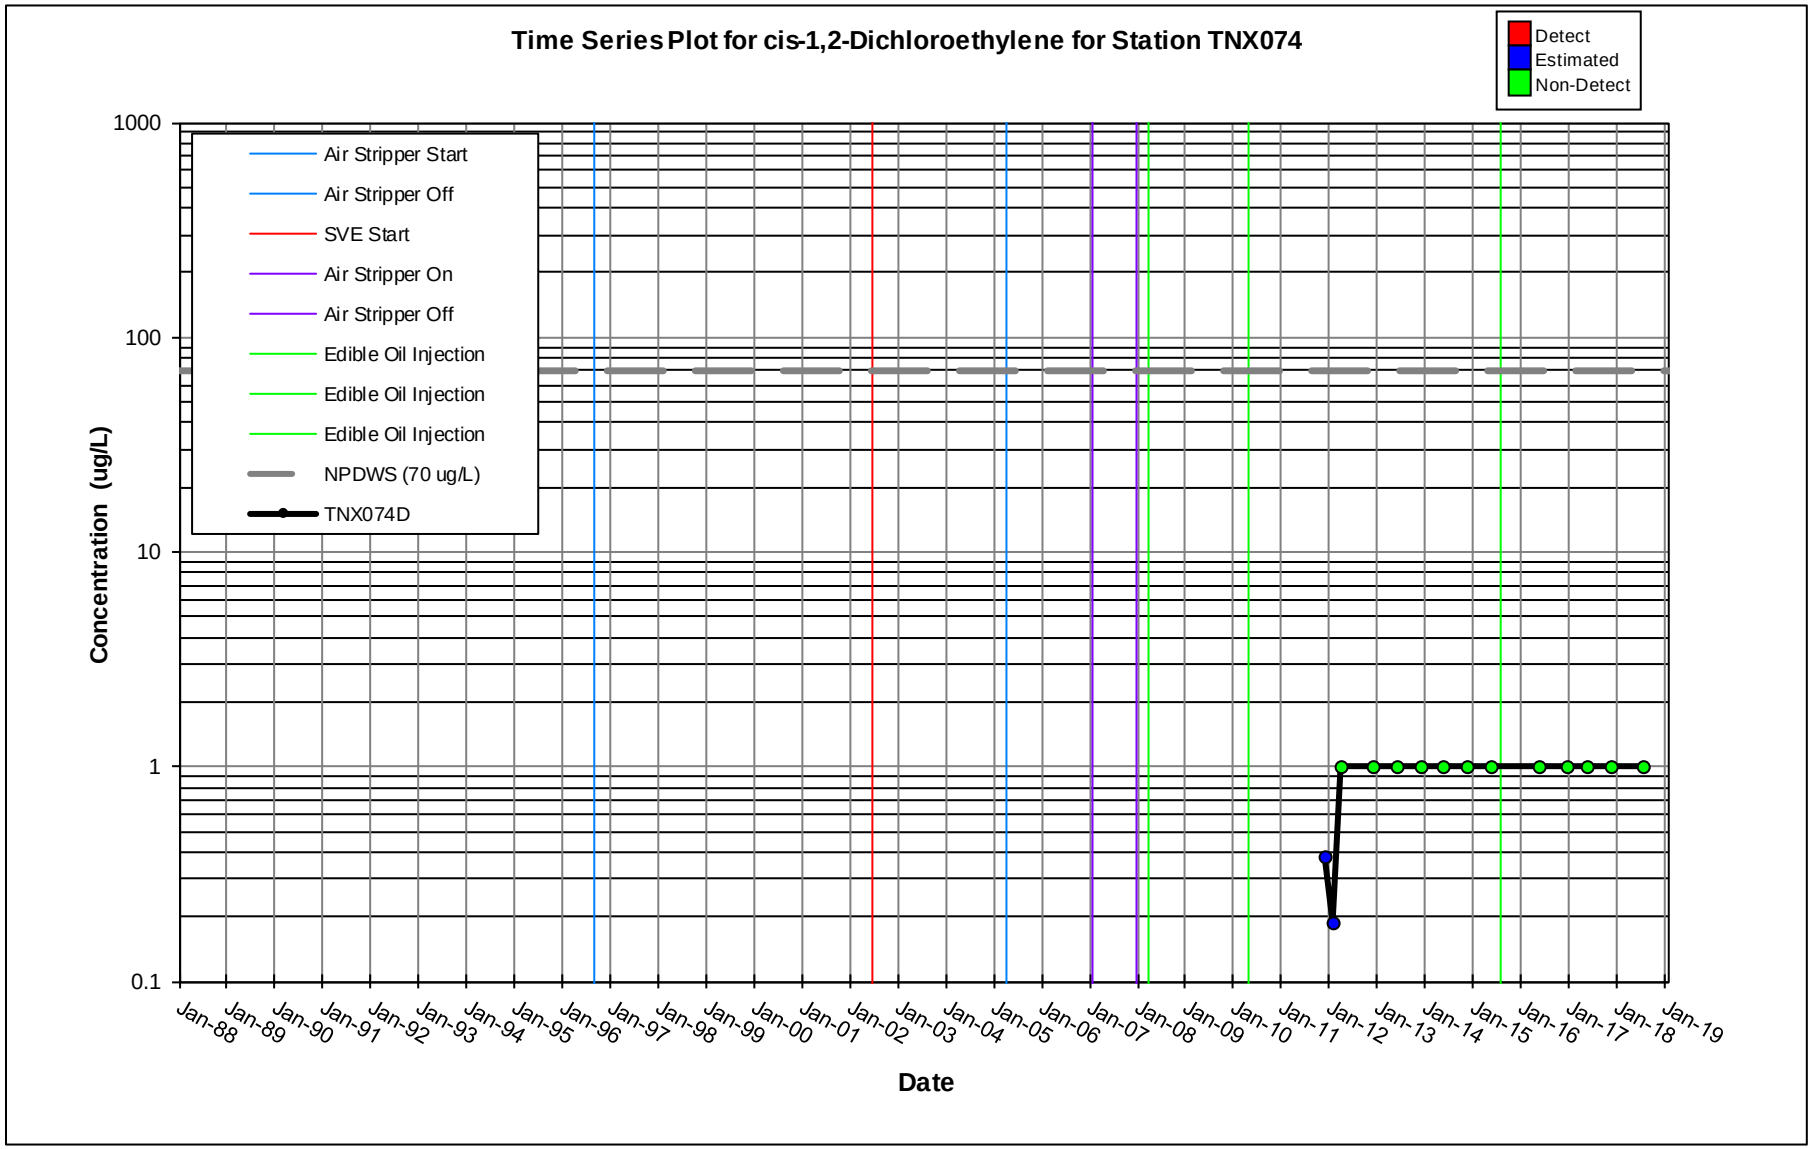
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX074
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX074D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

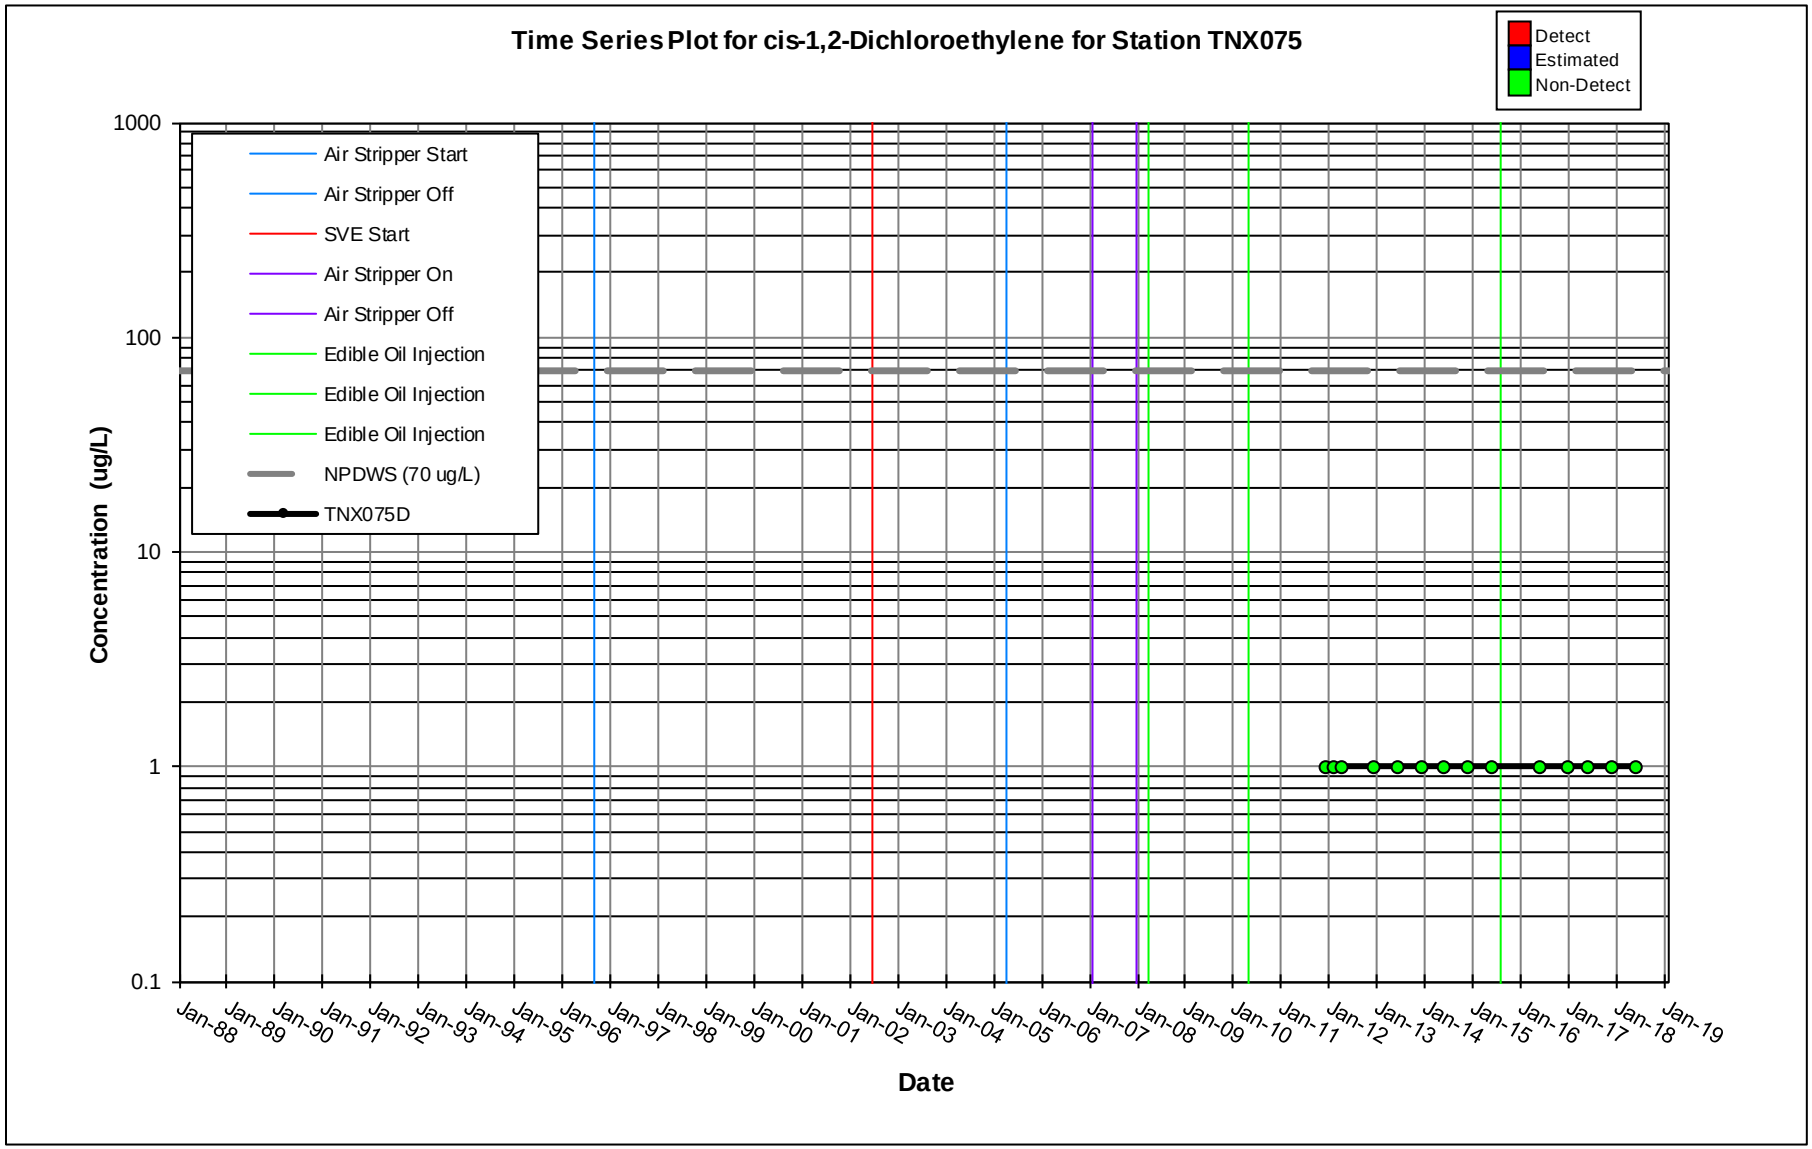
Time Series Plot for cis-1,2-Dichloroethylene for Station TNX075
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TNX075D
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

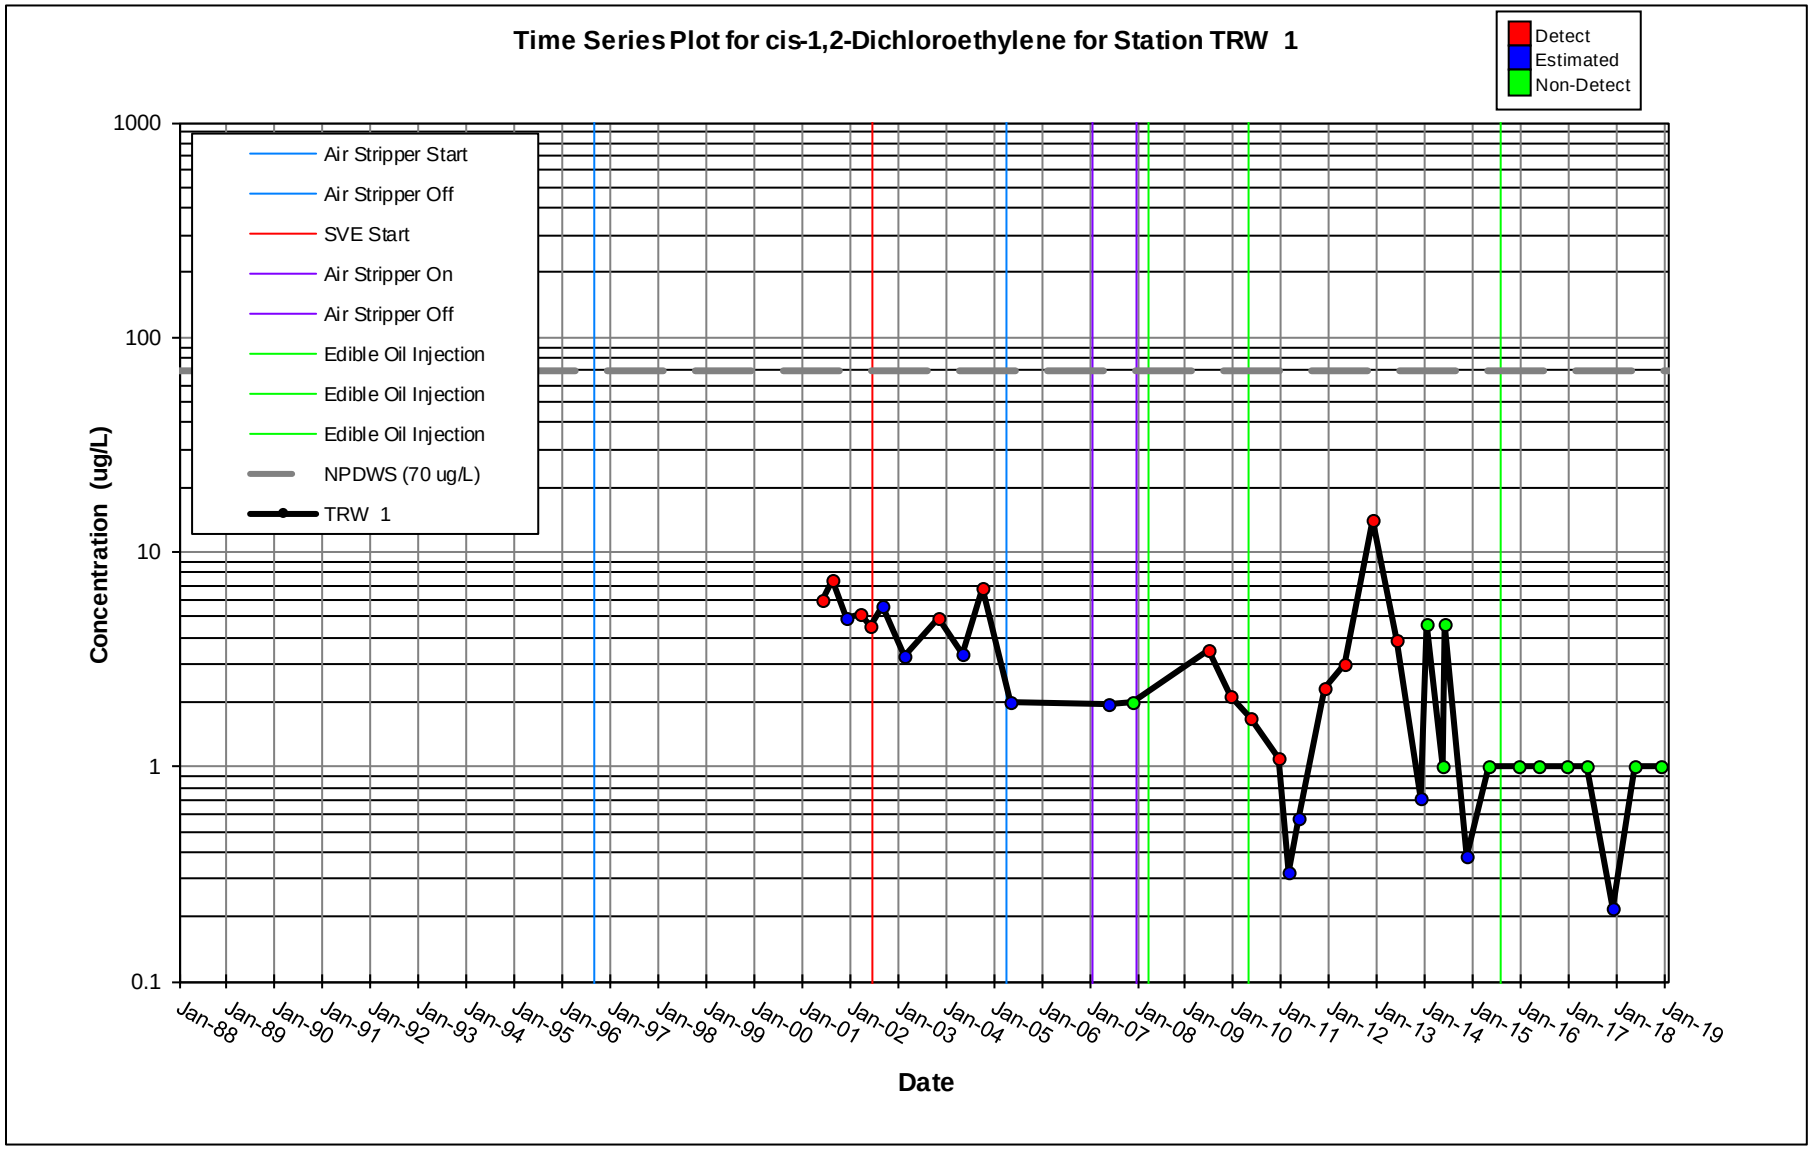
Time Series Plot for cis-1,2-Dichloroethylene for Station TRW 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TRW 1
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

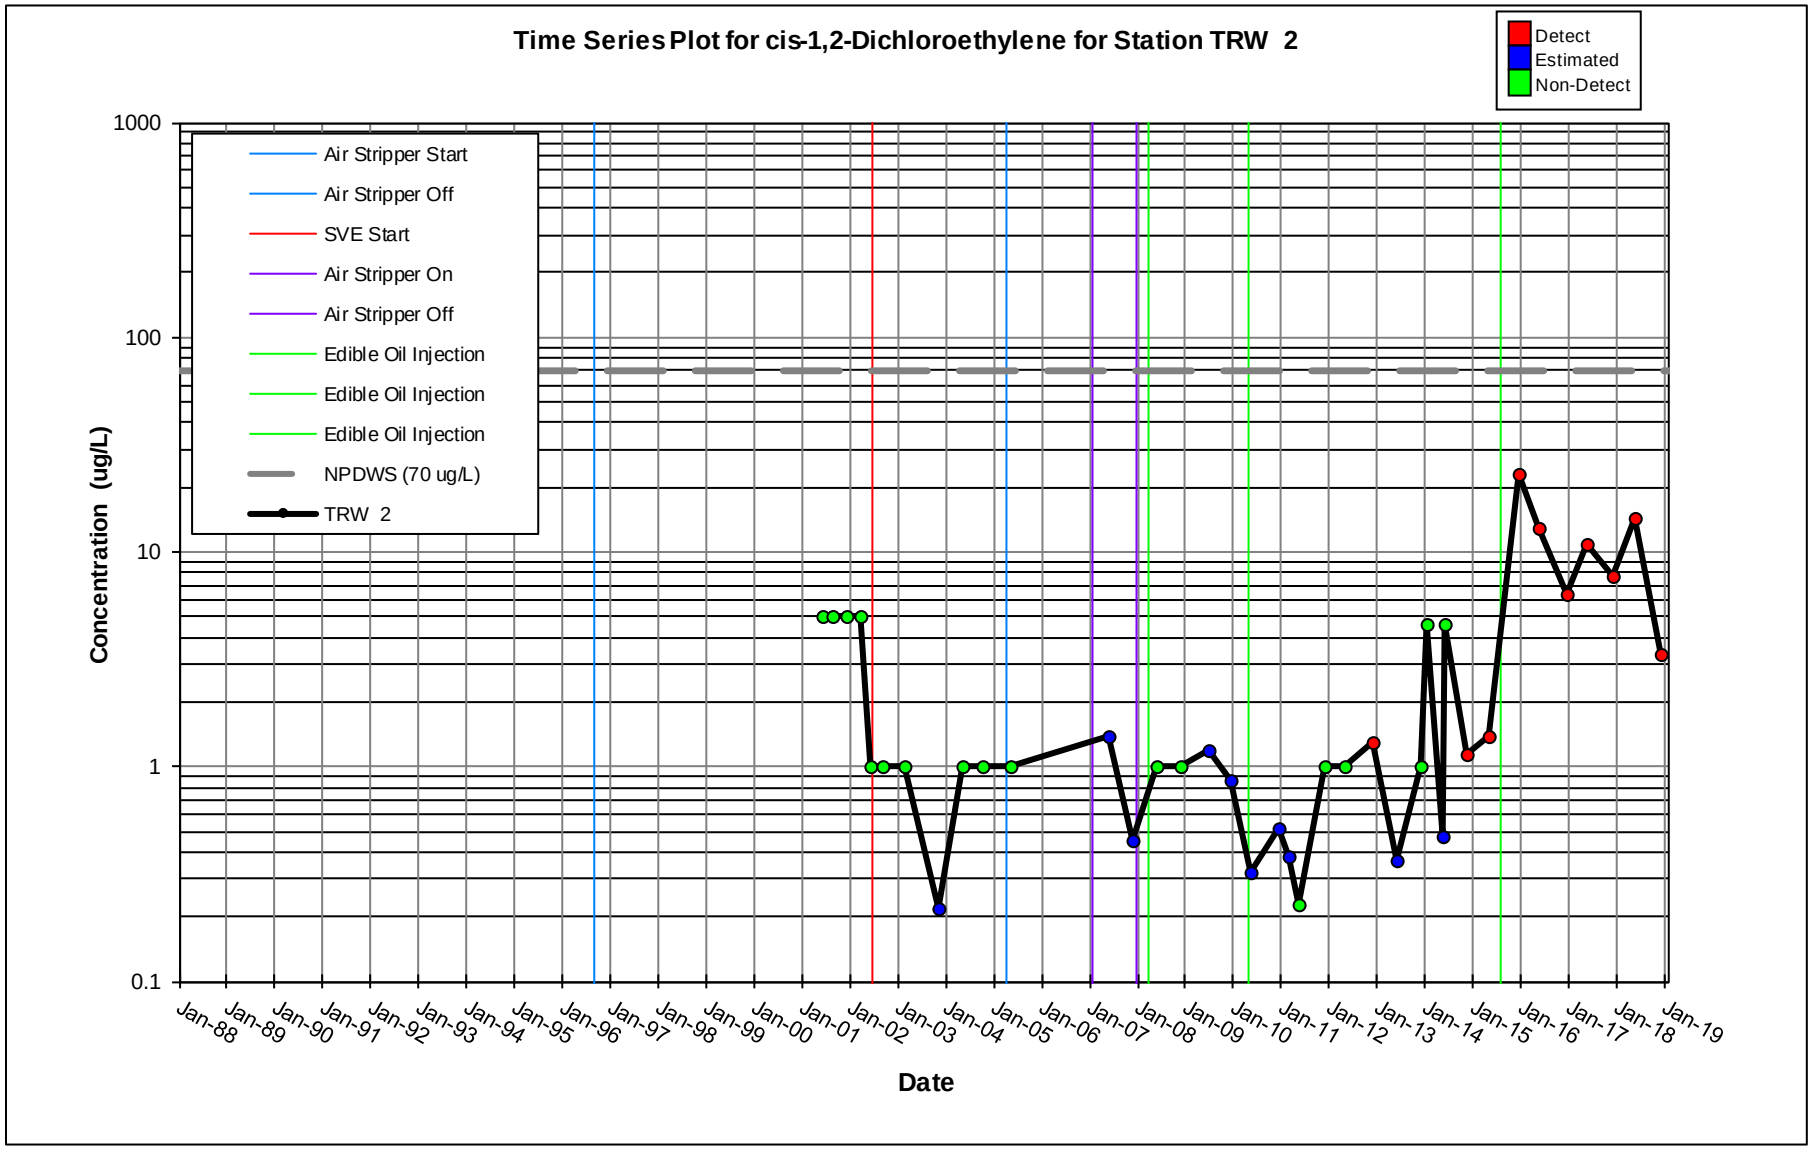
Time Series Plot for cis-1,2-Dichloroethylene for Station TRW 2
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TRW 2
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

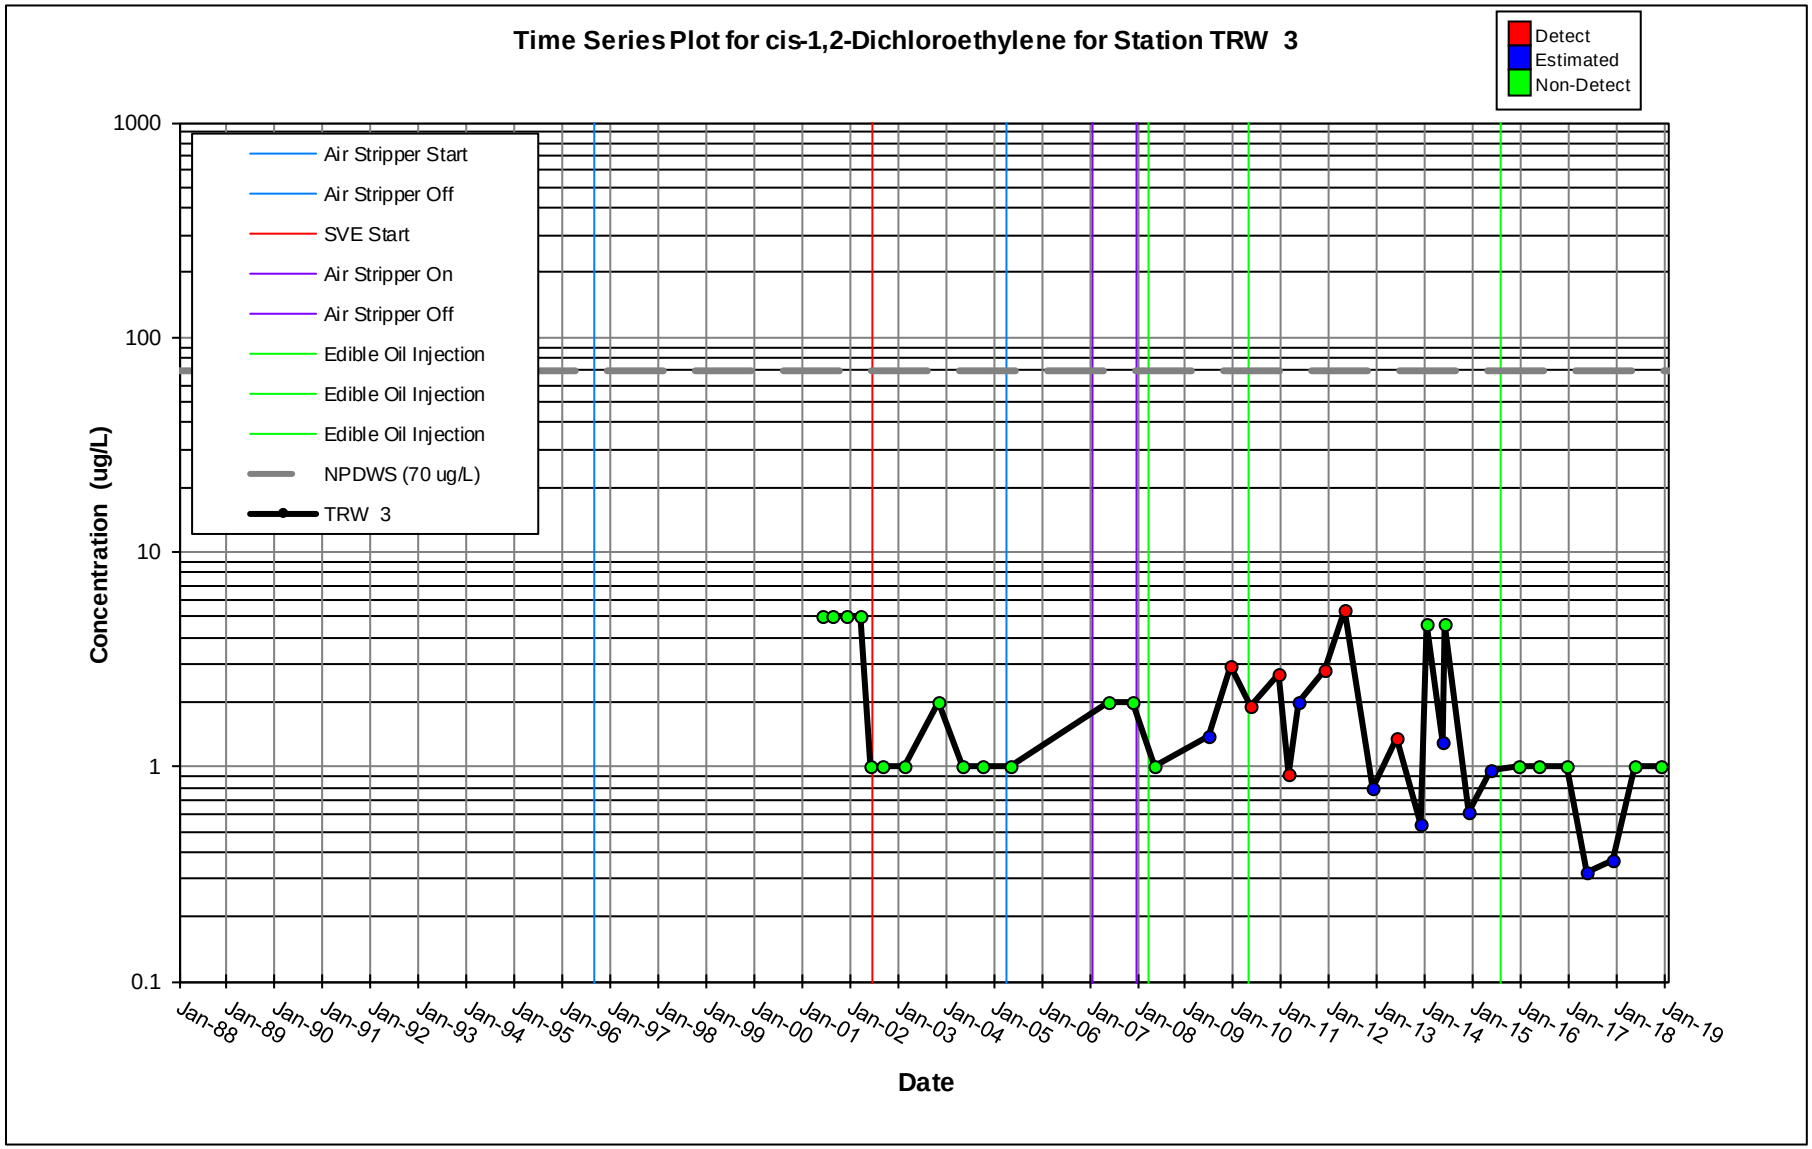
Time Series Plot for cis-1,2-Dichloroethylene for Station TRW 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TRW 3
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

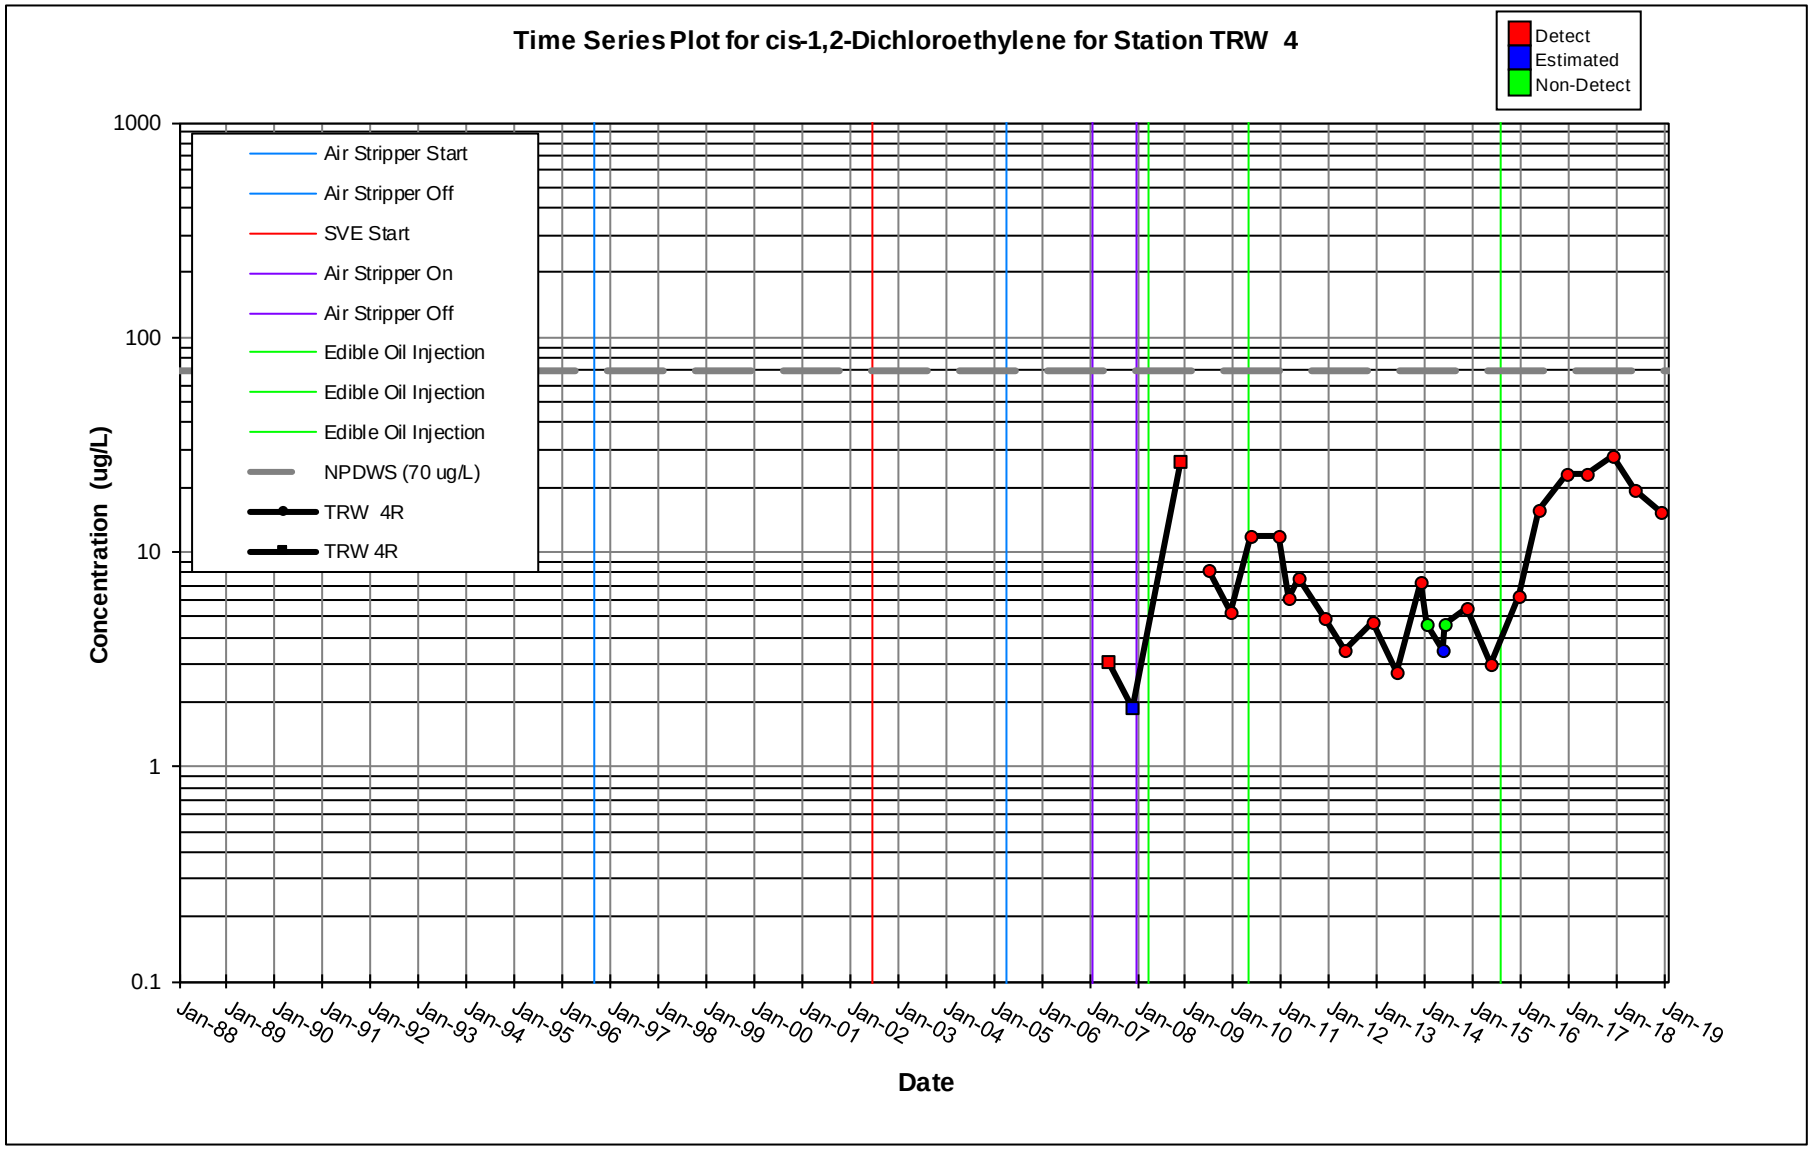
Time Series Plot for cis-1,2-Dichloroethylene for Station TRW 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TRW 4R
TRW 4R
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

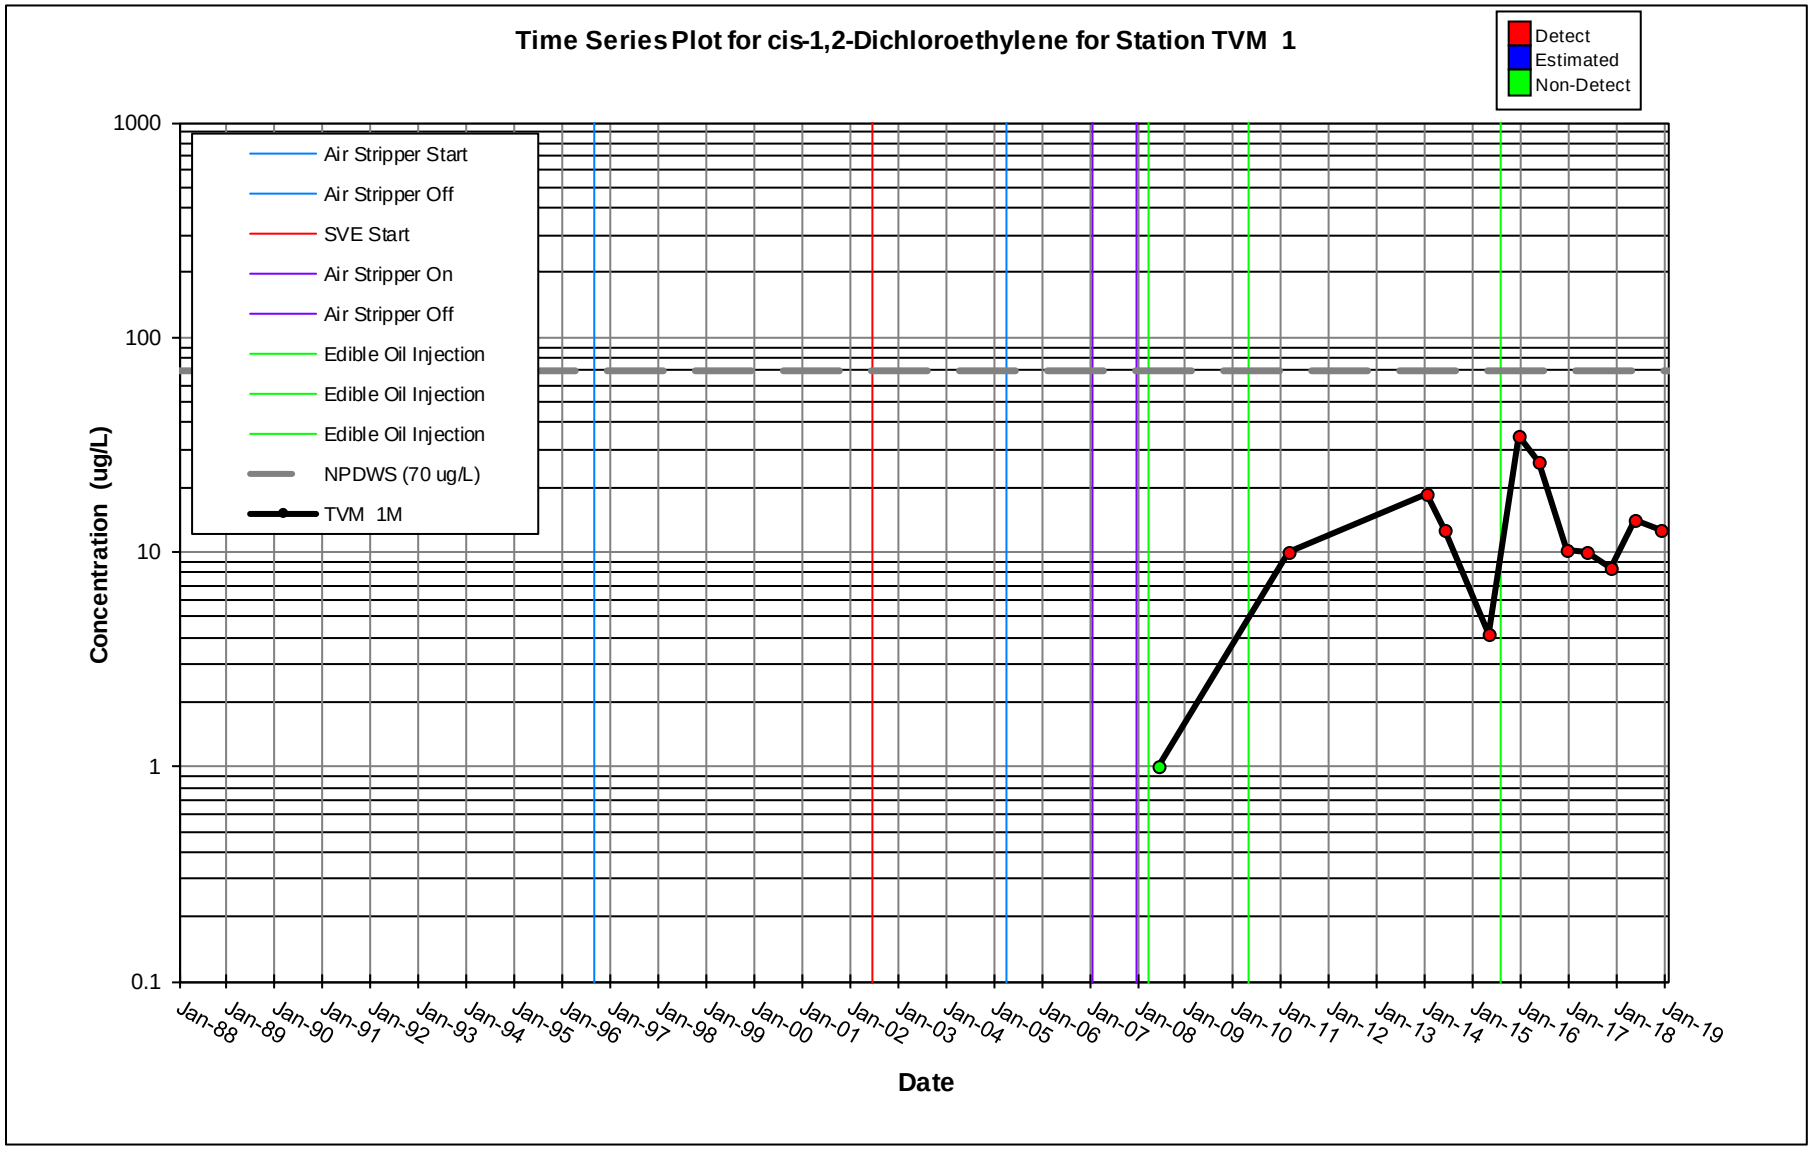
Time Series Plot for cis-1,2-Dichloroethylene for Station TVM 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TVM 1M
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

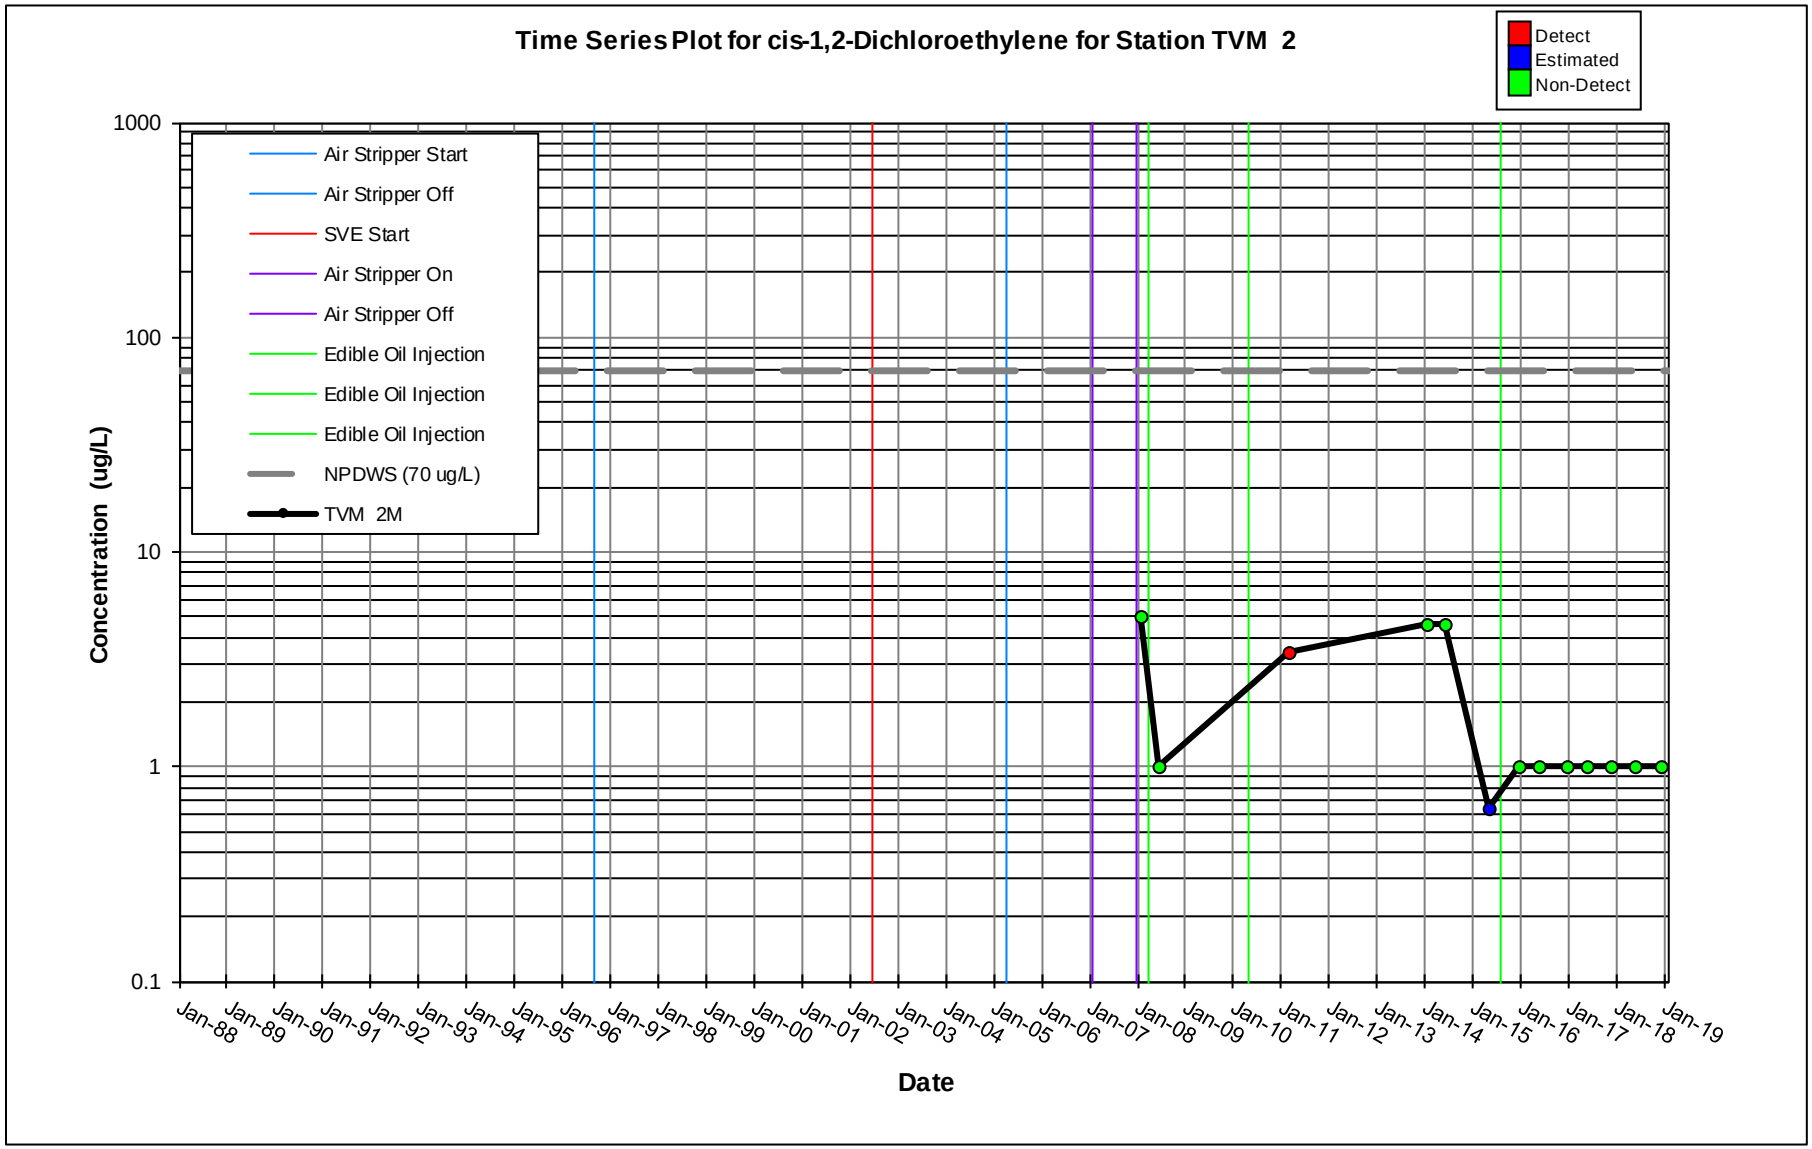
Time Series Plot for cis-1,2-Dichloroethylene for Station TVM 2
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TVM 2M
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

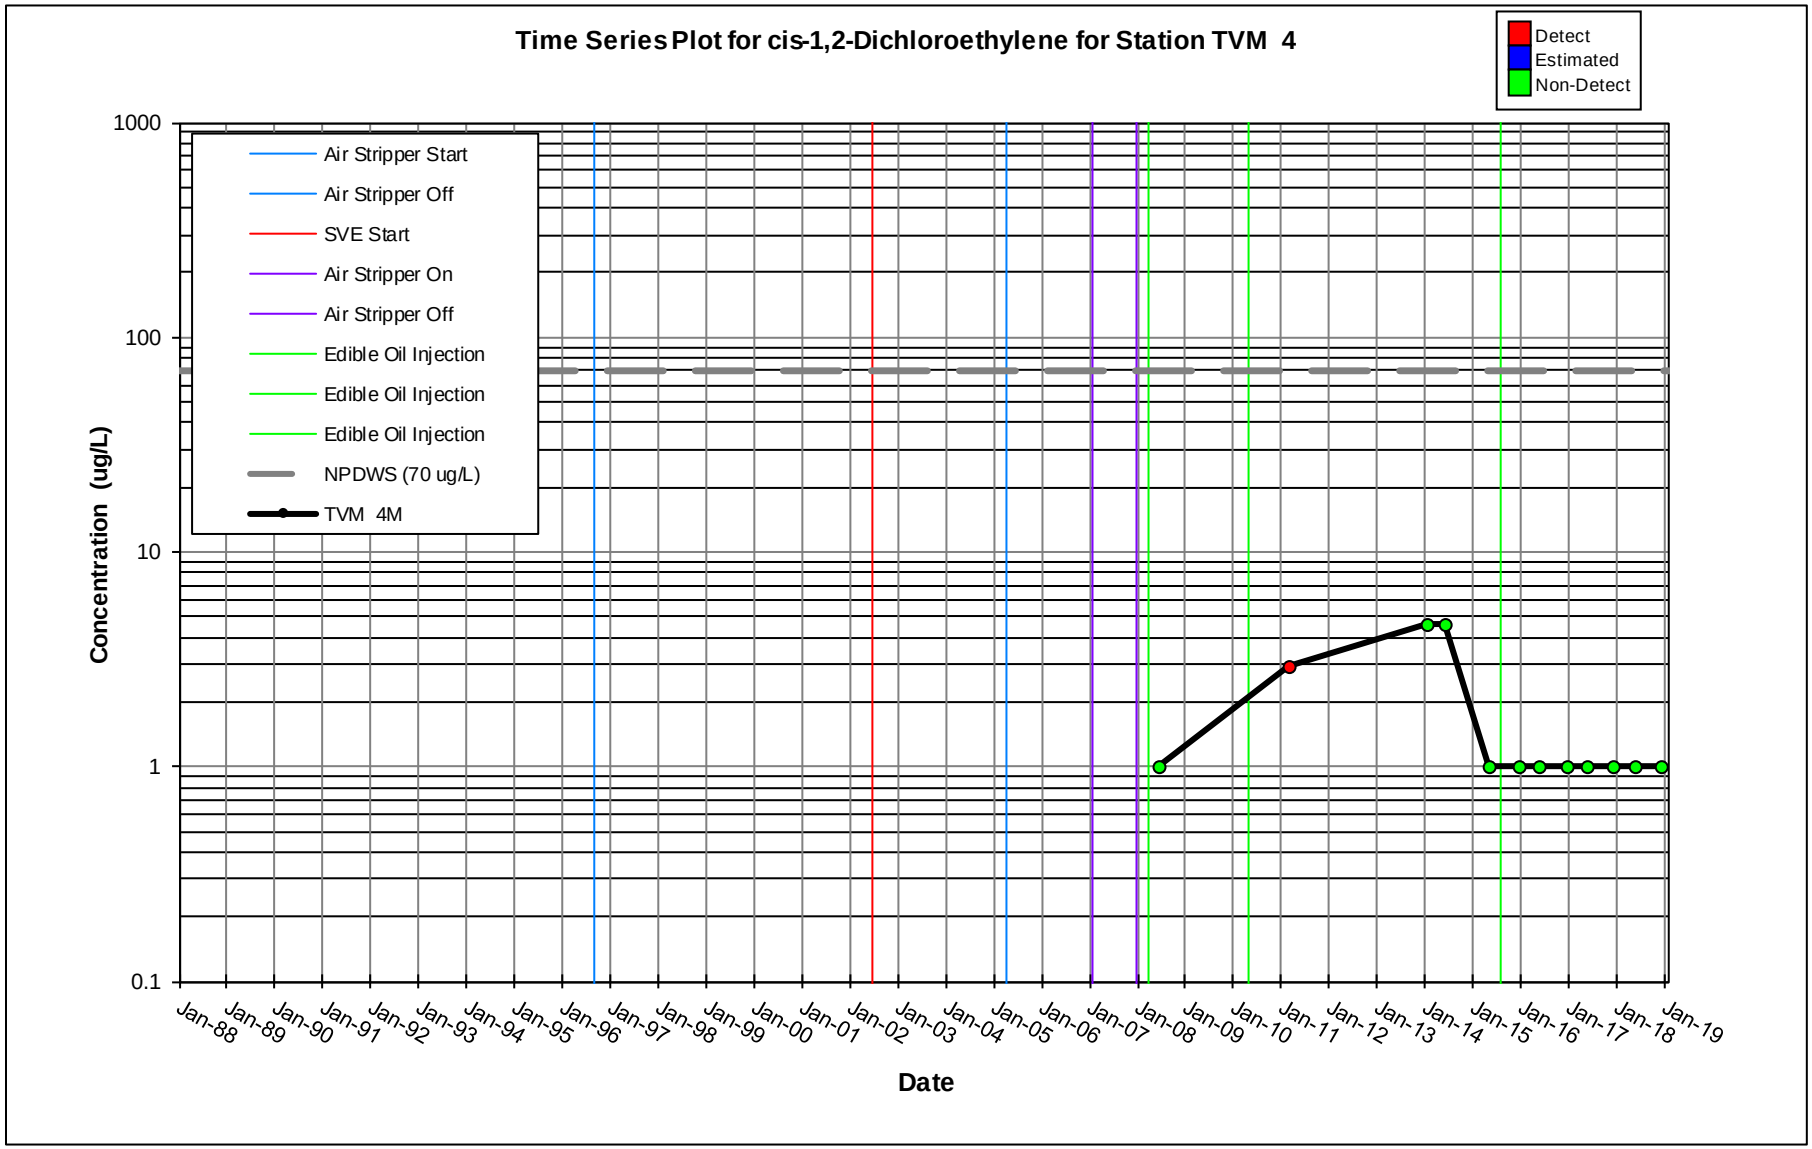
Time Series Plot for cis-1,2-Dichloroethylene for Station TVM 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TVM 4M
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

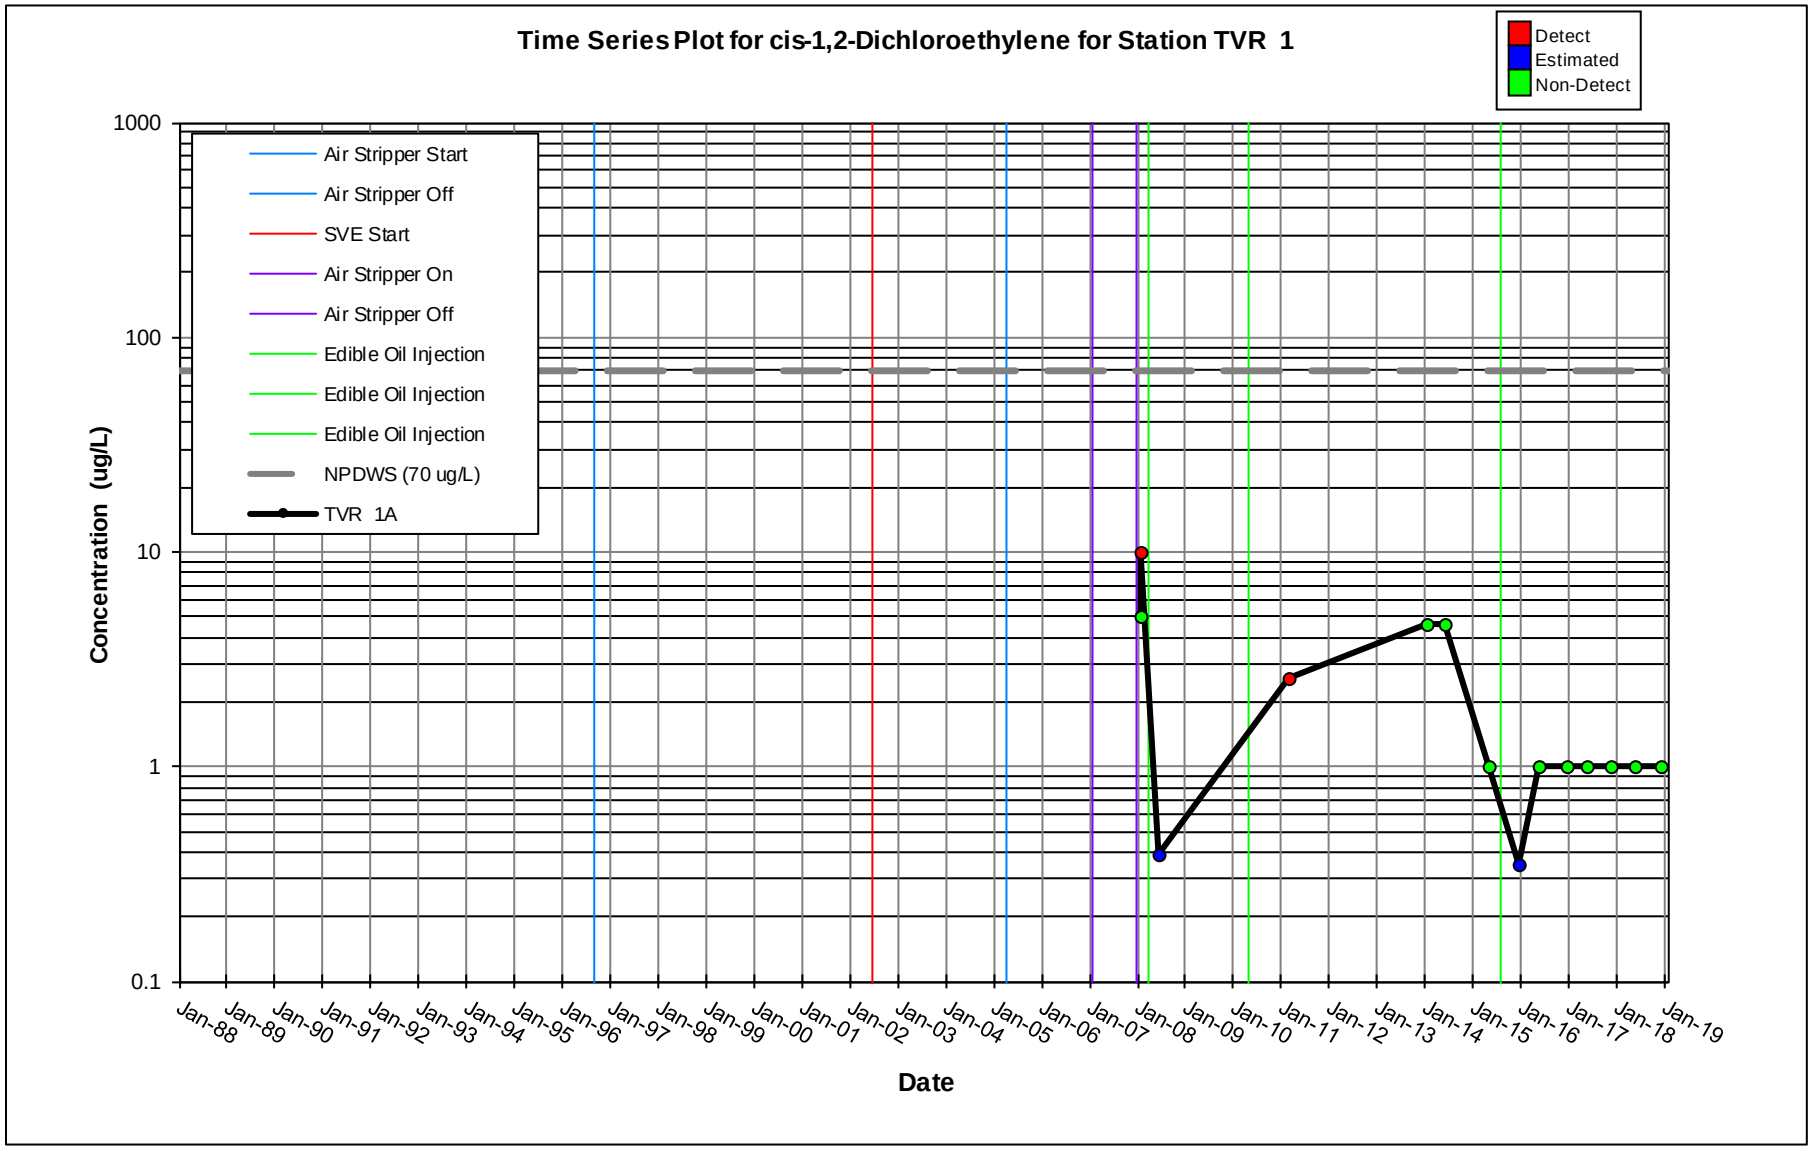
Time Series Plot for cis-1,2-Dichloroethylene for Station TVR 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (70 ug/L)
TVR 1A
Concentration (ug/L)
1000
100
10
1
0.1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

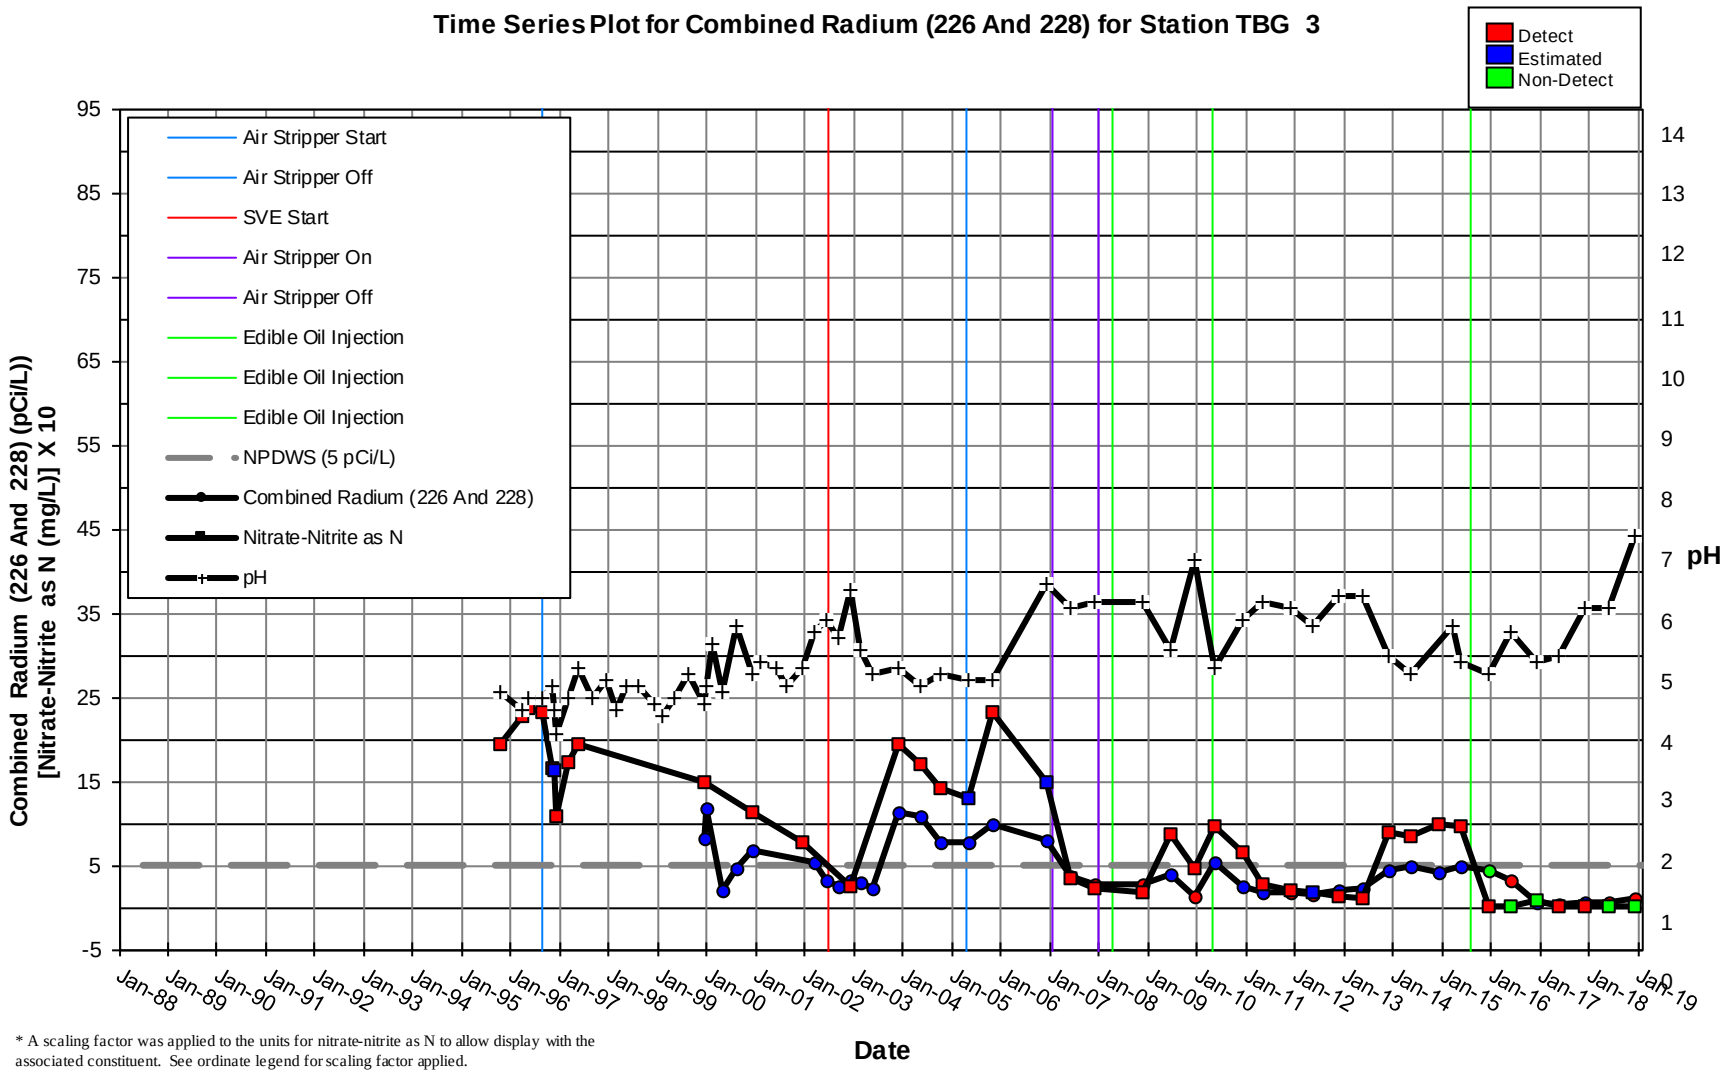

* A scaling factor was applied to the units for nitrate-nitrite as N to allow display with the associated constituent. See ordinate legend for scaling factor applied.

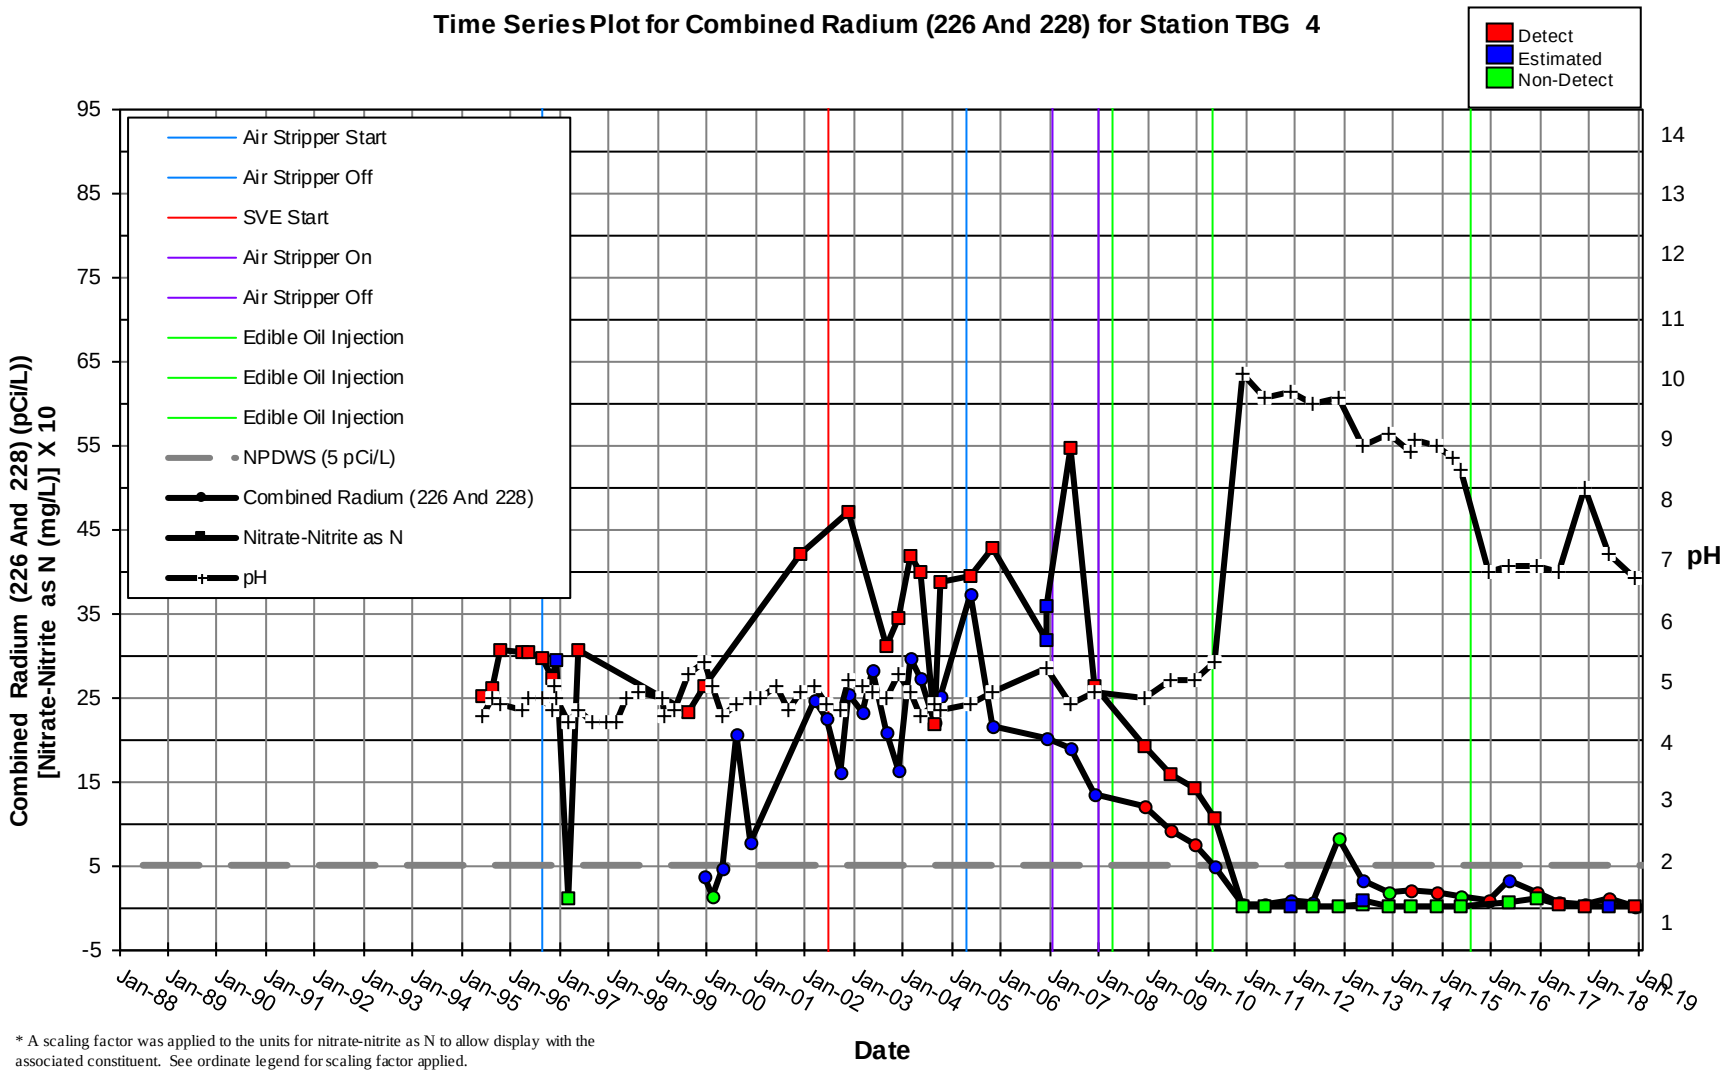

* A scaling factor was applied to the units for nitrate-nitrite as N to allow display with the associated constituent. See ordinate legend for scaling factor applied.

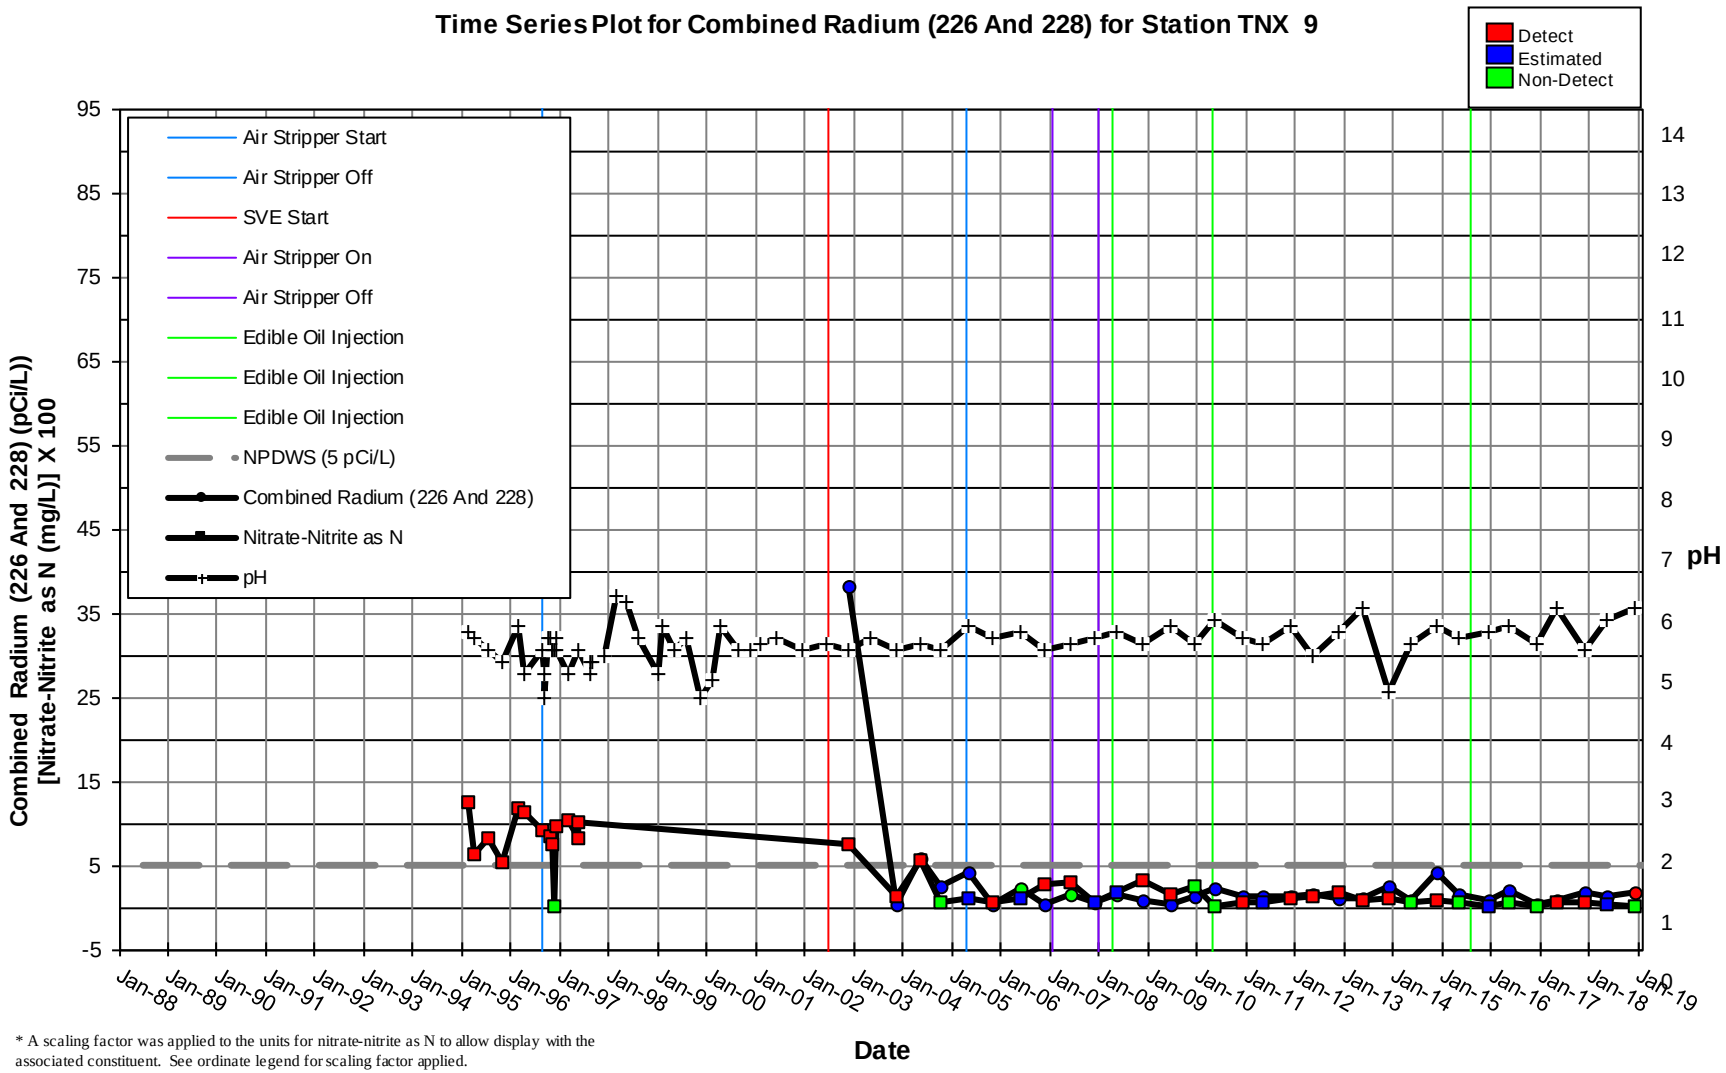

* A scaling factor was applied to the units for nitrate-nitrite as N to allow display with the associated constituent. See ordinate legend for scaling factor applied.

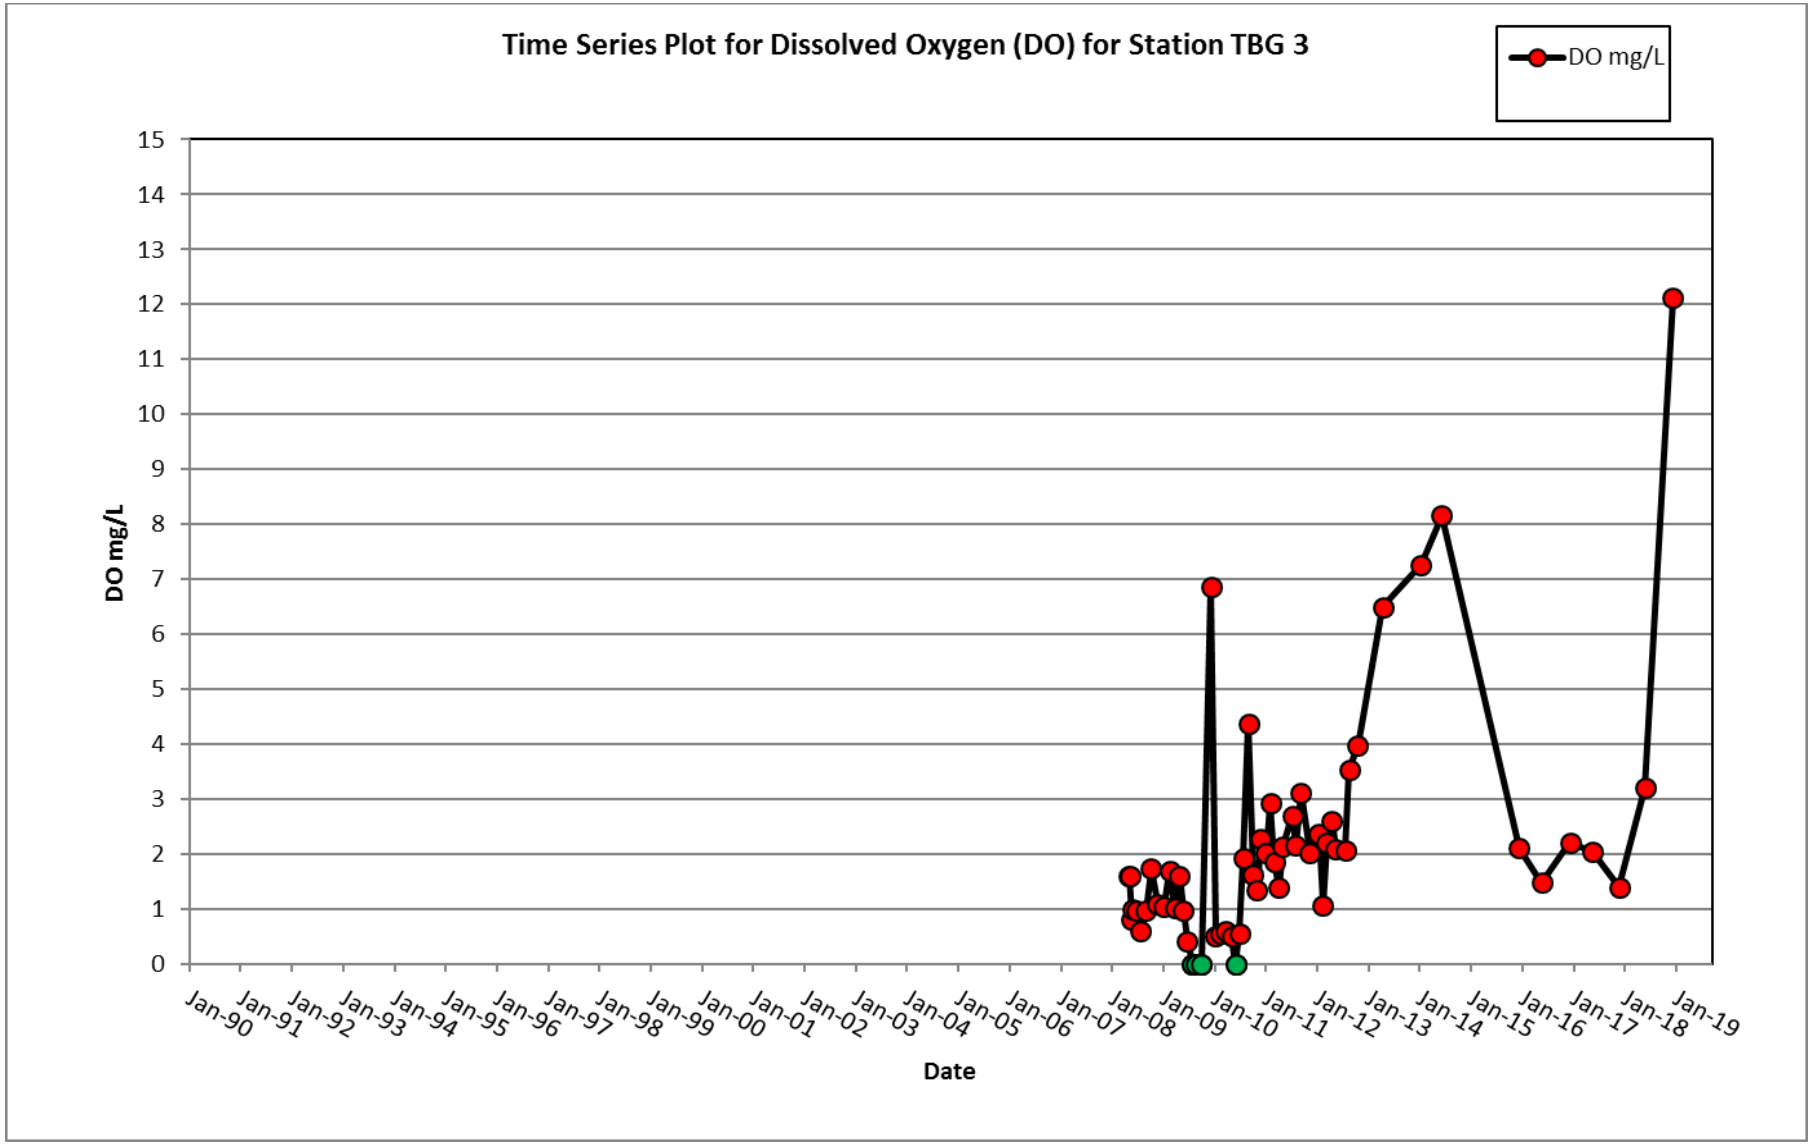
Time Series Plot for Dissolved Oxygen (DO) for Station TBG 3
DO mg/L
DO mg/L
15
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

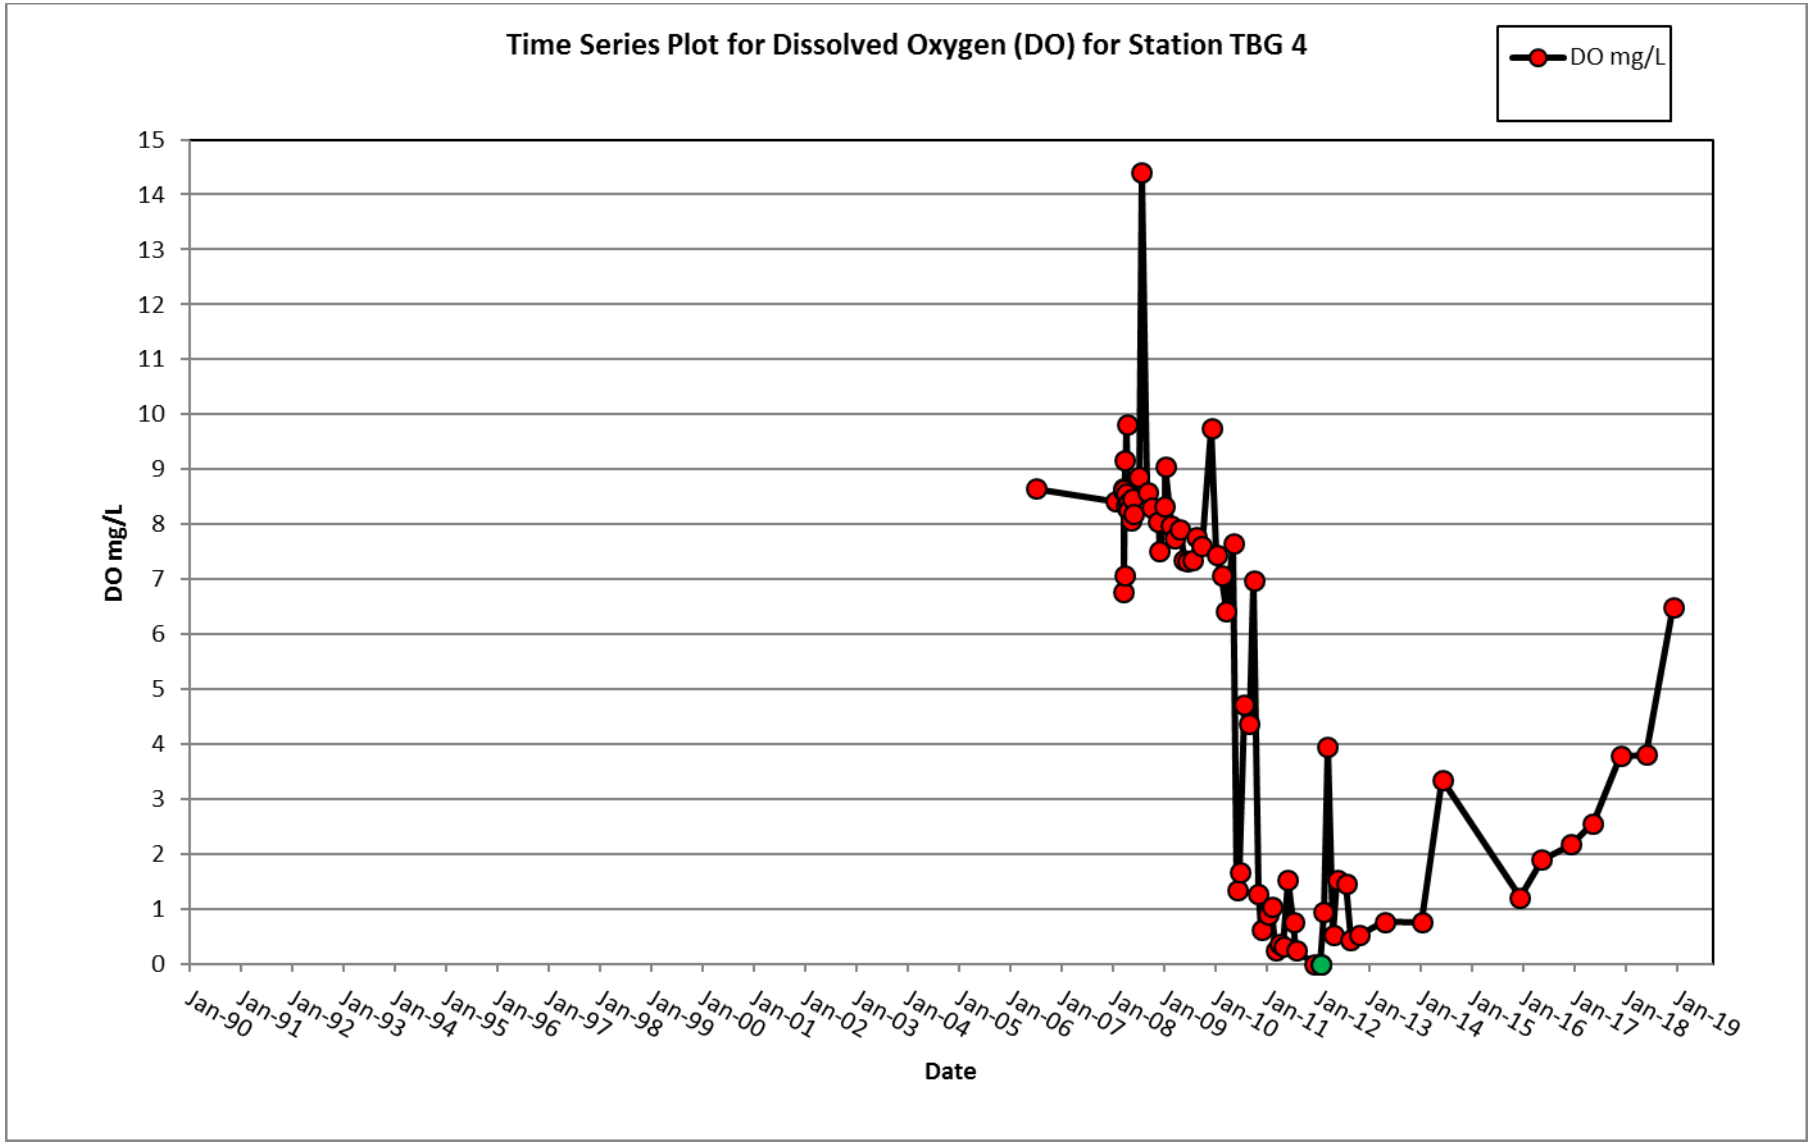
Time Series Plot for Dissolved Oxygen (DO) for Station TBG 4
DO mg/L
DO mg/L
15
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

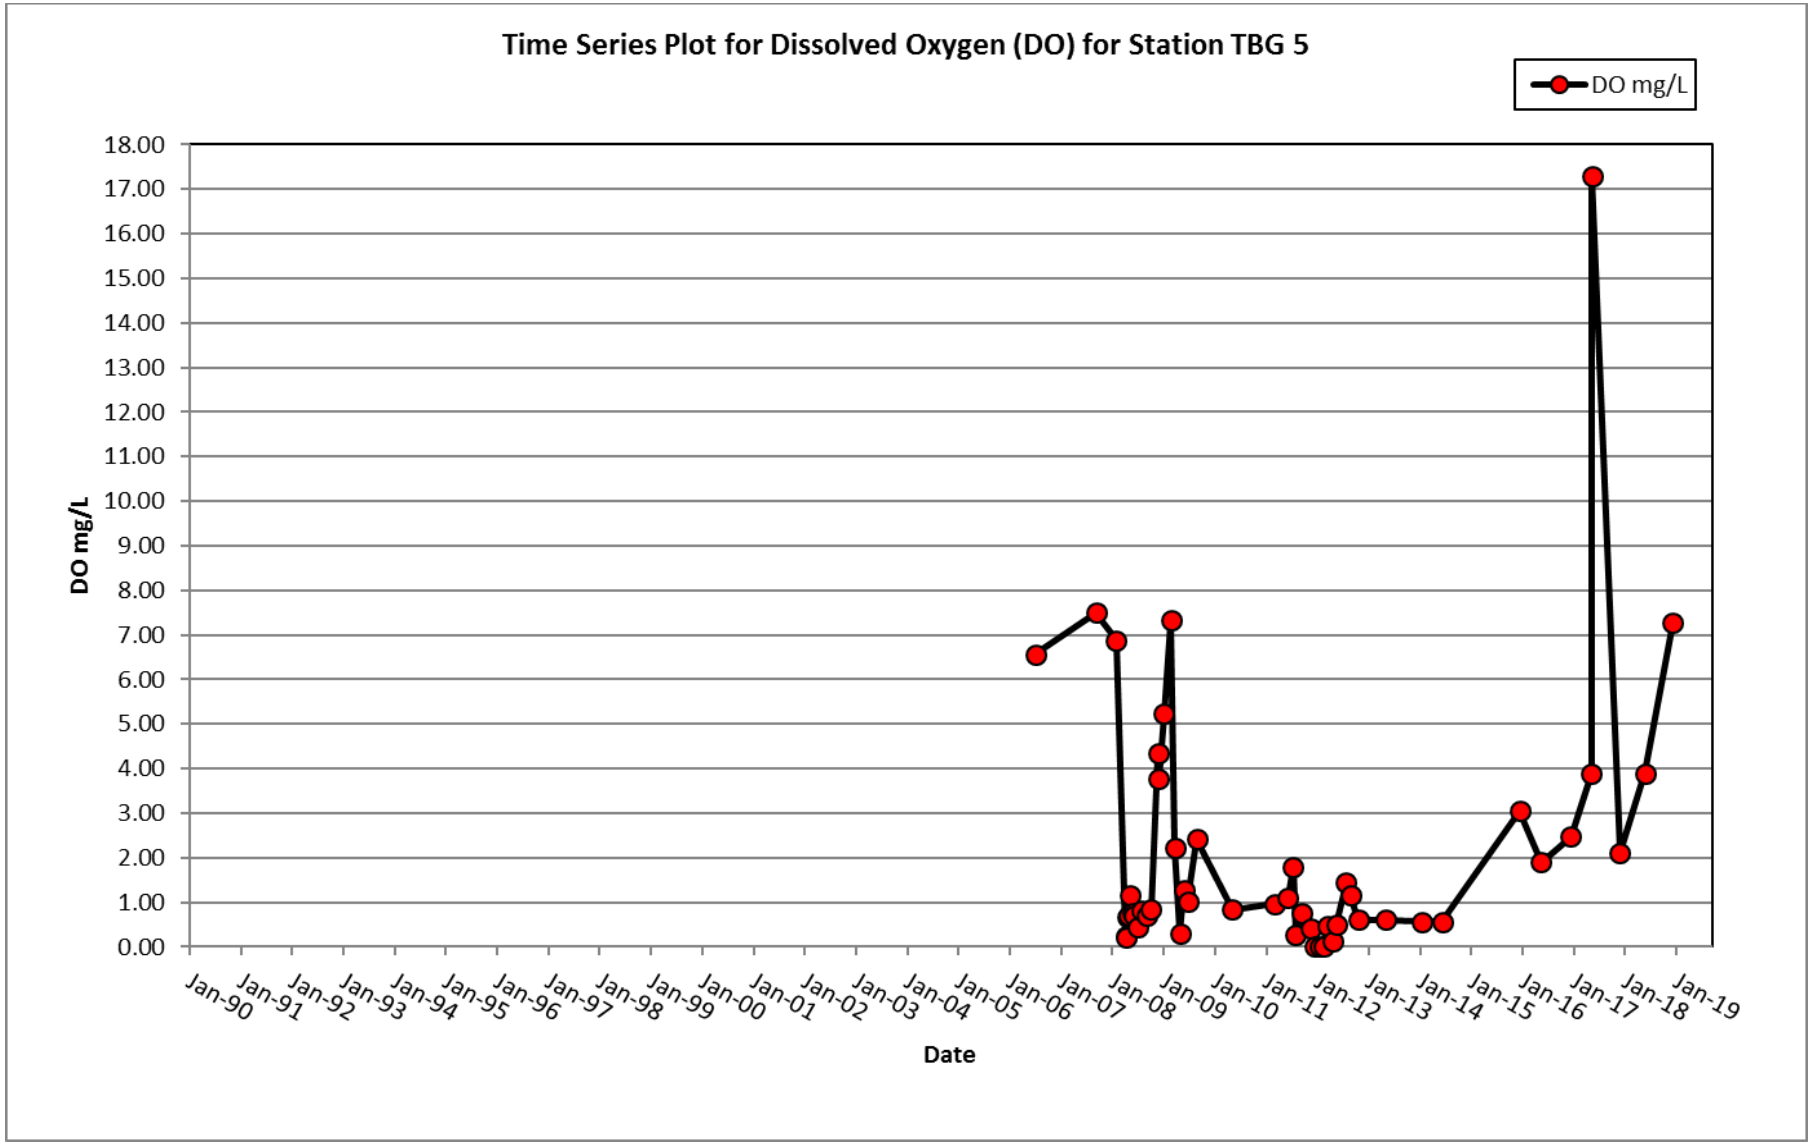
Time Series Plot for Dissolved Oxygen (DO) for Station TBG 5
DO mg/L
DO mg/L
18.00
17.00
16.00
15.00
14.00
13.00
12.00
11.00
10.00
9.00
8.00
7.00
6.00
5.00
4.00
3.00
2.00
1.00
0.00
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

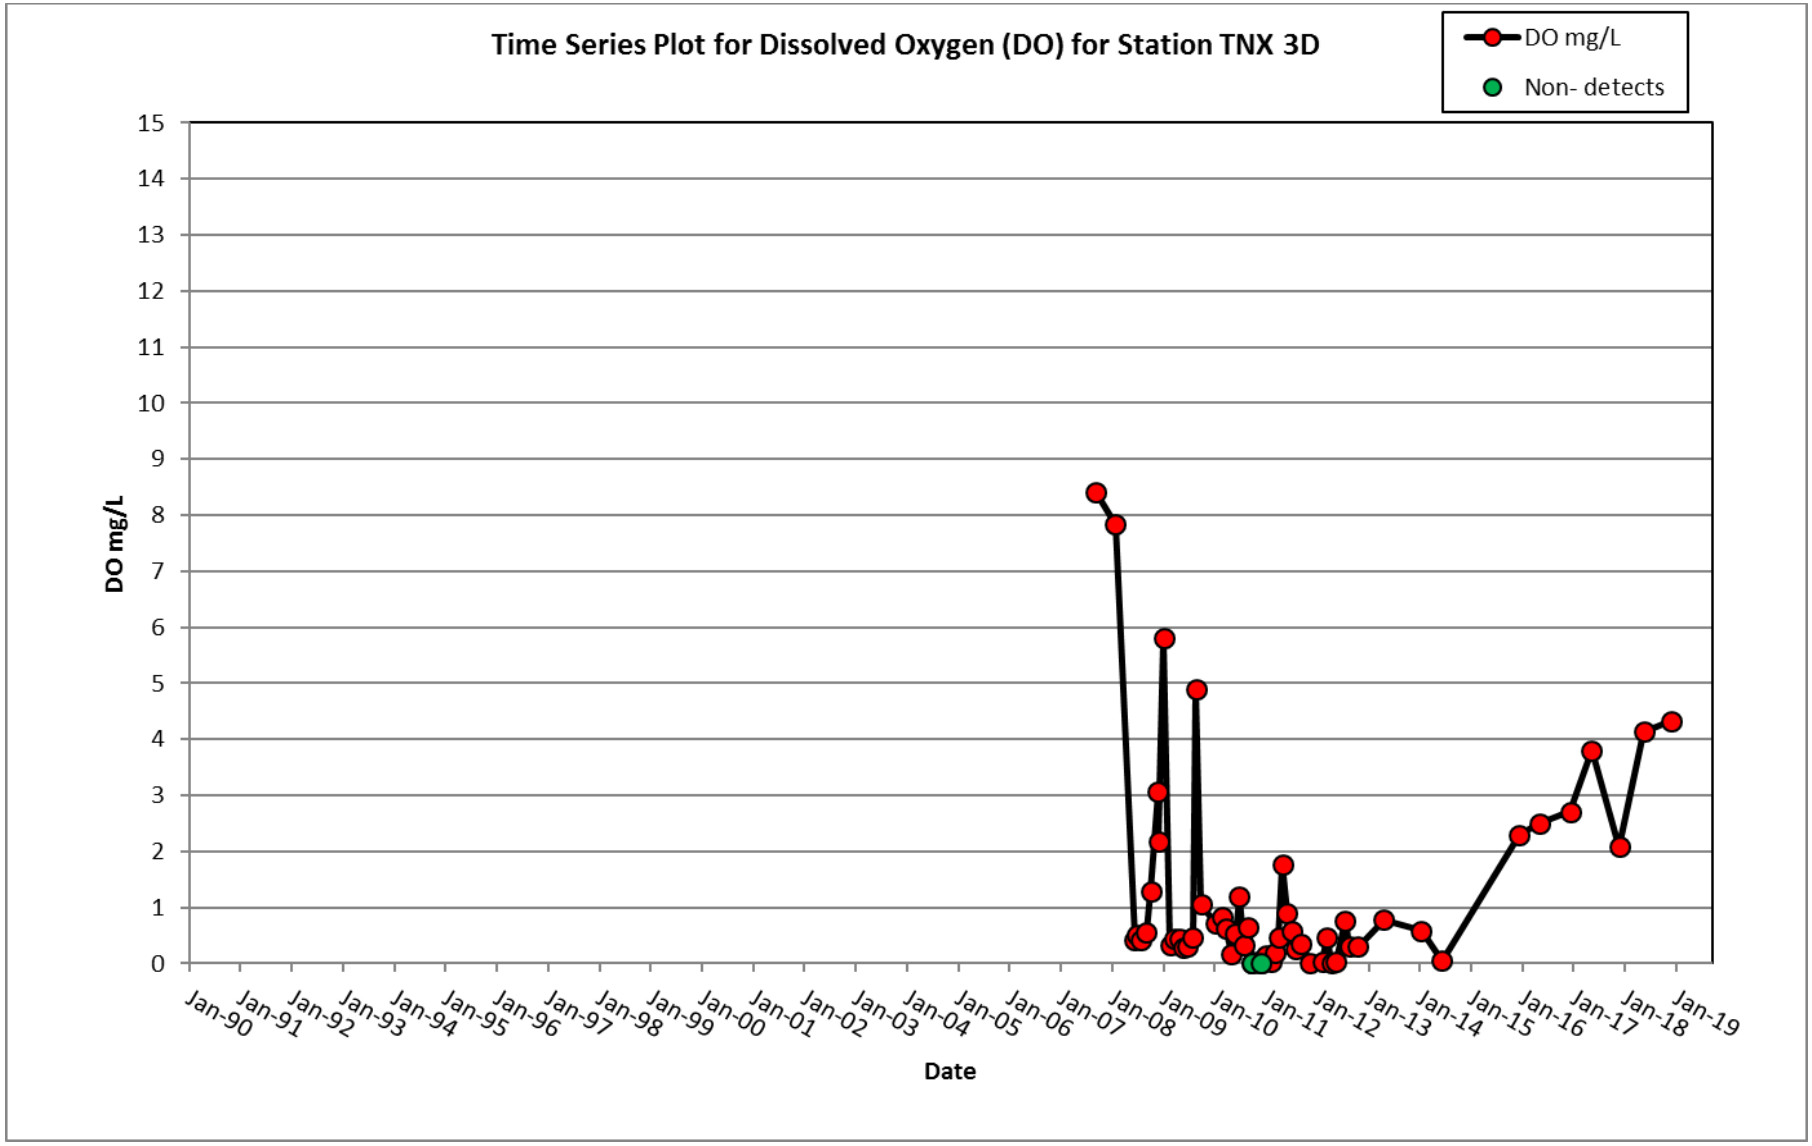
Time Series Plot for Dissolved Oxygen (DO) for Station TNX 3D
DO mg/L
Non- detects
DO mg/L
15
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

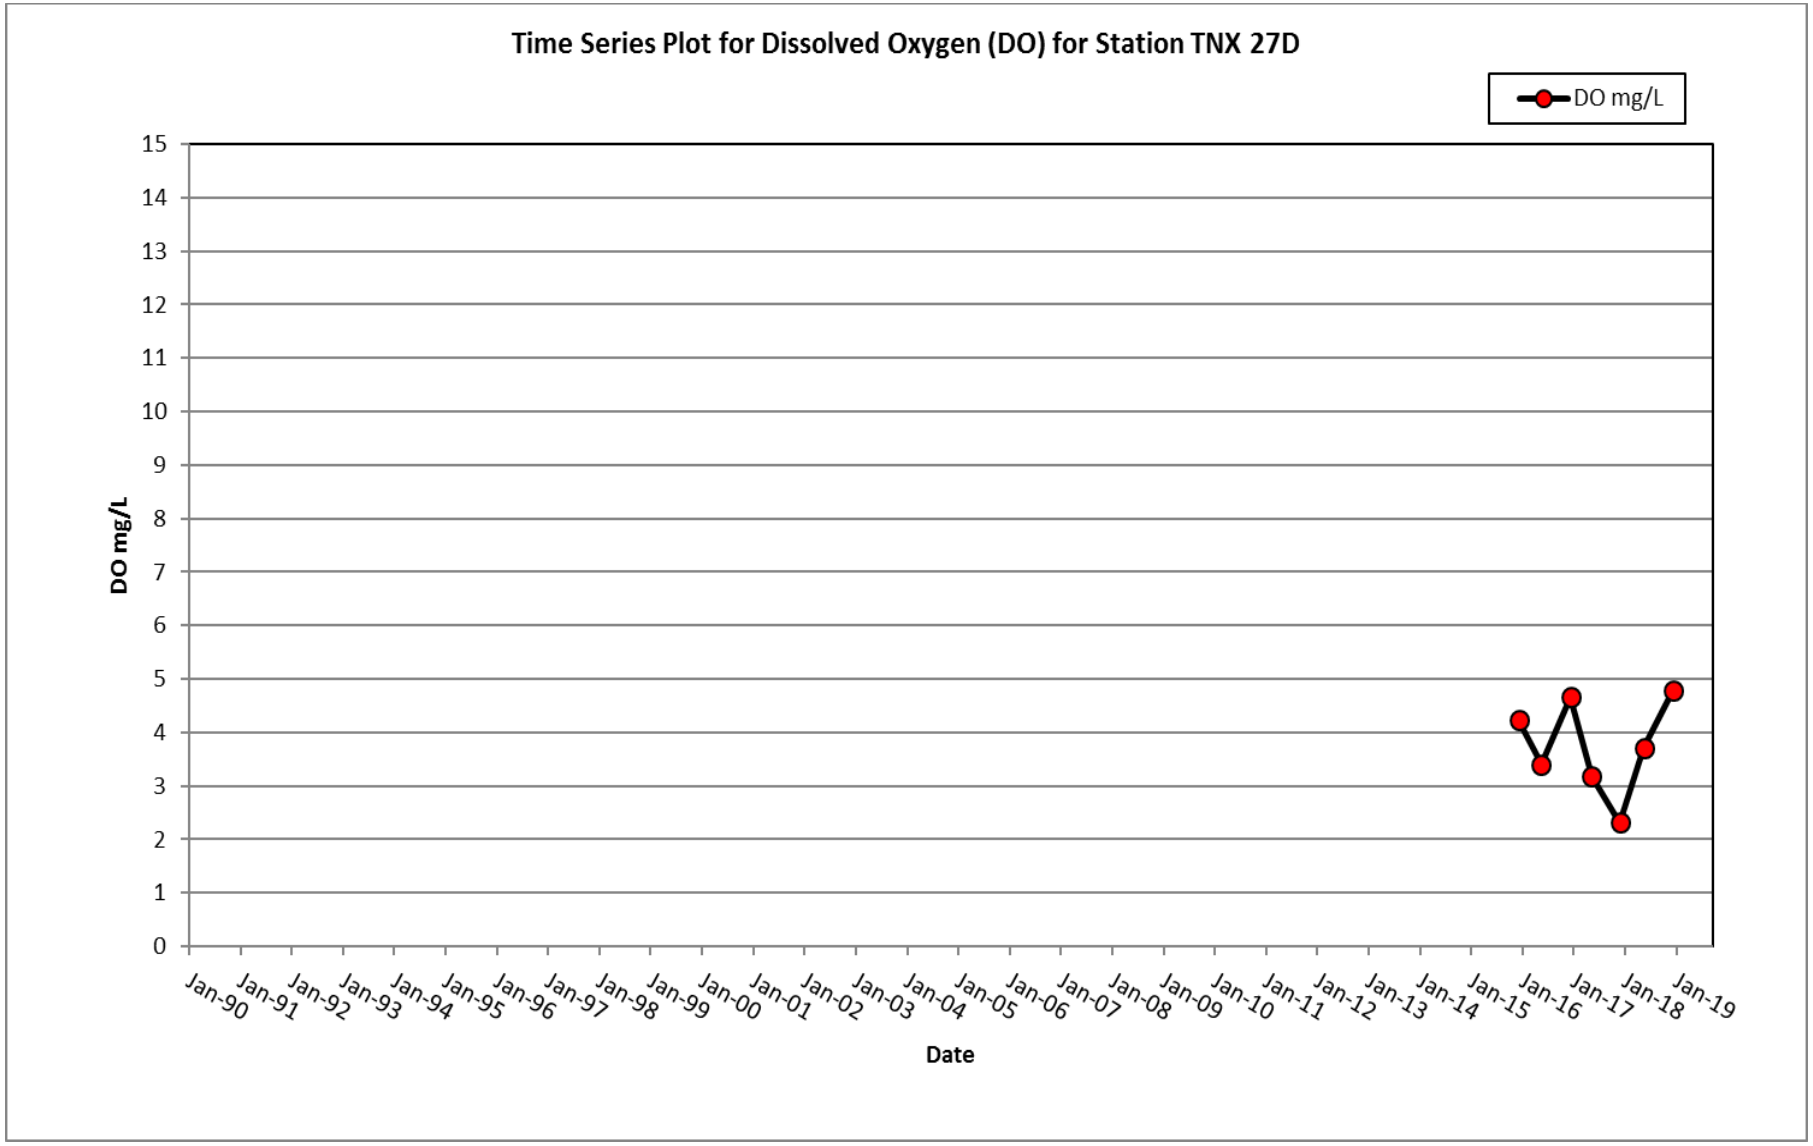
Time Series Plot for Dissolved Oxygen (DO) for Station TNX 27D
DO mg/L
DO mg/L
15
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

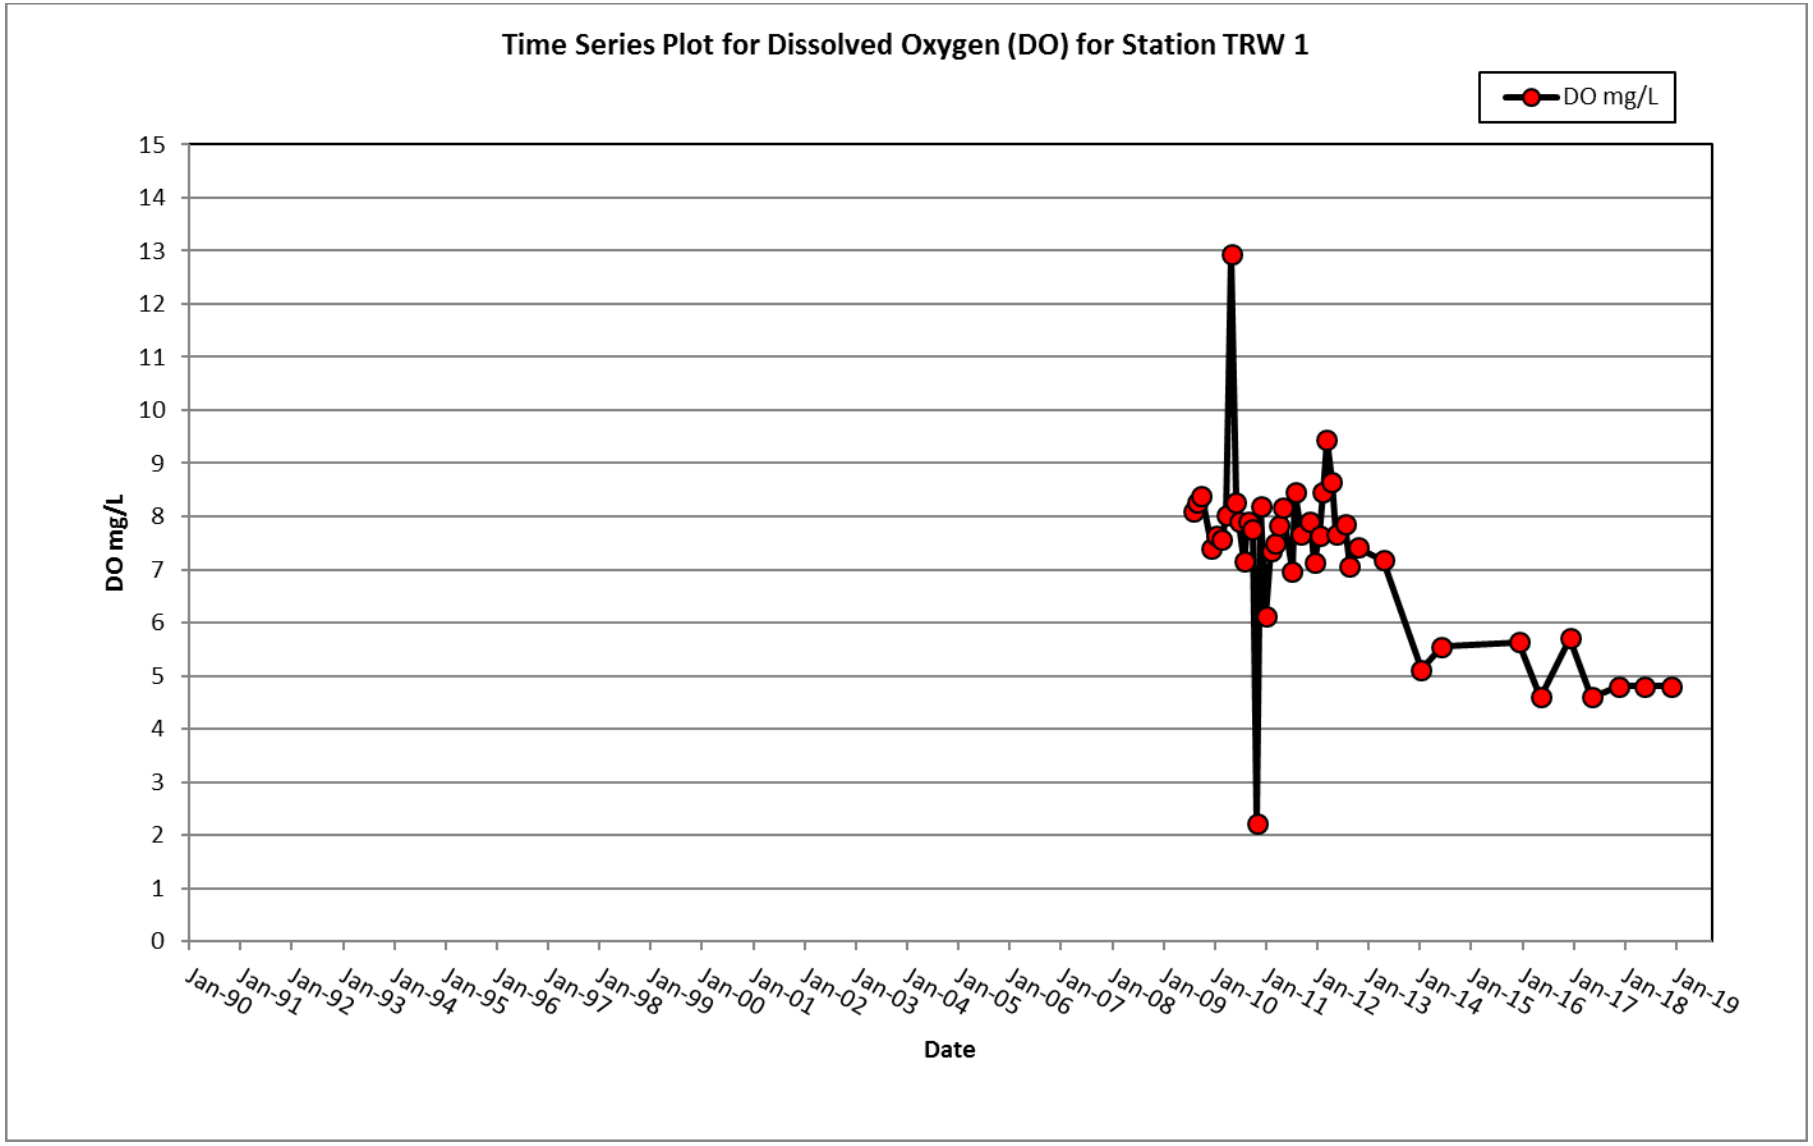
Time Series Plot for Dissolved Oxygen (DO) for Station TRW 1
DO mg/L
DO mg/L
15
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

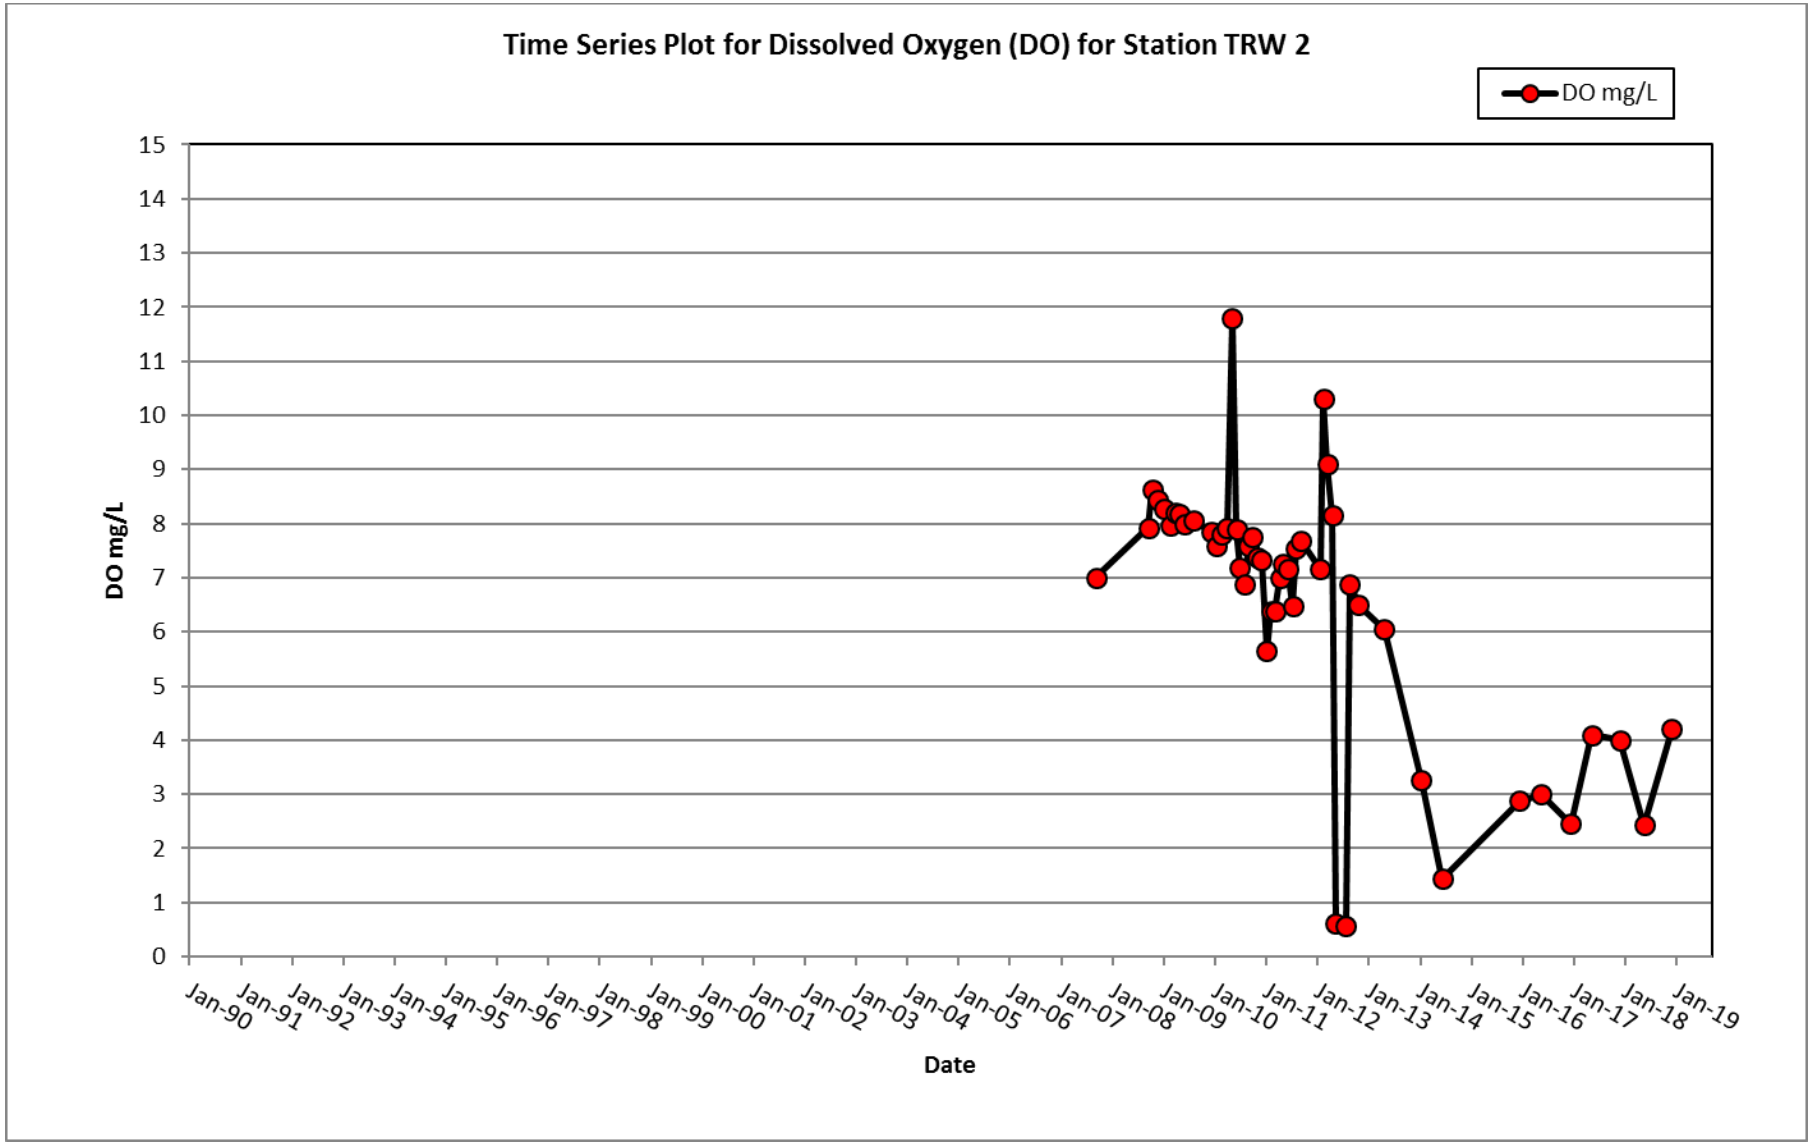
Time Series Plot for Dissolved Oxygen (DO) for Station TRW 2
DO mg/L
DO mg/L
15
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

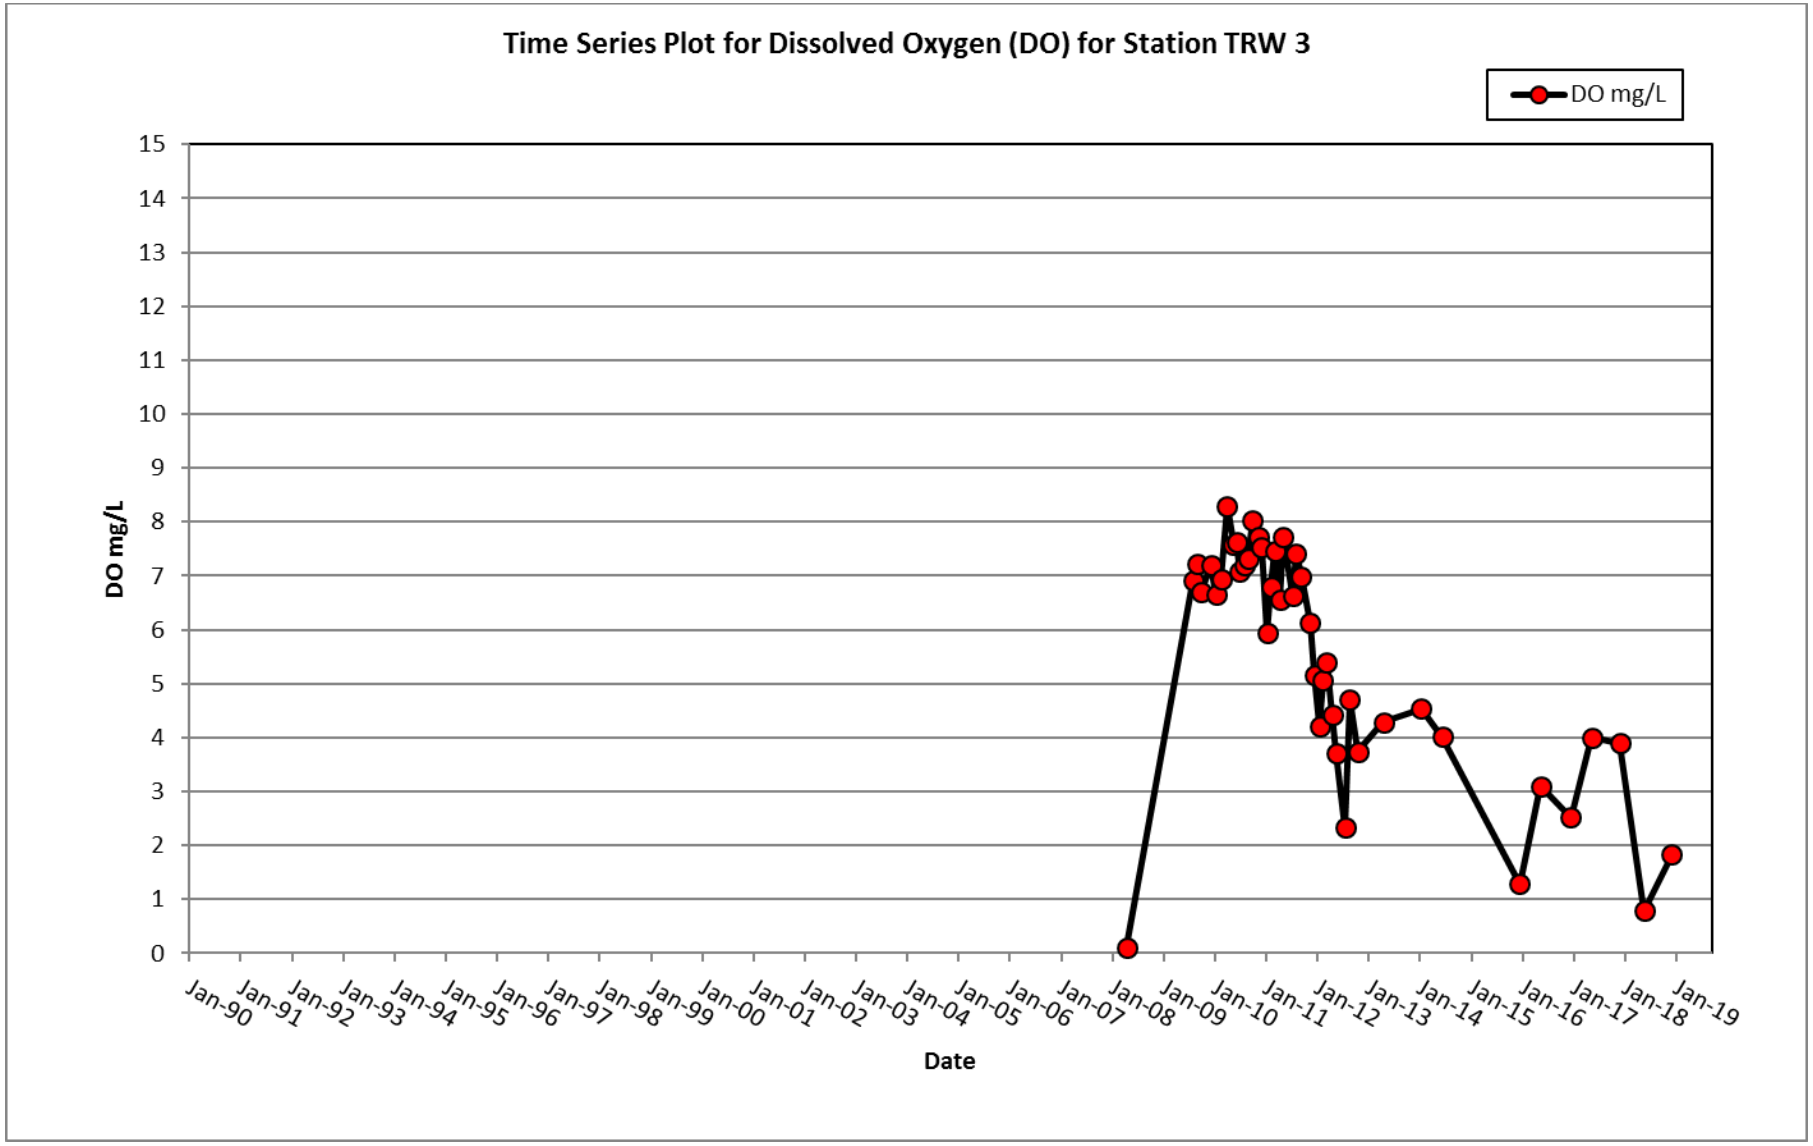
Time Series Plot for Dissolved Oxygen (DO) for Station TRW 3
DO mg/L
DO mg/L
15
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

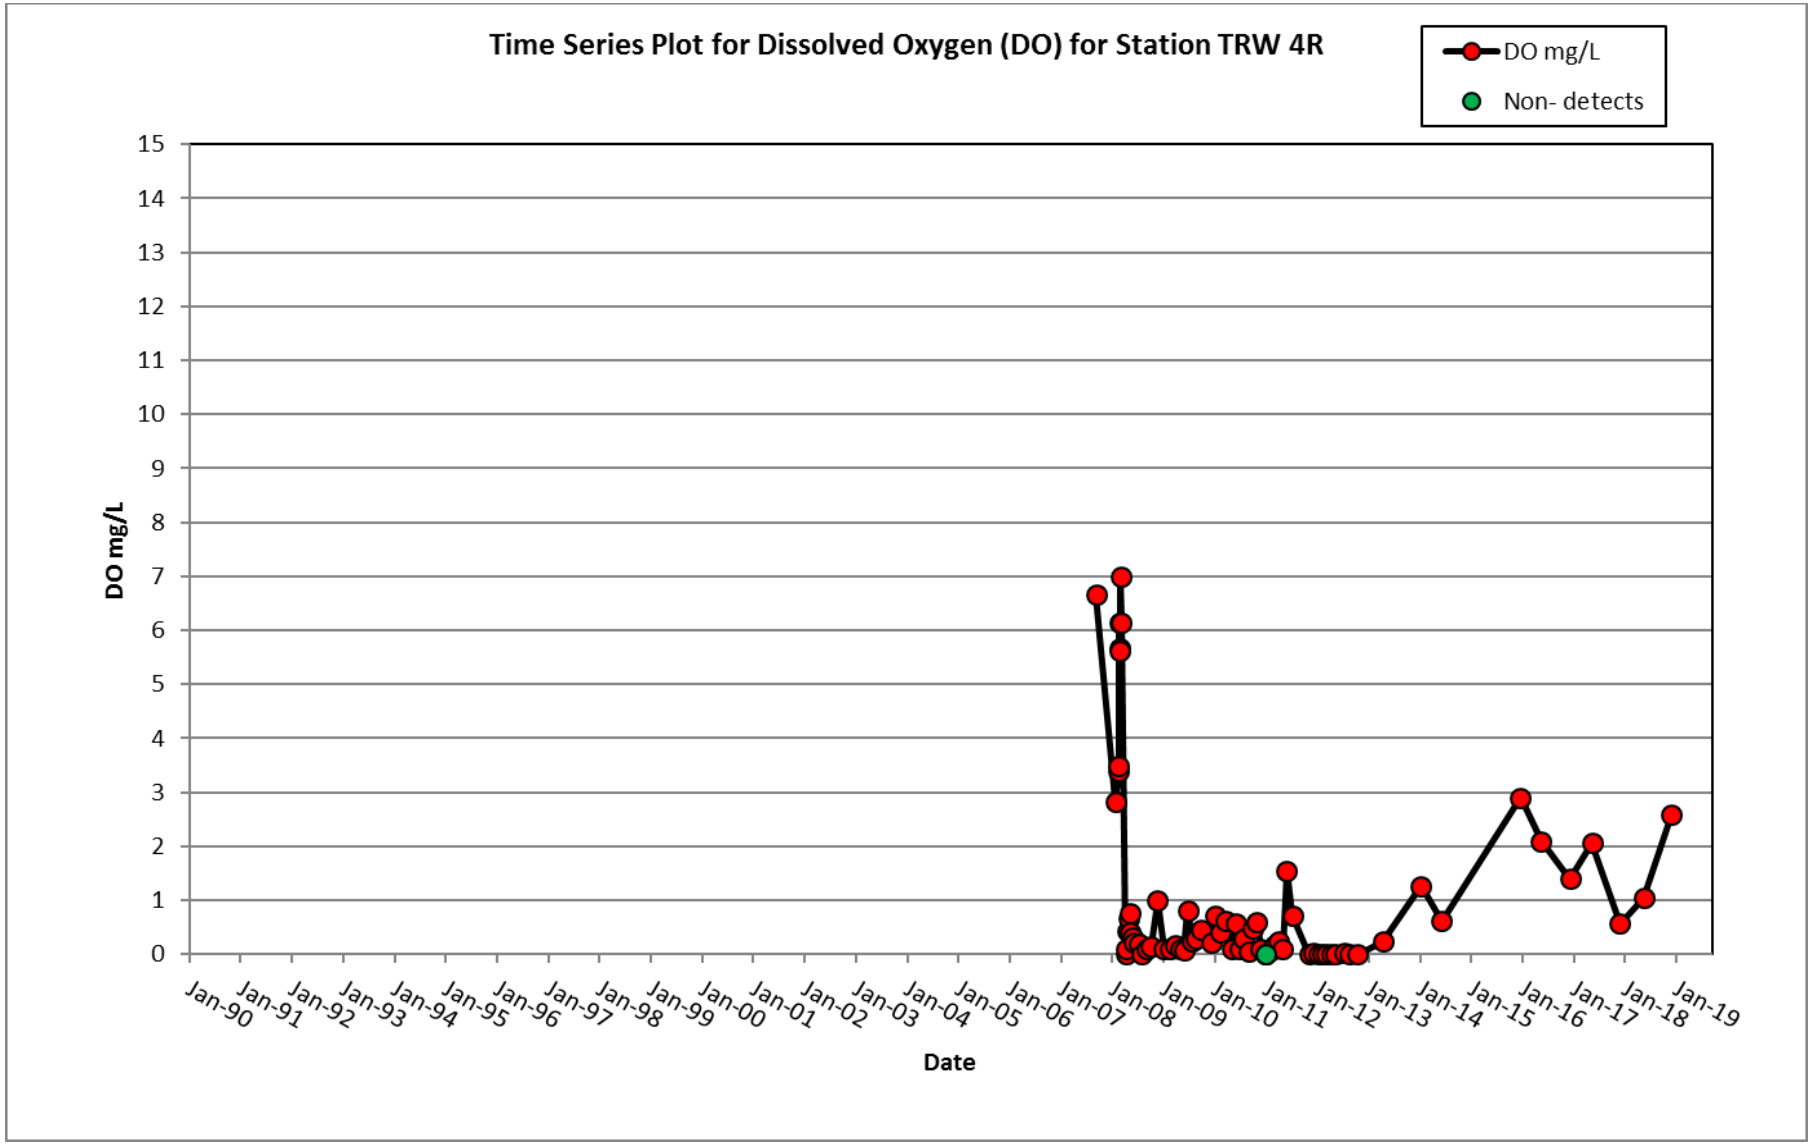
Time Series Plot for Dissolved Oxygen (DO) for Station TRW 4R
DO mg/L
Non- detects
DO mg/L
15
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

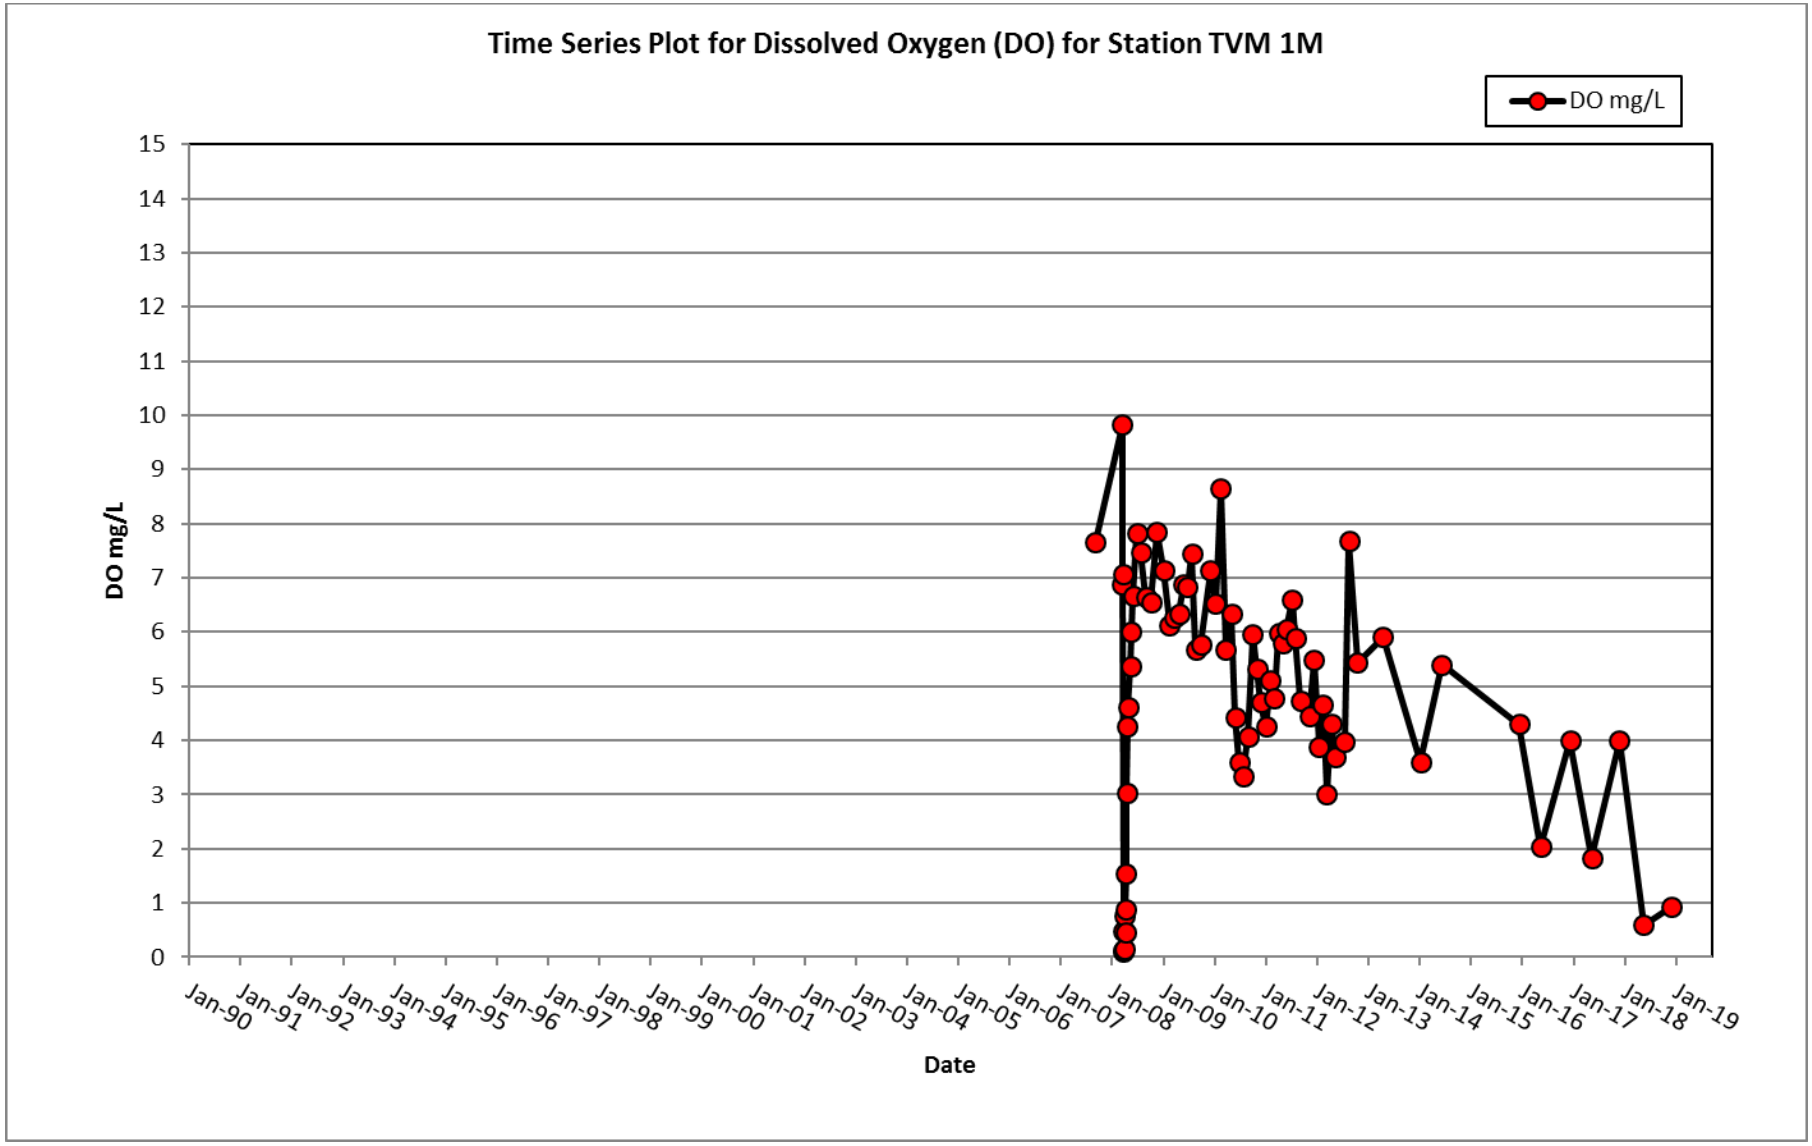
Time Series Plot for Dissolved Oxygen (DO) for Station TVM 1M
DO mg/L
DO mg/L
15
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

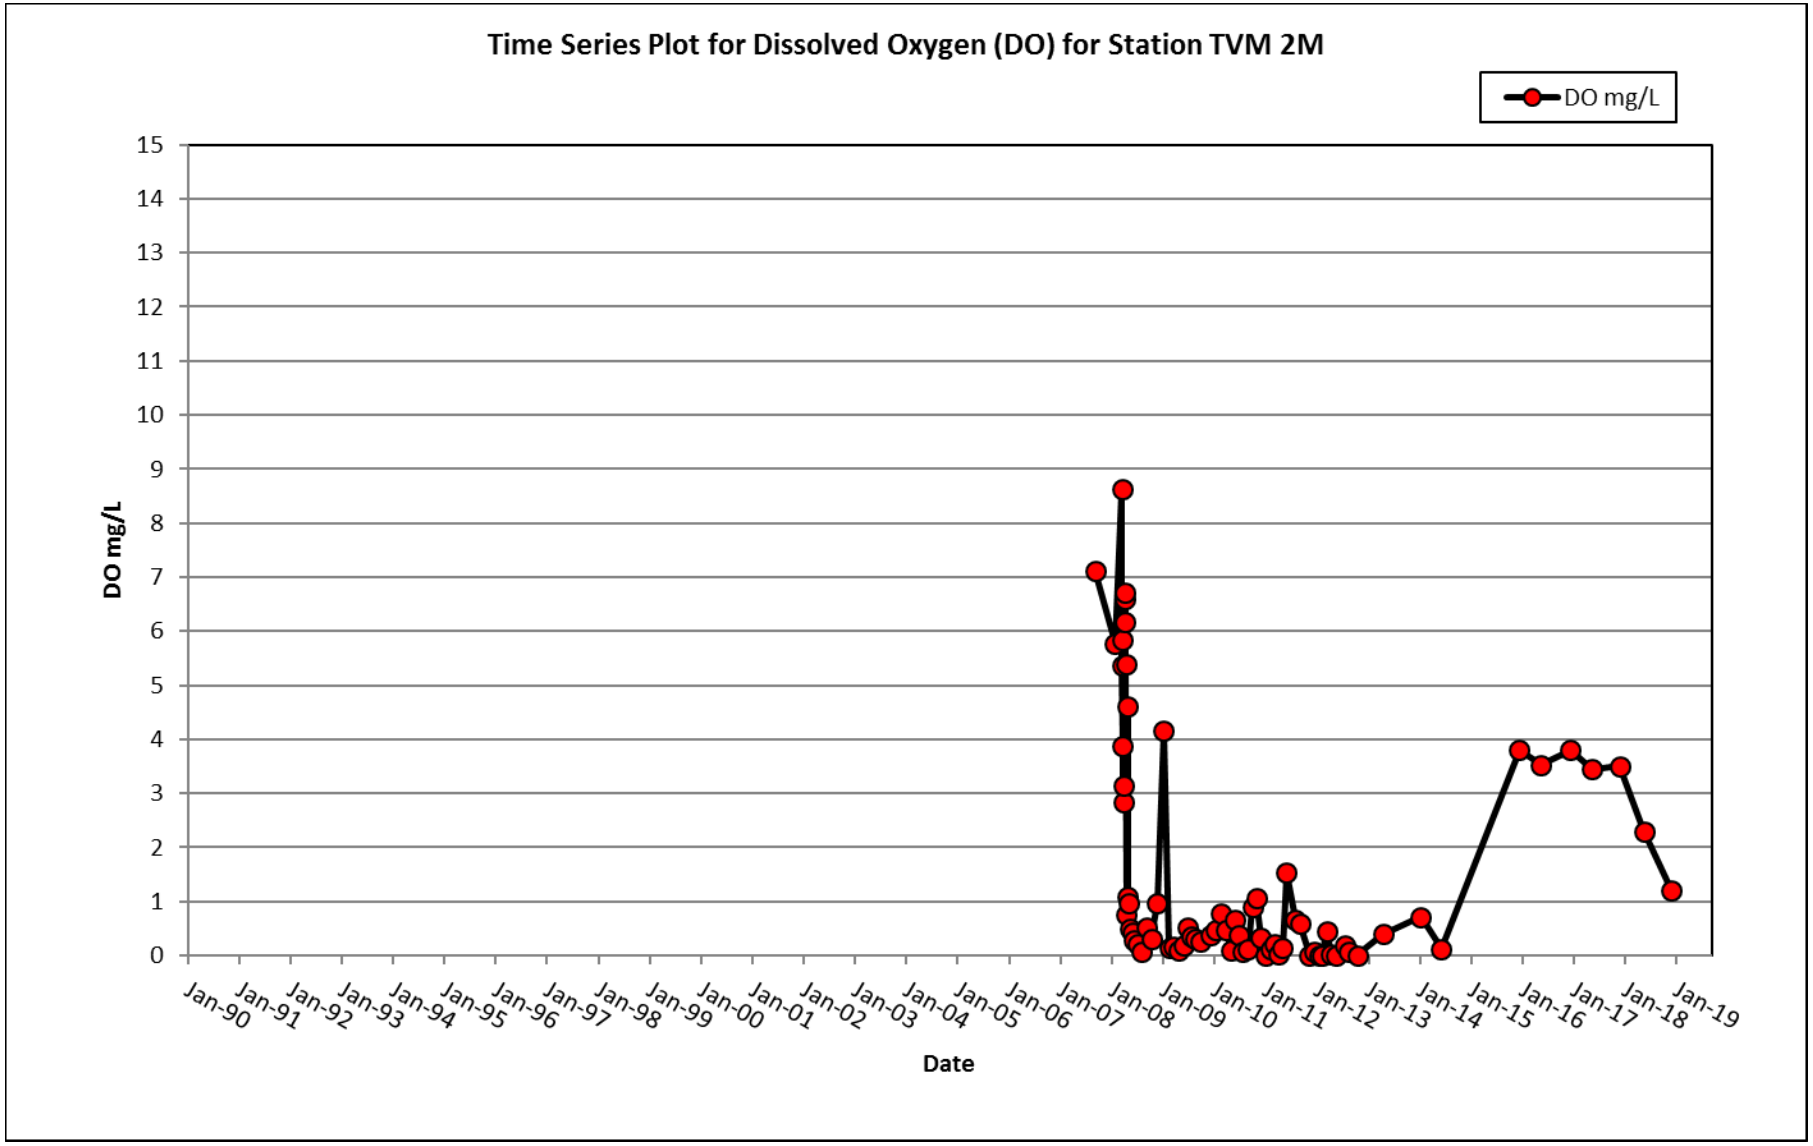
Time Series Plot for Dissolved Oxygen (DO) for Station TVM 2M
DO mg/L
DO mg/L
15
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

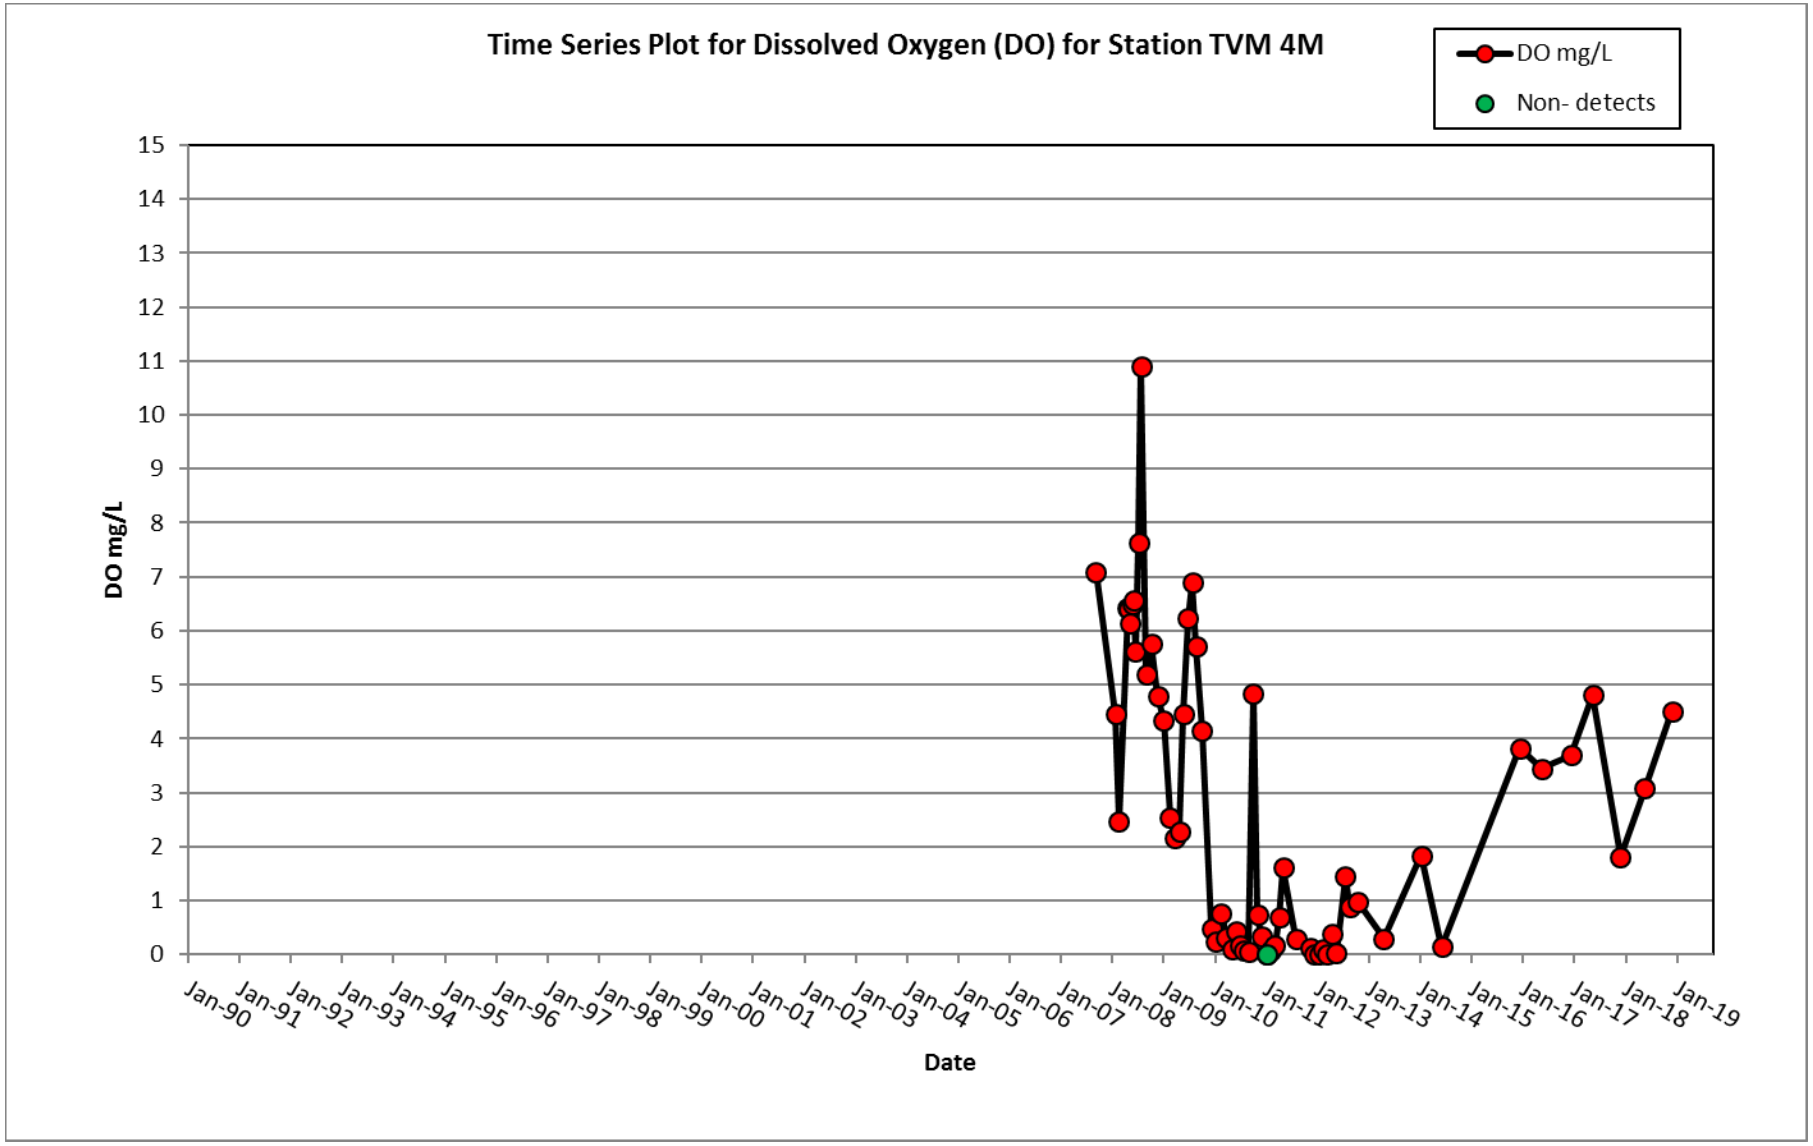
Time Series Plot for Dissolved Oxygen (DO) for Station TVM 4M
DO mg/L
Non- detects
DO mg/L
15
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

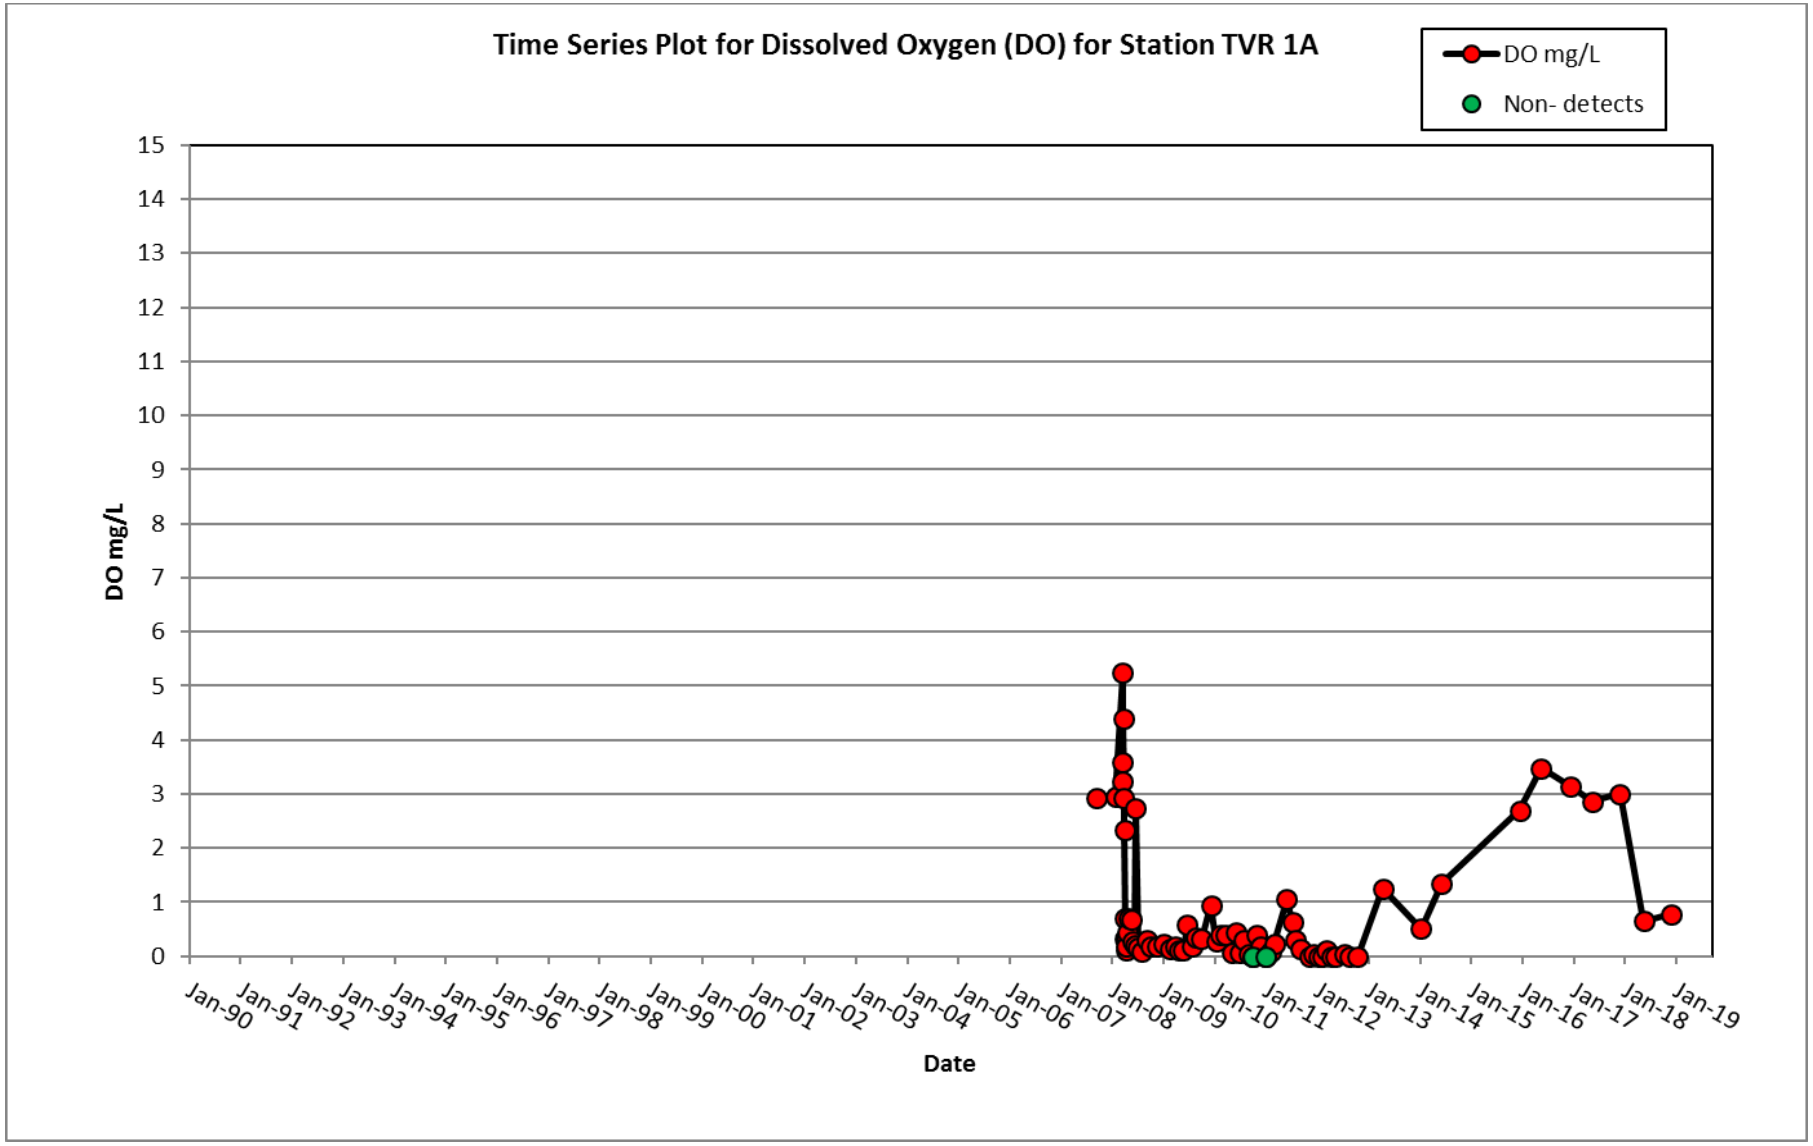
Time Series Plot for Dissolved Oxygen (DO) for Station TVR 1A
DO mg/L
Non- detects
DO mg/L
15
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

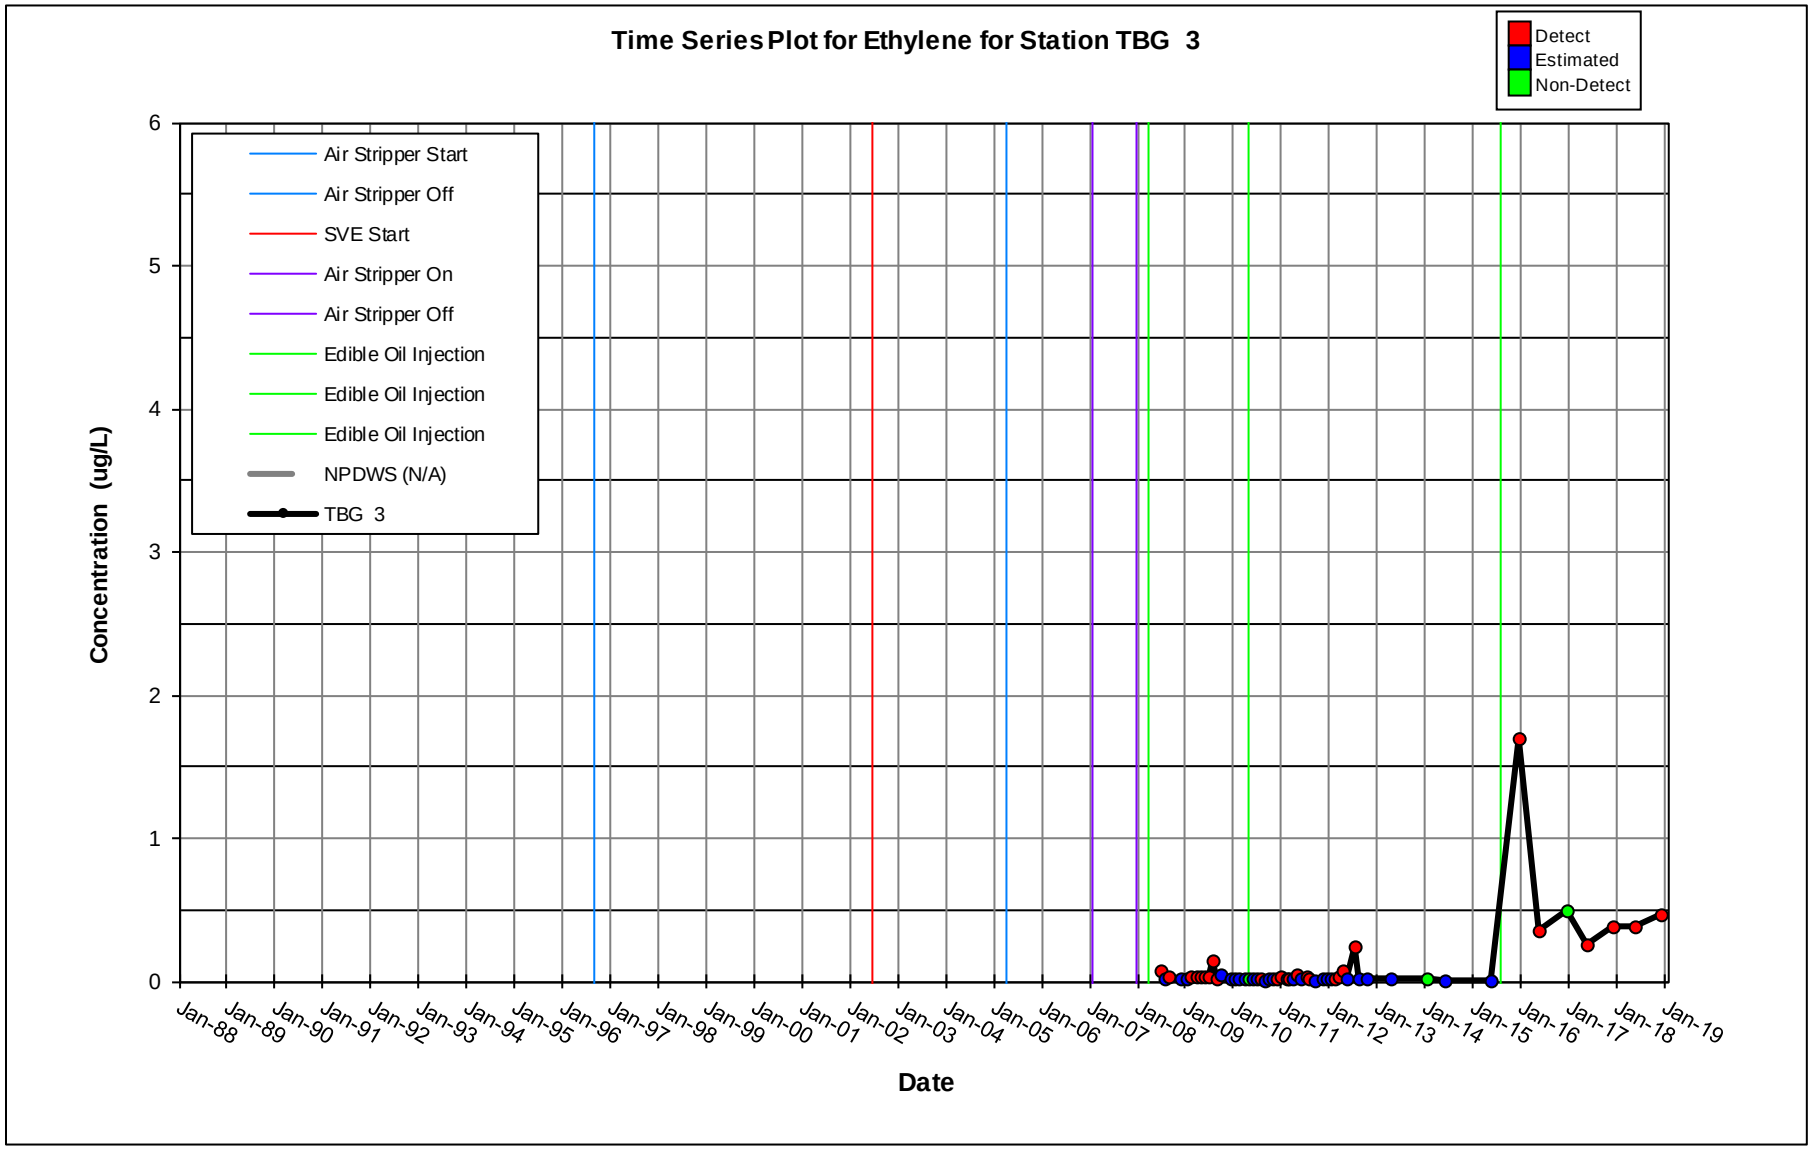
Time Series Plot for Ethylene for Station TBG 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TBG 3
Concentration (ug/L)
0
1
2
3
4
5
6
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

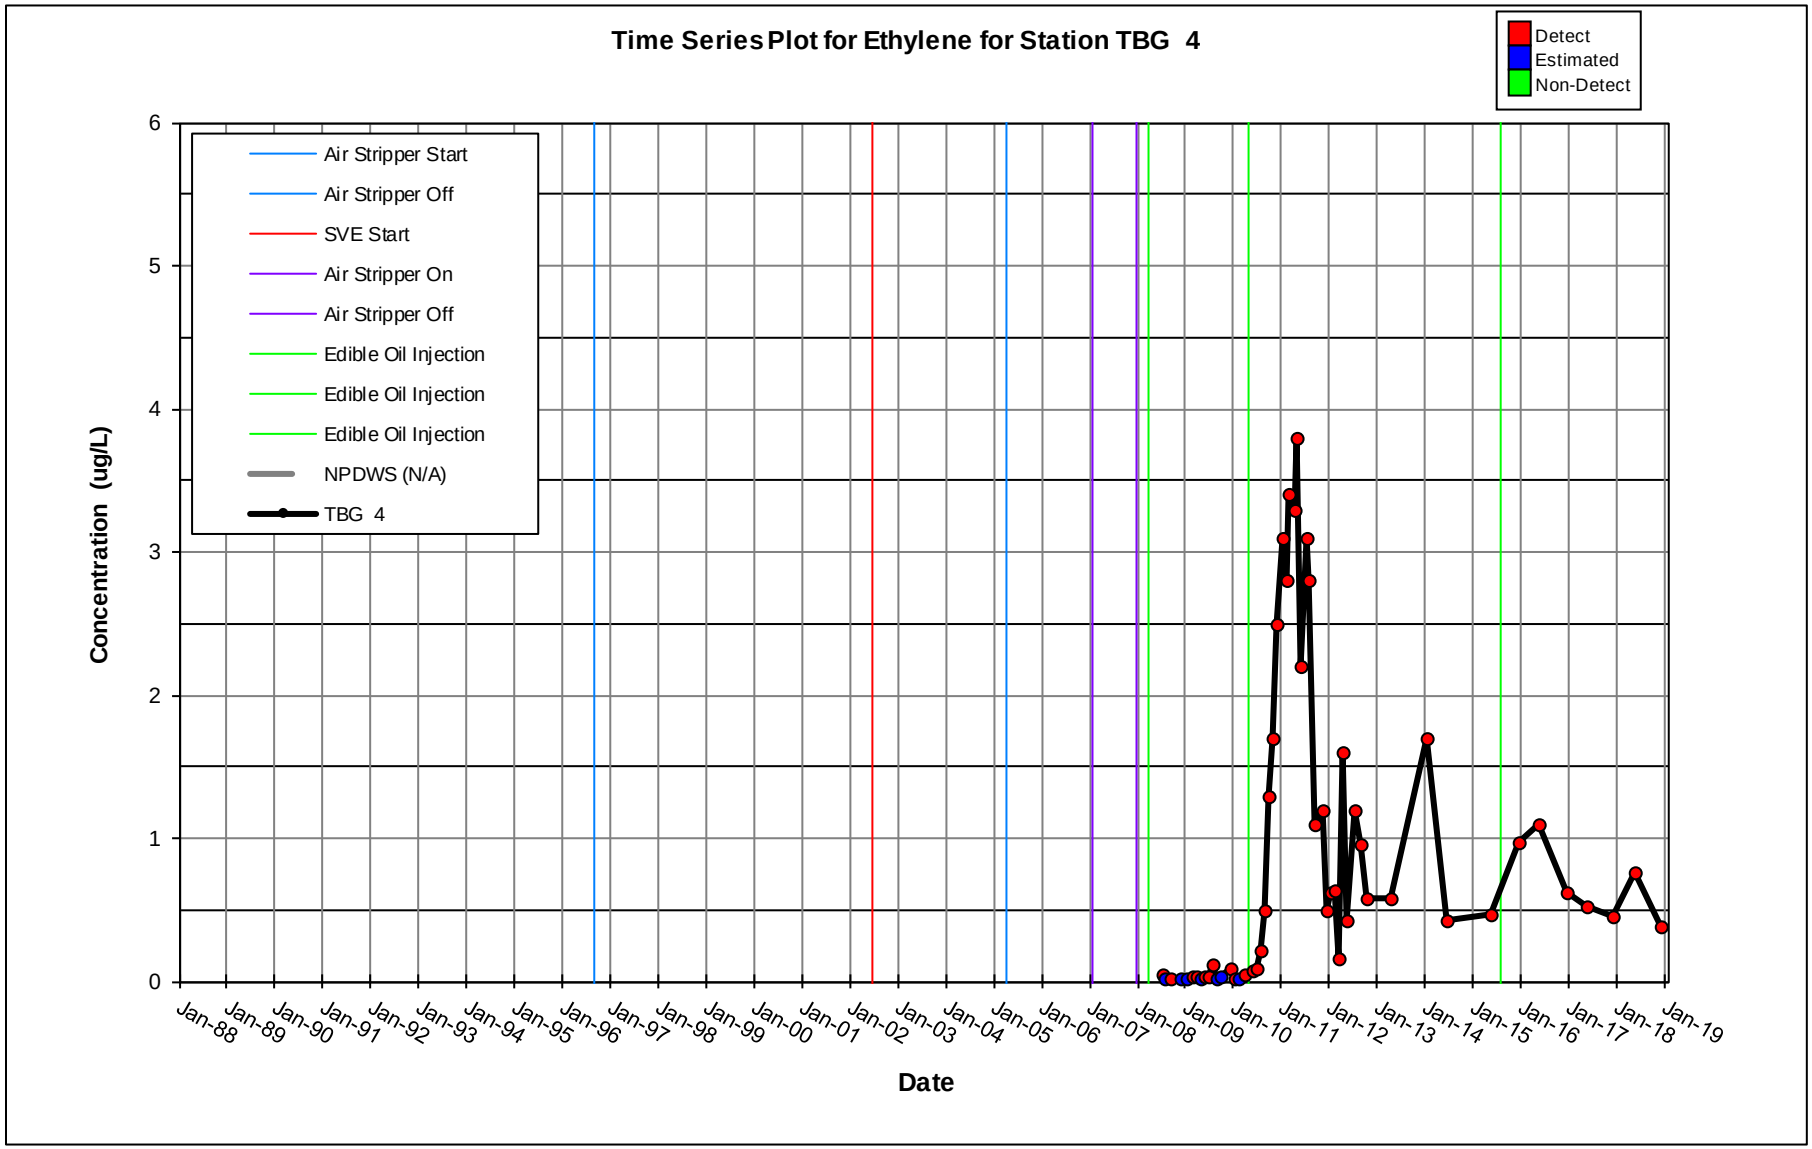
Time Series Plot for Ethylene for Station TBG 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TBG 4
Concentration (ug/L)
0
1
2
3
4
5
6
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

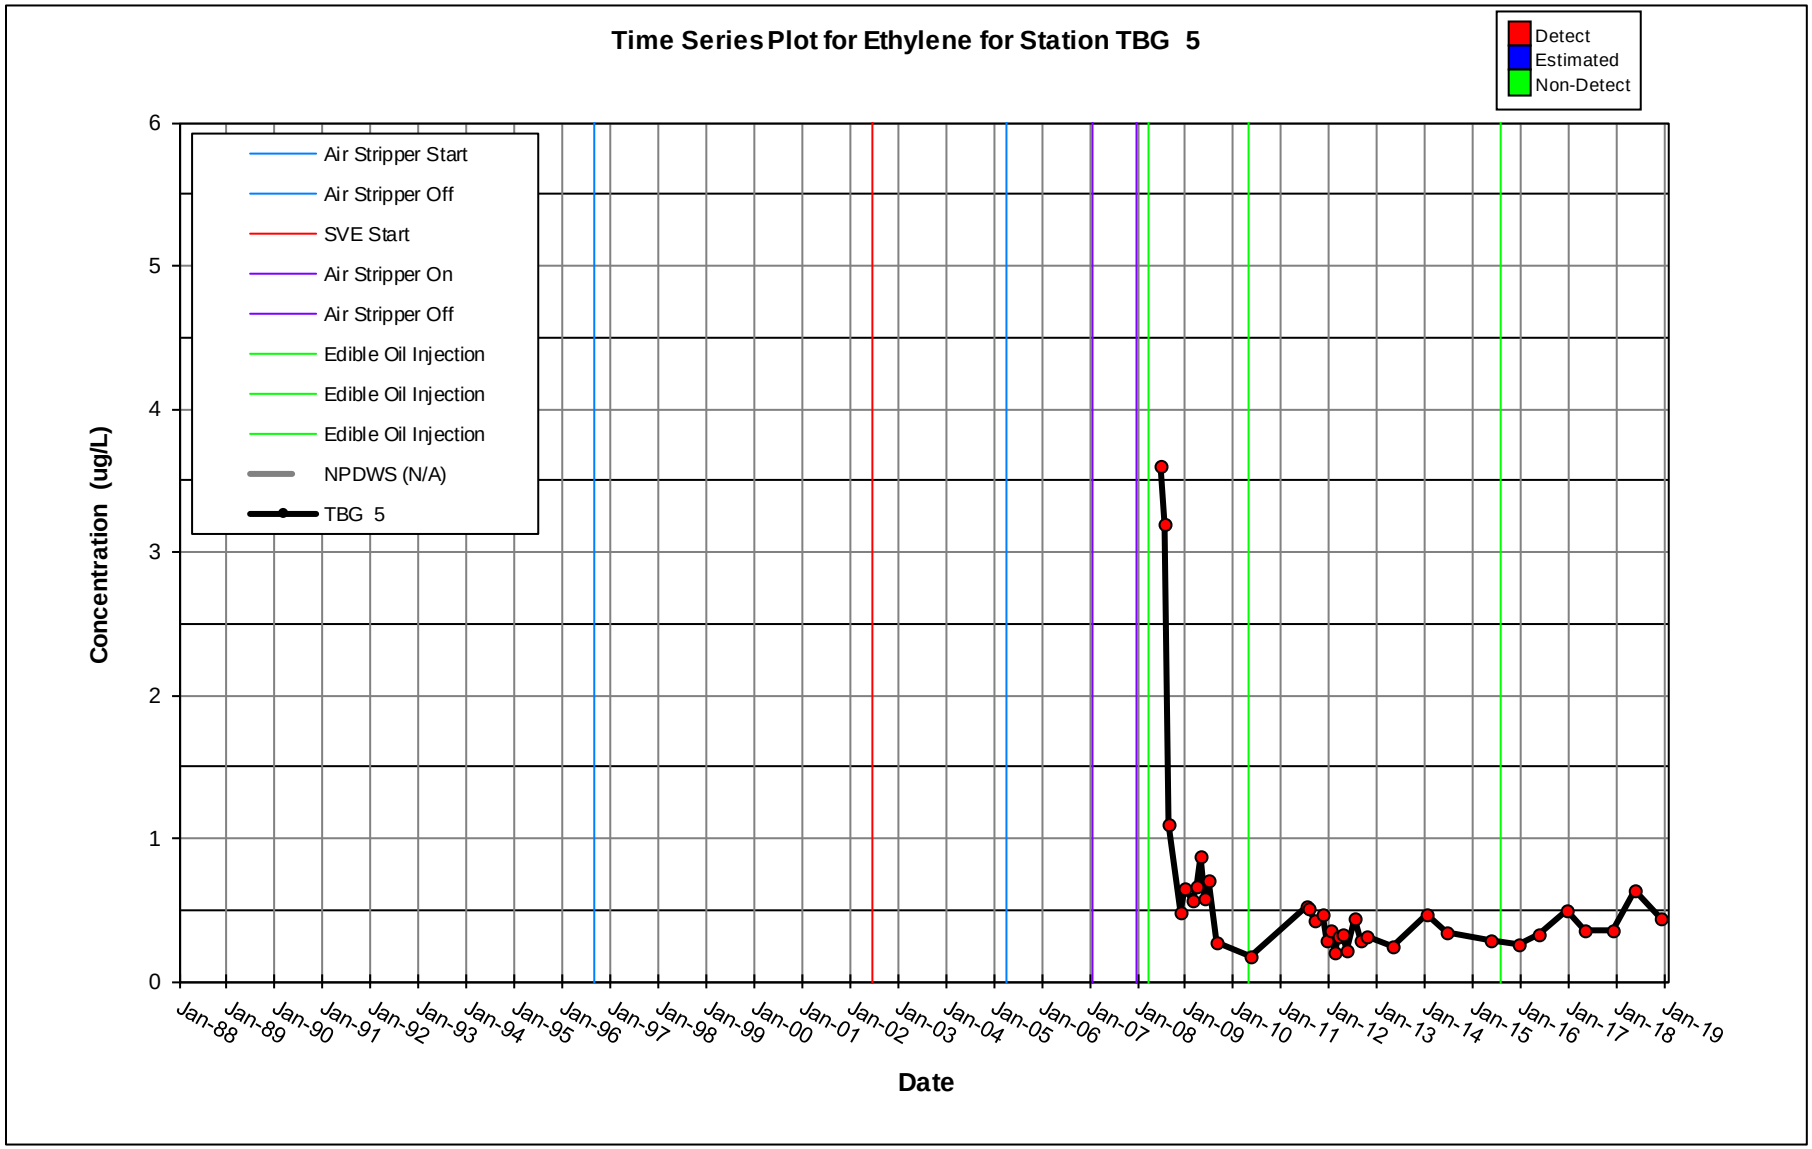
Time Series Plot for Ethylene for Station TBG 5
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TBG 5
Concentration (ug/L)
0
1
2
3
4
5
6
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

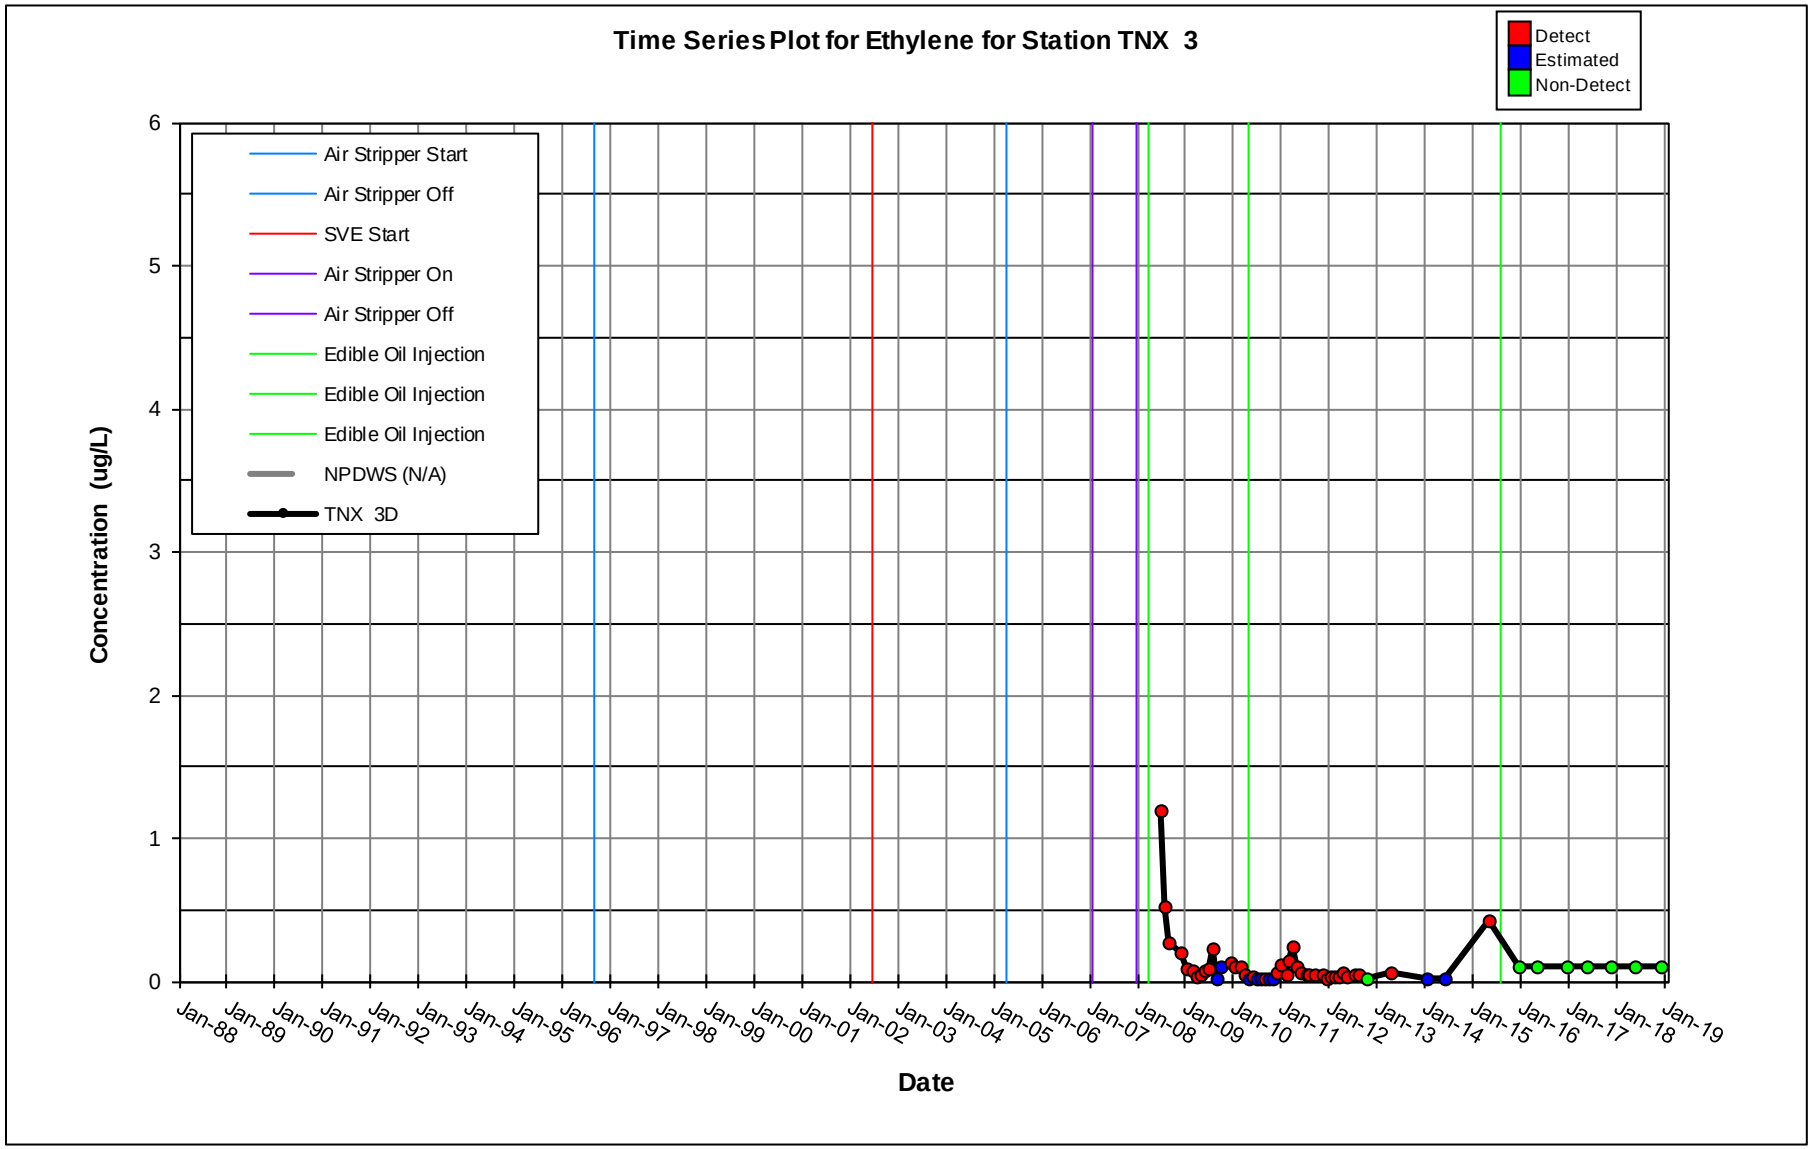
Time Series Plot for Ethylene for Station TNX 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TNX 3D
Concentration (ug/L)
0
1
2
3
4
5
6
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

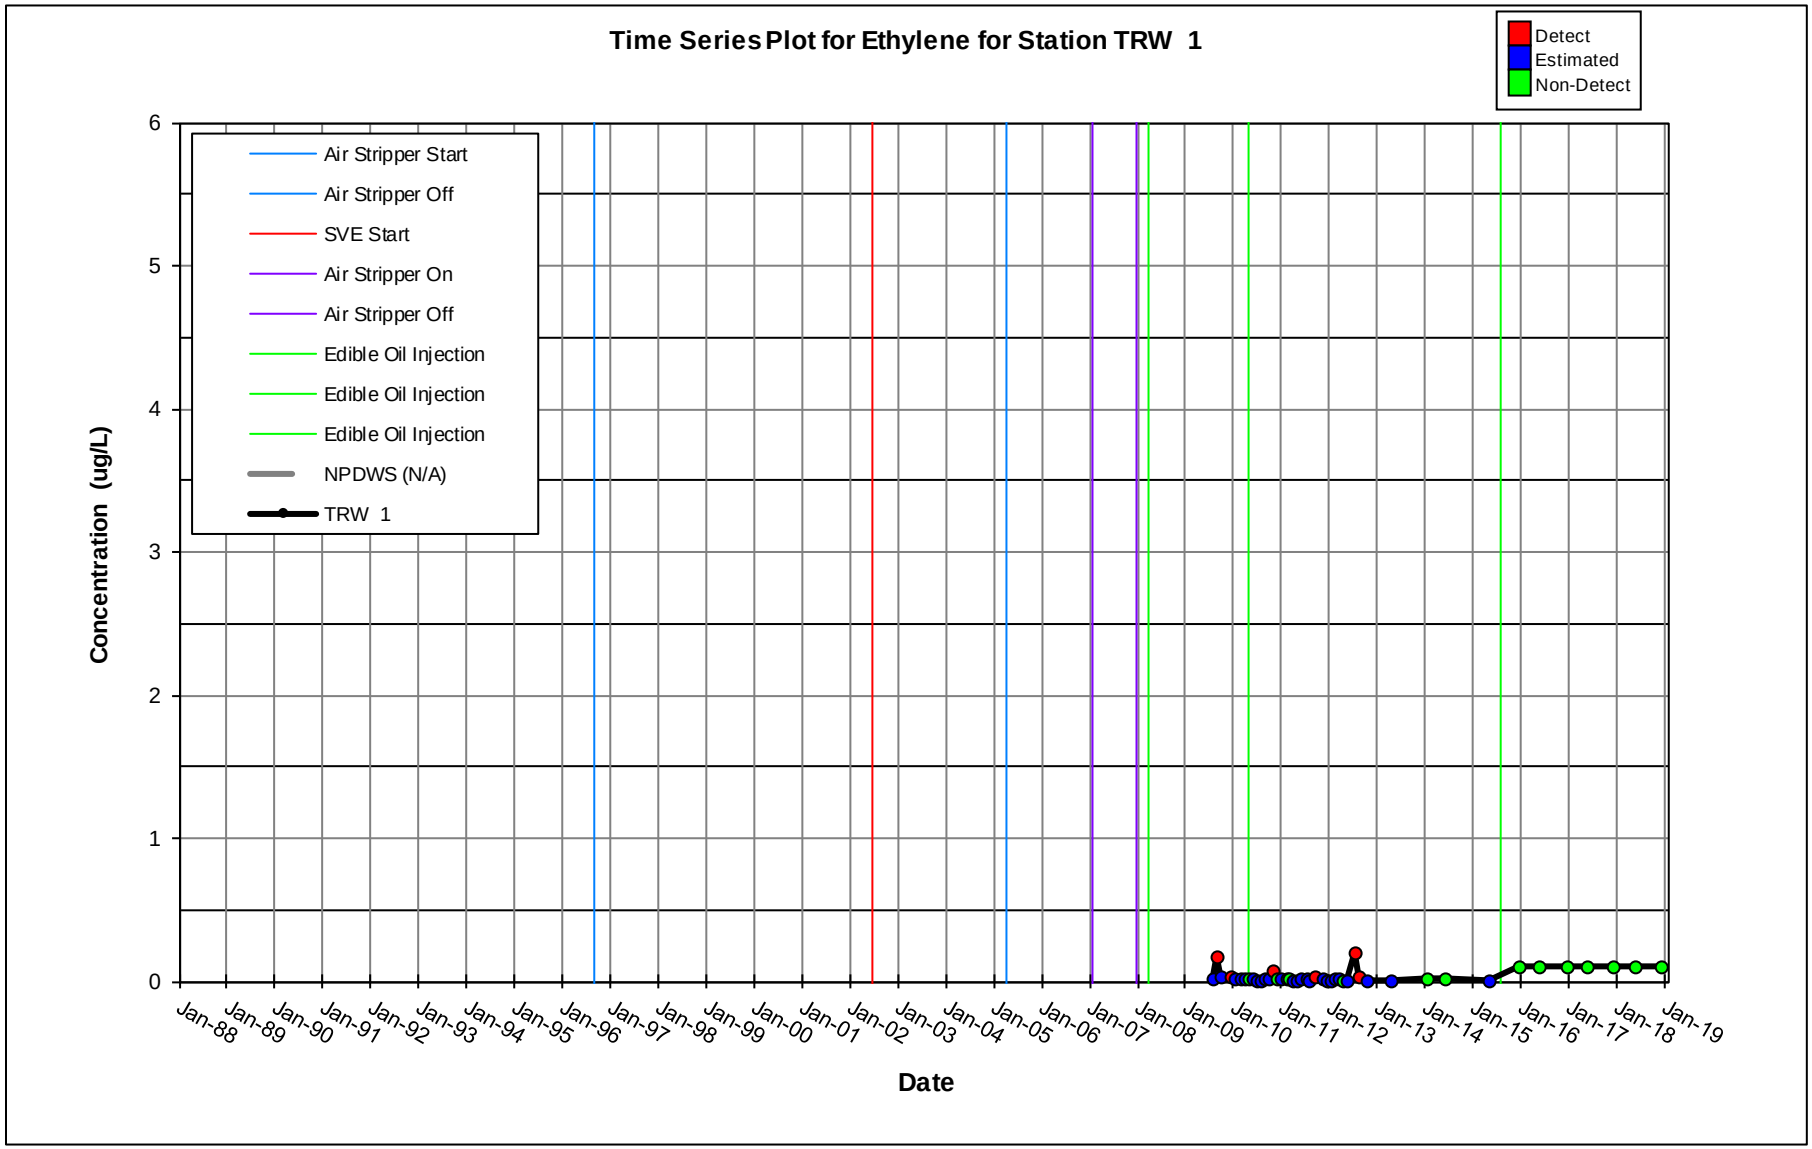
Time Series Plot for Ethylene for Station TRW 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TRW 1
Concentration (ug/L)
0
1
2
3
4
5
6
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

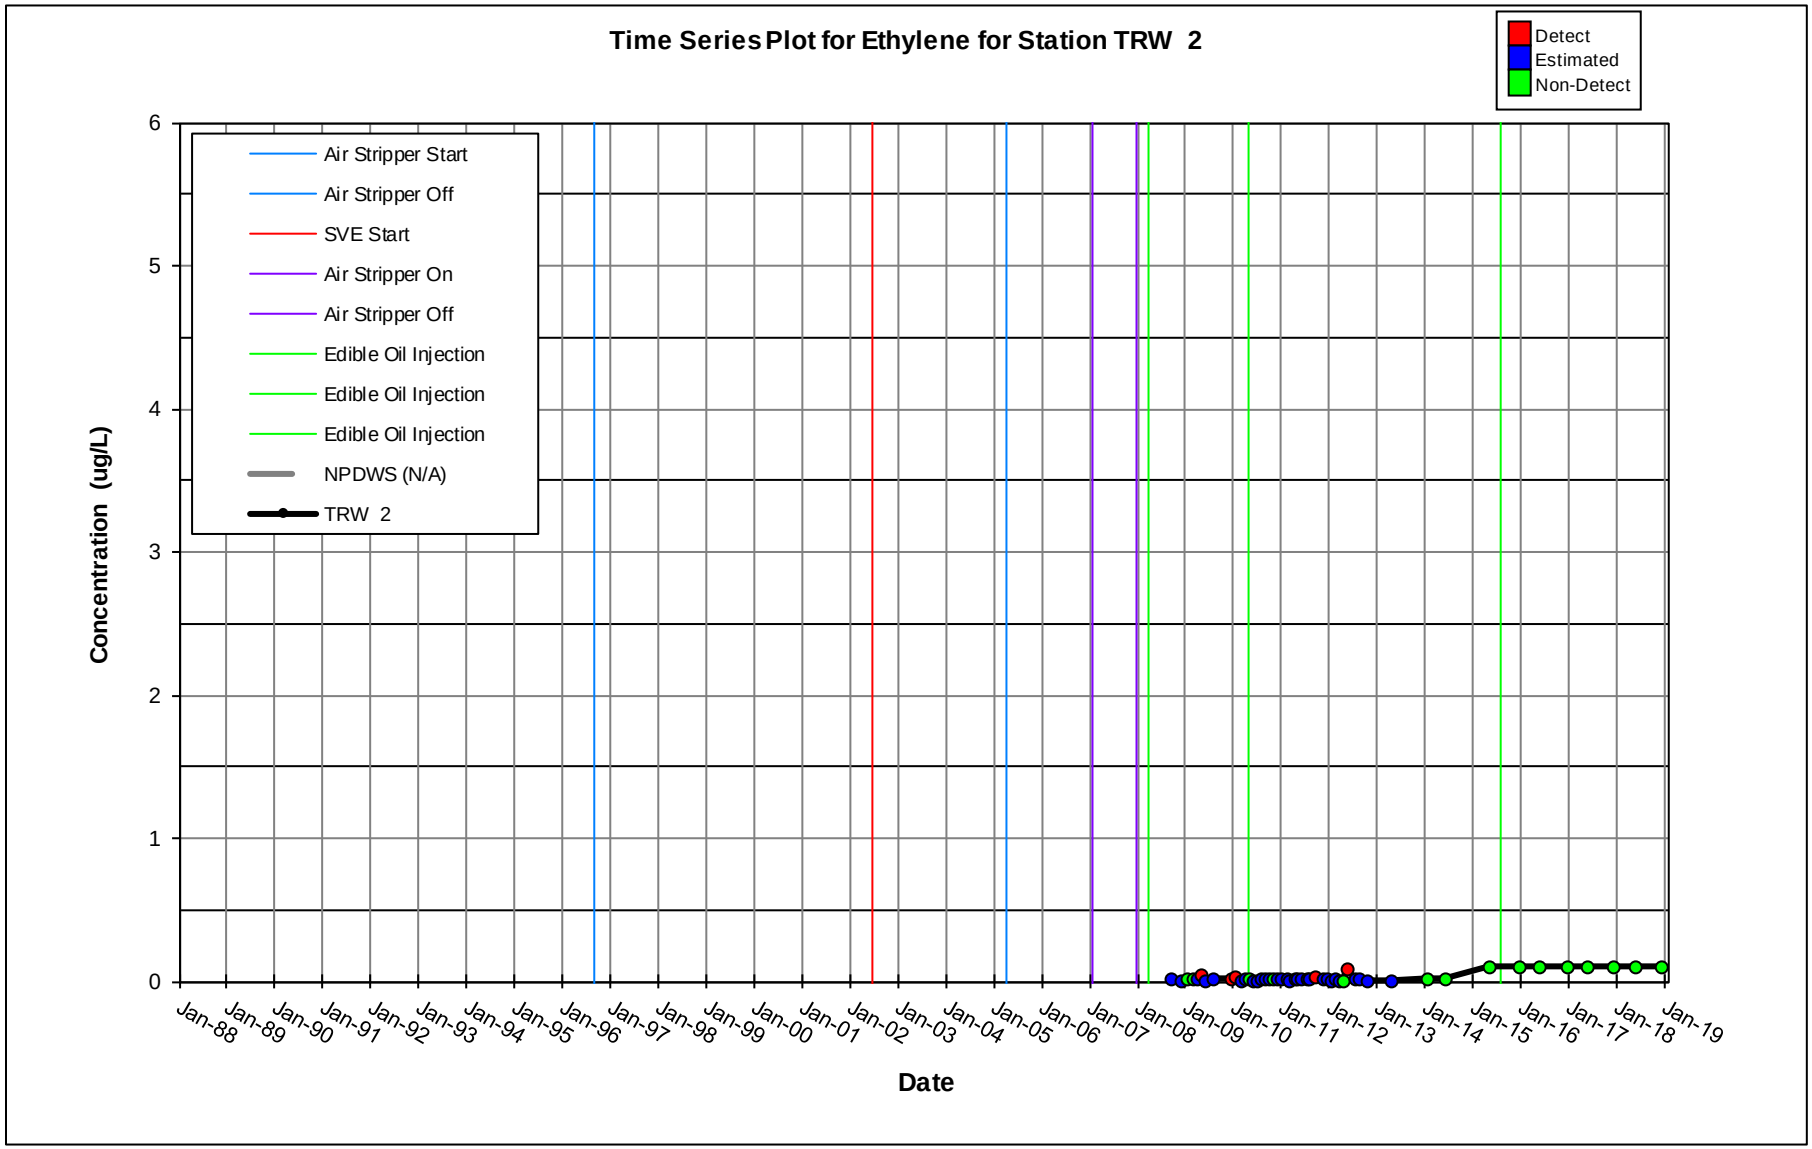
Time Series Plot for Ethylene for Station TRW 2
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TRW 2
Concentration (ug/L)
0
1
2
3
4
5
6
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

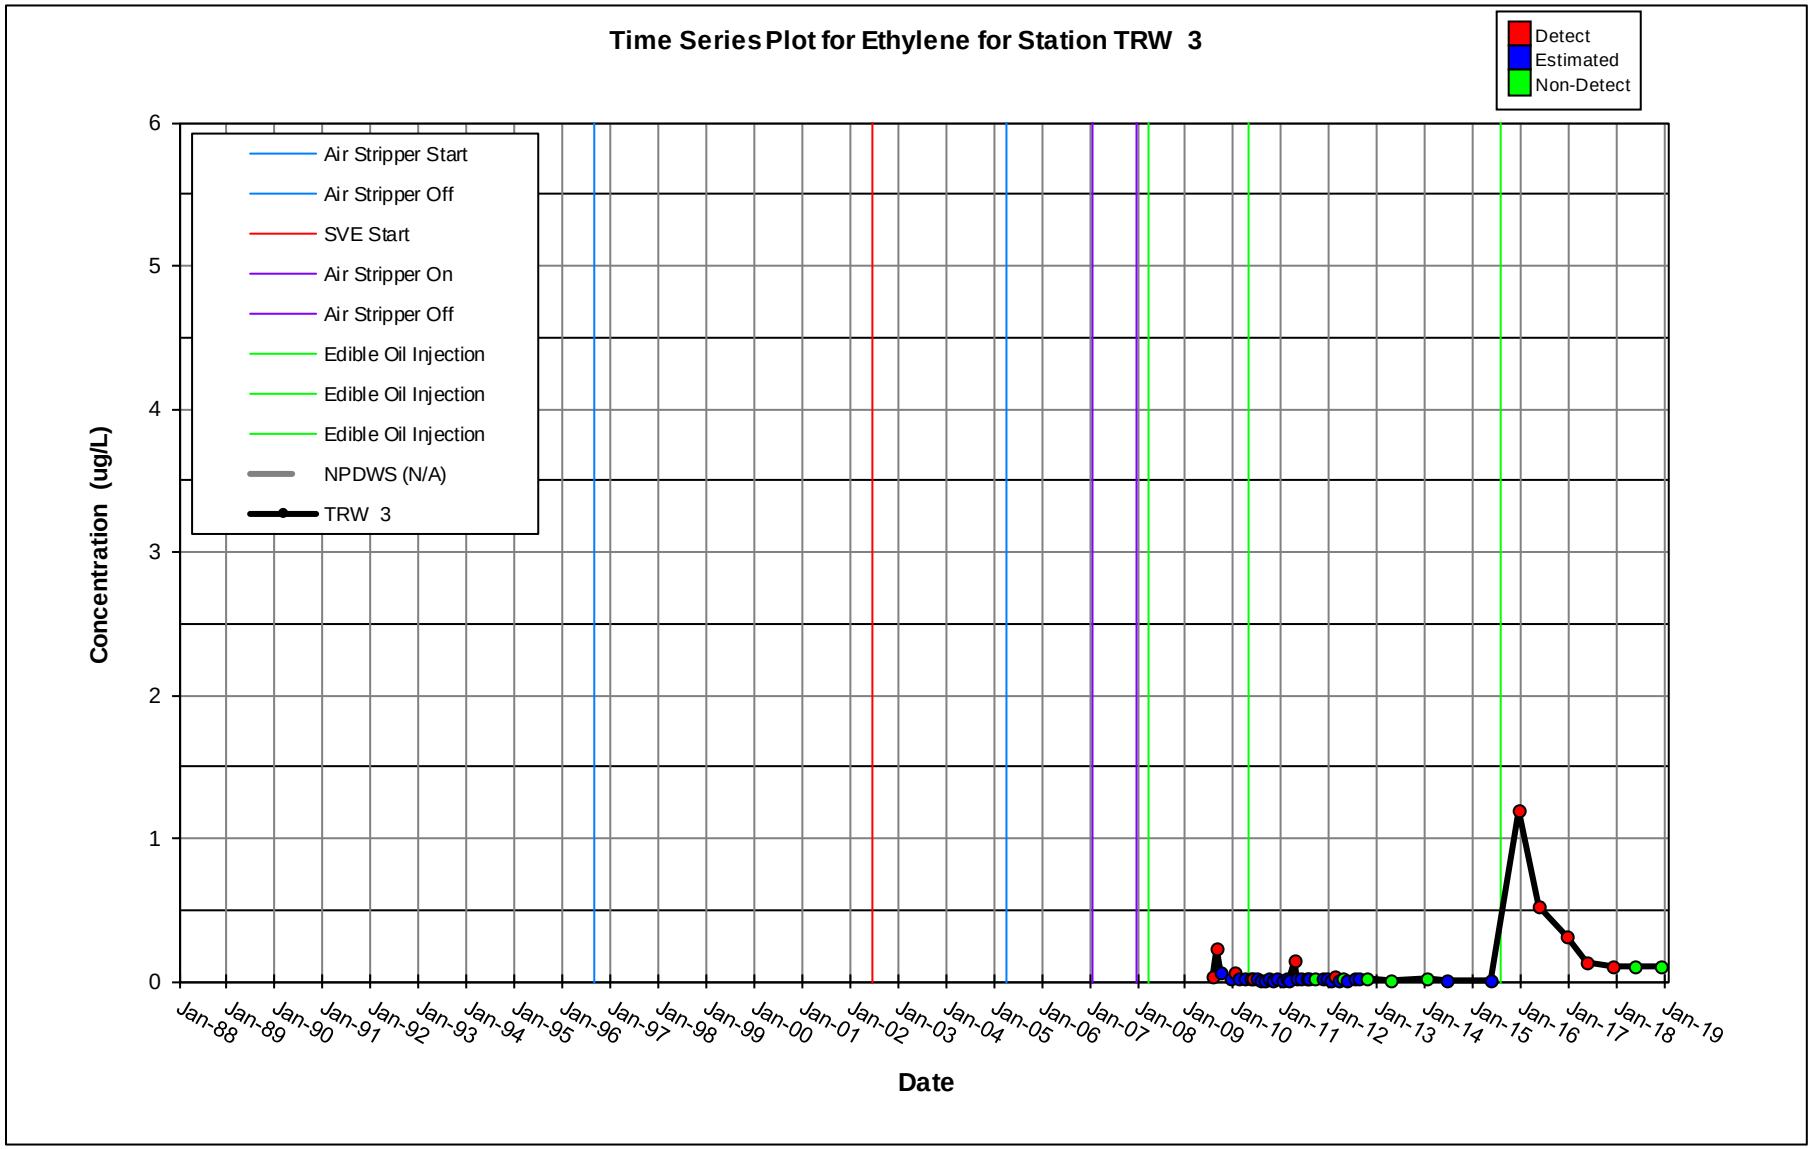
Time Series Plot for Ethylene for Station TRW 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TRW 3
Concentration (ug/L)
0
1
2
3
4
5
6
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

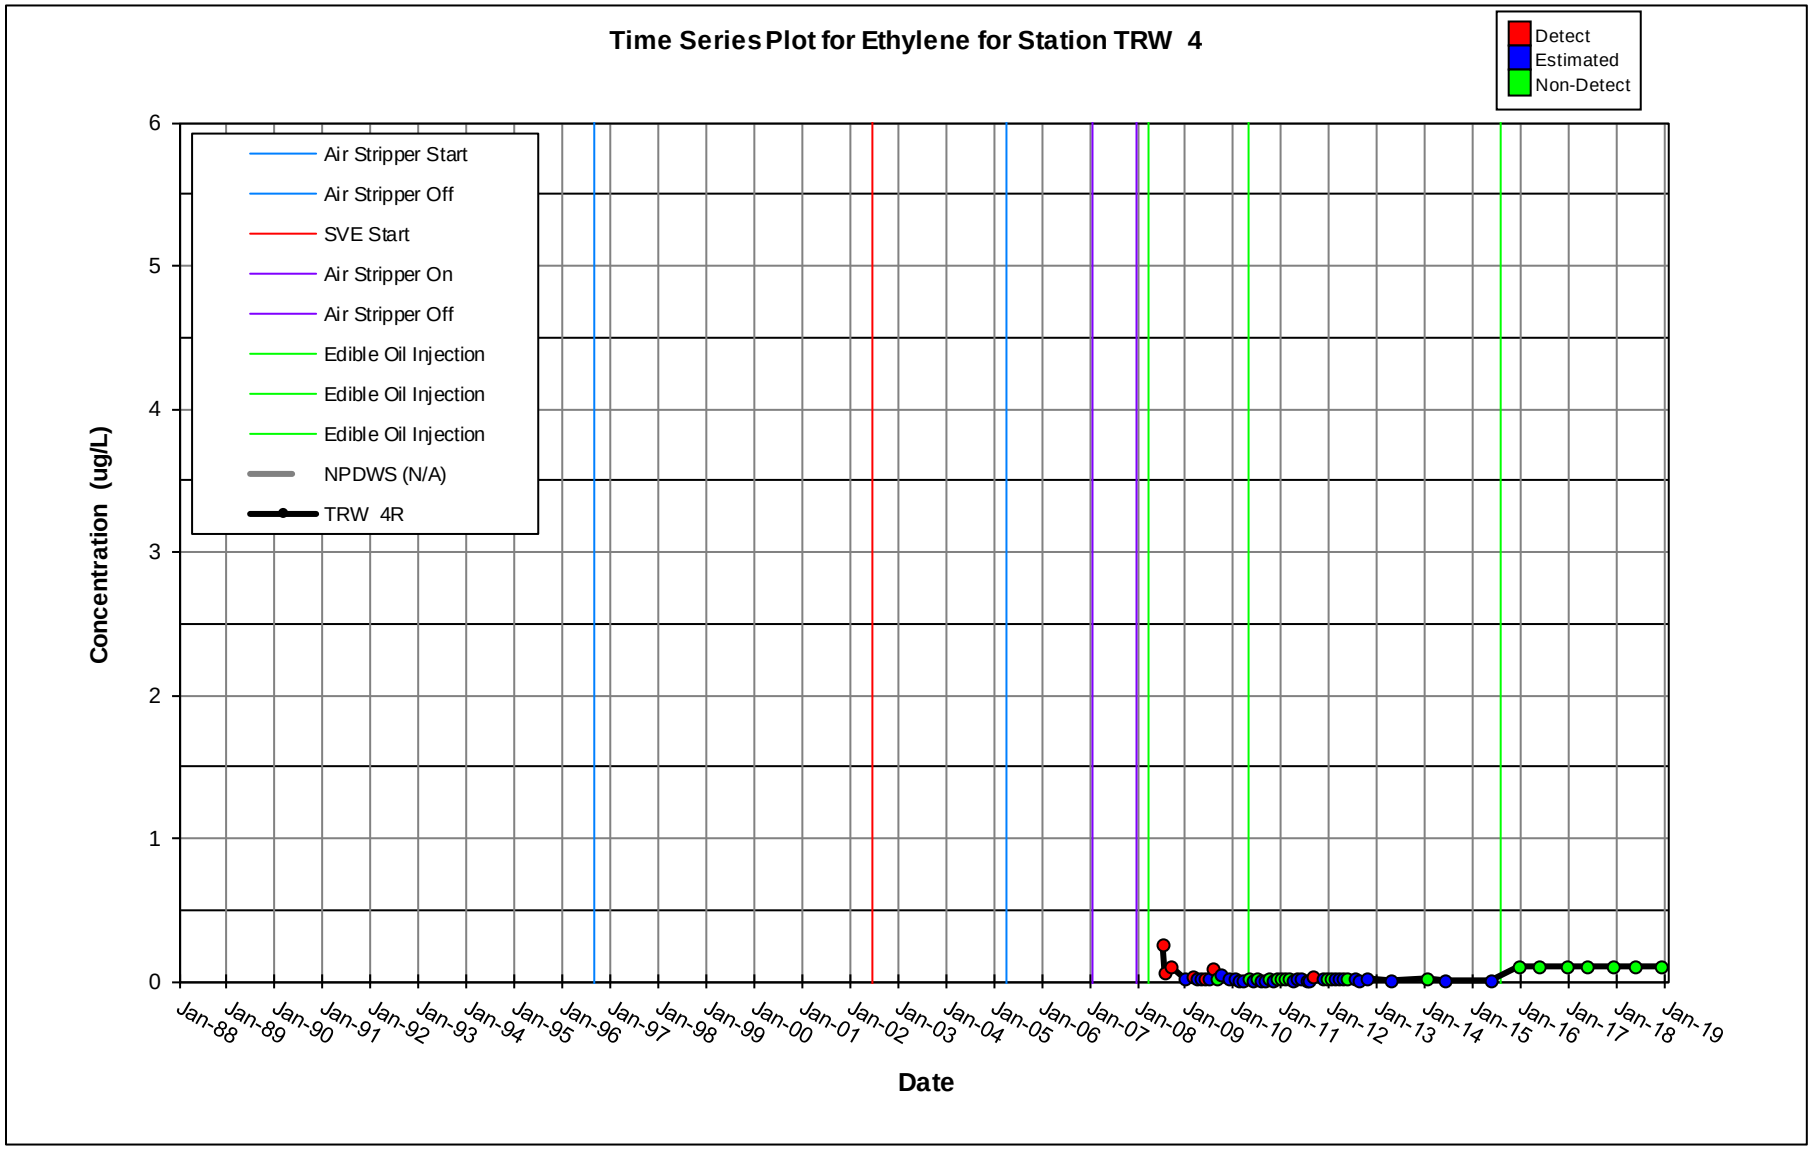
Time Series Plot for Ethylene for Station TRW 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TRW 4R
Concentration (ug/L)
0
1
2
3
4
5
6
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

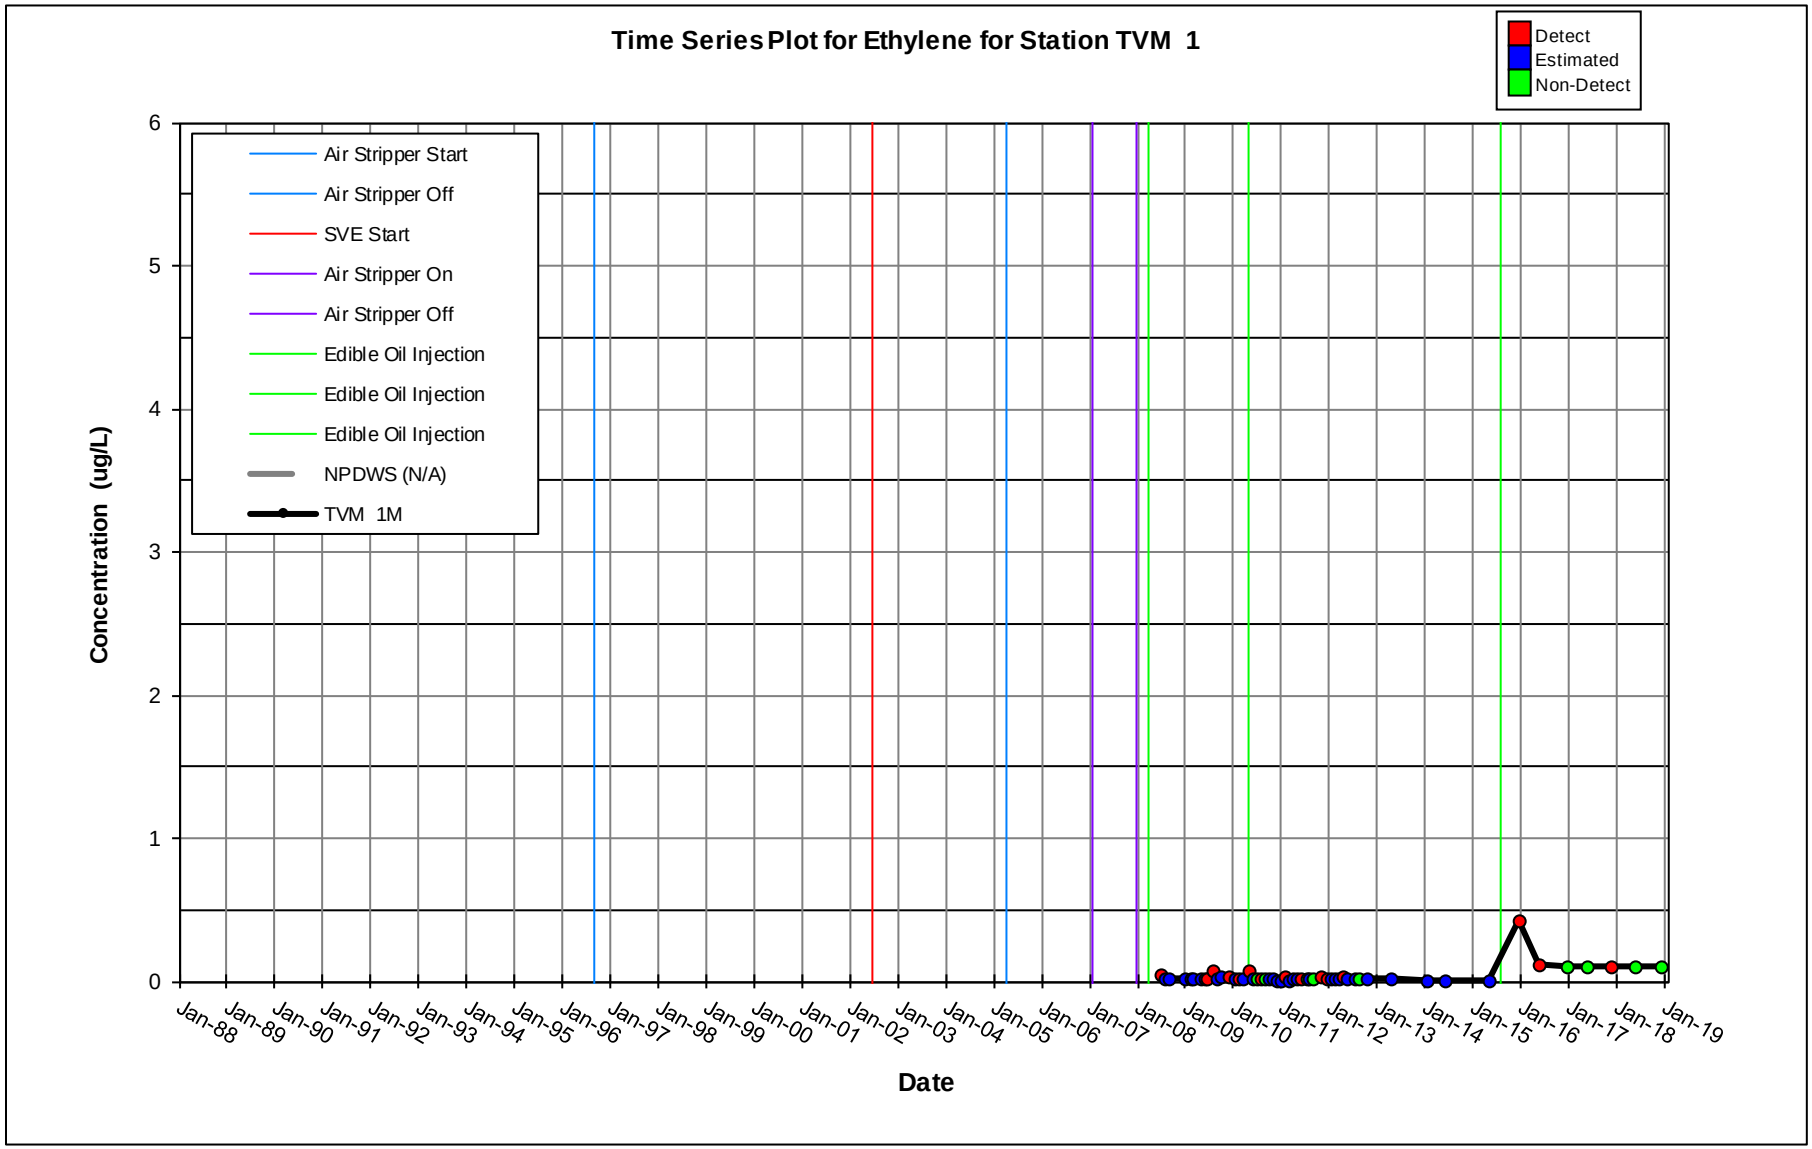
Time Series Plot for Ethylene for Station TVM 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TVM 1M
Concentration (ug/L)
0
1
2
3
4
5
6
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

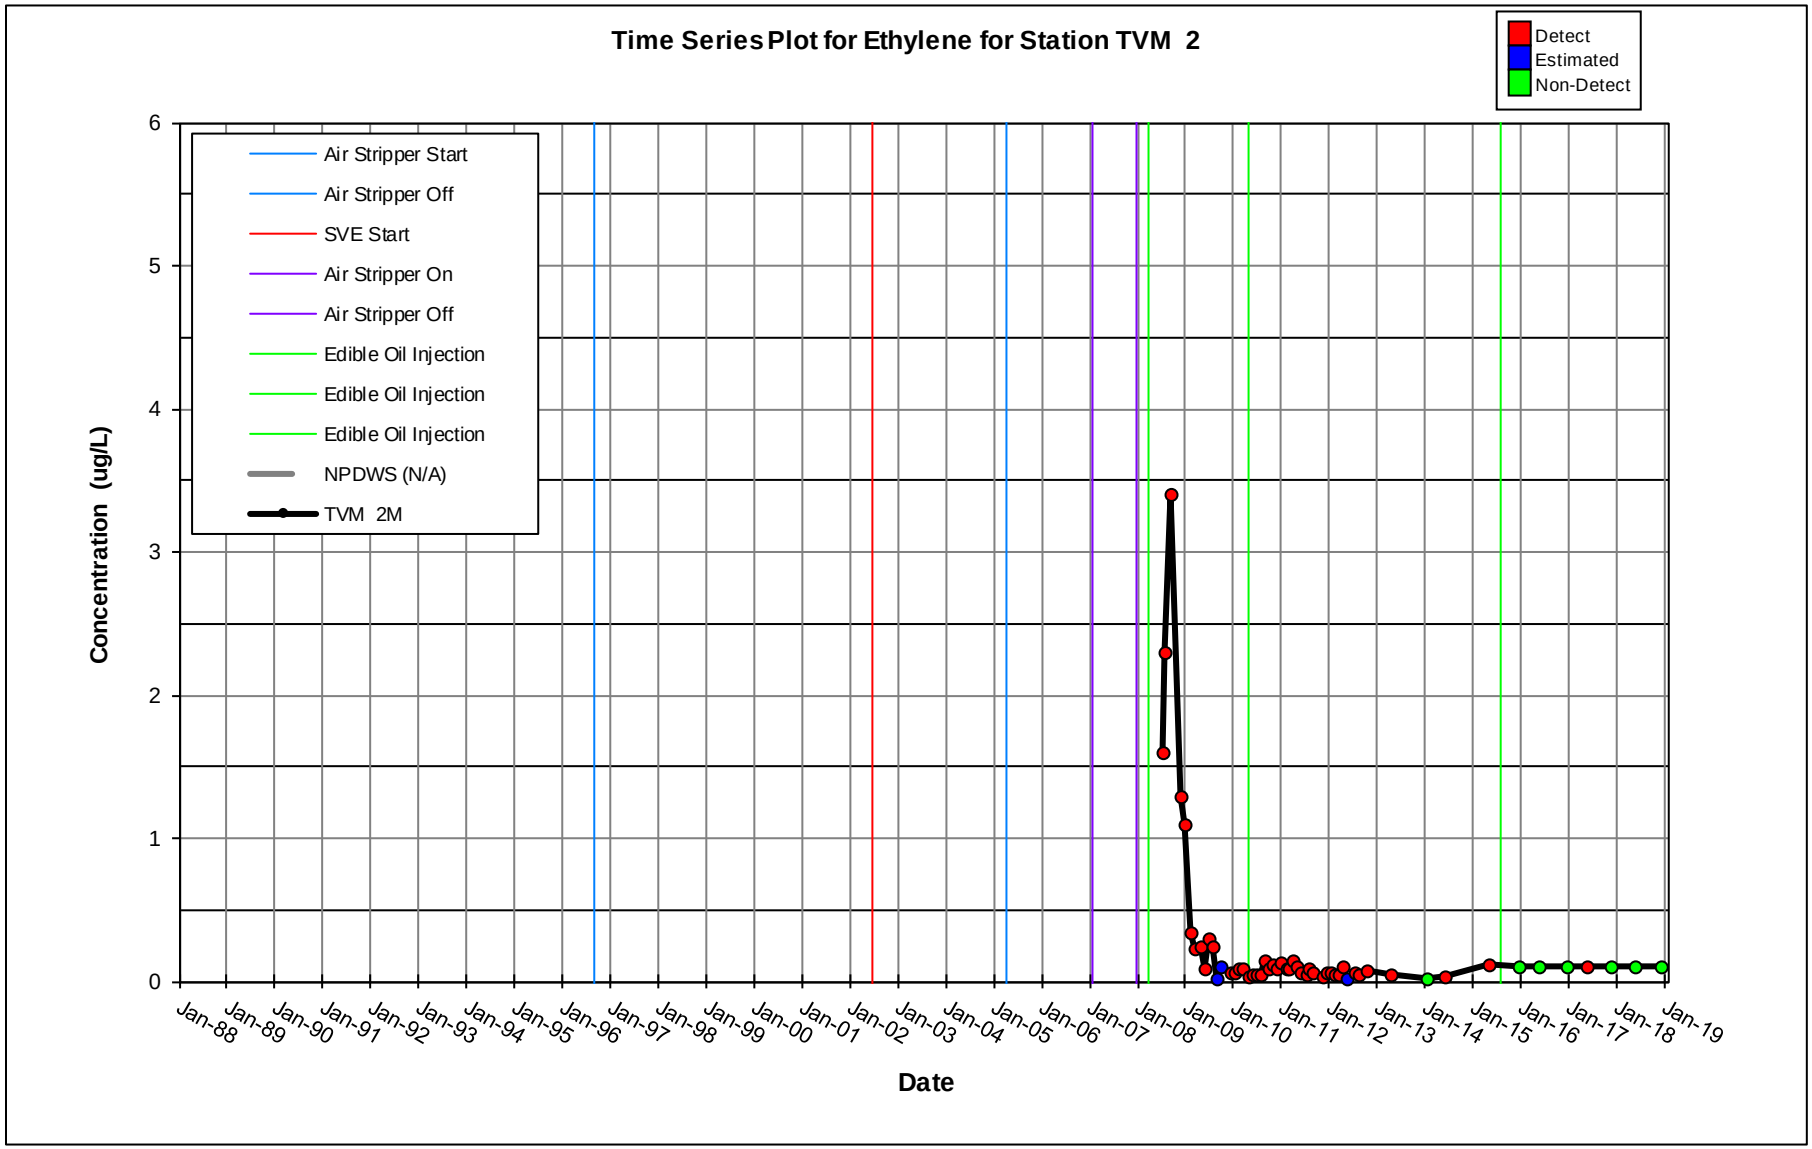
Time Series Plot for Ethylene for Station TVM 2
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TVM 2M
Concentration (ug/L)
0
1
2
3
4
5
6
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

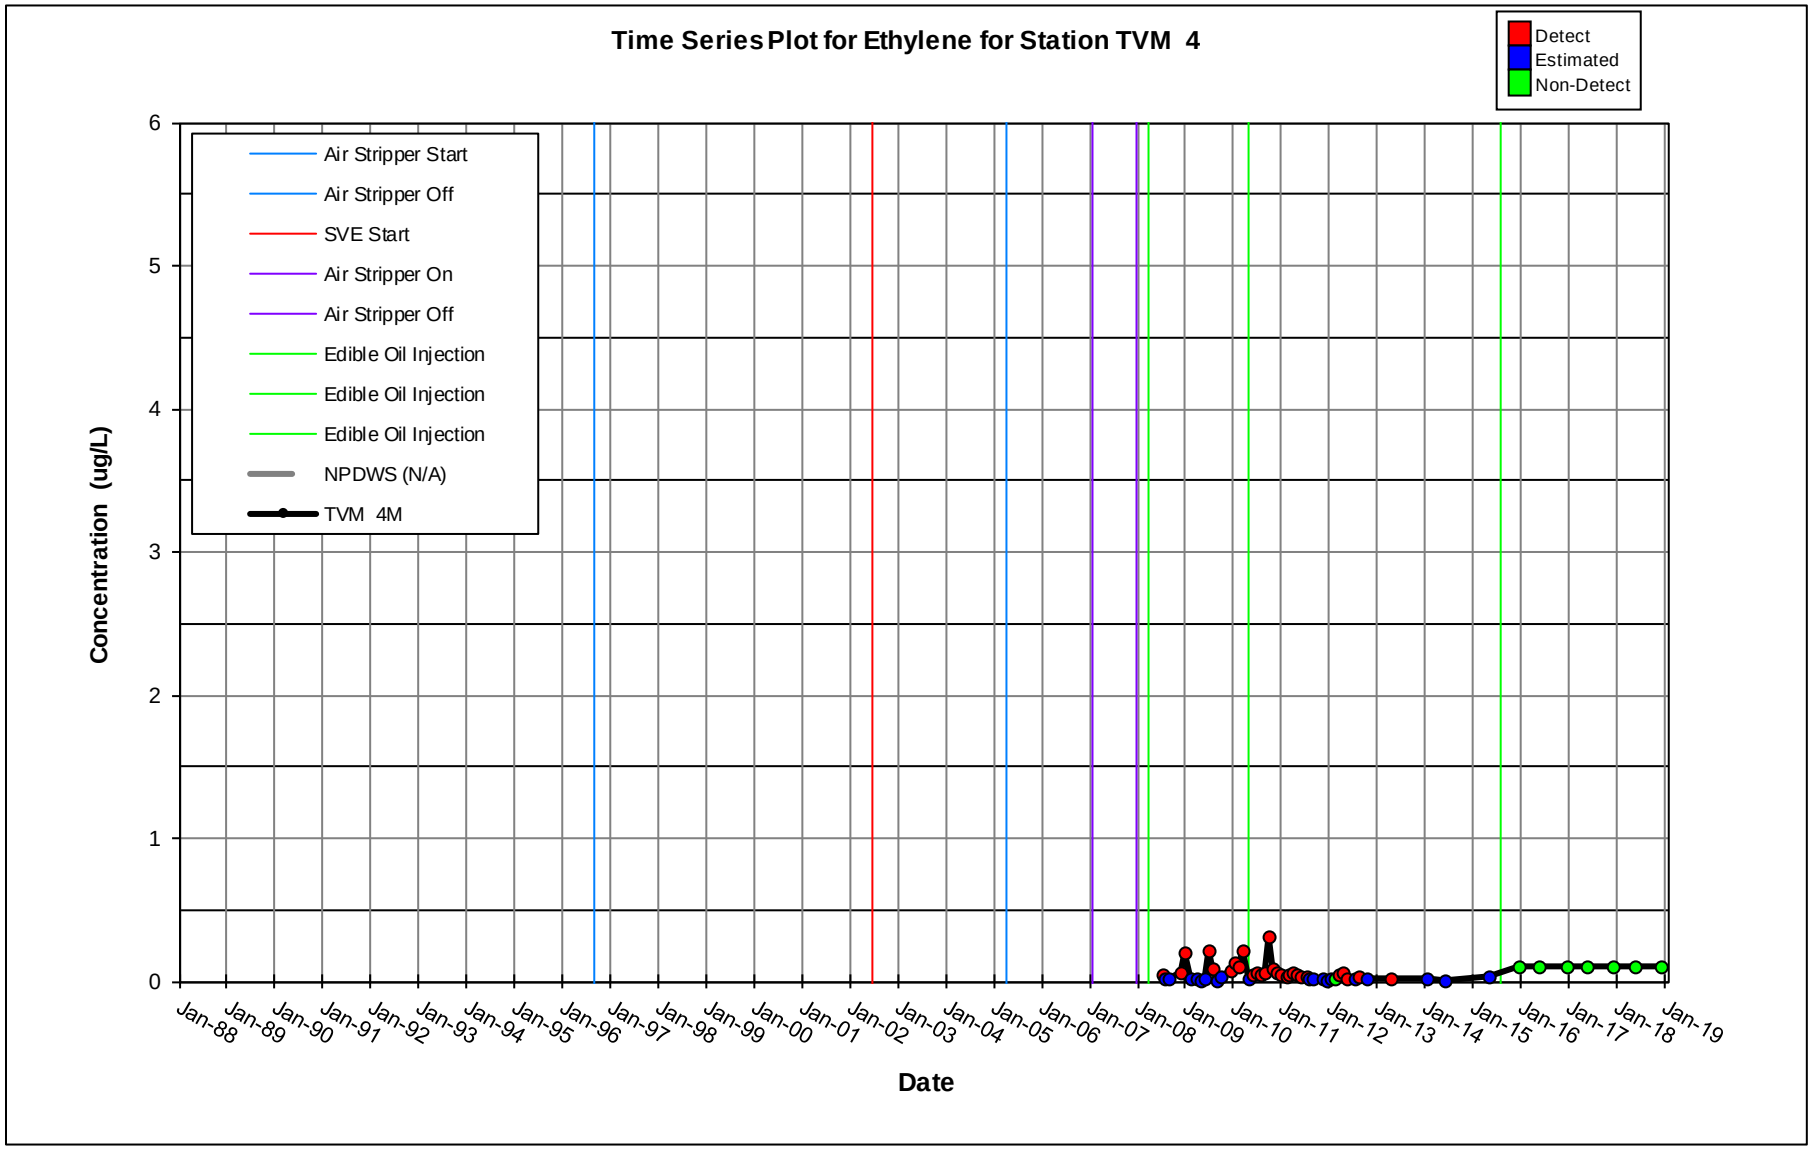
Time Series Plot for Ethylene for Station TVM 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TVM 4M
Concentration (ug/L)
0
1
2
3
4
5
6
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

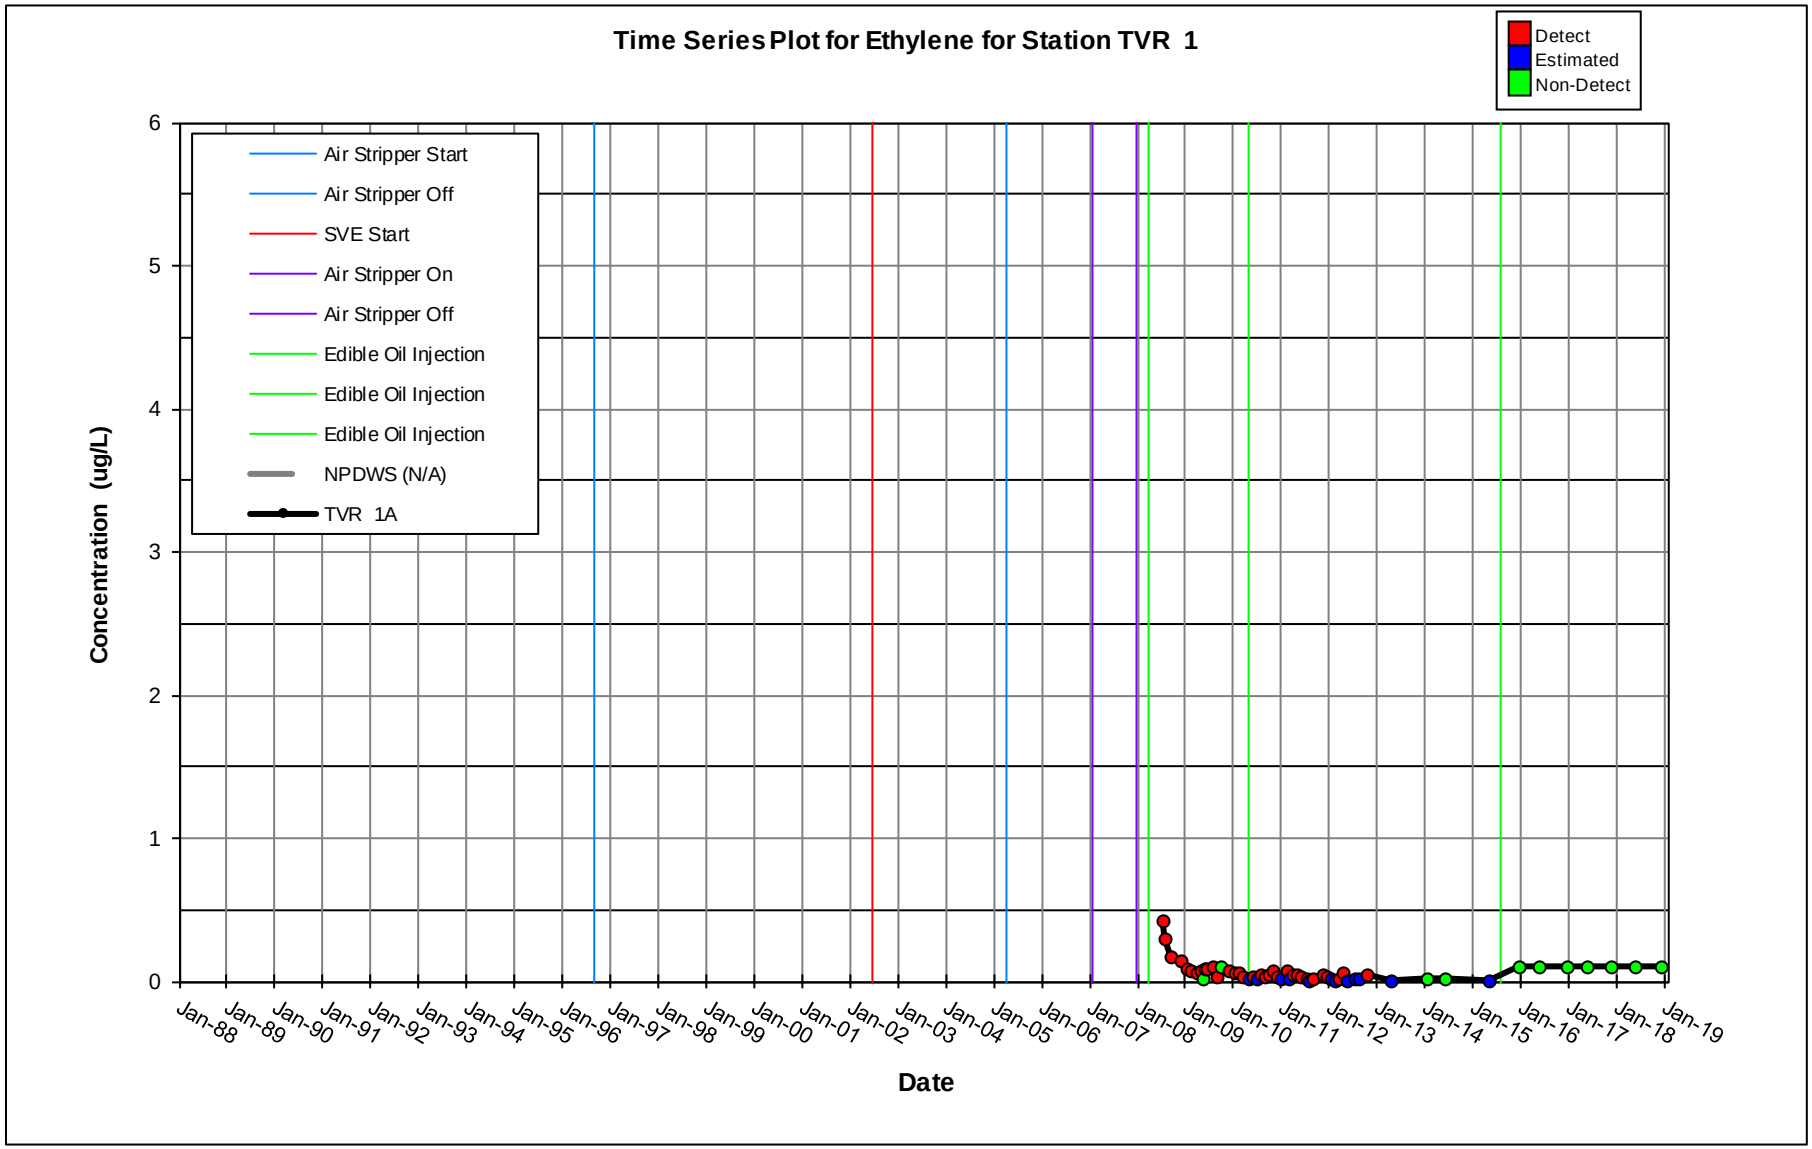
Time Series Plot for Ethylene for Station TVR 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TVR 1A
Concentration (ug/L)
0
1
2
3
4
5
6
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

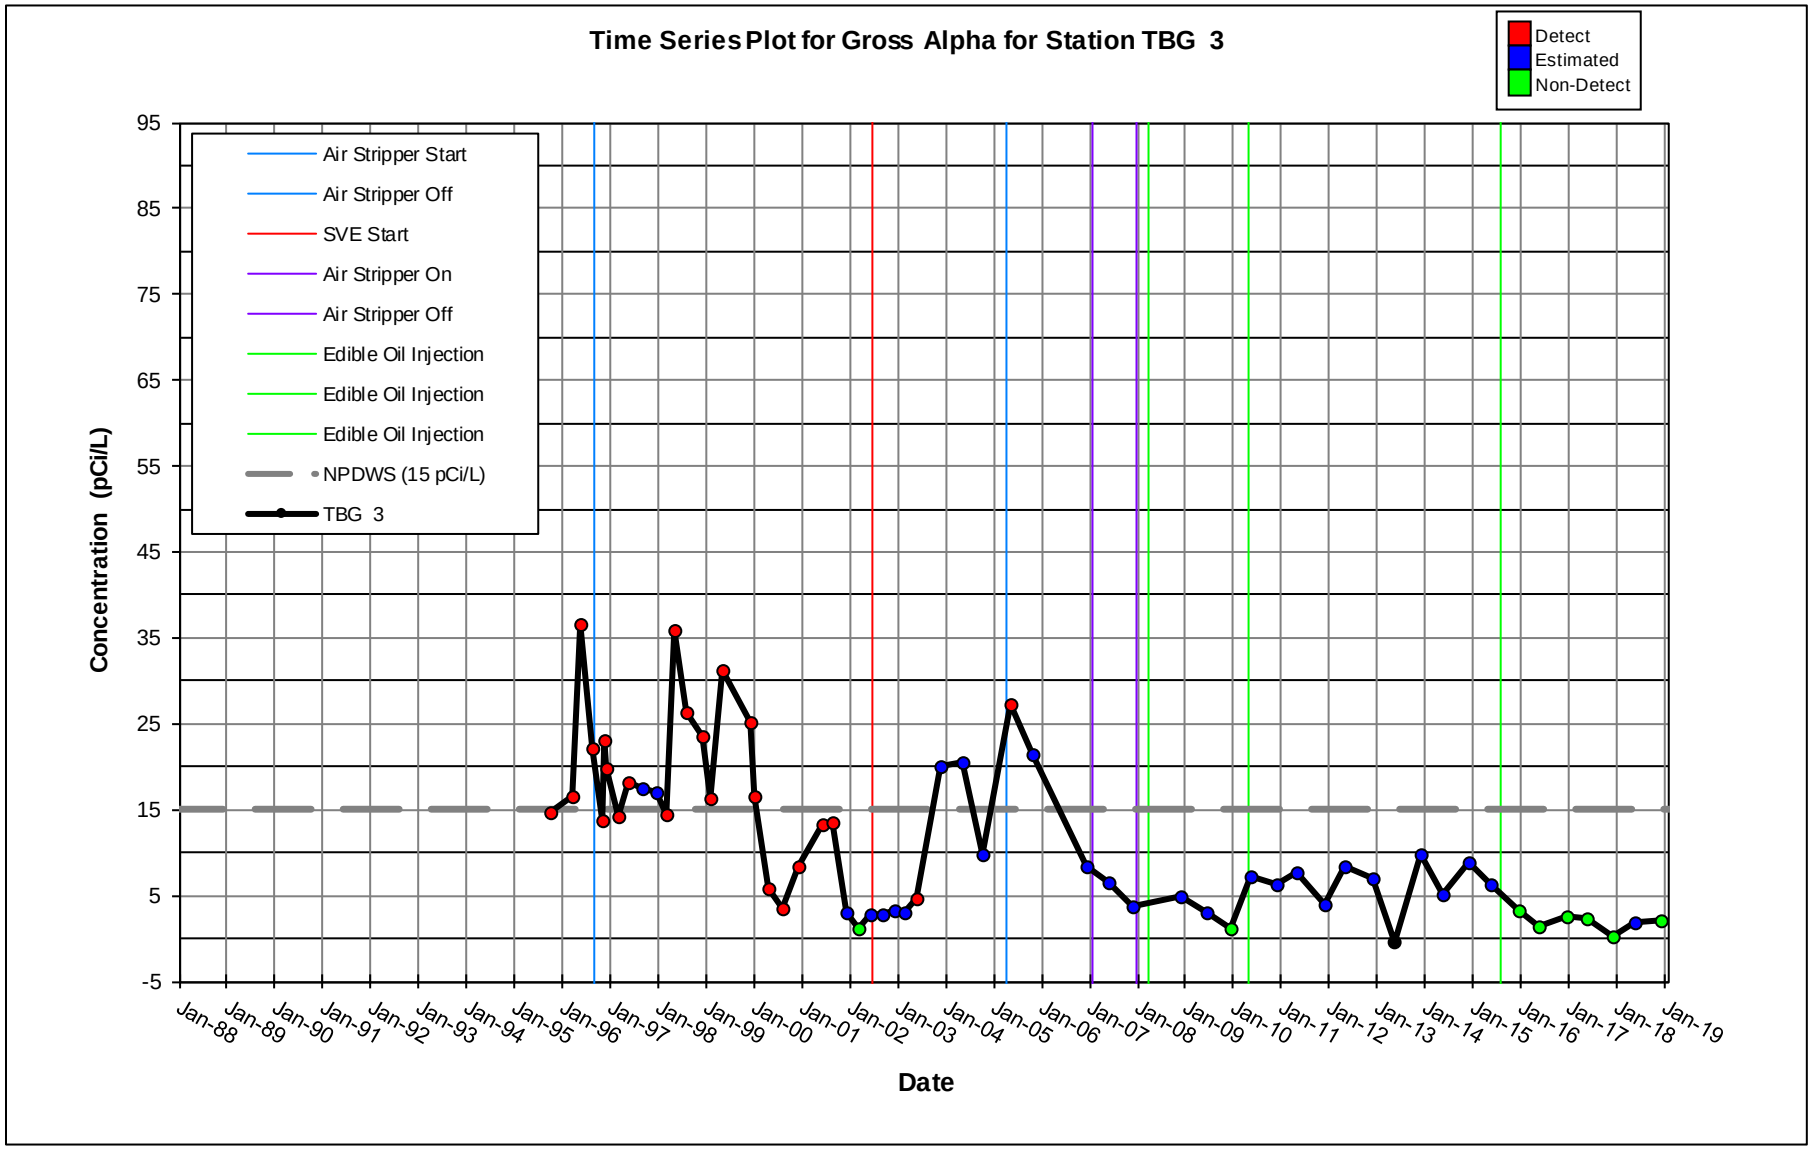
Time Series Plot for Gross Alpha for Station TBG 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (15 pCi/L)
TBG 3
Concentration (pCi/L)
95
85
75
65
55
45
35
25
15
5
-5
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

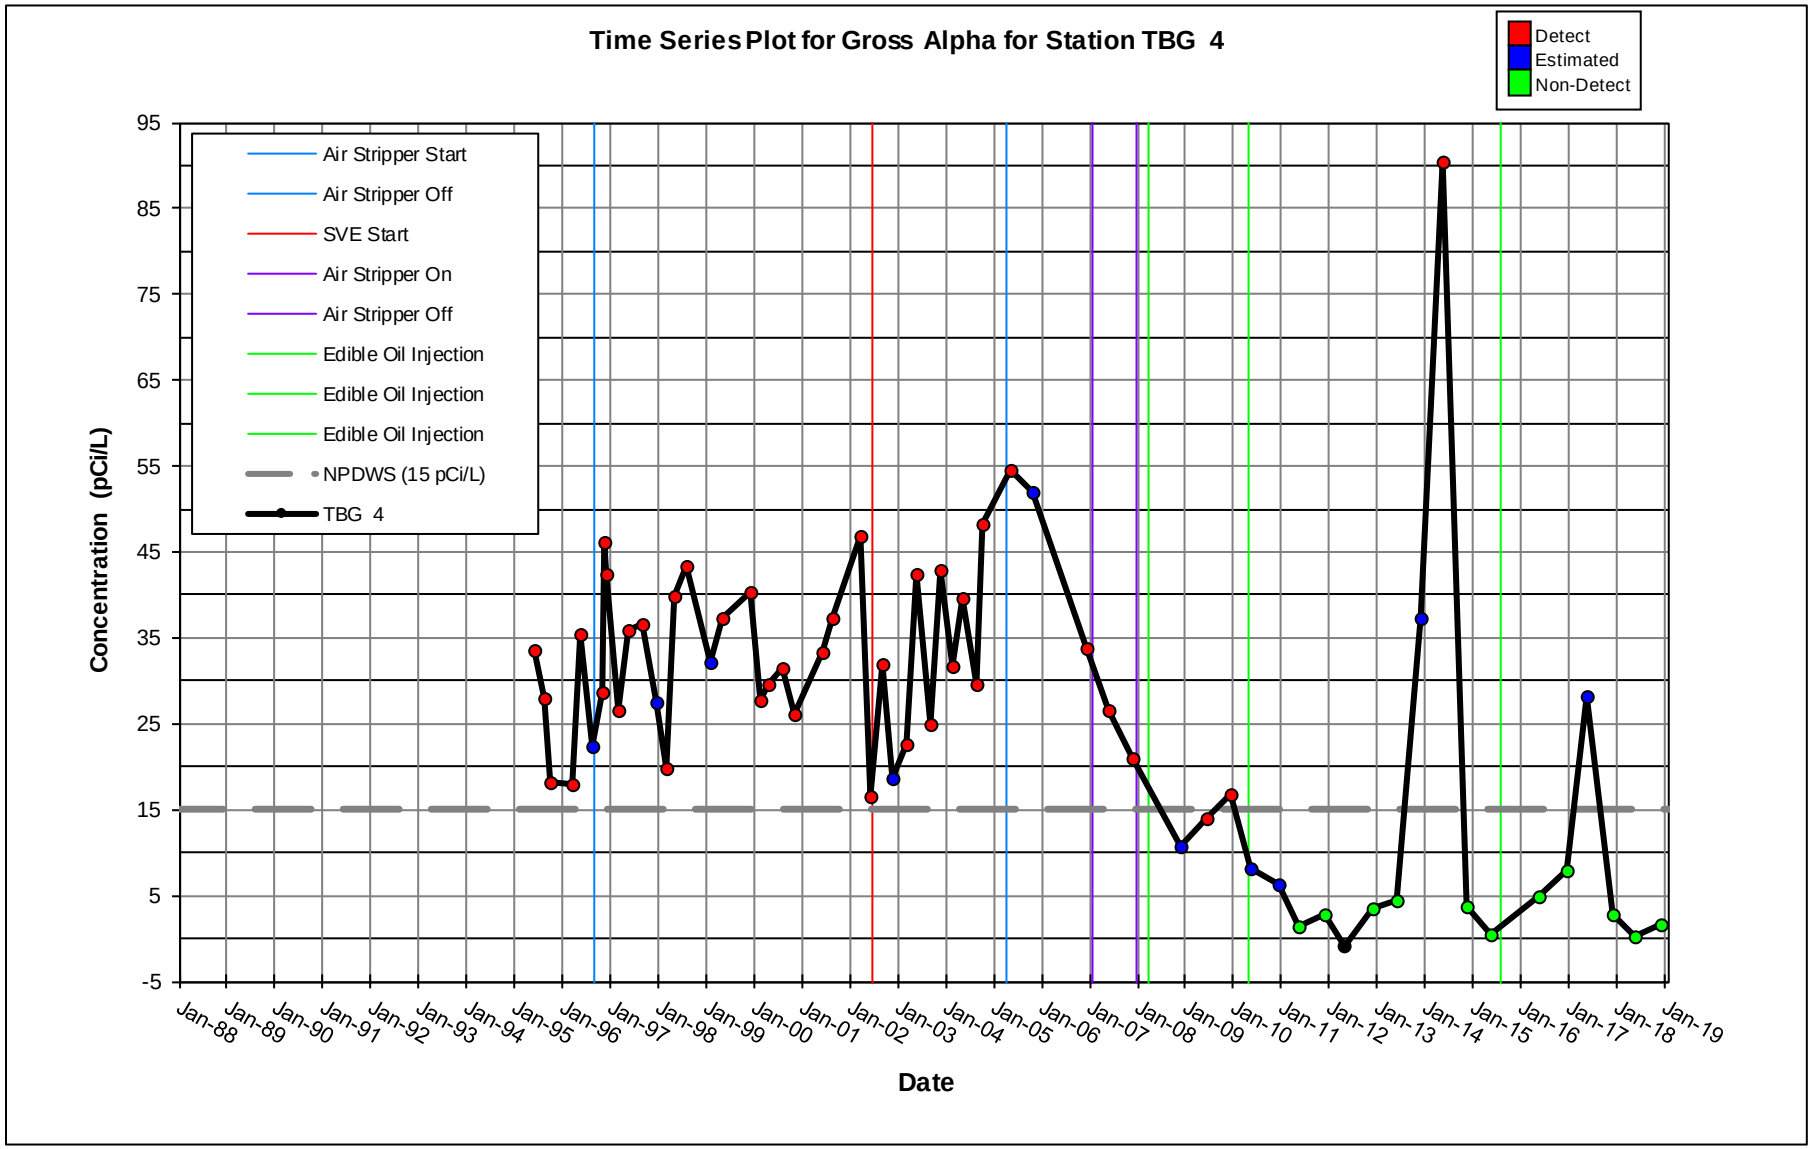
Time Series Plot for Gross Alpha for Station TBG 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (15 pCi/L)
TBG 4
Concentration (pCi/L)
95
85
75
65
55
45
35
25
15
5
-5
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

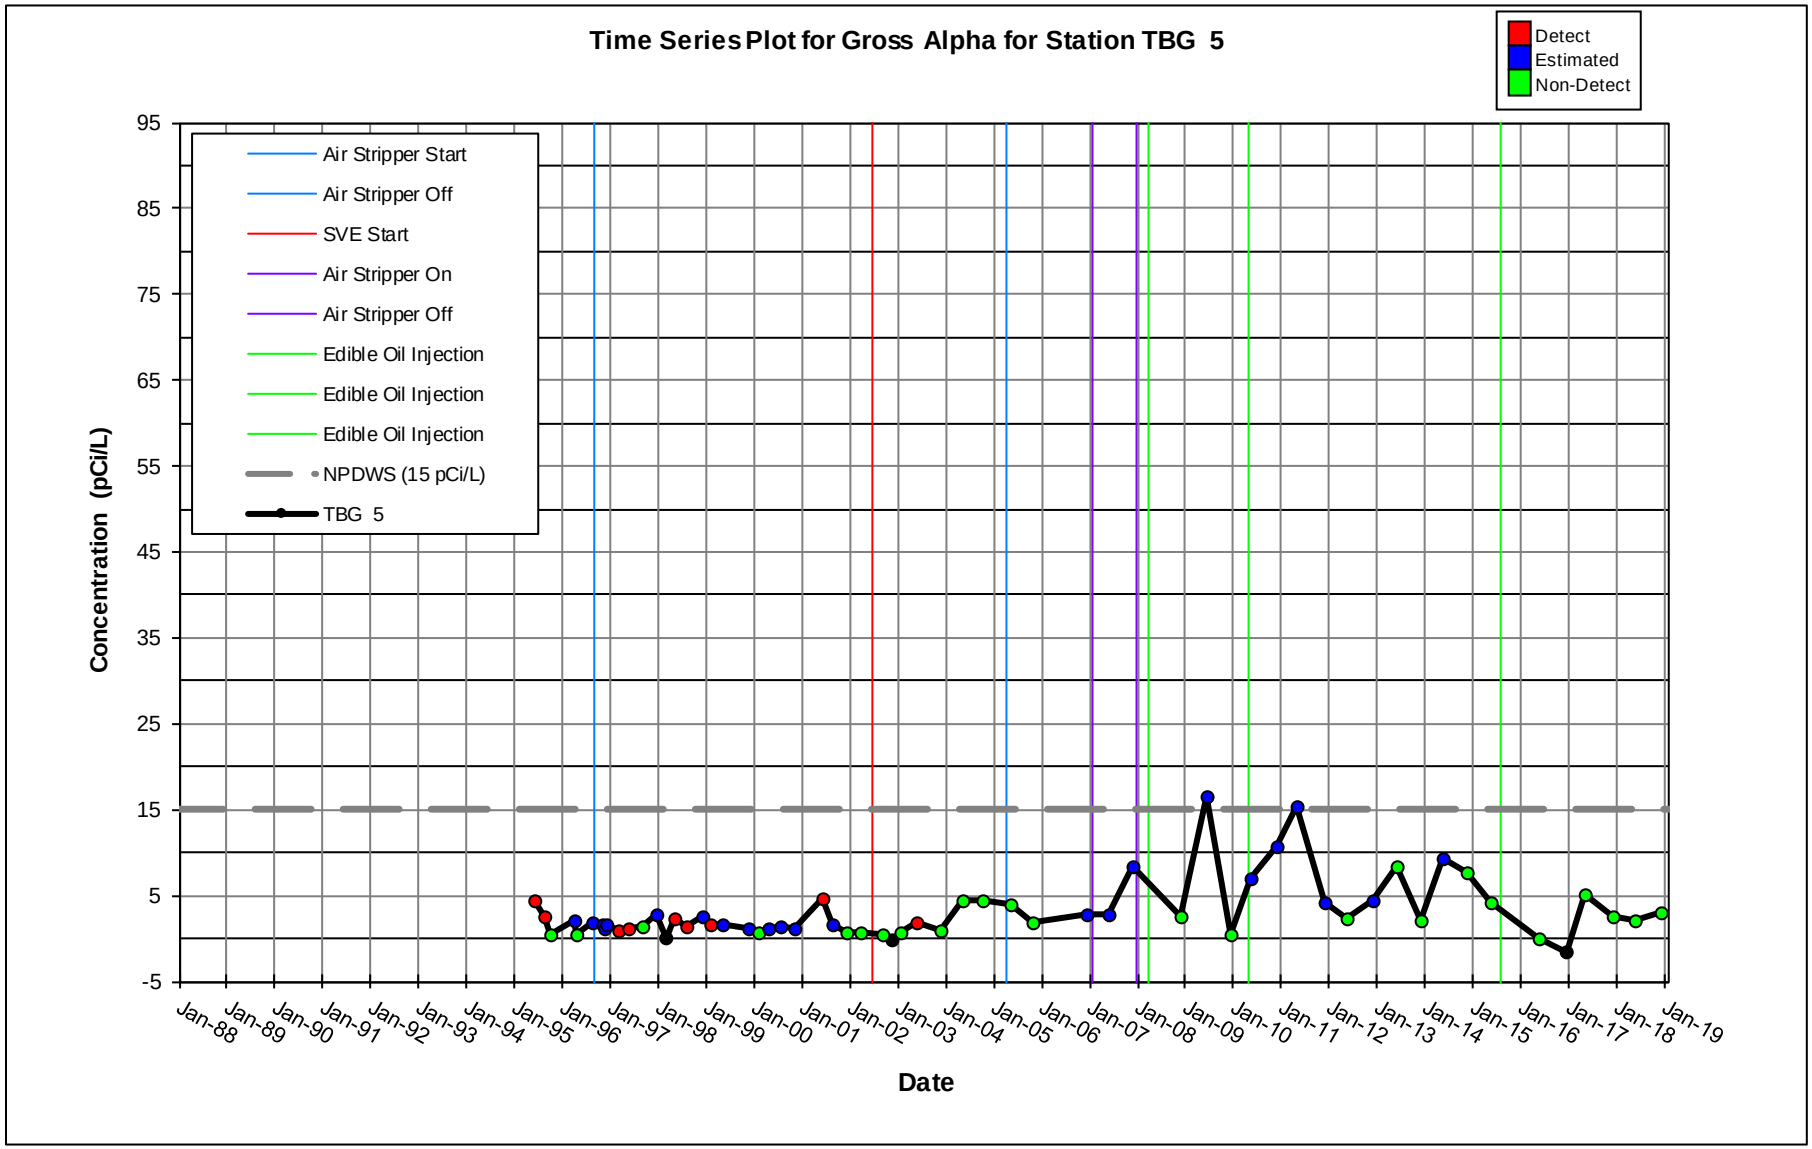
Time Series Plot for Gross Alpha for Station TBG 5
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (15 pCi/L)
TBG 5
Concentration (pCi/L)
95
85
75
65
55
45
35
25
15
5
-5
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

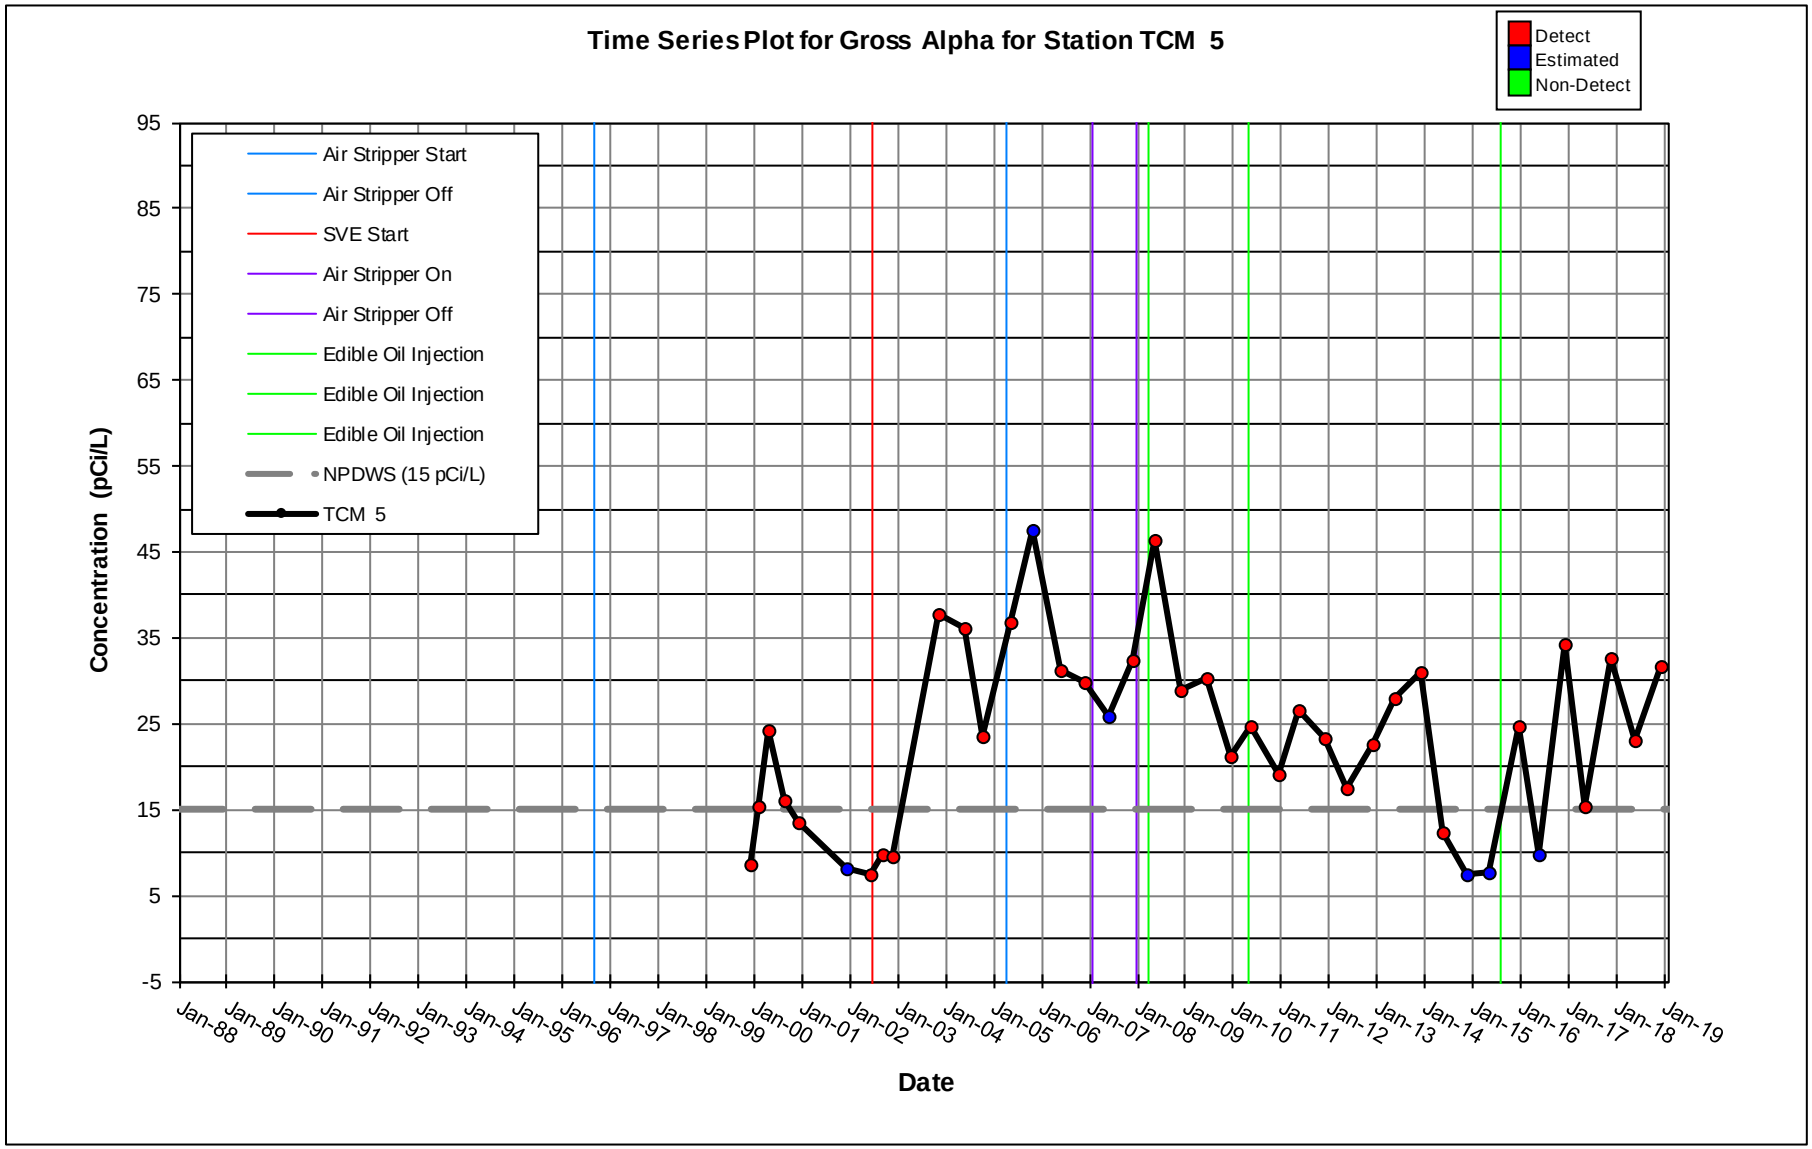
Time Series Plot for Gross Alpha for Station TCM 5
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (15 pCi/L)
TCM 5
Concentration (pCi/L)
95
85
75
65
55
45
35
25
15
5
-5
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

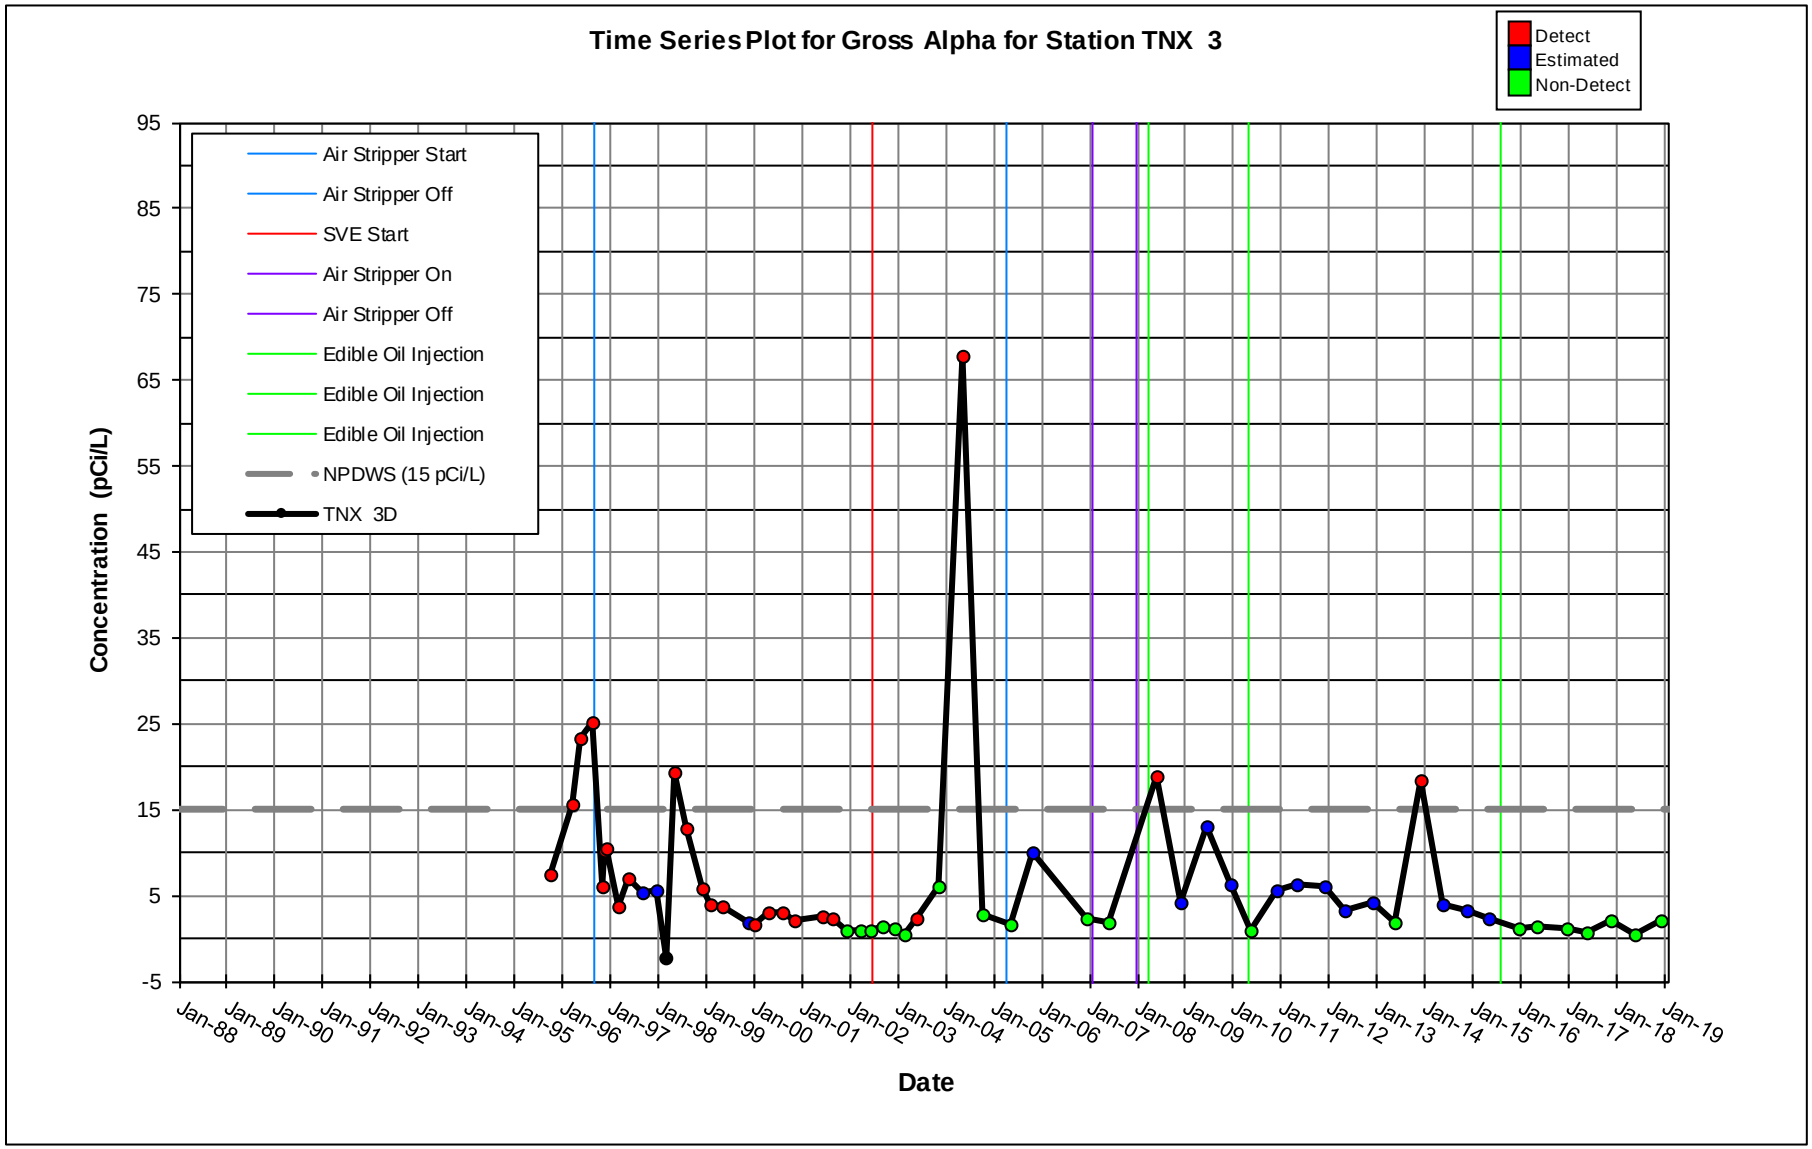
Time Series Plot for Gross Alpha for Station TNX 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (15 pCi/L)
TNX 3D
Concentration (pCi/L)
95
85
75
65
55
45
35
25
15
5
-5
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

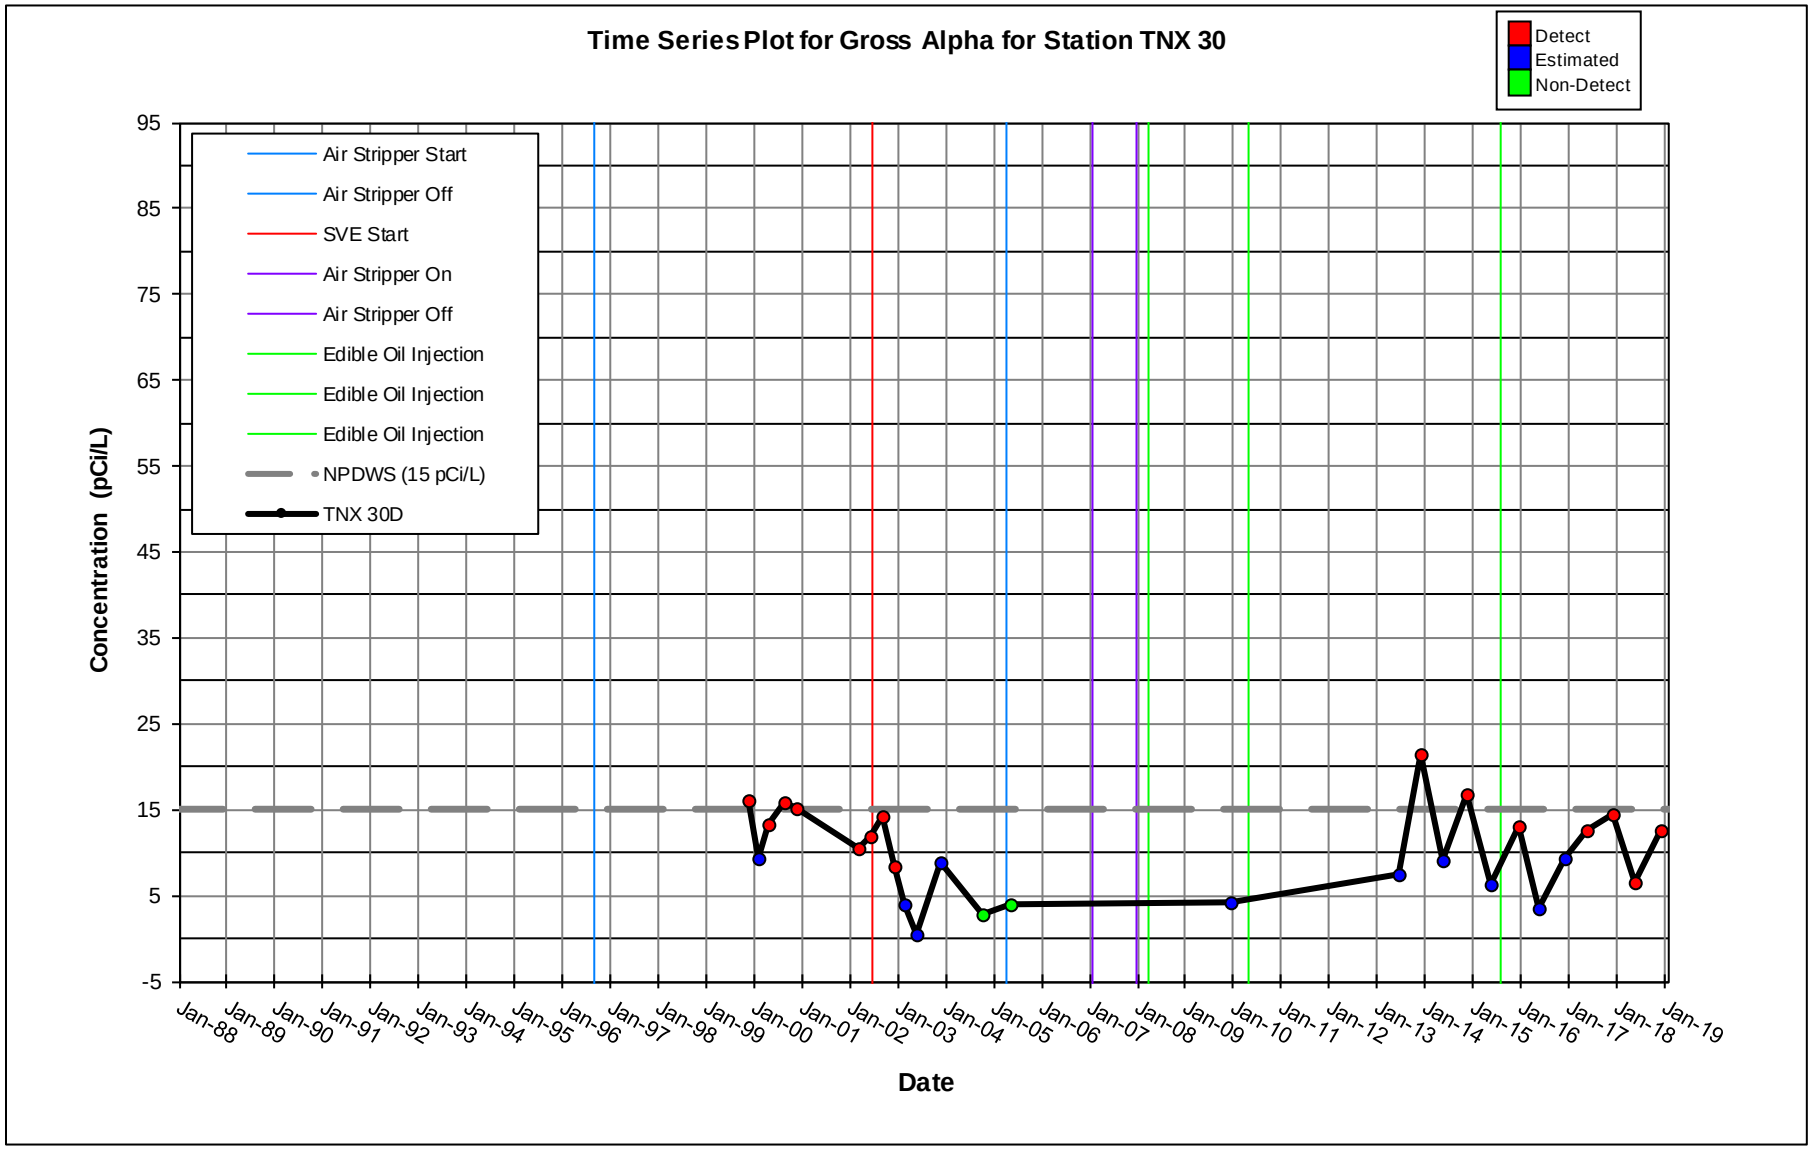
Time Series Plot for Gross Alpha for Station TNX 30
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (15 pCi/L)
TNX 30D
Concentration (pCi/L)
95
85
75
65
55
45
35
25
15
5
-5
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

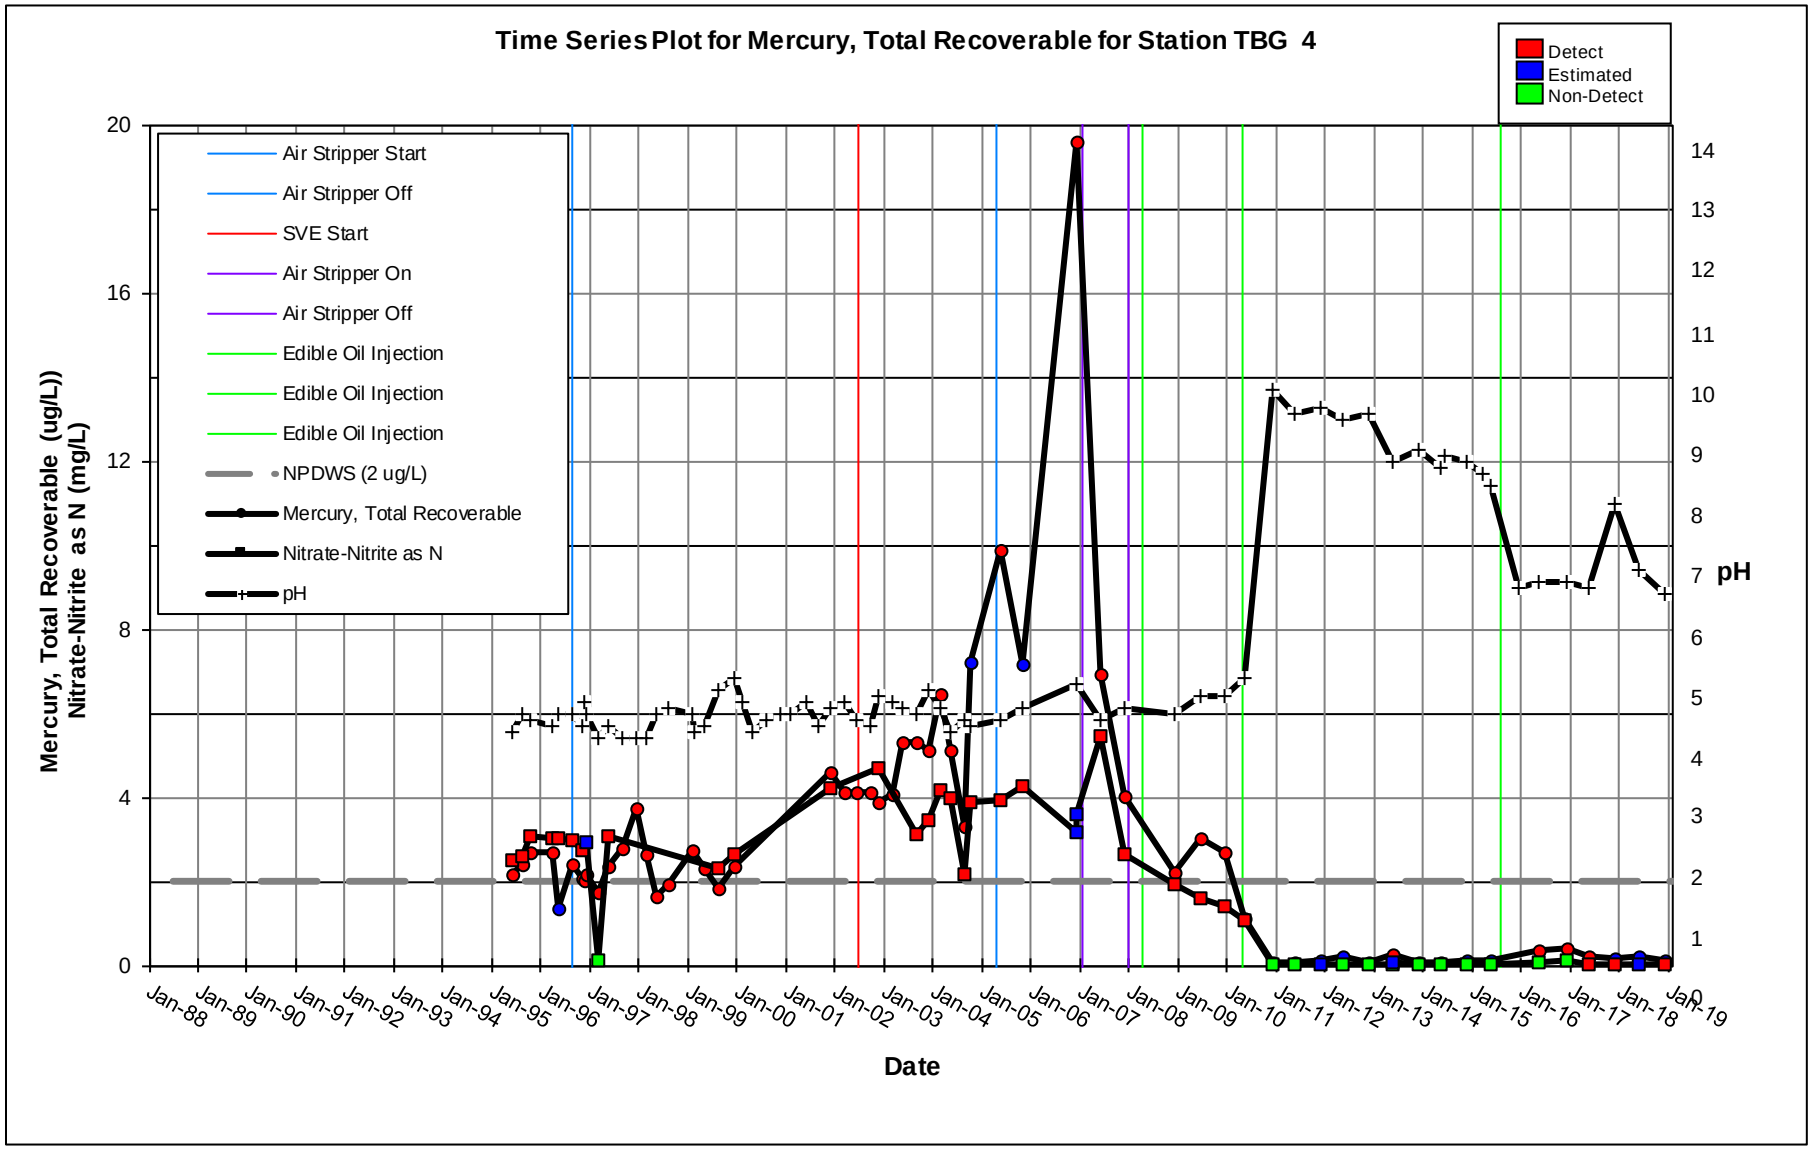
Time Series Plot for Mercury, Total Recoverable for Station TBG 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (2 ug/L)
Mercury, Total Recoverable
Nitrate-Nitrite as N
pH
Mercury, Total Recoverable (ug/L))
Nitrate-Nitrite as N (mg/L)
pH
Date
0
4
8
12
16
20
1
2
3
4
5
6
7
8
9
10
11
12
13
14
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19

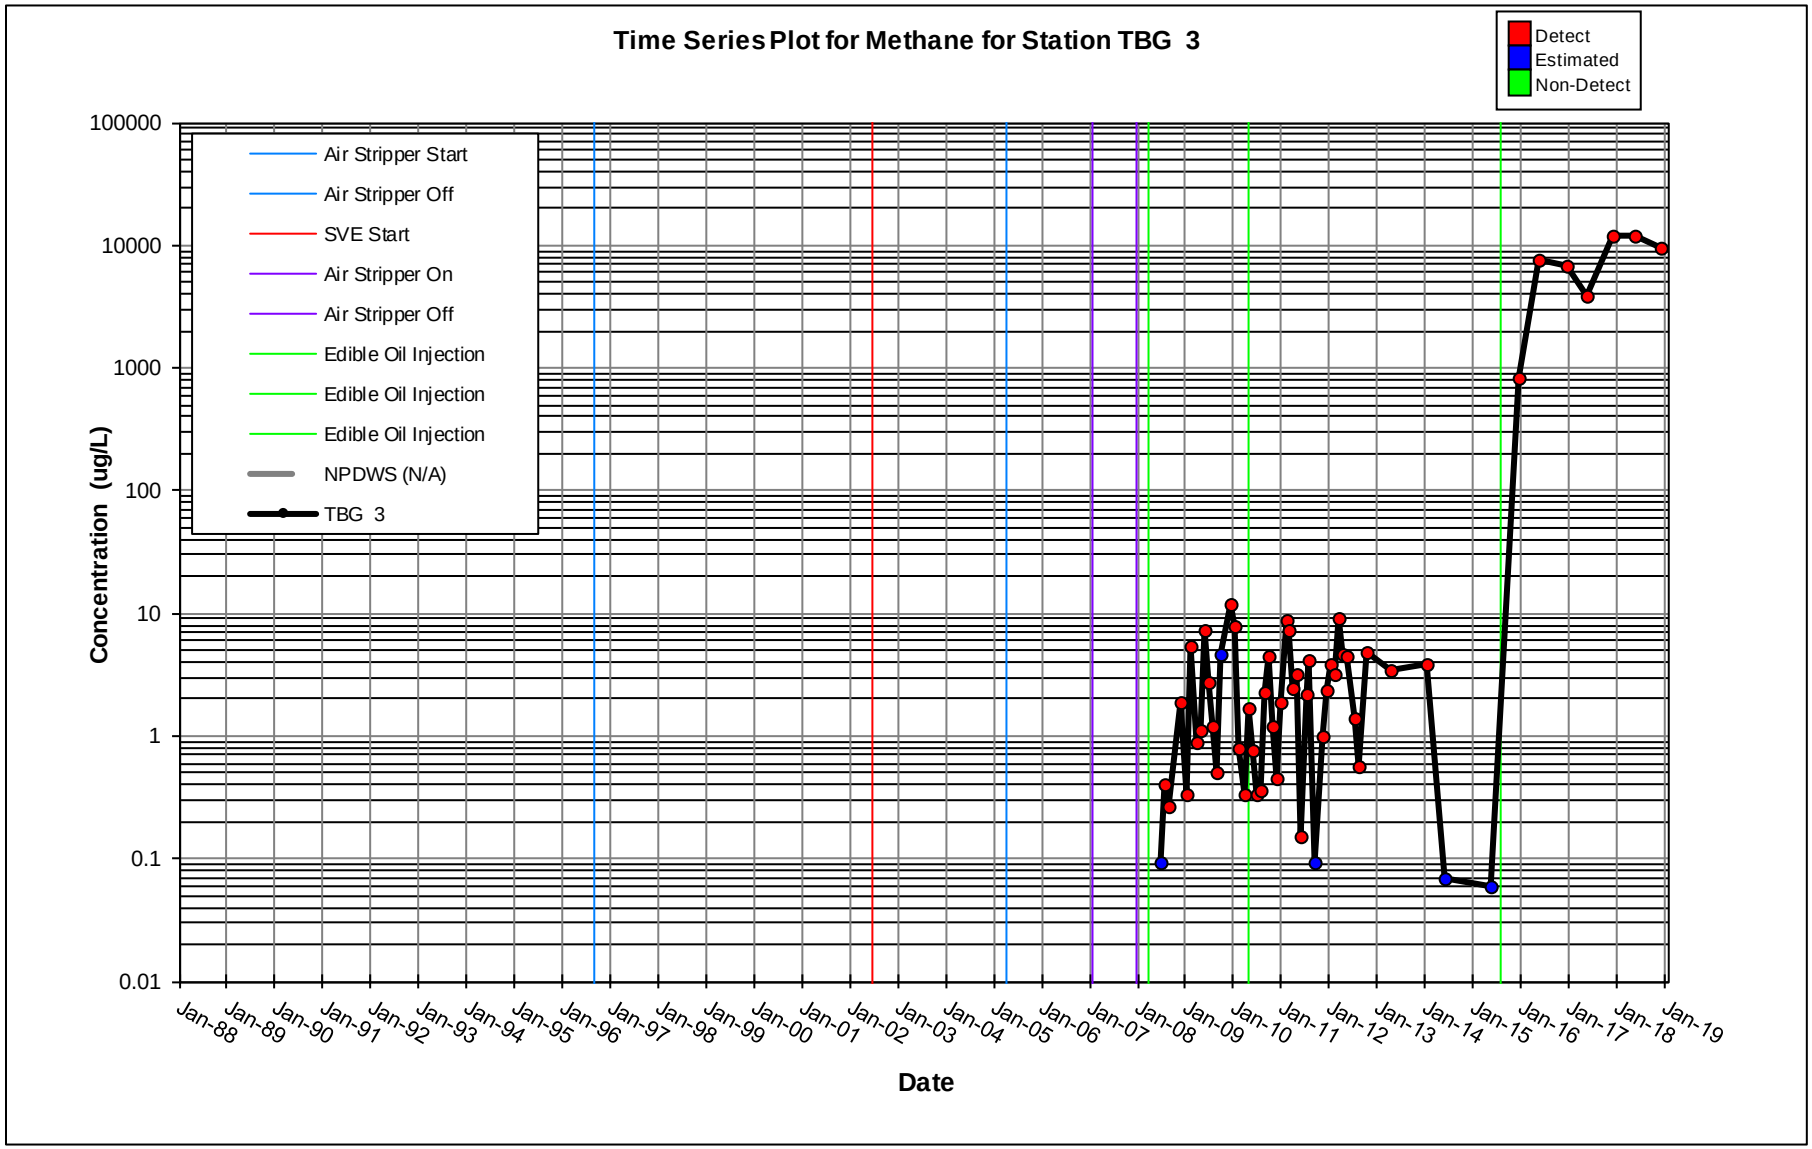
Time Series Plot for Methane for Station TBG 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TBG 3
Concentration (ug/L)
100000
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

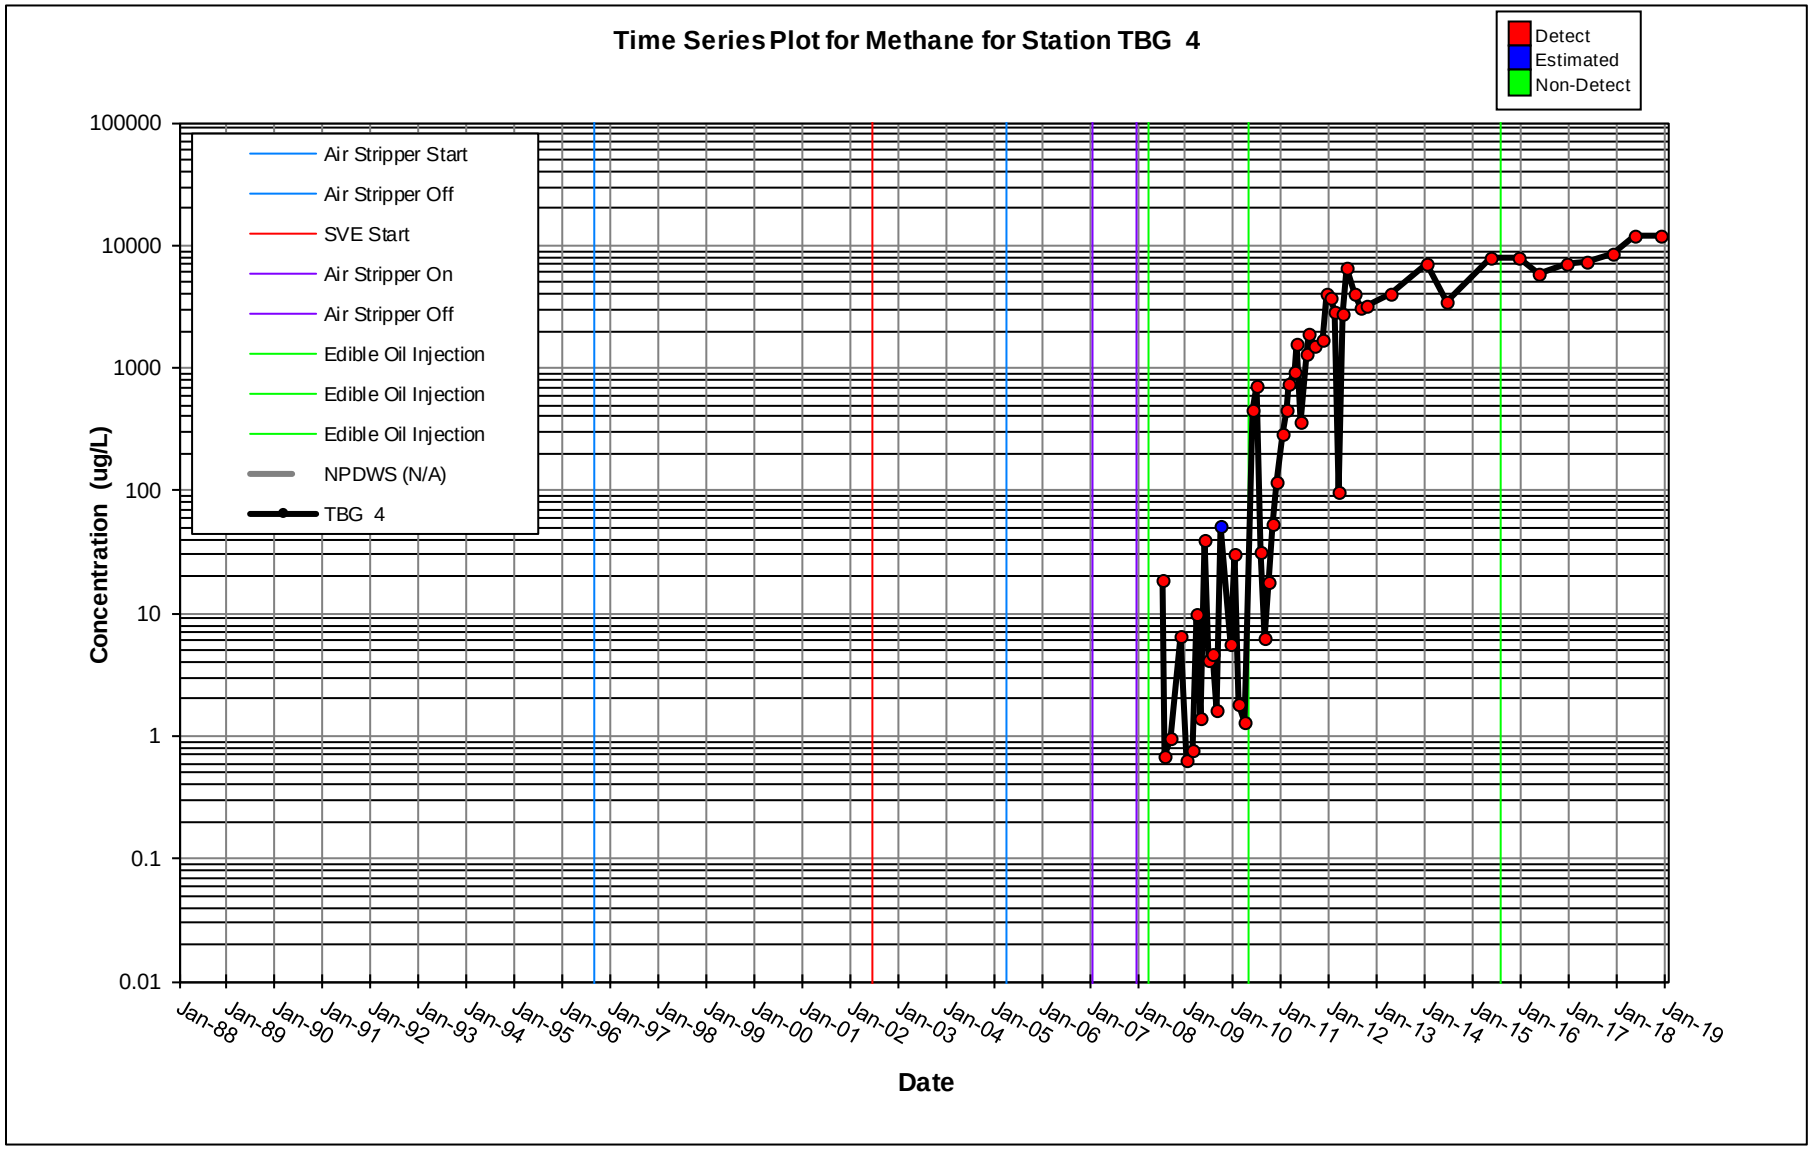
Time Series Plot for Methane for Station TBG 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TBG 4
Concentration (ug/L)
100000
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

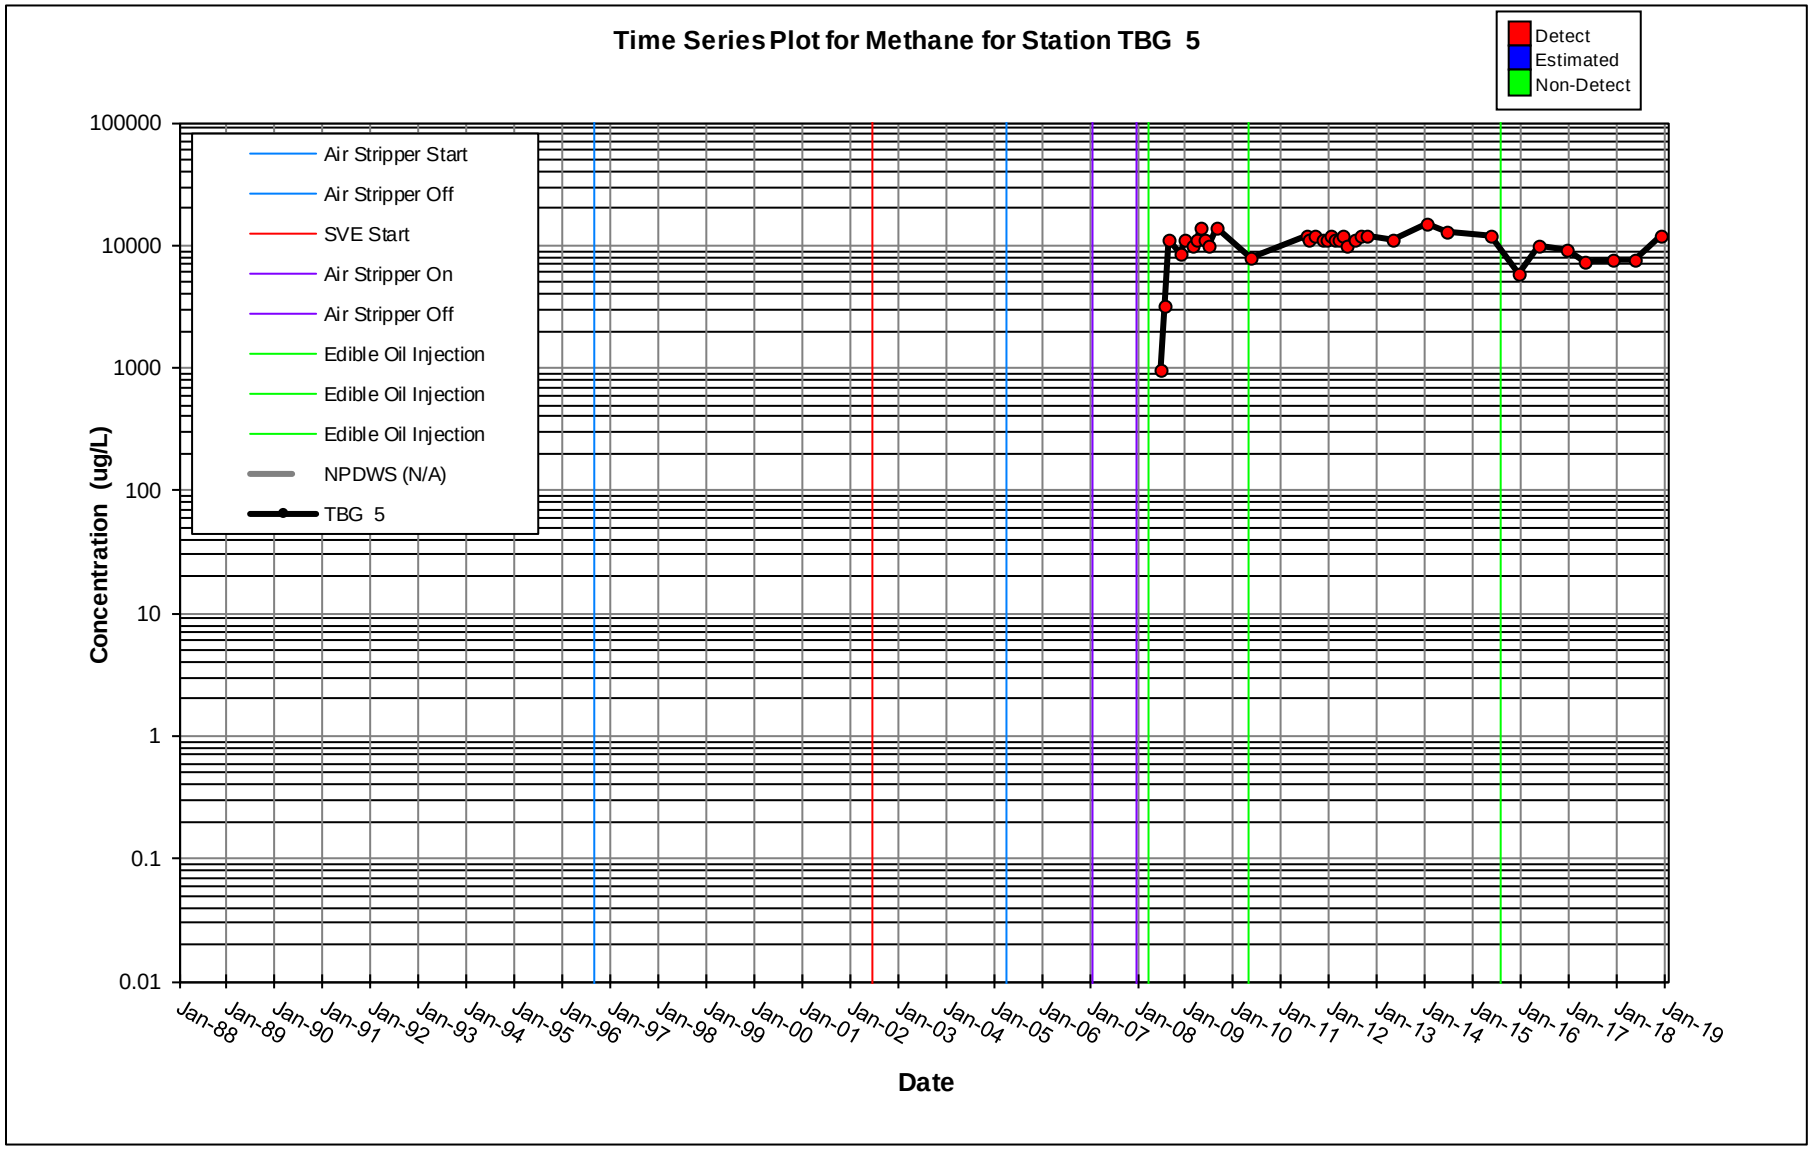
Time Series Plot for Methane for Station TBG 5
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TBG 5
Concentration (ug/L)
100000
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

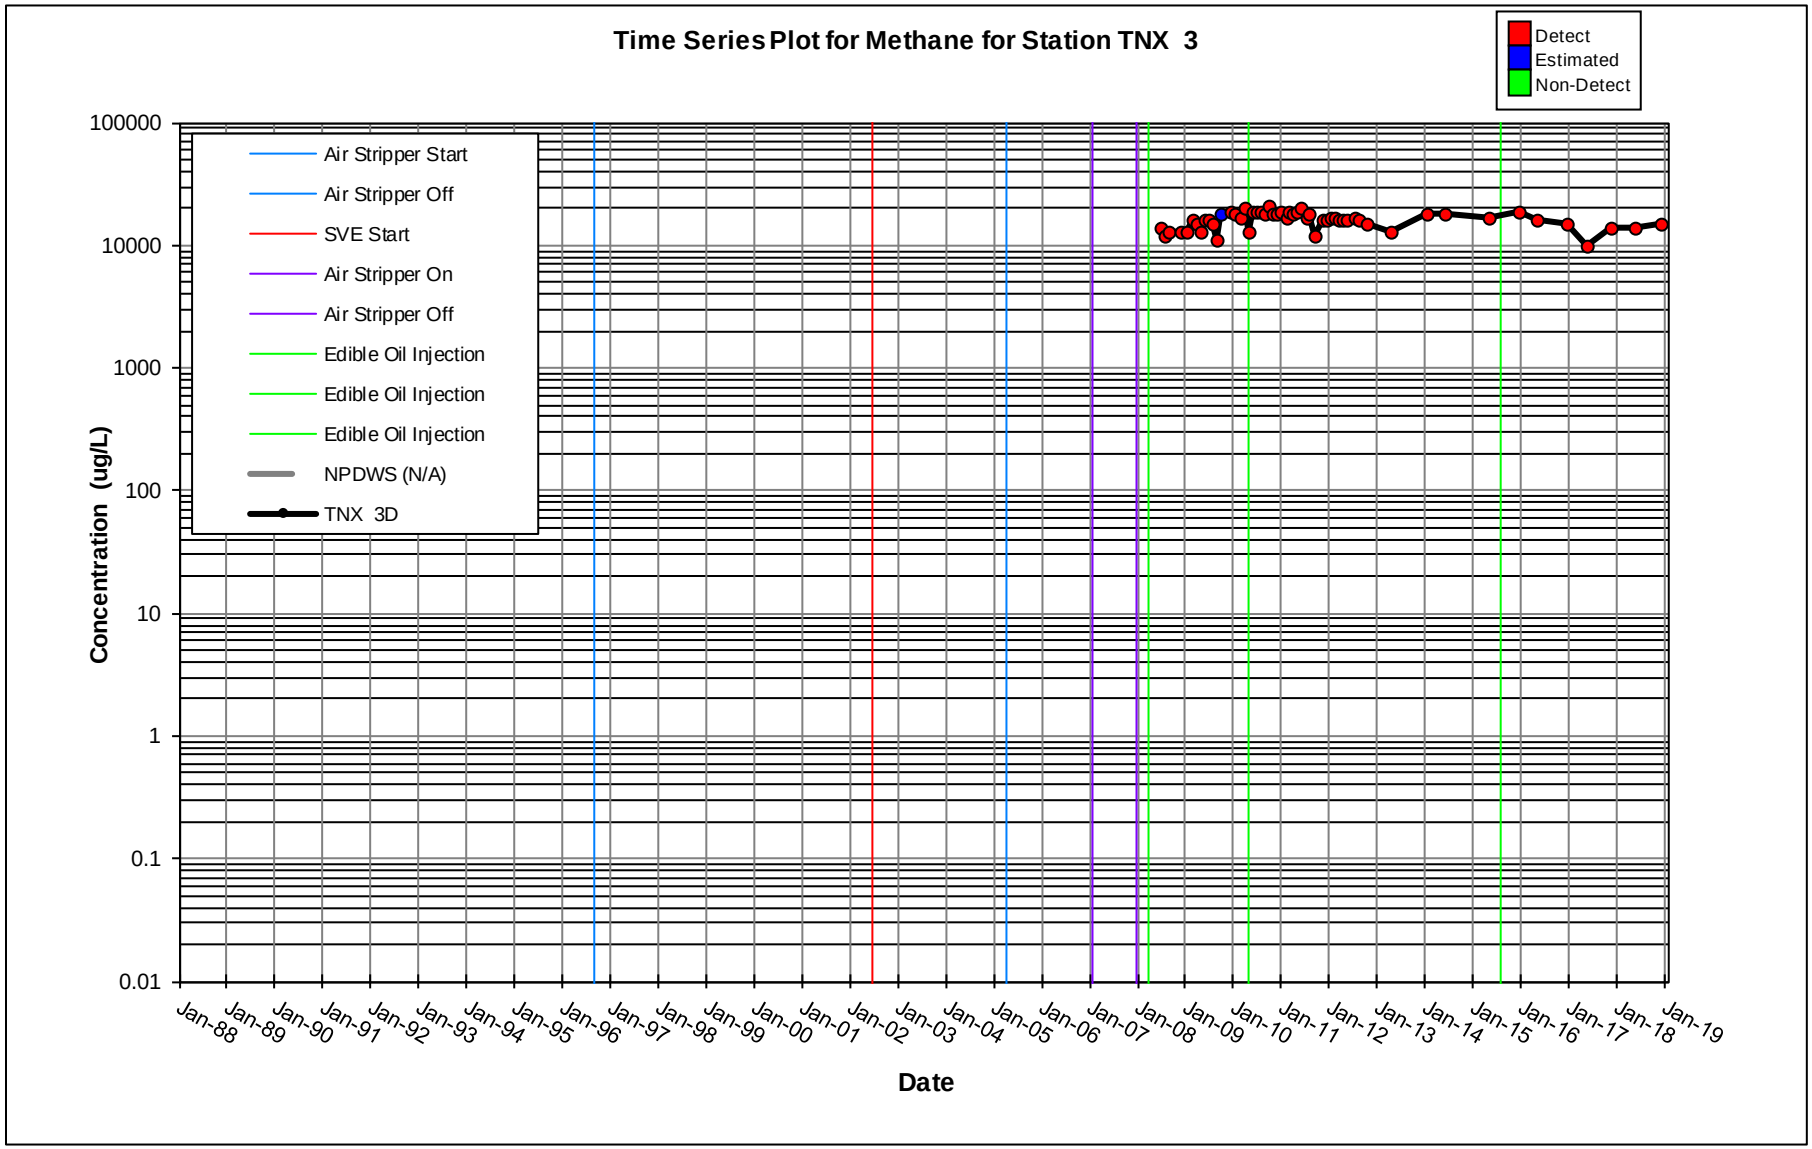
Time Series Plot for Methane for Station TNX 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TNX 3D
Concentration (ug/L)
100000
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

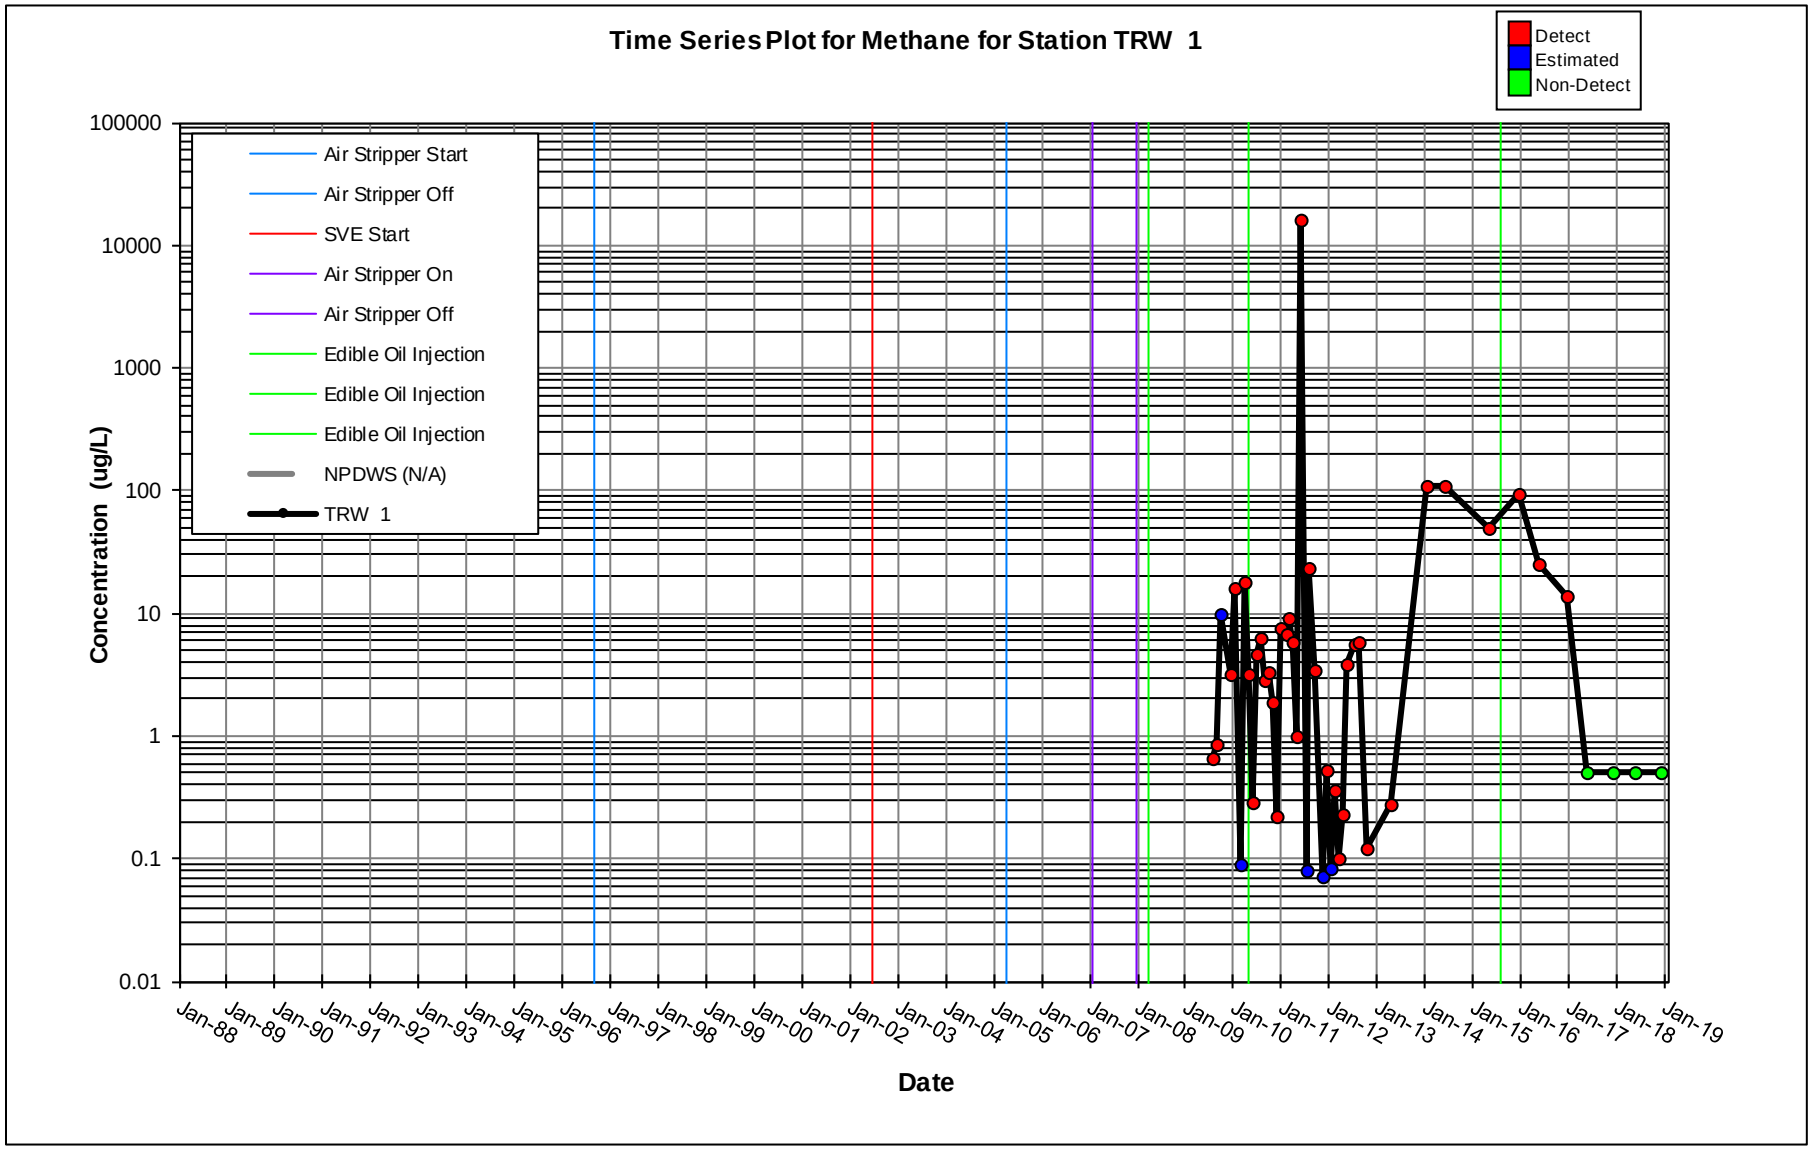
Time Series Plot for Methane for Station TRW 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TRW 1
Concentration (ug/L)
100000
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

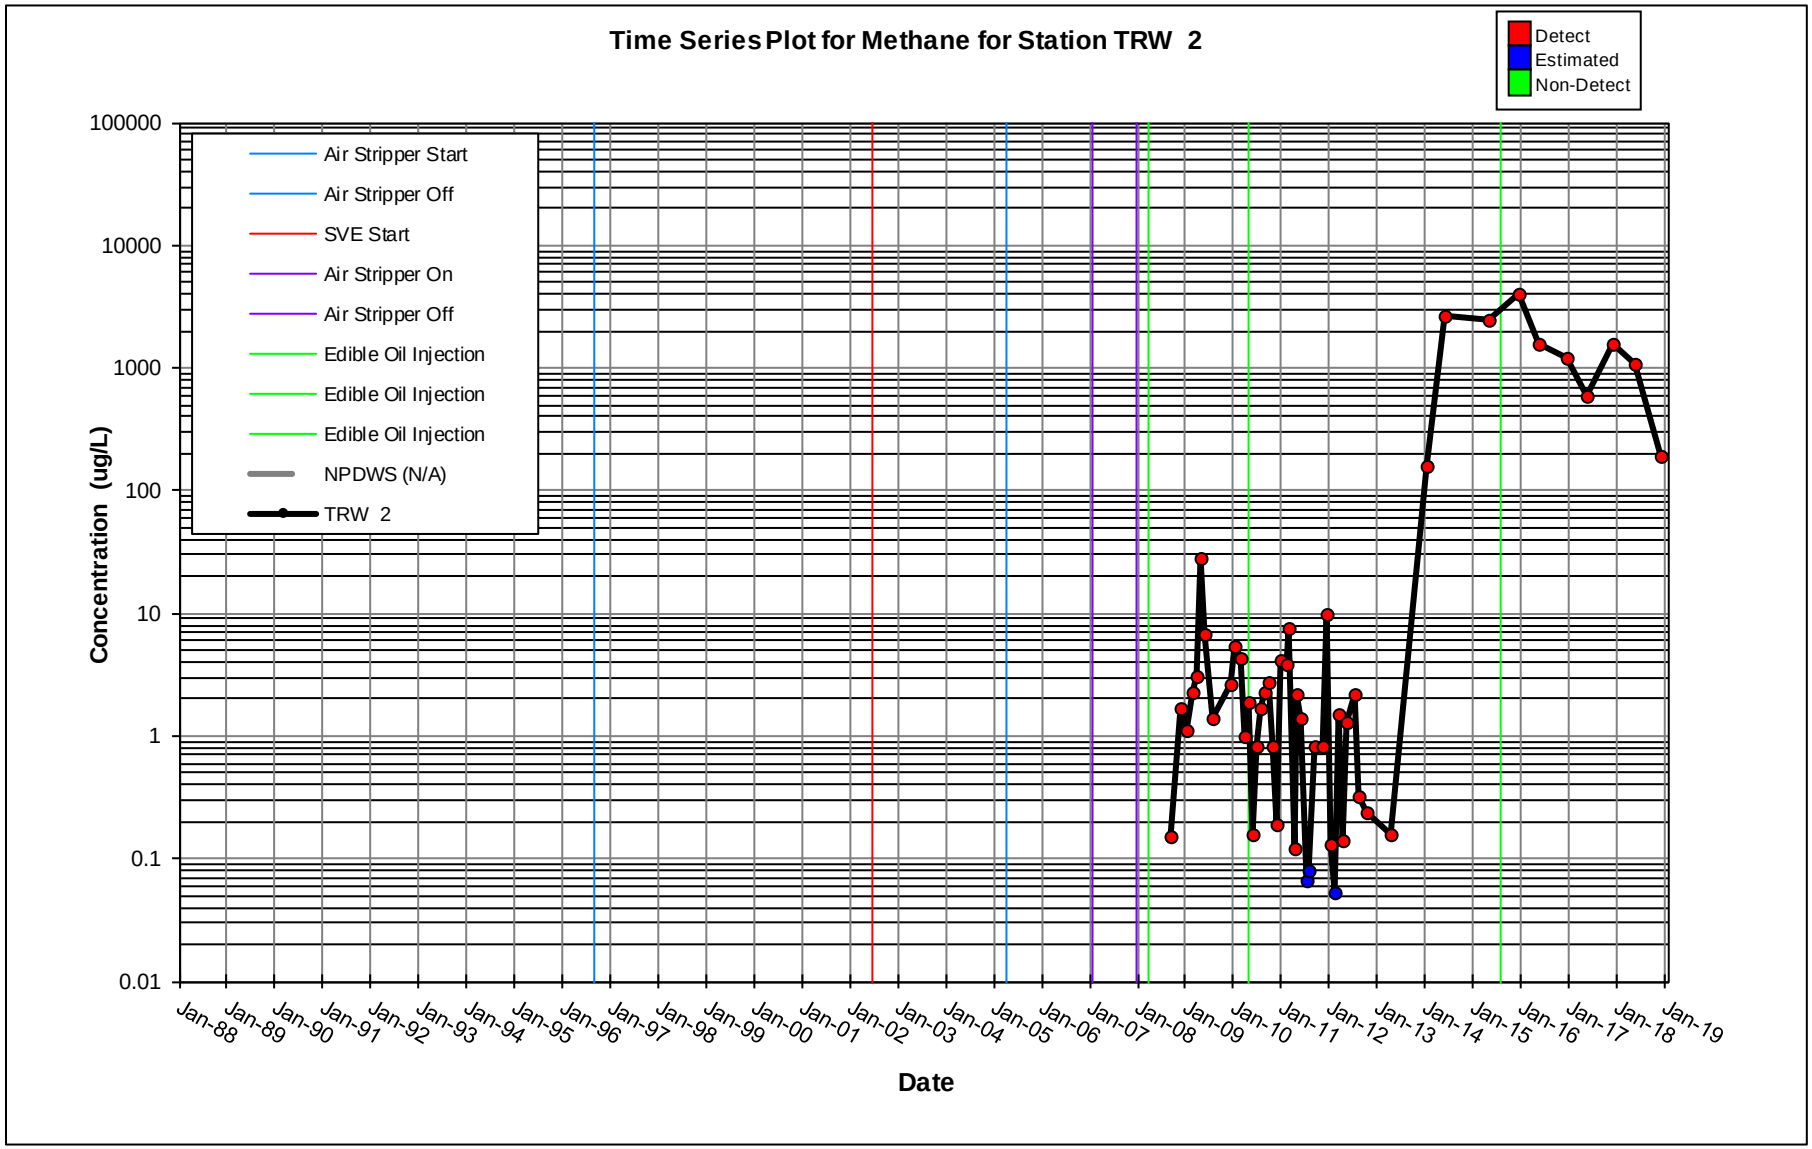
Time Series Plot for Methane for Station TRW 2
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TRW 2
Concentration (ug/L)
100000
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

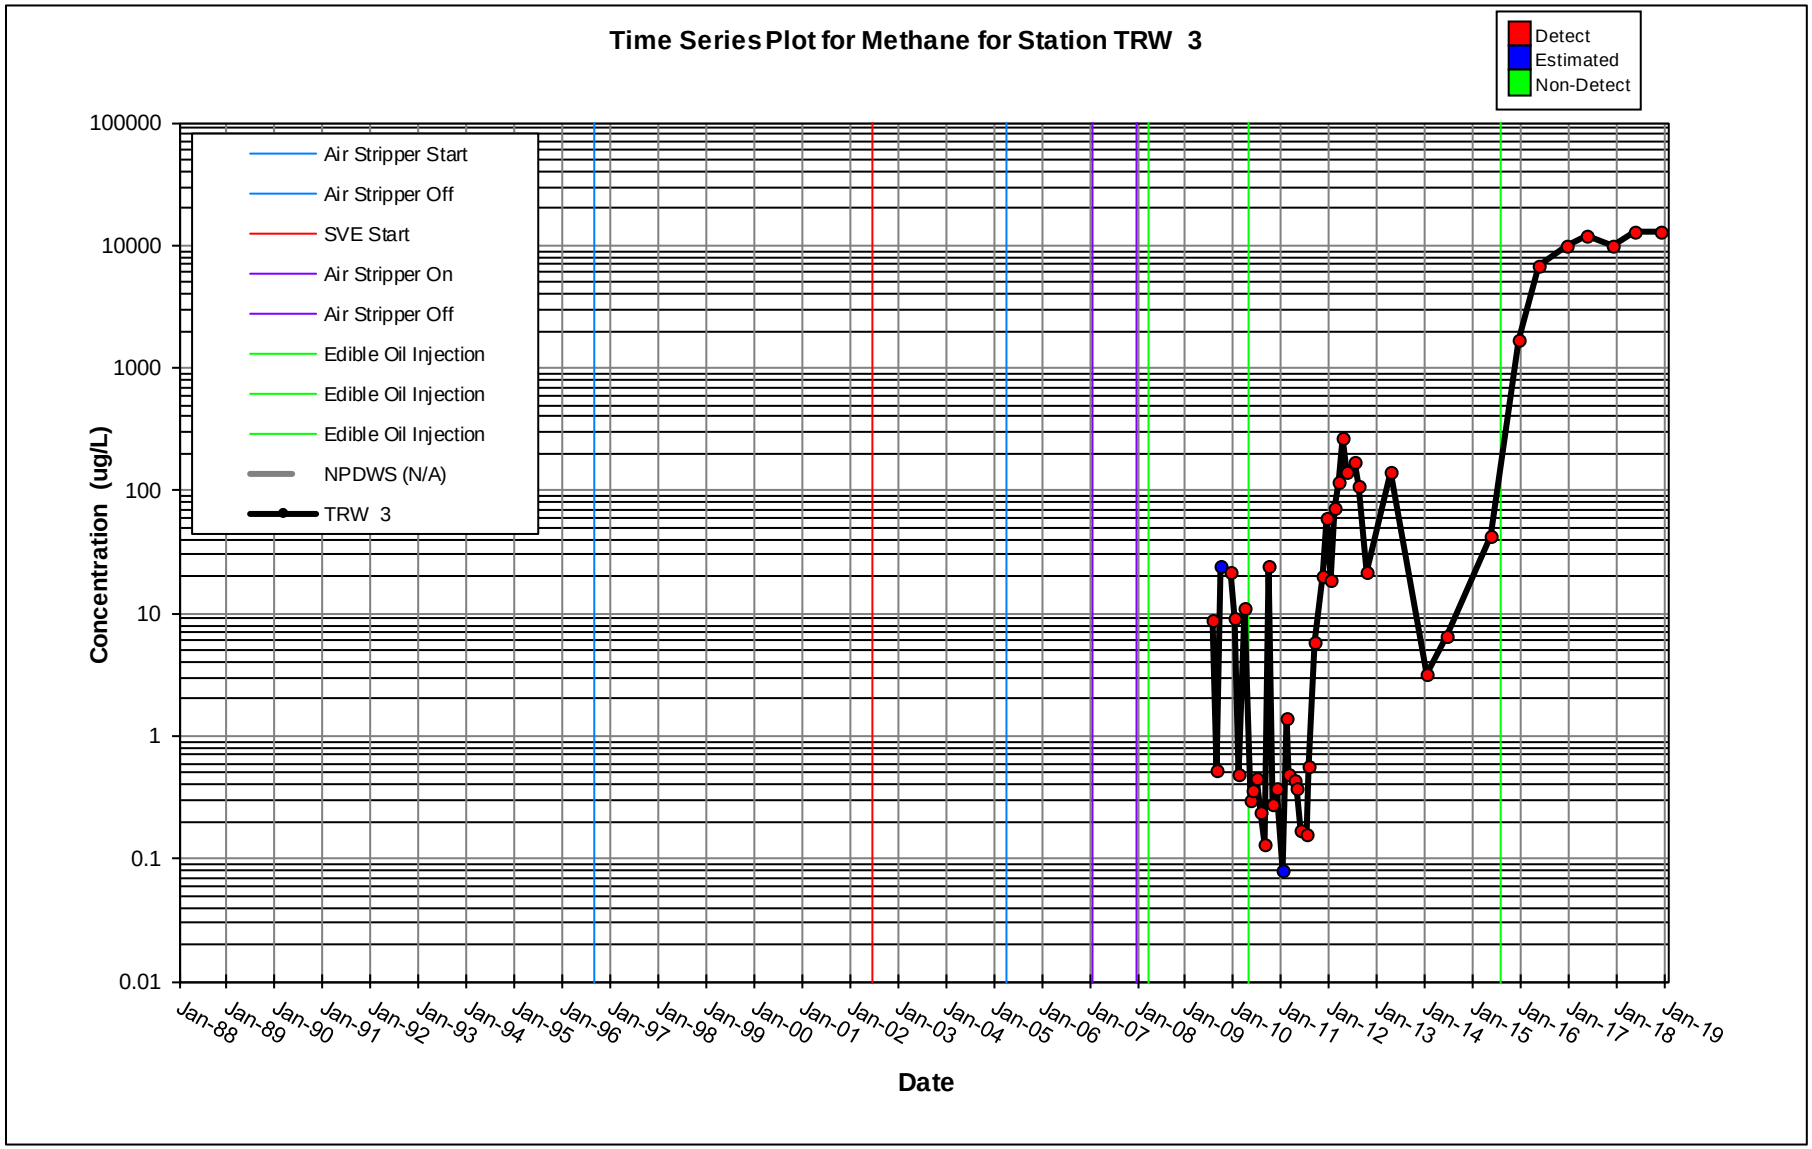
Time Series Plot for Methane for Station TRW 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TRW 3
Concentration (ug/L)
100000
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

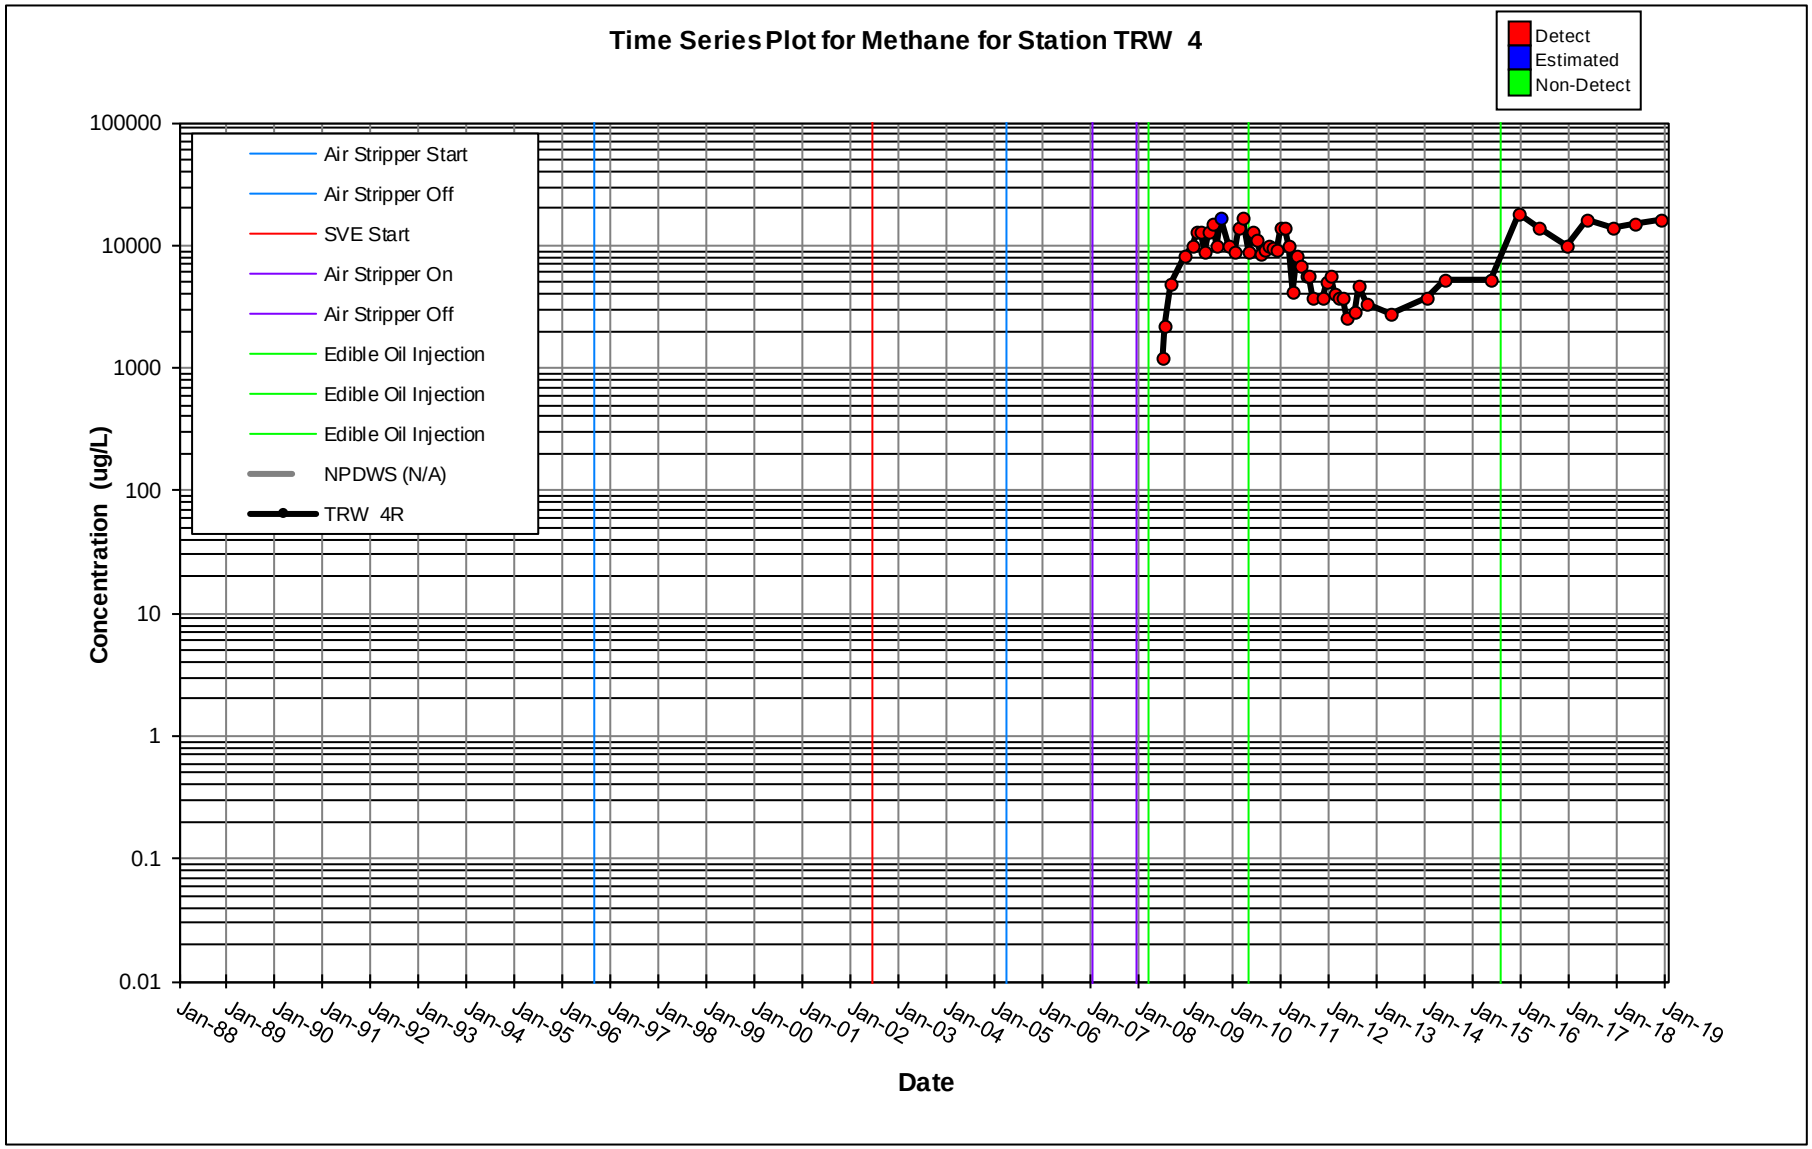
Time Series Plot for Methane for Station TRW 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TRW 4R
Concentration (ug/L)
100000
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

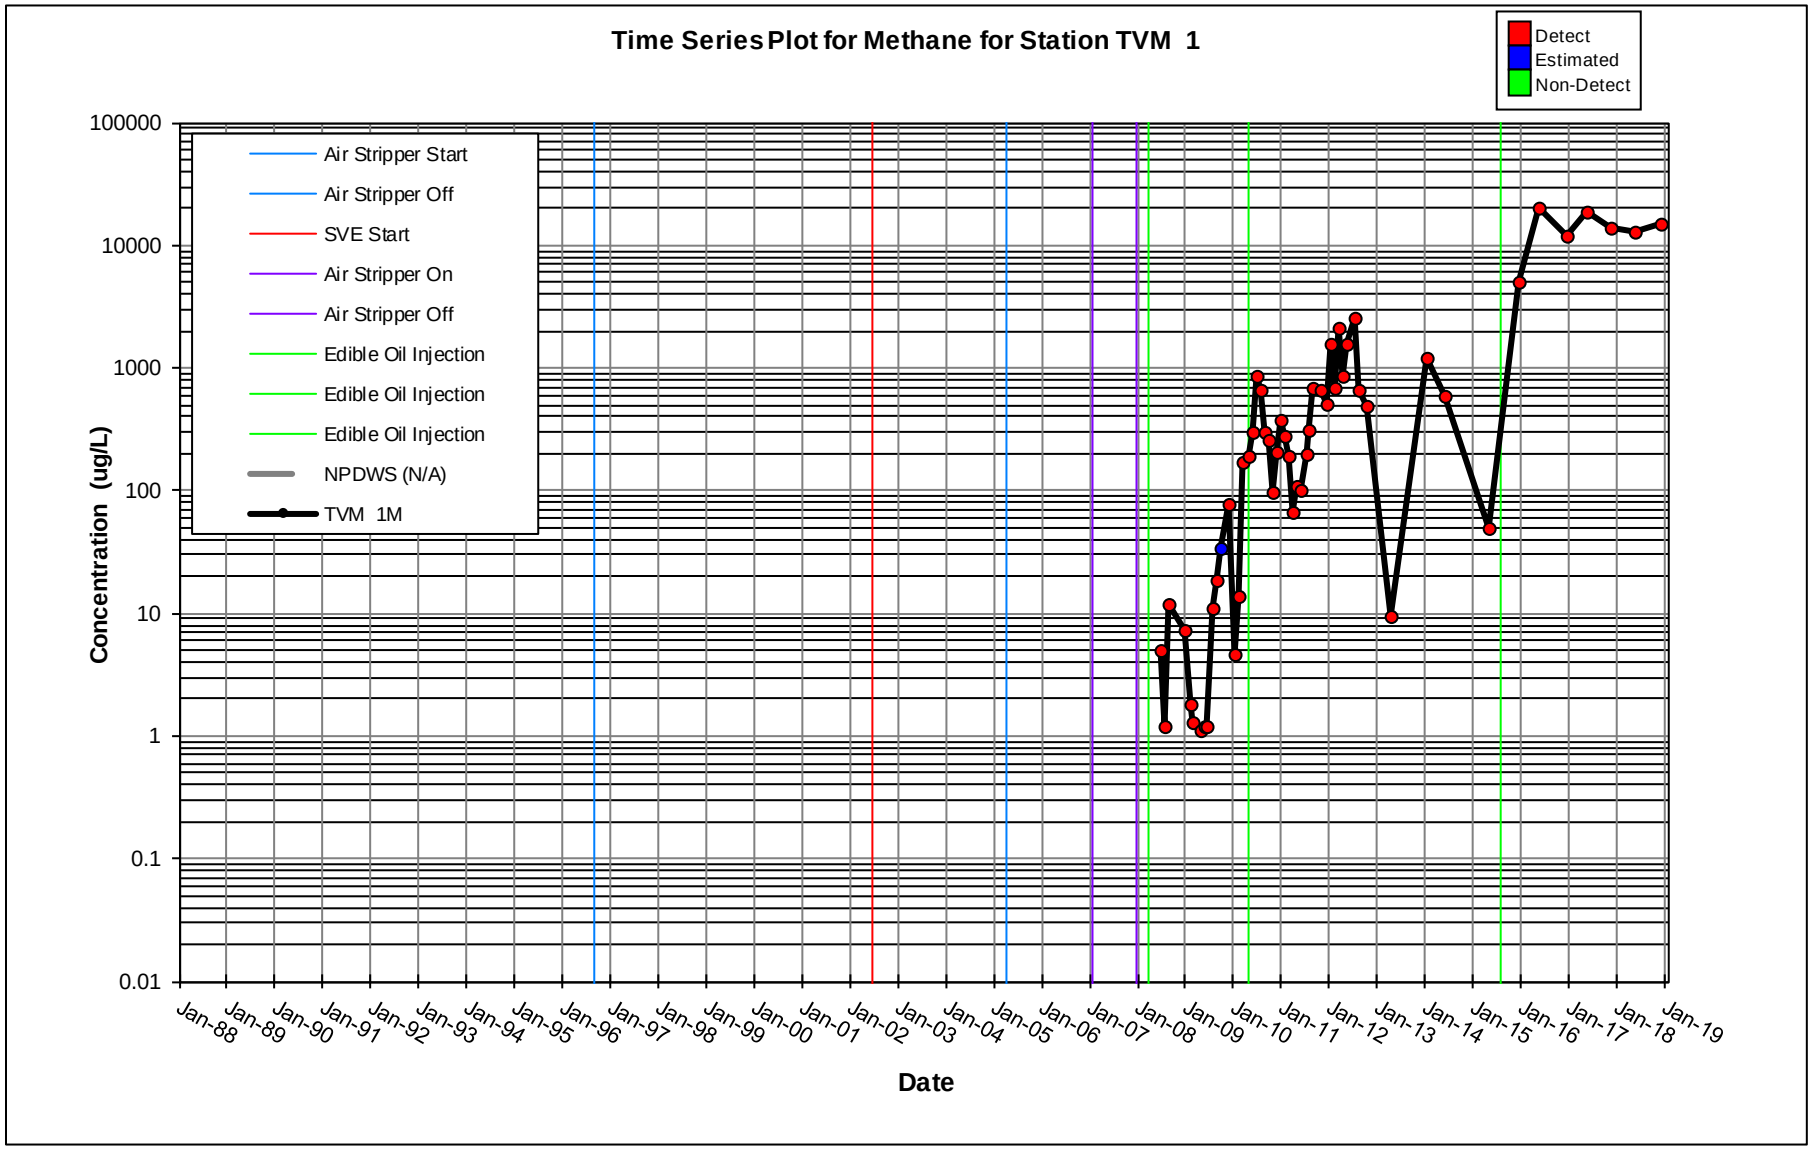
Time Series Plot for Methane for Station TVM 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TVM 1M
Concentration (ug/L)
100000
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

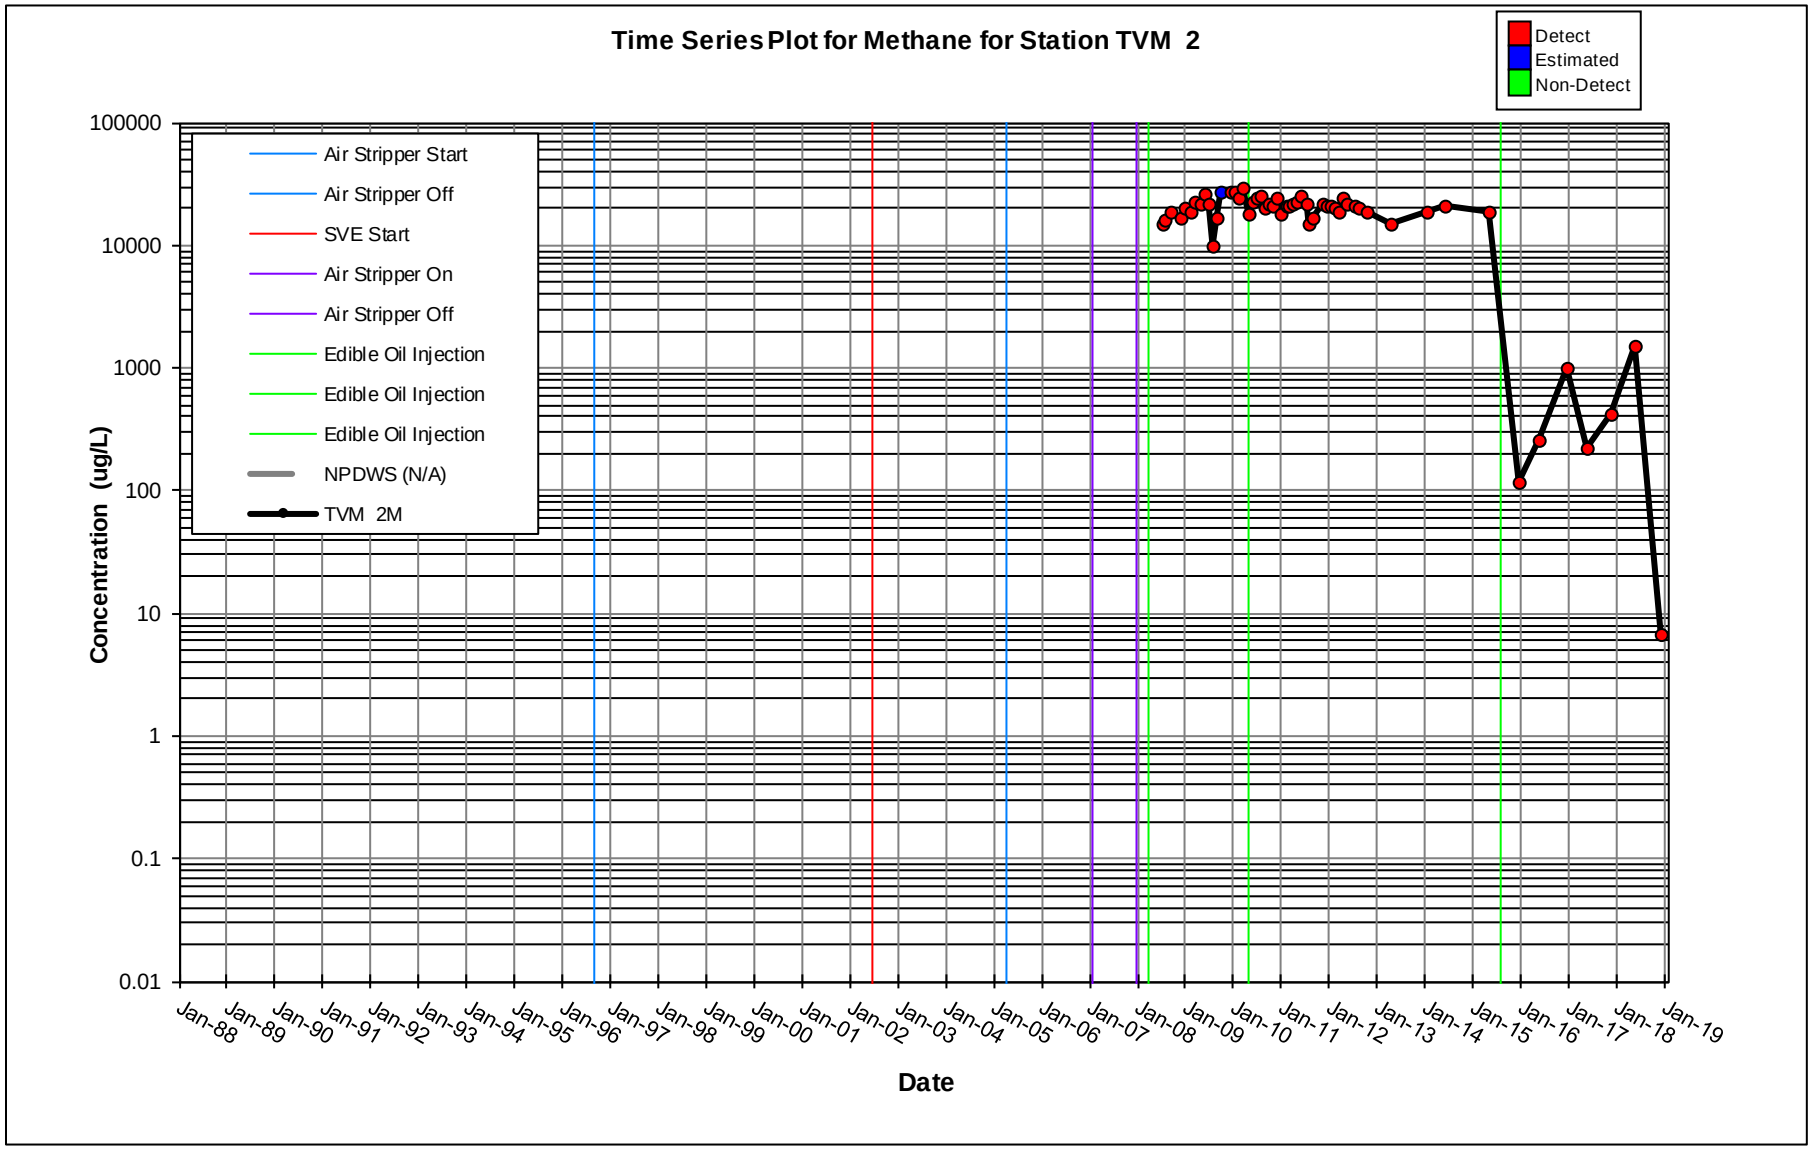
Time Series Plot for Methane for Station TVM 2
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TVM 2M
Concentration (ug/L)
100000
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

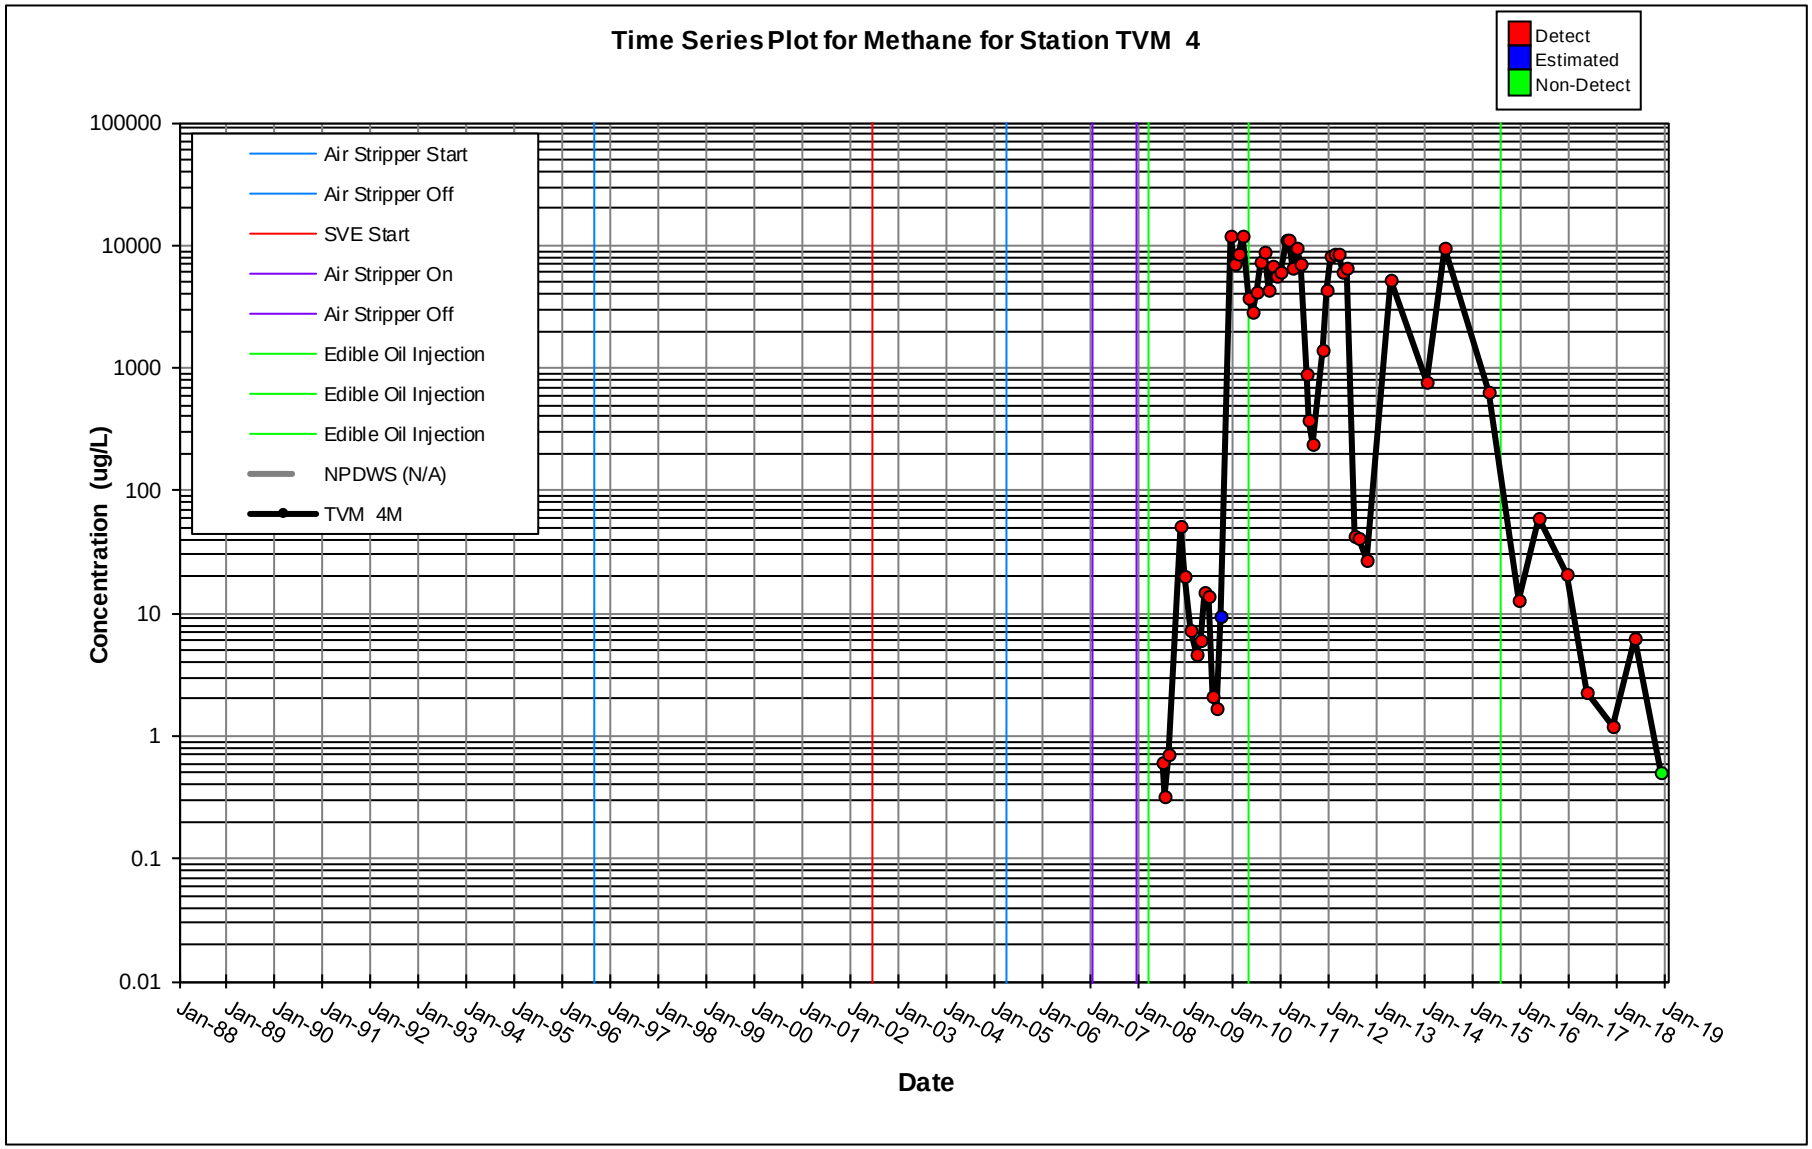
Time Series Plot for Methane for Station TVM 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TVM 4M
Concentration (ug/L)
100000
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

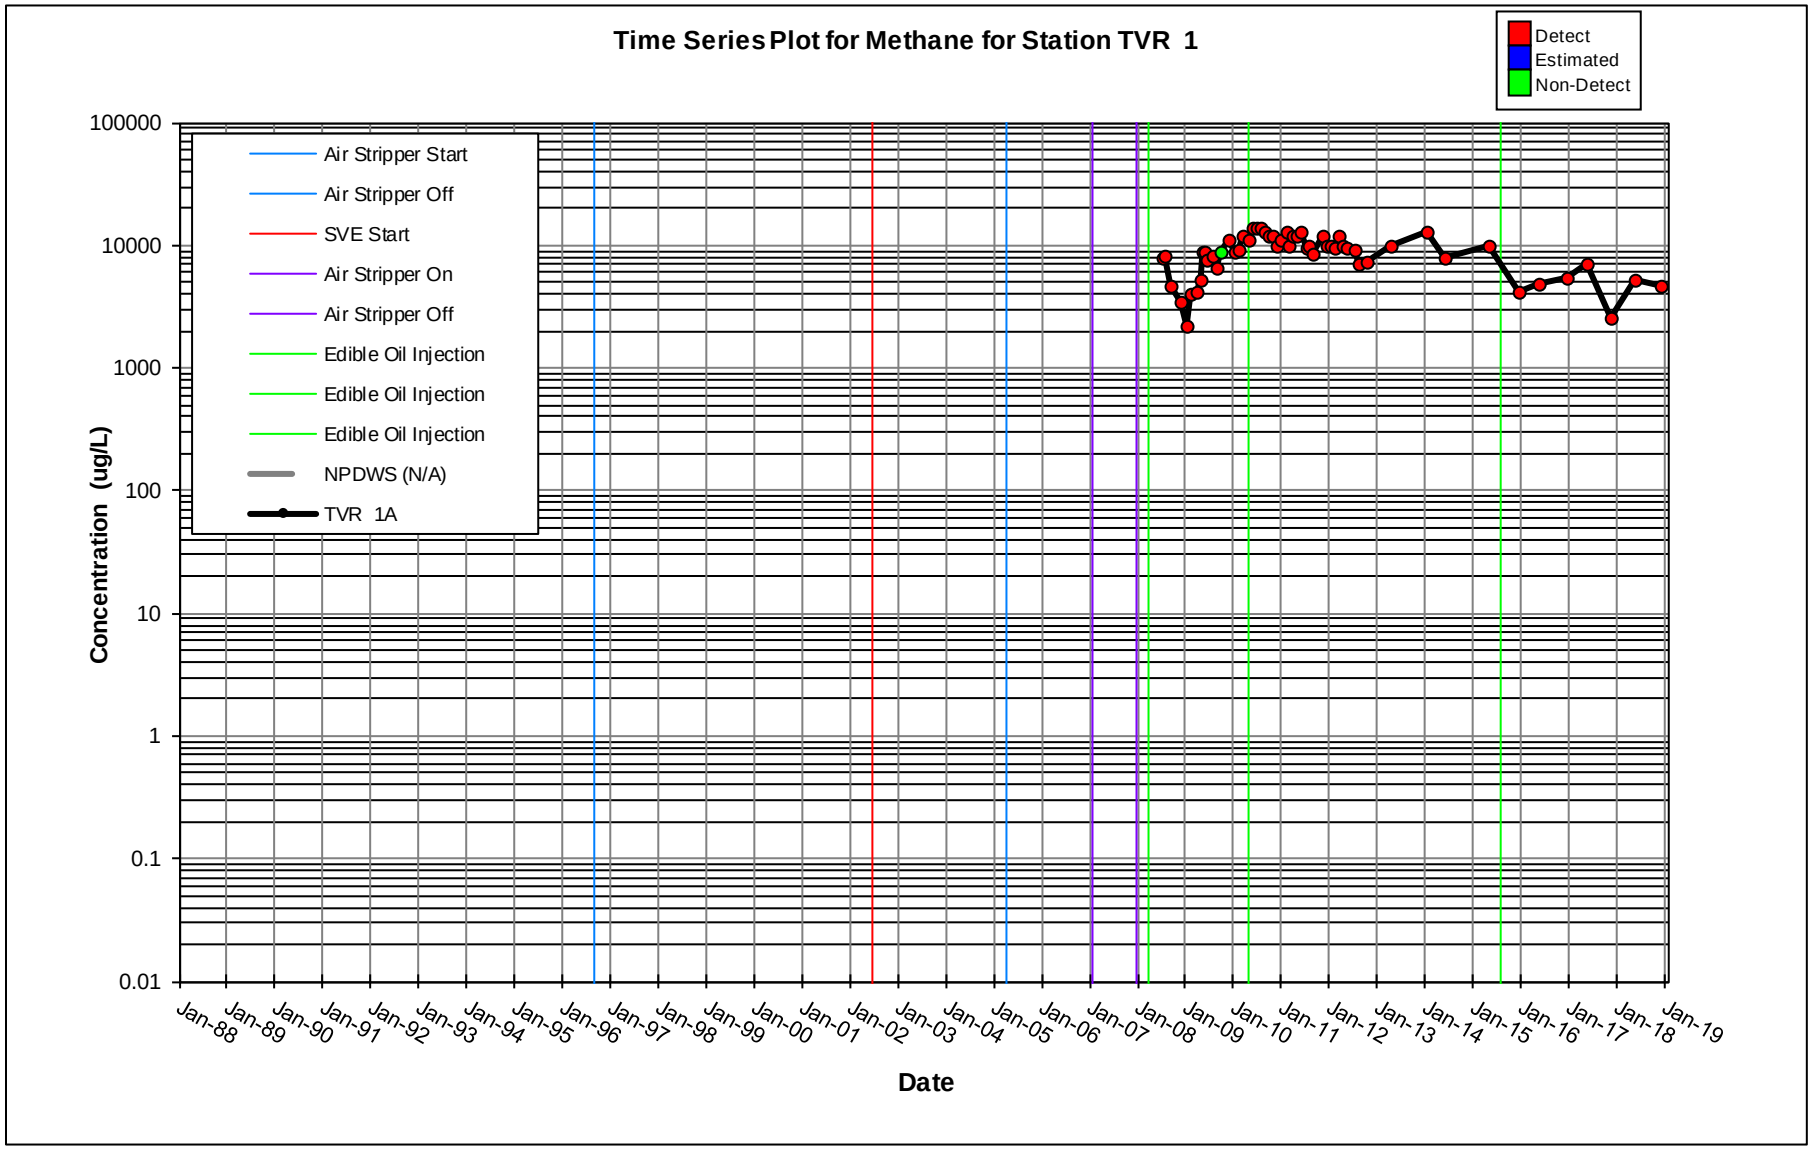
Time Series Plot for Methane for Station TVR 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (N/A)
TVR 1A
Concentration (ug/L)
100000
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

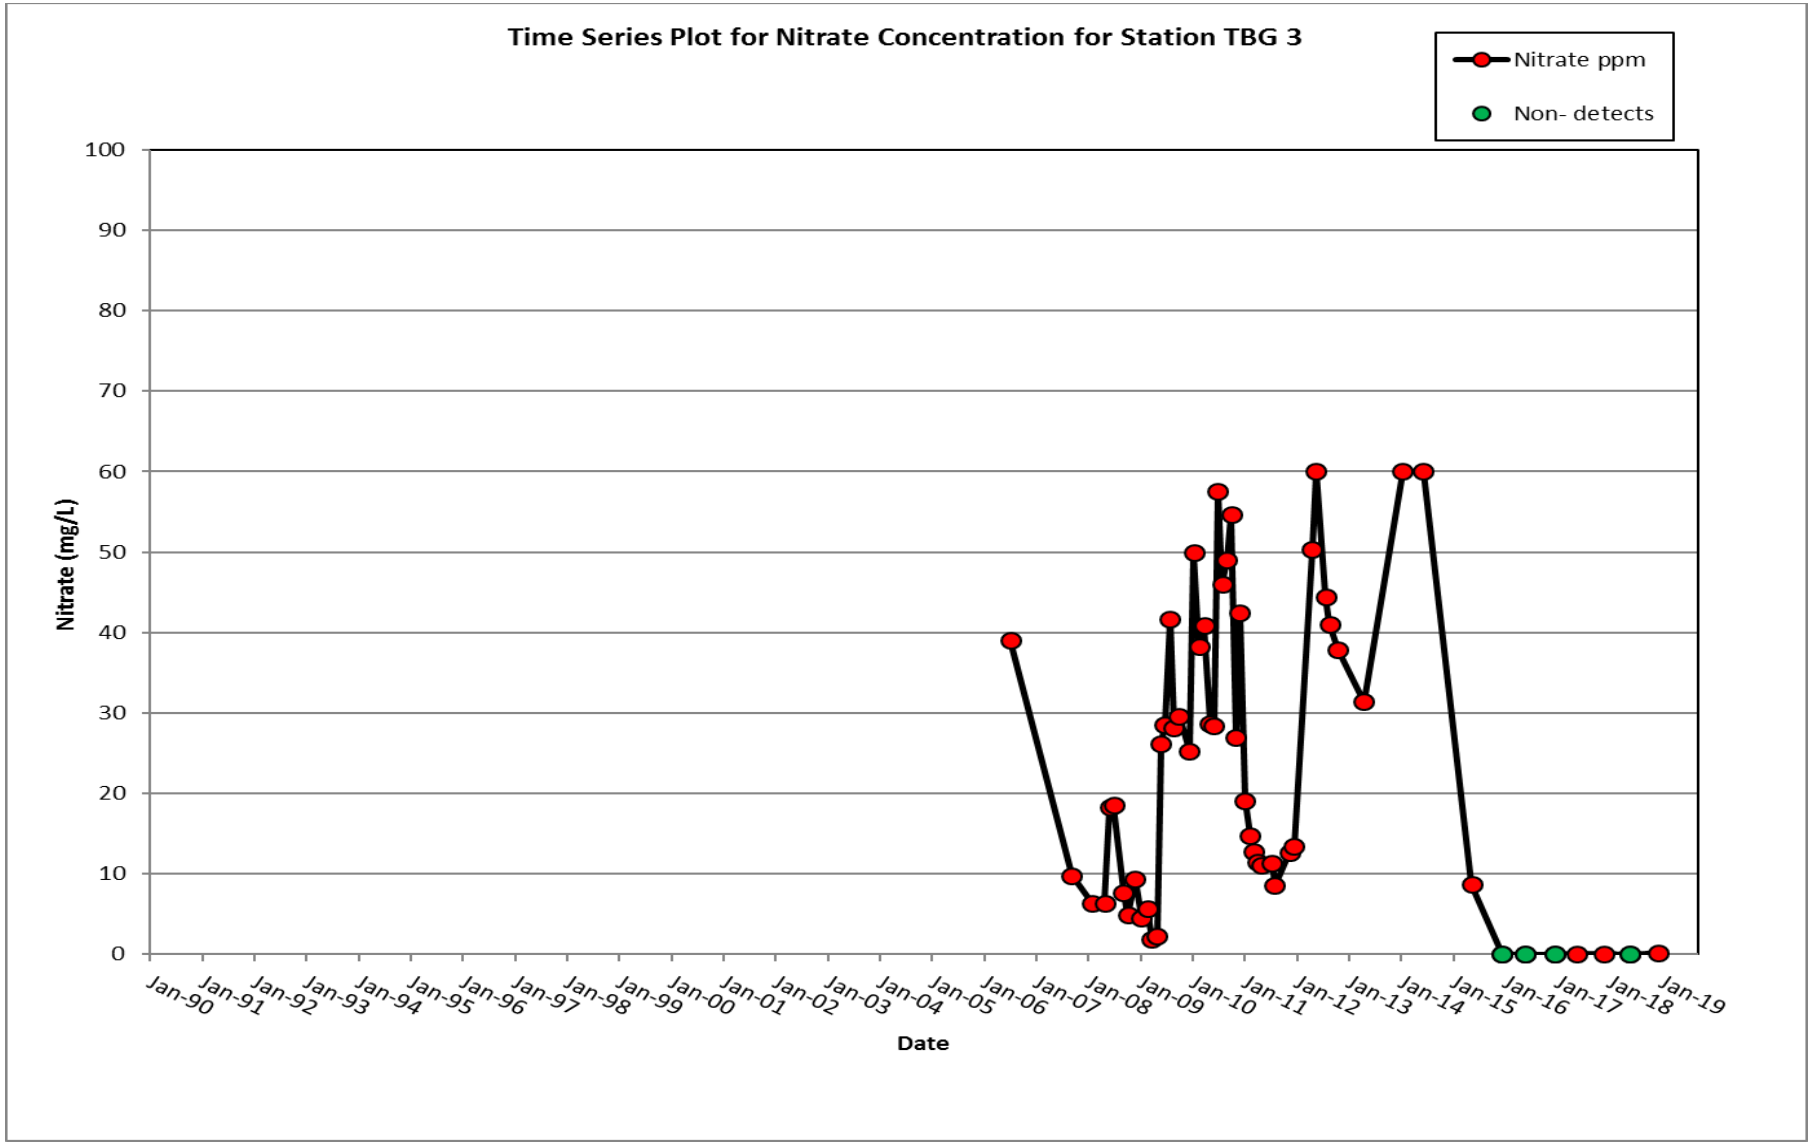
Time Series Plot for Nitrate Concentration for Station TBG 3
Nitrate ppm
Non- detects
Nitrate (mg/L)
100
90
80
70
60
50
40
30
20
10
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

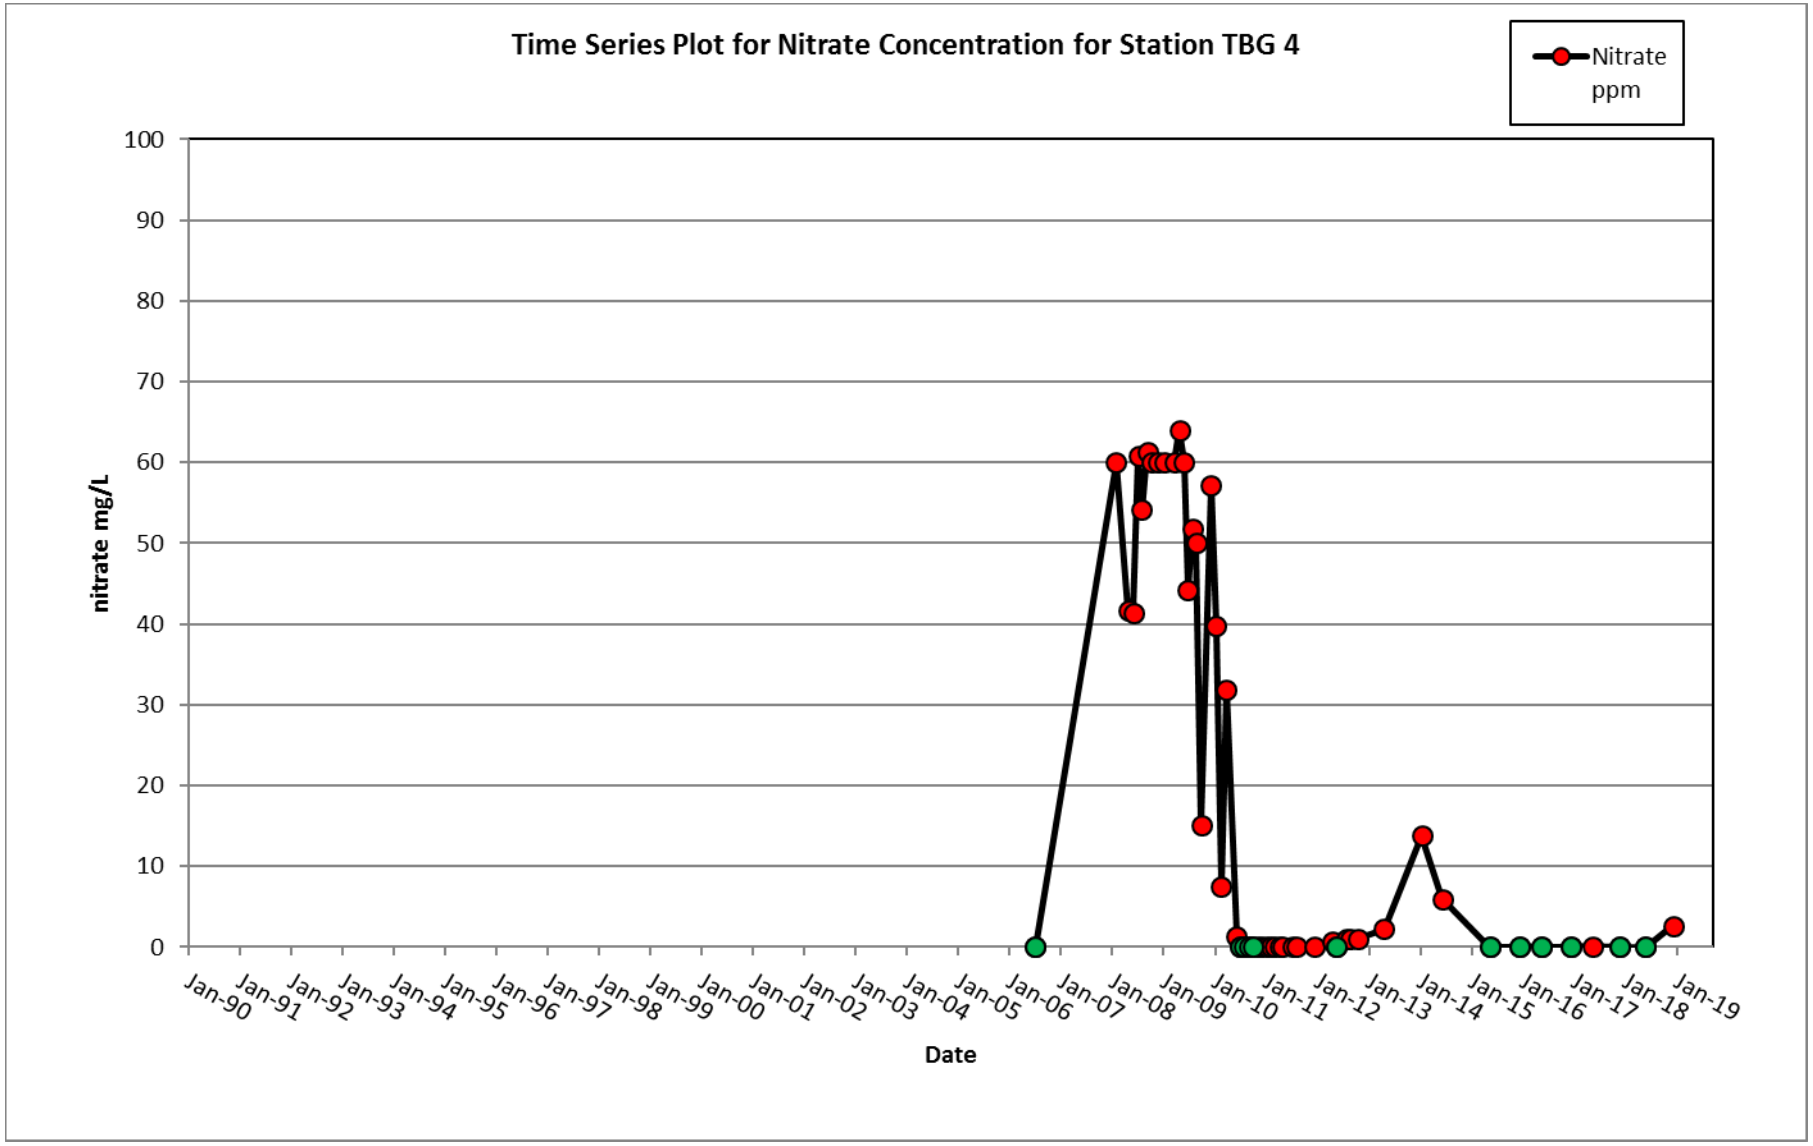
Time Series Plot for Nitrate Concentration for Station TBG 4
Nitrate ppm
nitrate mg/L
100
90
80
70
60
50
40
30
20
10
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

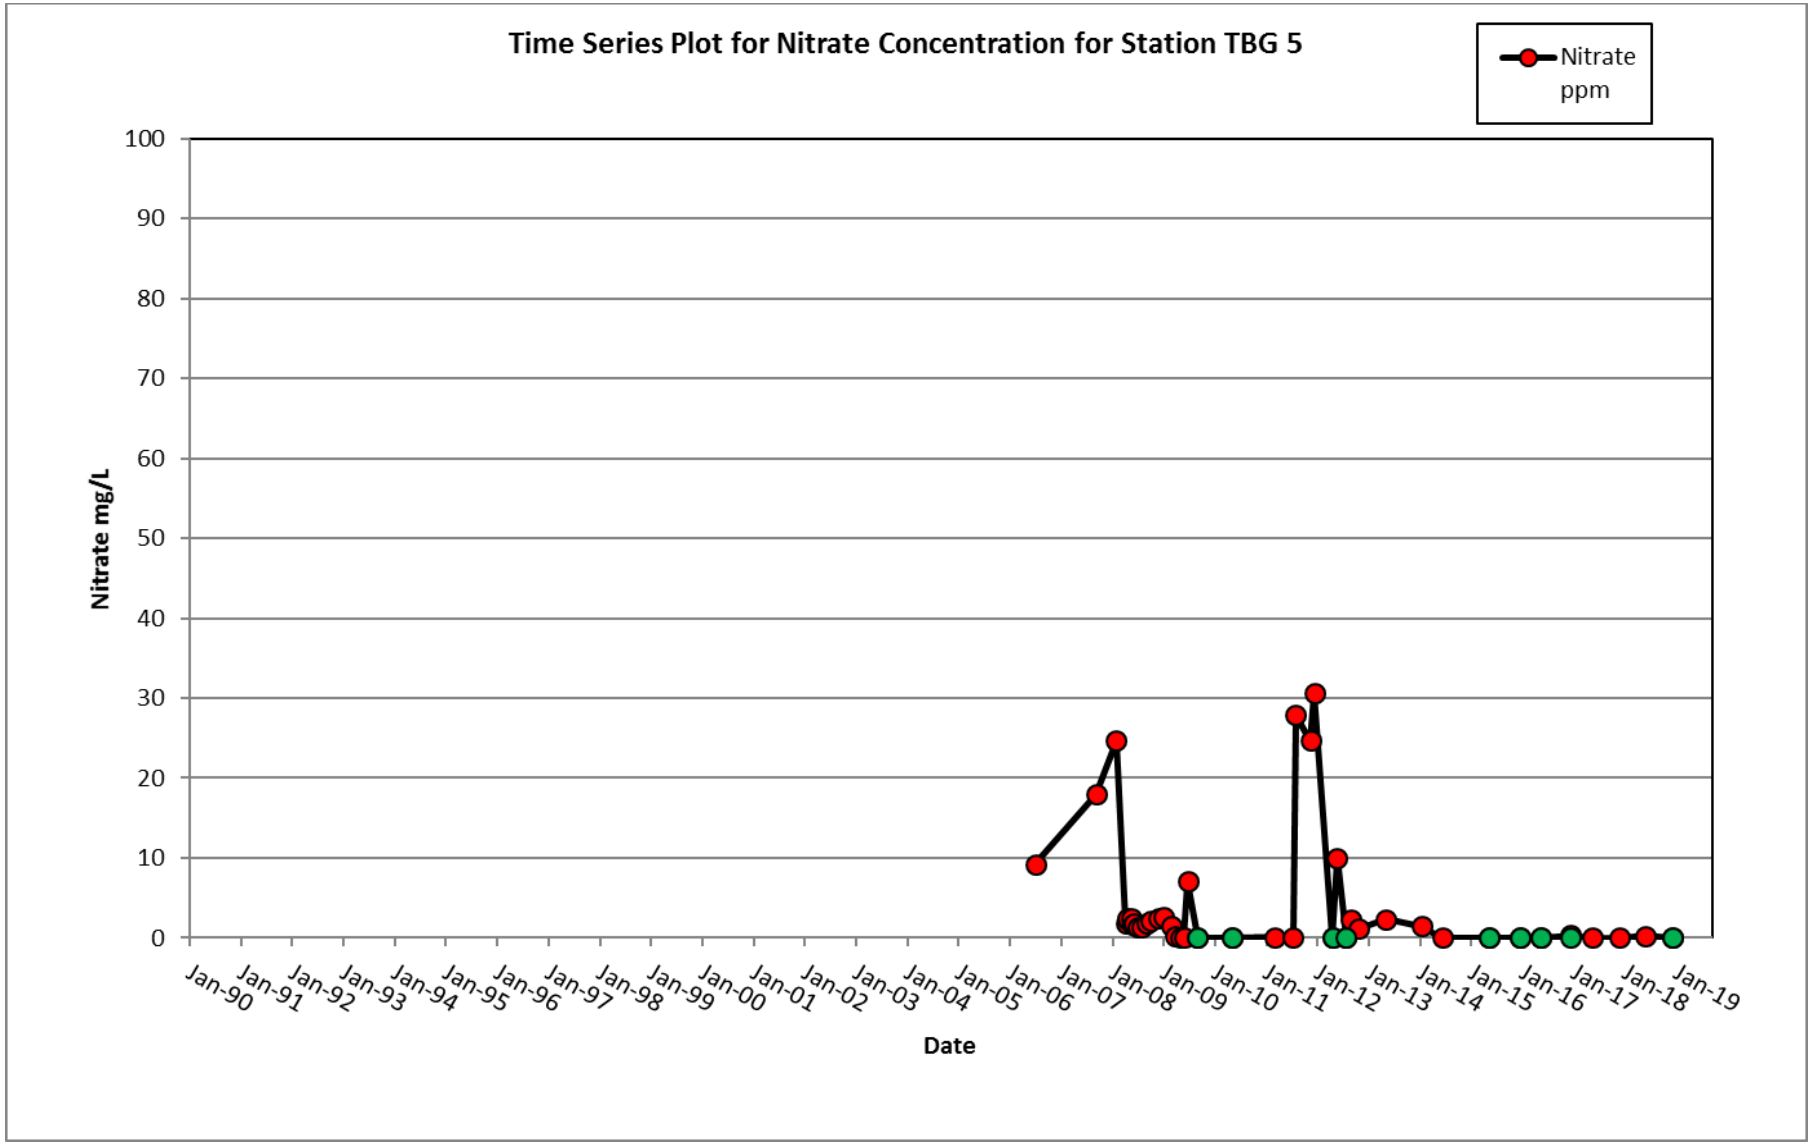
Time Series Plot for Nitrate Concentration for Station TBG 5
Nitrate ppm
Nitrate mg/L
100
90
80
70
60
50
40
30
20
10
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

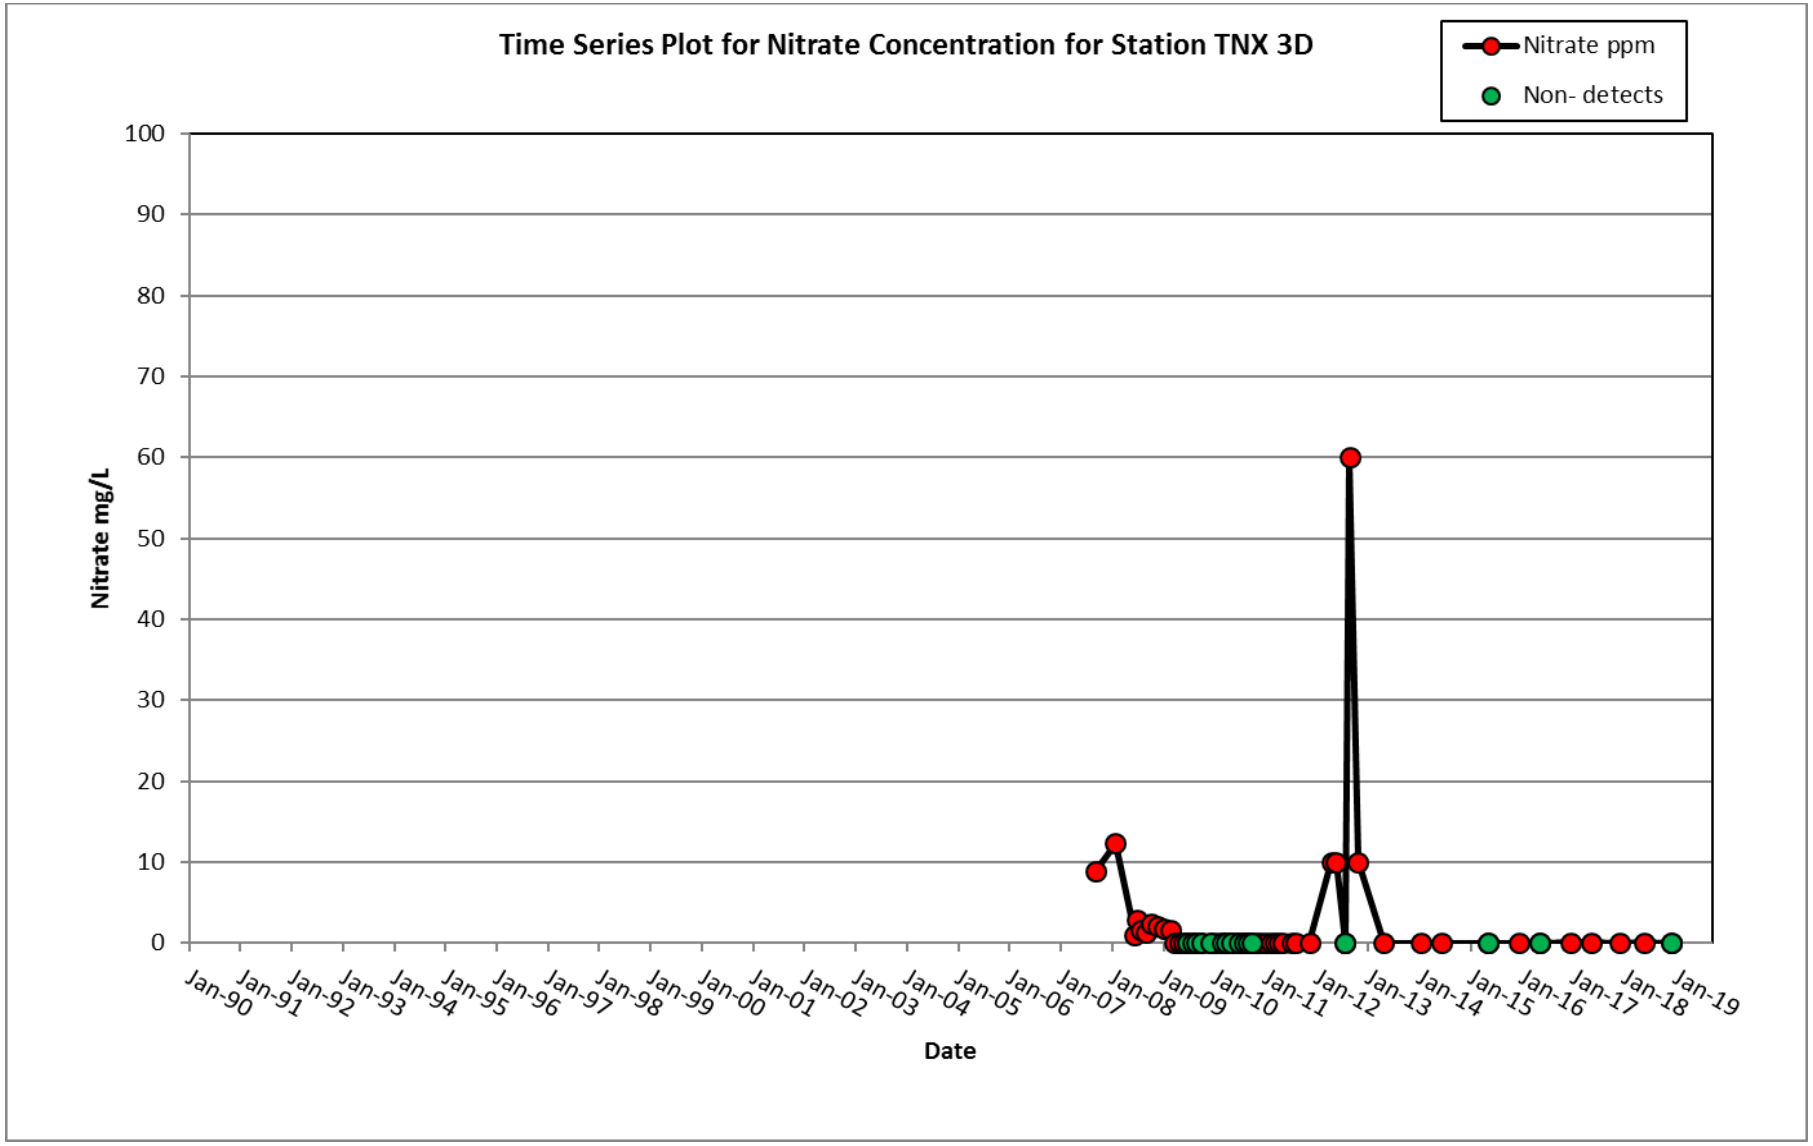
Time Series Plot for Nitrate Concentration for Station TNX 3D
Nitrate ppm
Non- detects
Nitrate mg/L
100
90
80
70
60
50
40
30
20
10
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

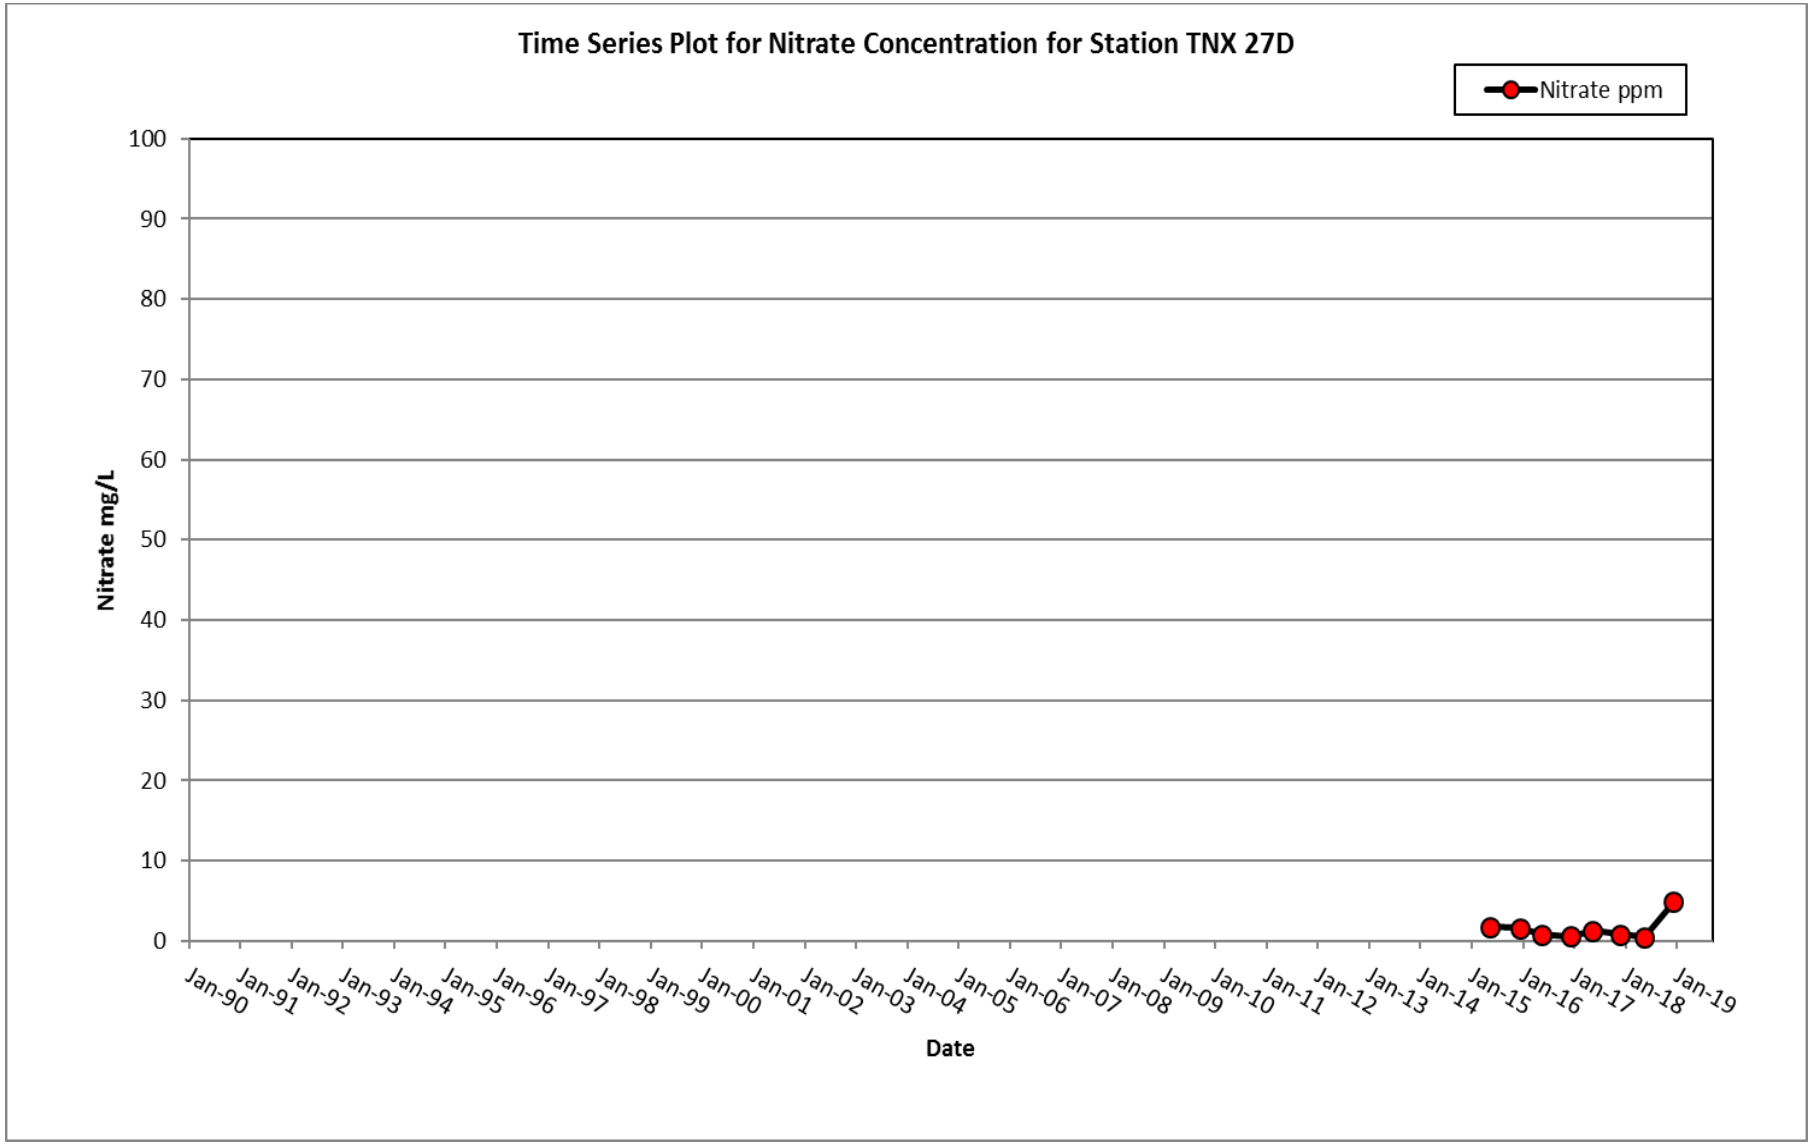
Time Series Plot for Nitrate Concentration for Station TNX 27D
Nitrate ppm
Nitrate mg/L
100
90
80
70
60
50
40
30
20
10
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

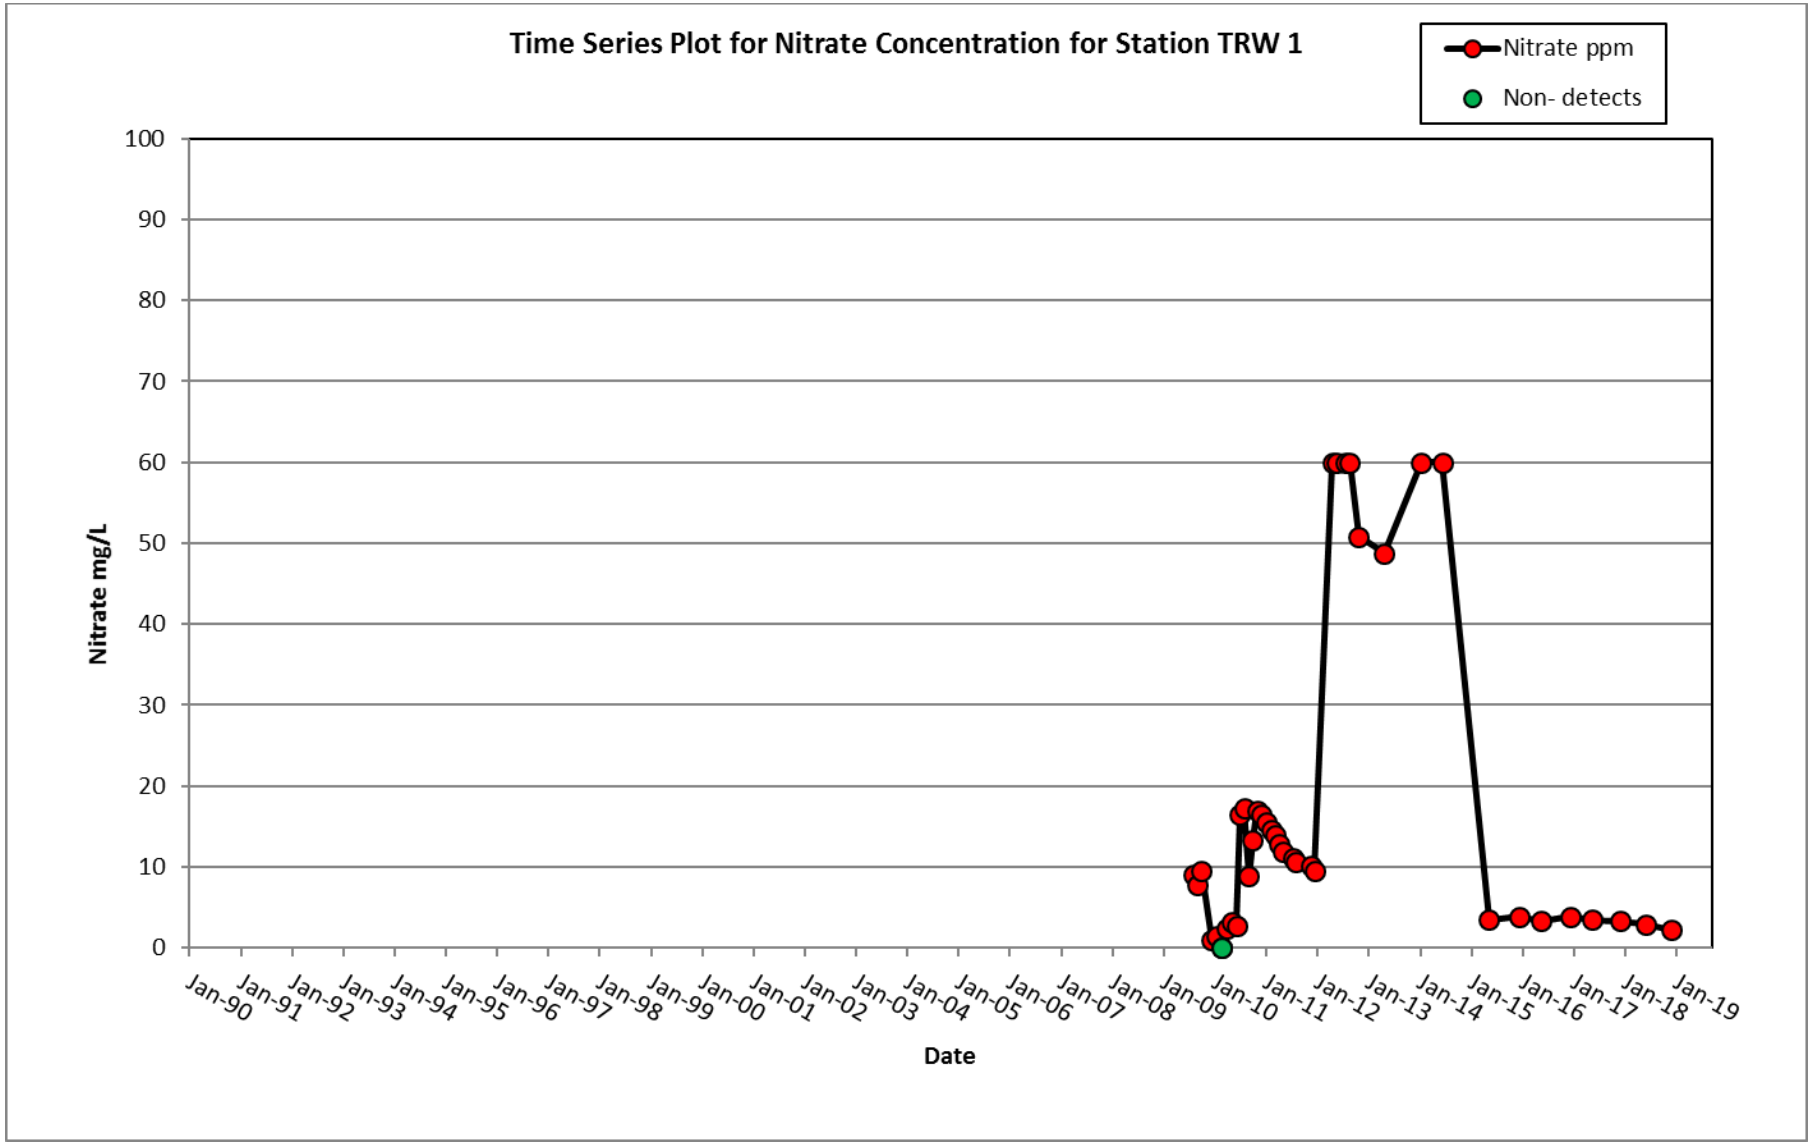
Time Series Plot for Nitrate Concentration for Station TRW 1
Nitrate ppm
Non- detects
Nitrate mg/L
100
90
80
70
60
50
40
30
20
10
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

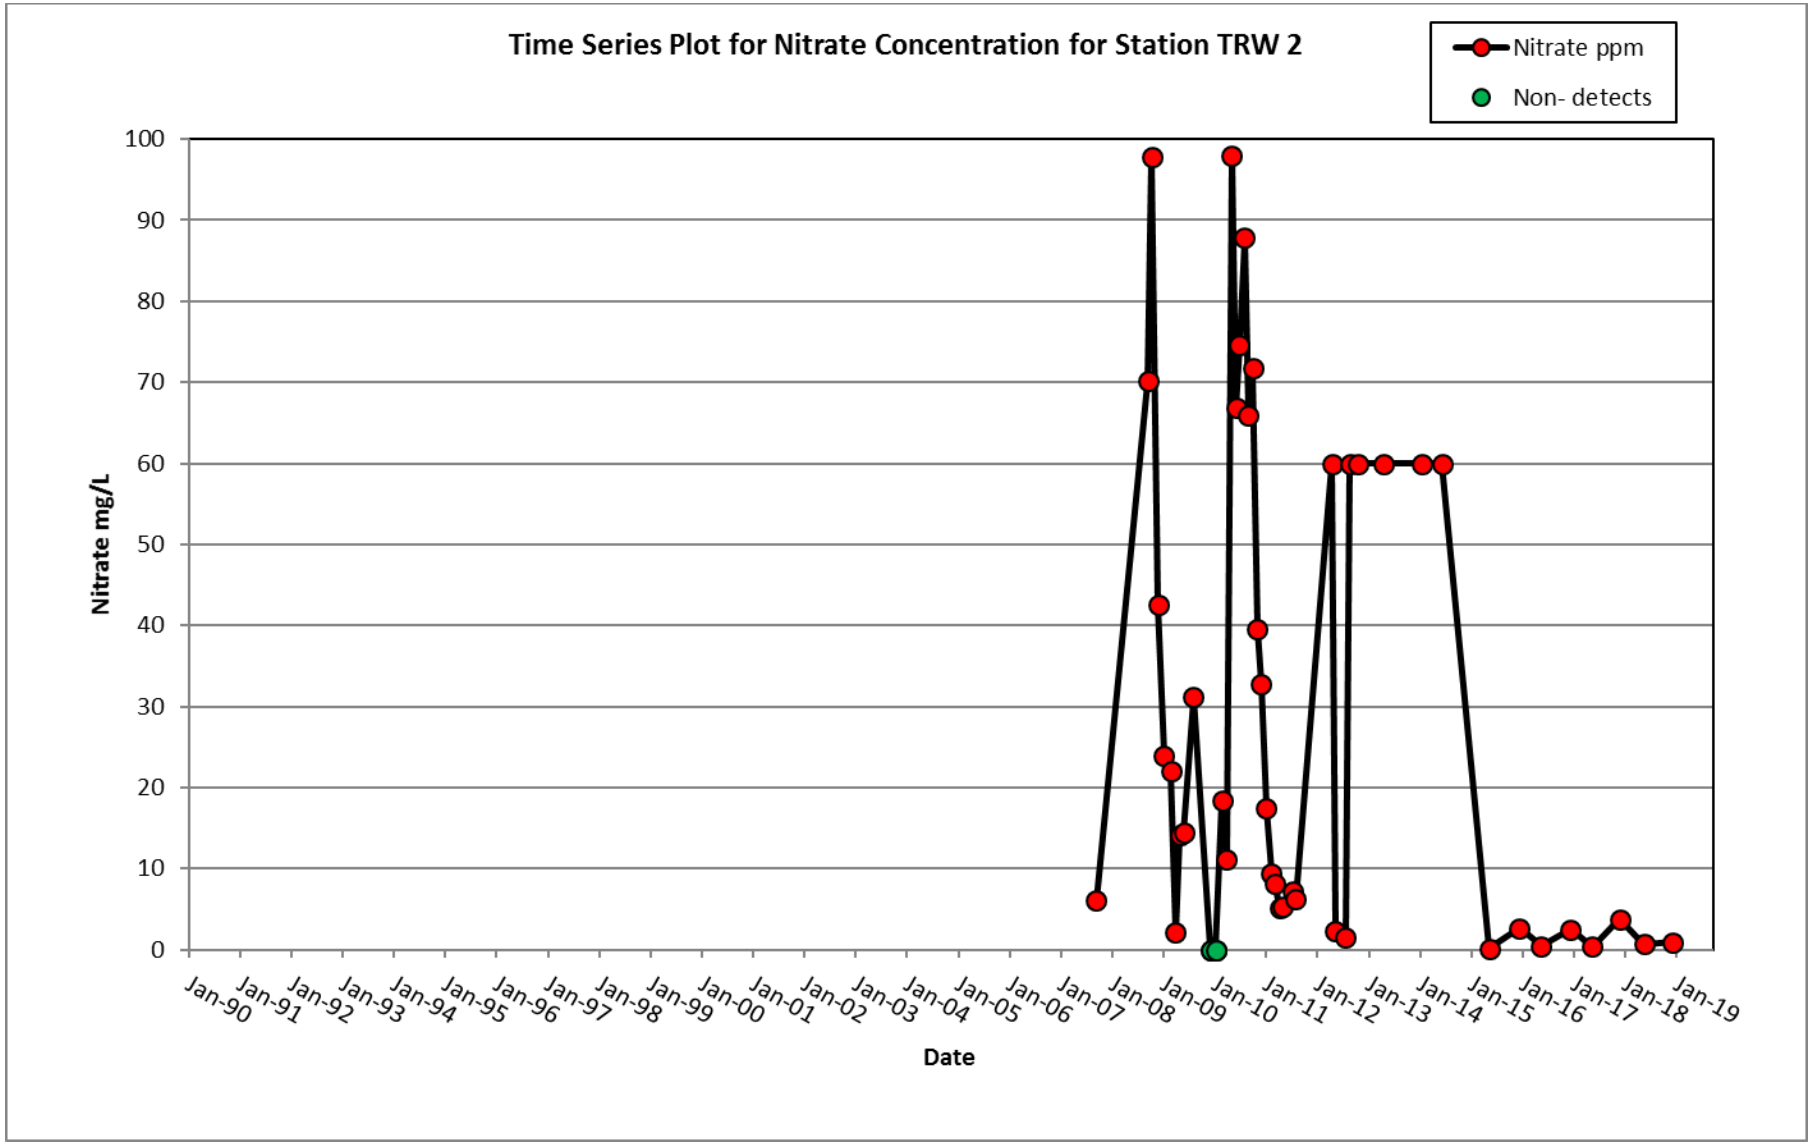
Time Series Plot for Nitrate Concentration for Station TRW 2
Nitrate ppm
Non- detects
Nitrate mg/L
100
90
80
70
60
50
40
30
20
10
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

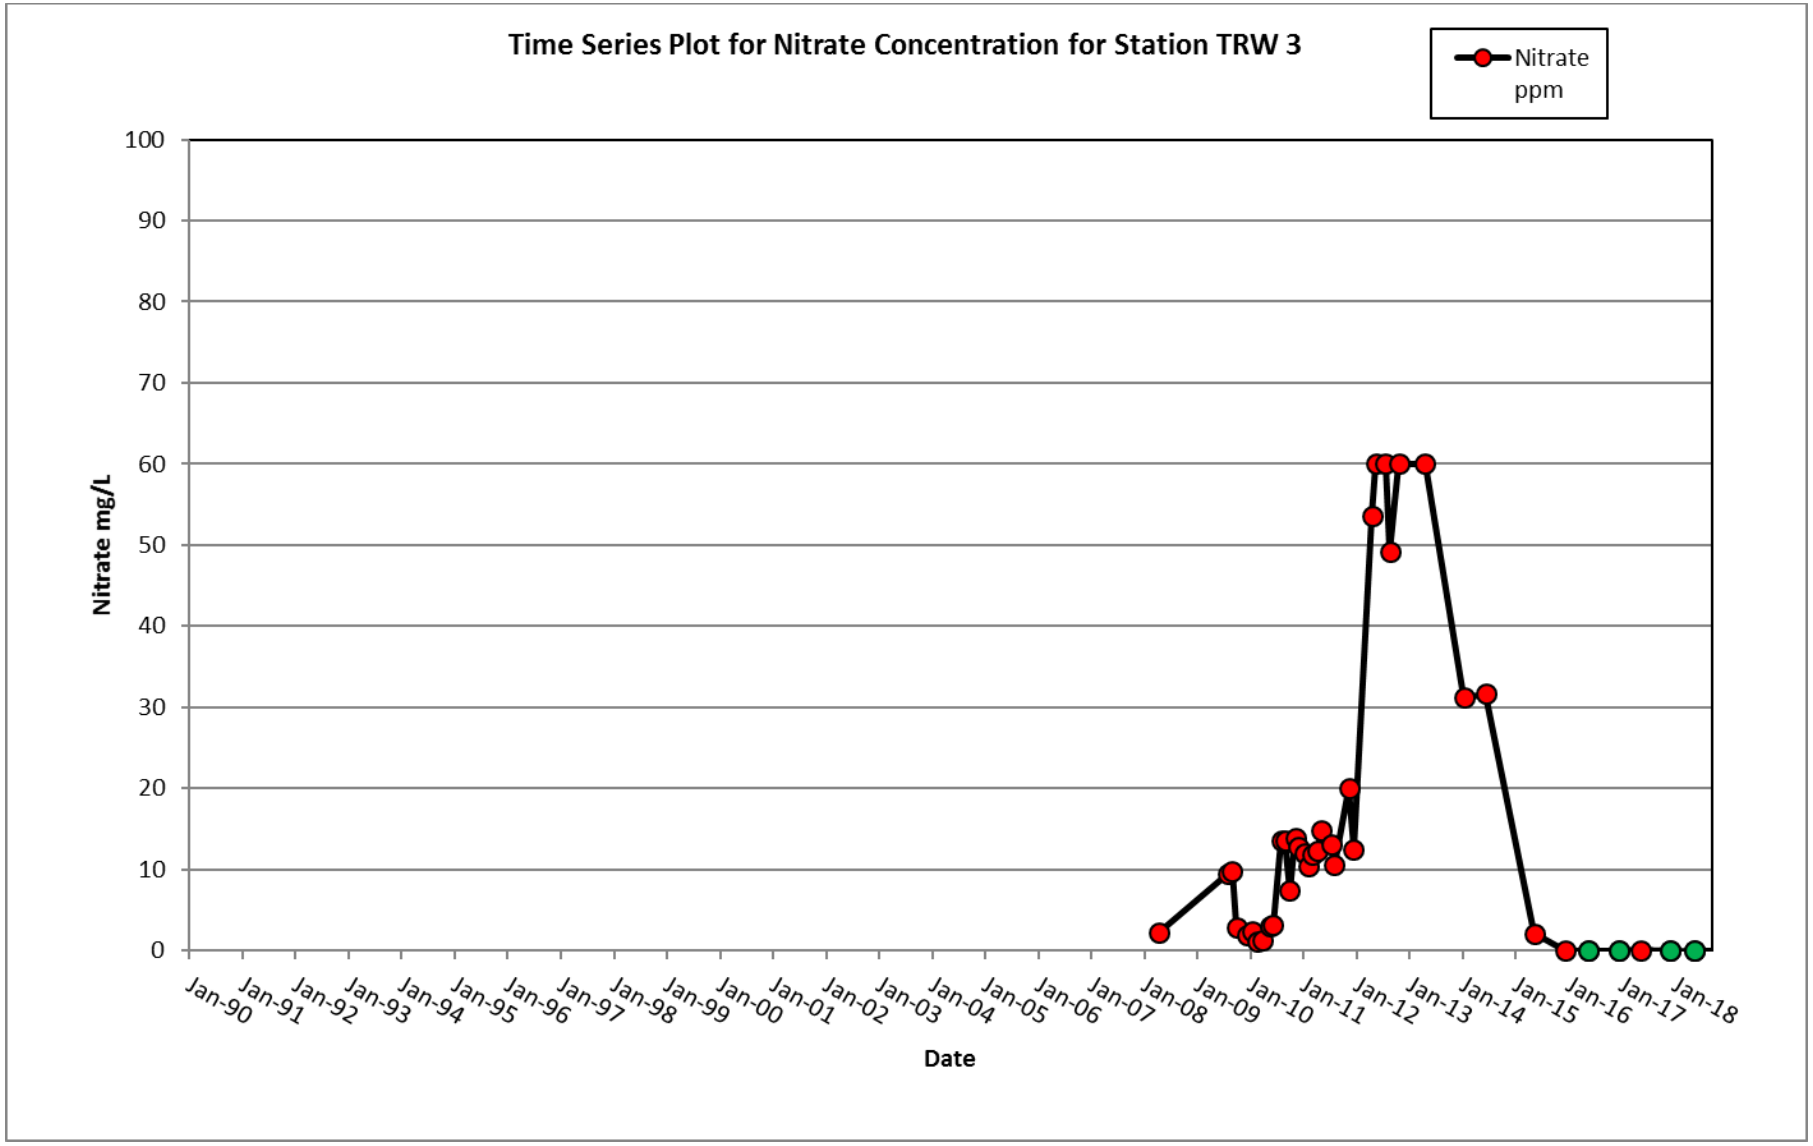
Time Series Plot for Nitrate Concentration for Station TRW 3
Nitrate ppm
Nitrate mg/L
100
90
80
70
60
50
40
30
20
10
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Date

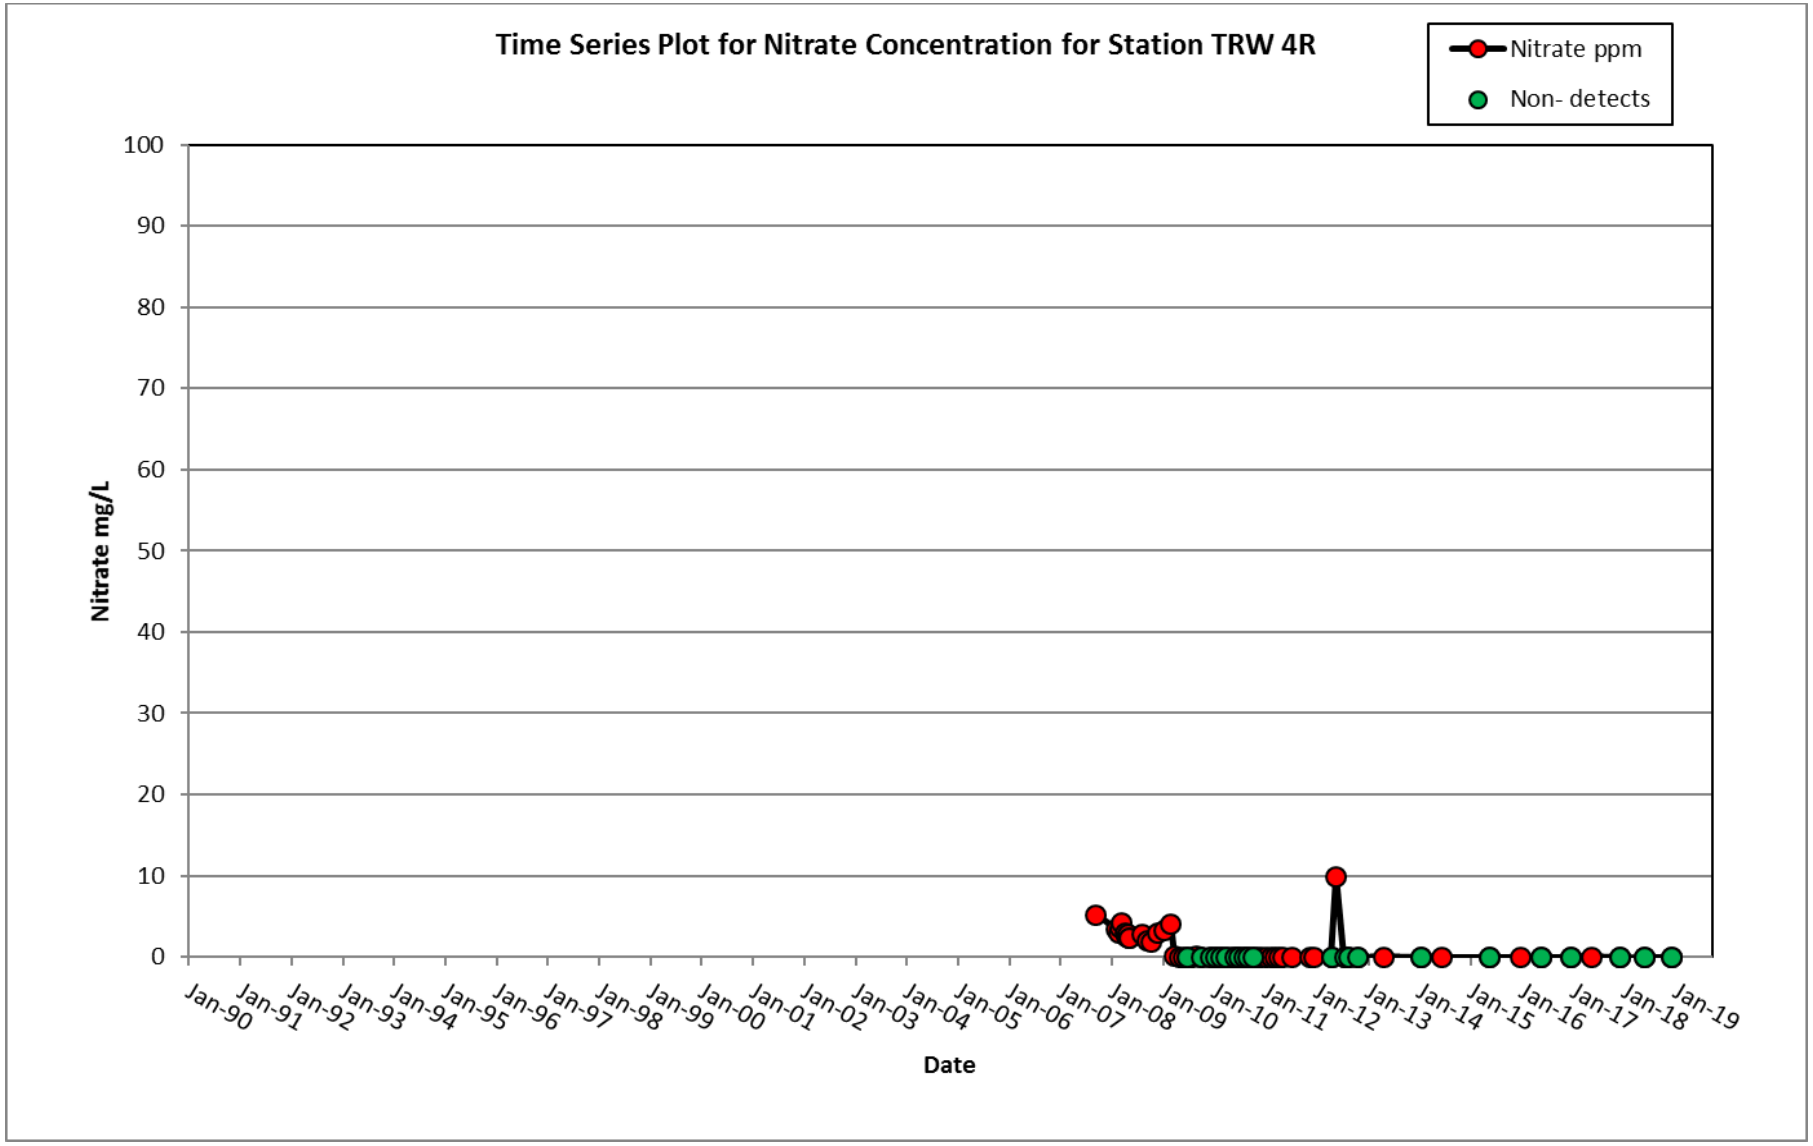
Time Series Plot for Nitrate Concentration for Station TRW 4R
Nitrate ppm
Non- detects
Nitrate mg/L
100
90
80
70
60
50
40
30
20
10
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

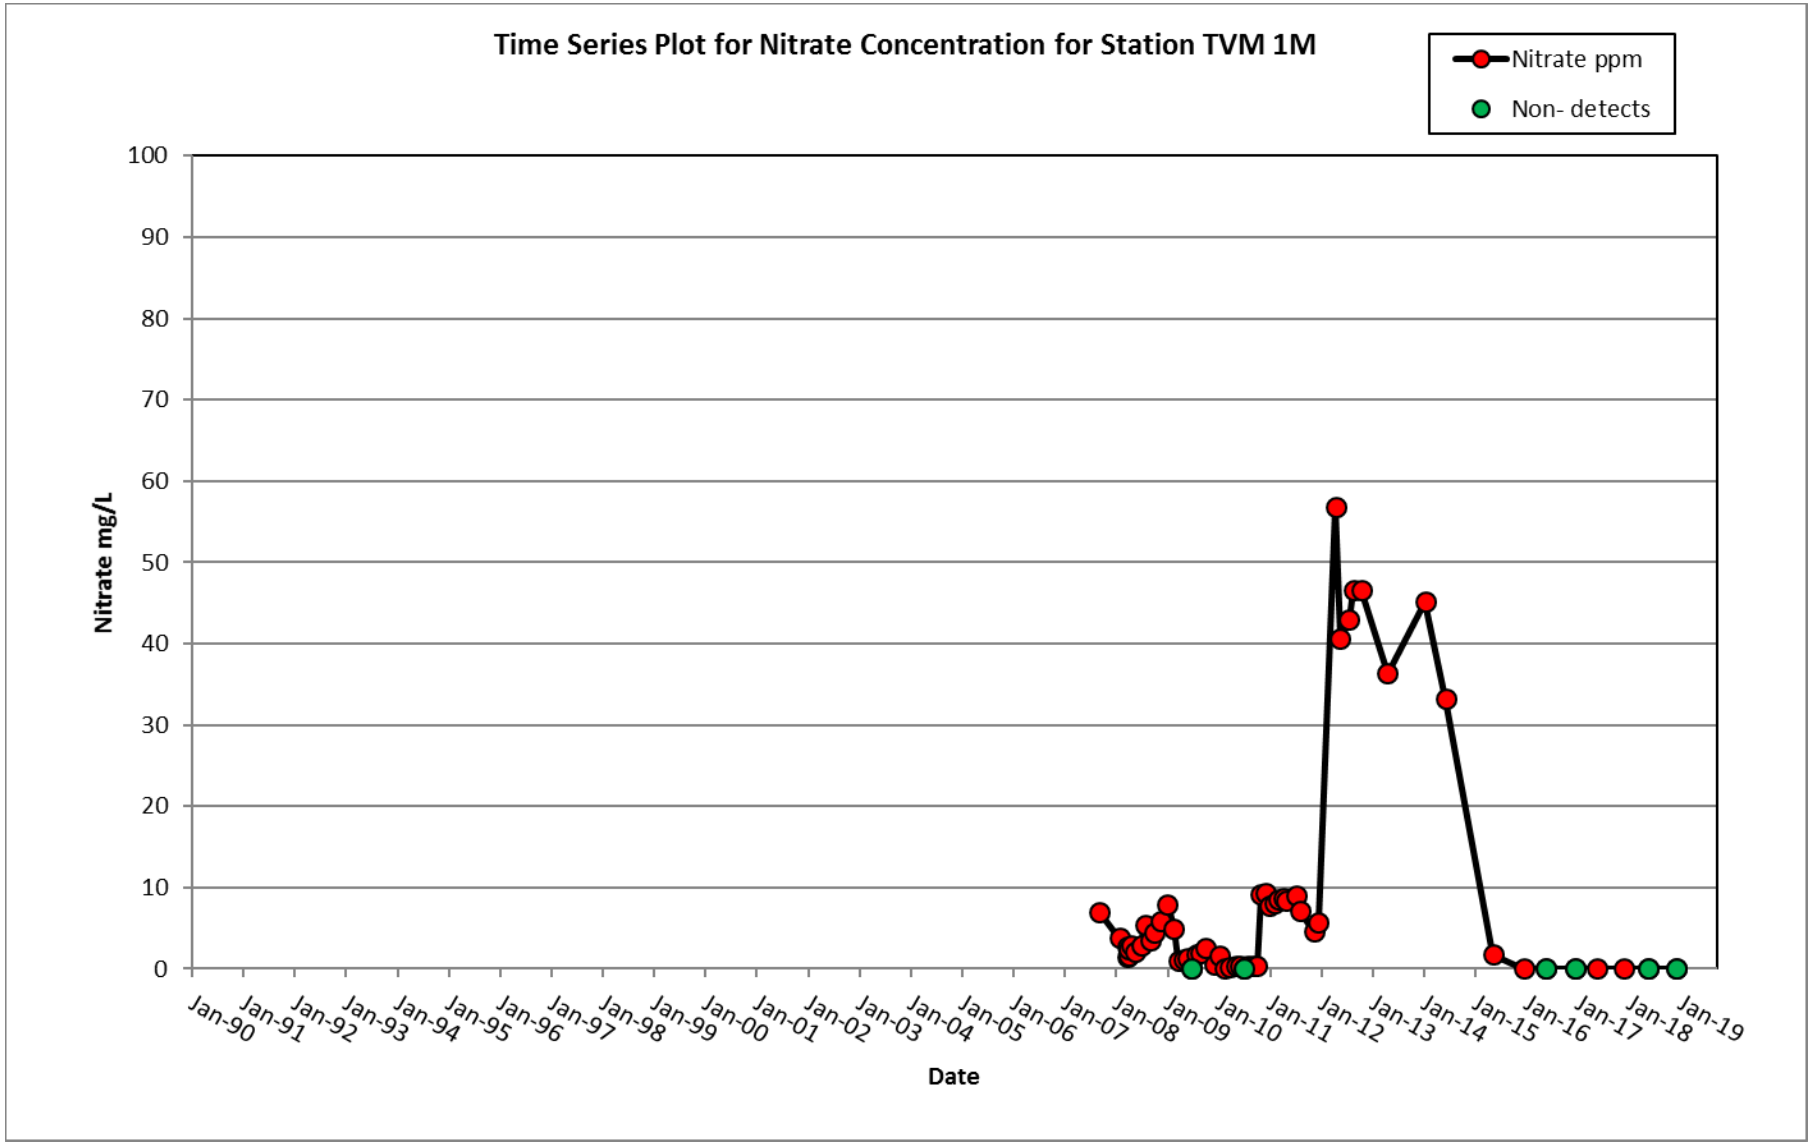
Time Series Plot for Nitrate Concentration for Station TVM 1M
Nitrate ppm
Non- detects
Nitrate mg/L
100
90
80
70
60
50
40
30
20
10
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

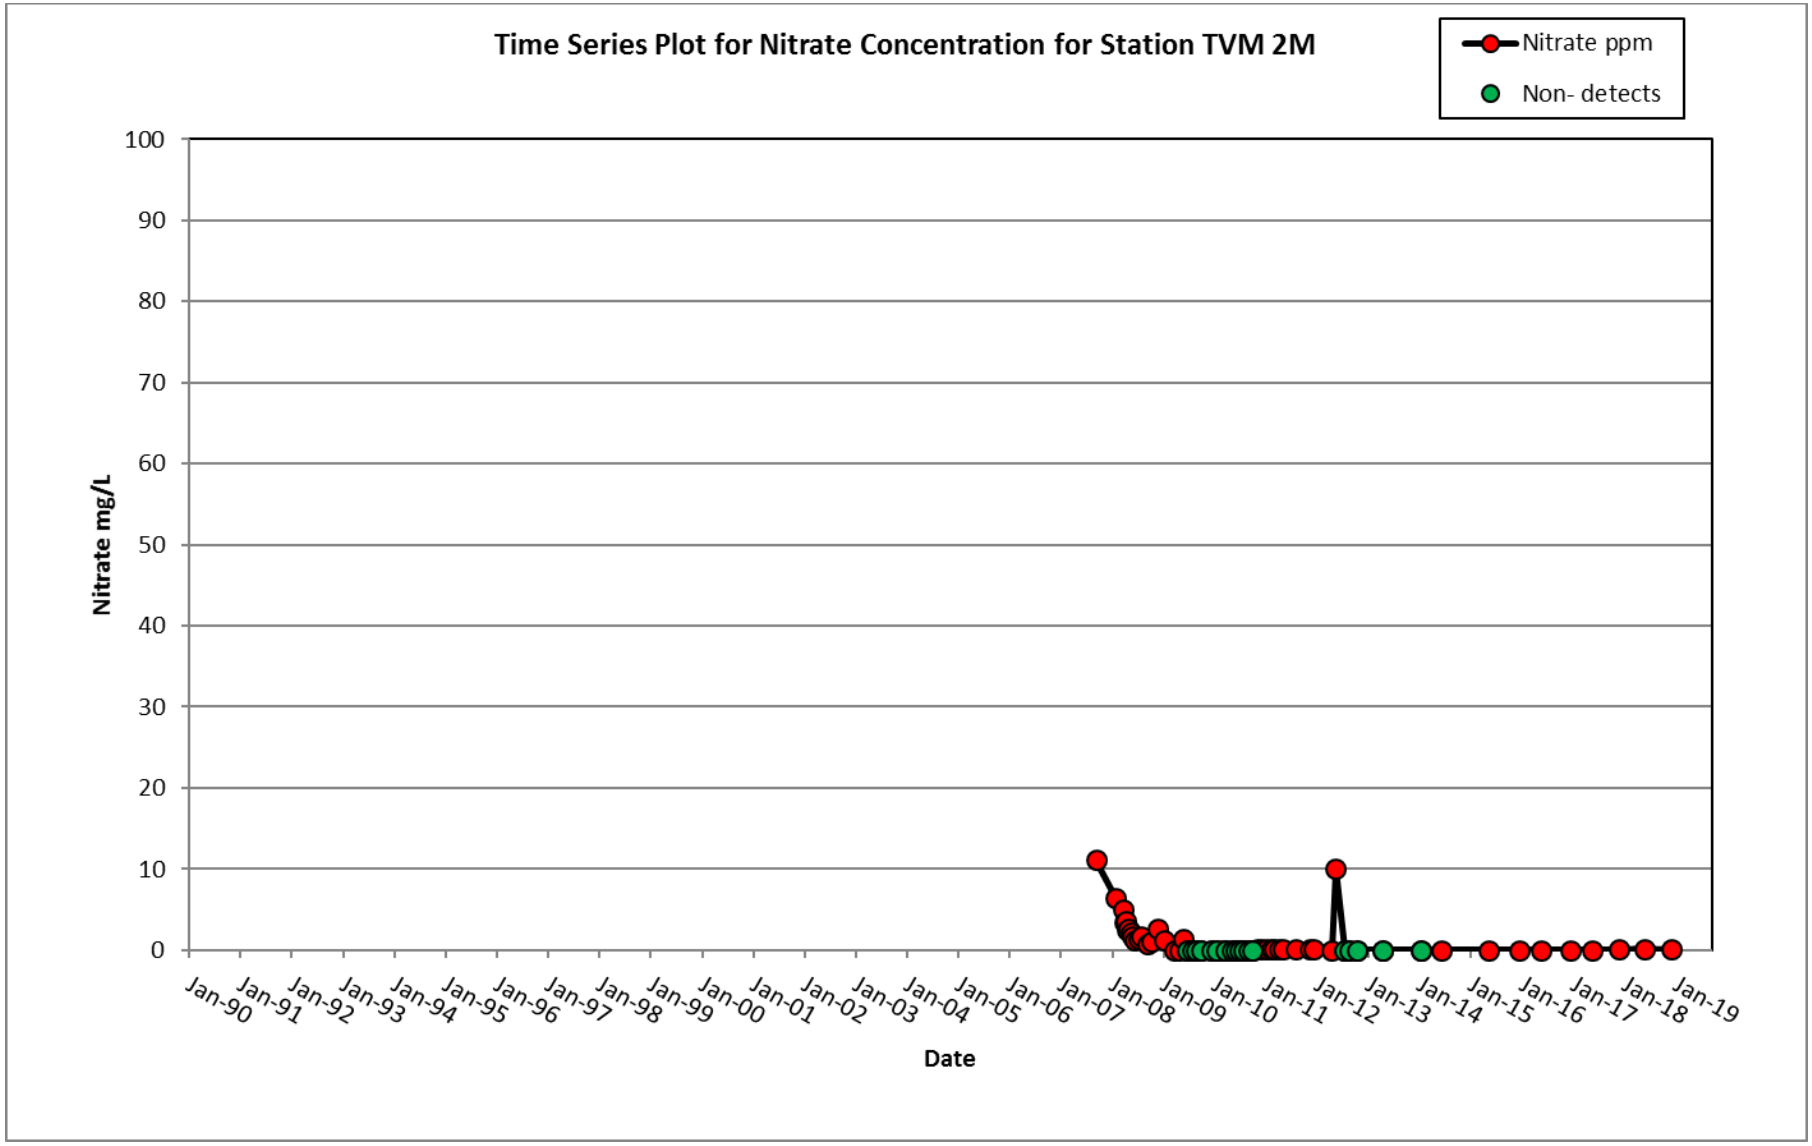
Time Series Plot for Nitrate Concentration for Station TVM 2M
Nitrate ppm
Non- detects
Nitrate mg/L
100
90
80
70
60
50
40
30
20
10
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

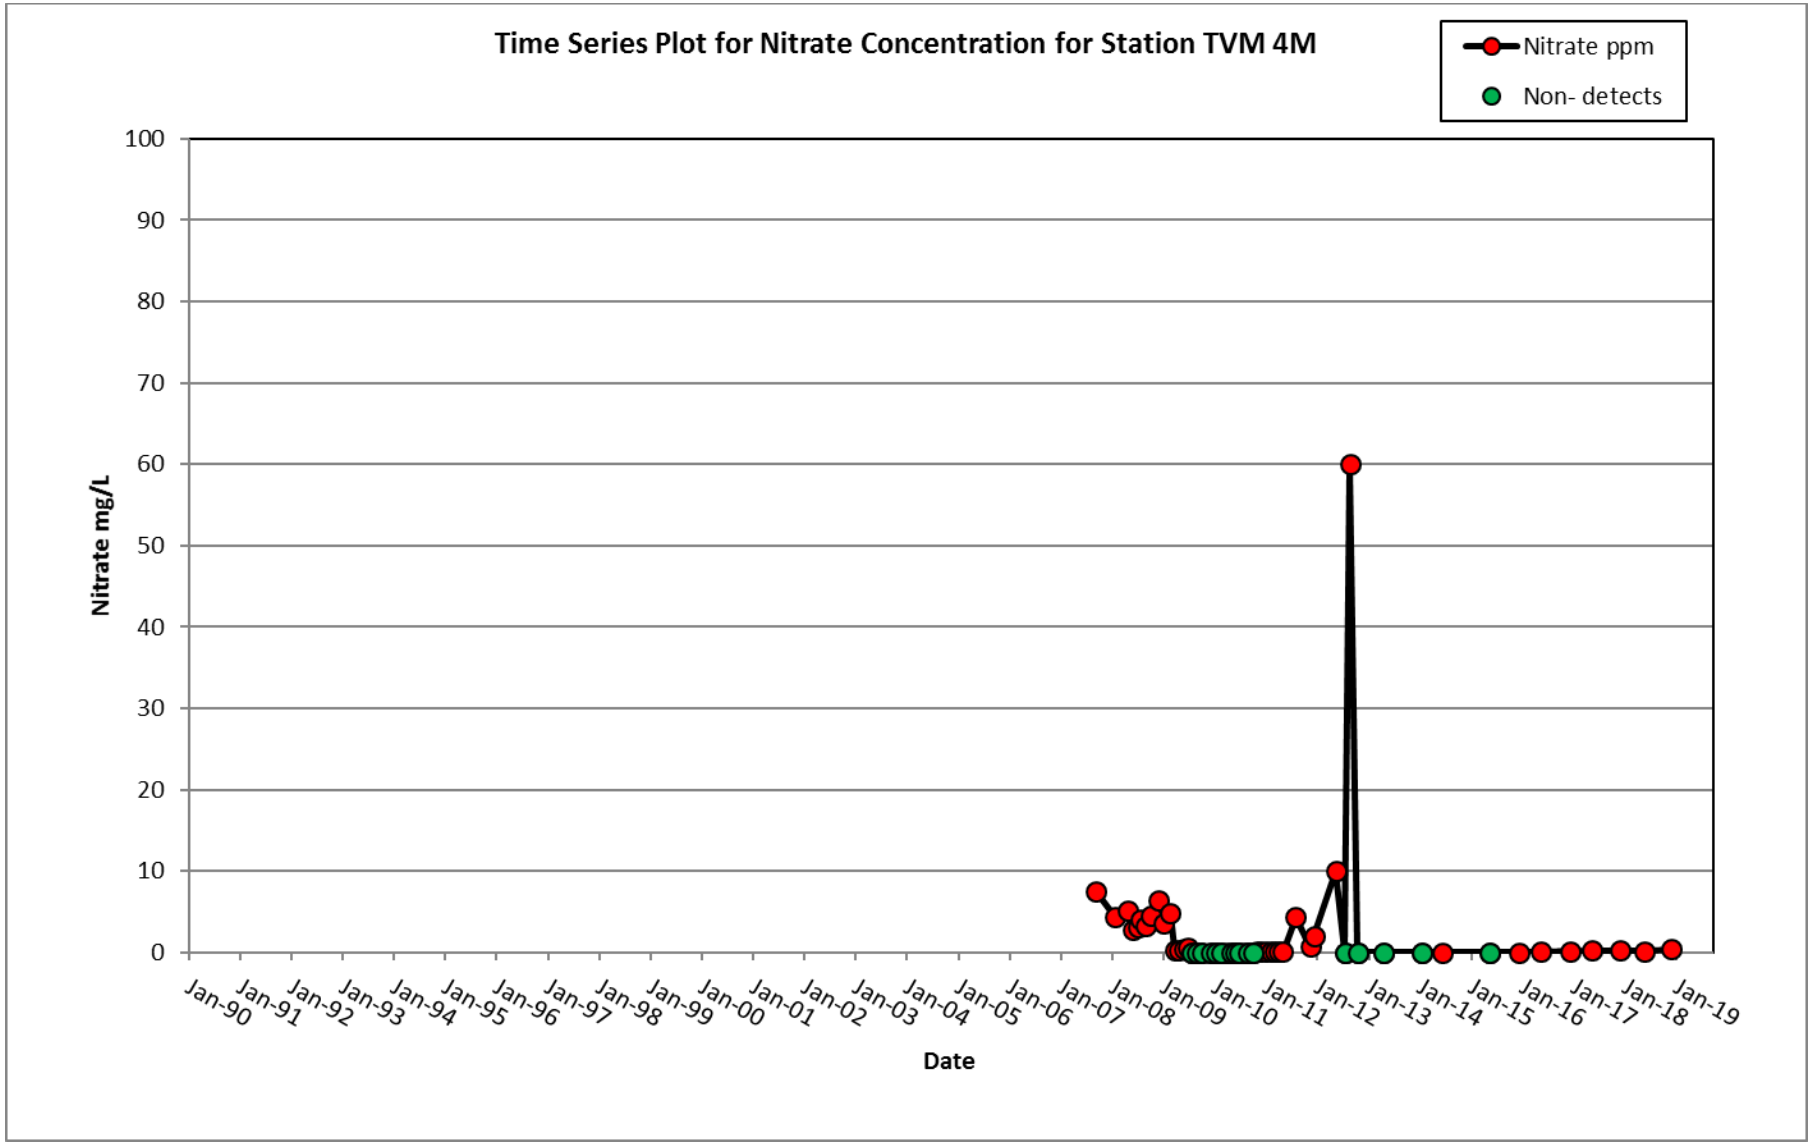
Time Series Plot for Nitrate Concentration for Station TVM 4M
Nitrate ppm
Non- detects
Nitrate mg/L
100
90
80
70
60
50
40
30
20
10
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

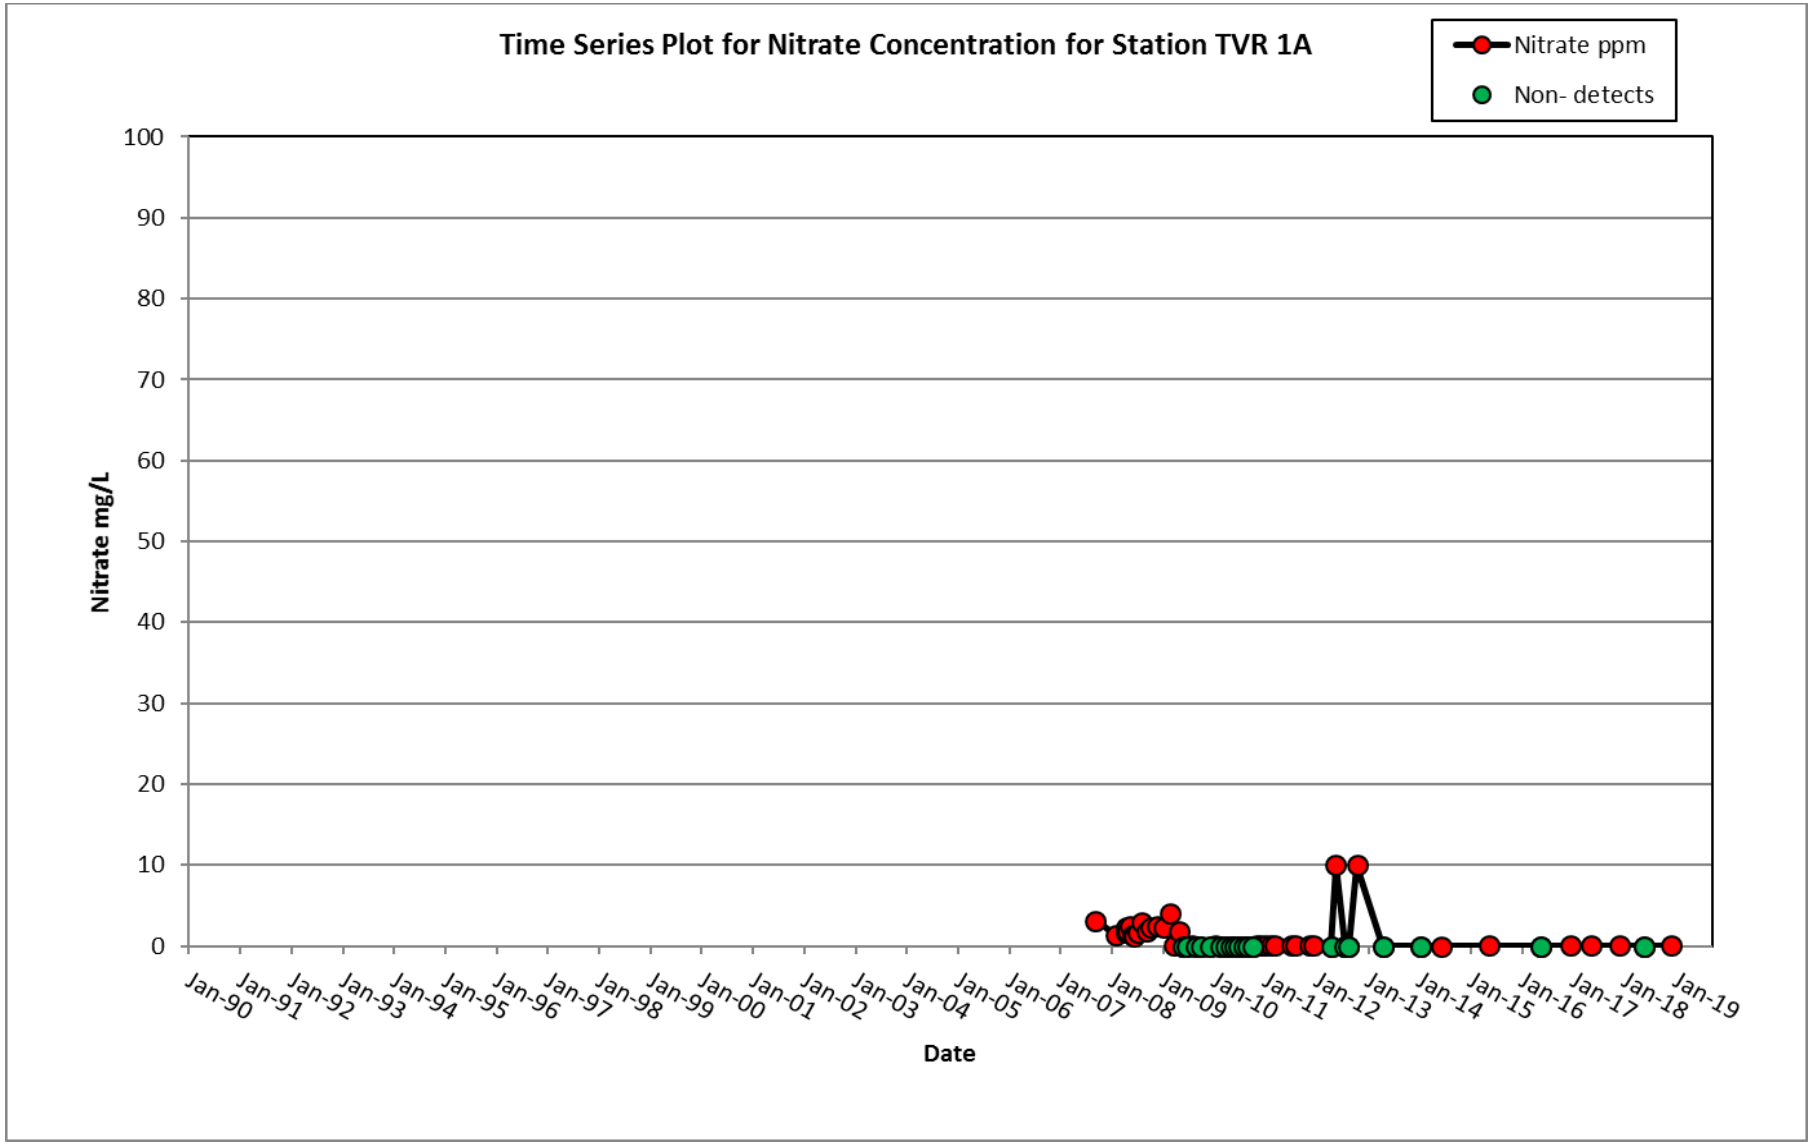
Time Series Plot for Nitrate Concentration for Station TVR 1A
Nitrate ppm
Non- detects
Nitrate mg/L
100
90
80
70
60
50
40
30
20
10
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

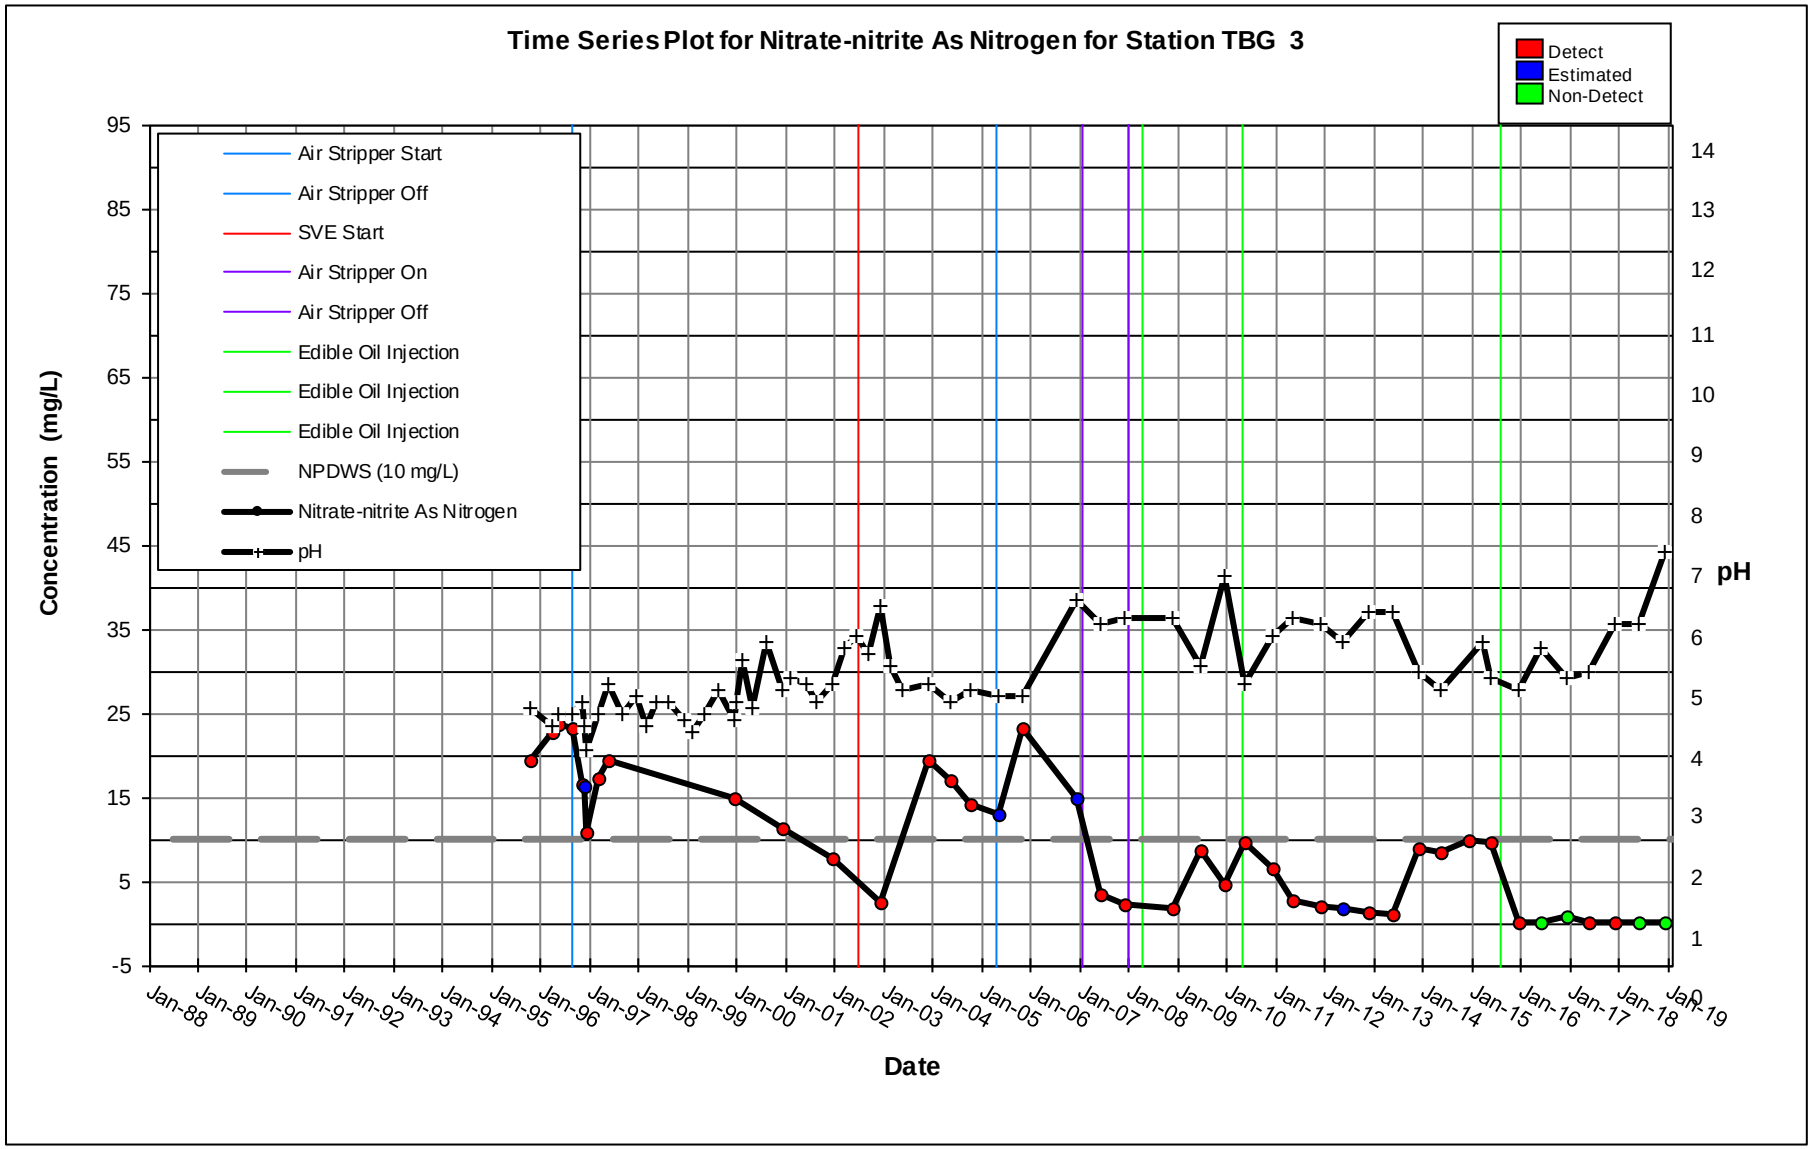
Time Series Plot for Nitrate-nitrite As Nitrogen for Station TBG 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (10 mg/L)
Nitrate-nitrite As Nitrogen
pH
Concentration (mg/L)
pH
Date
95
85
75
65
55
45
35
25
15
5
-5
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19

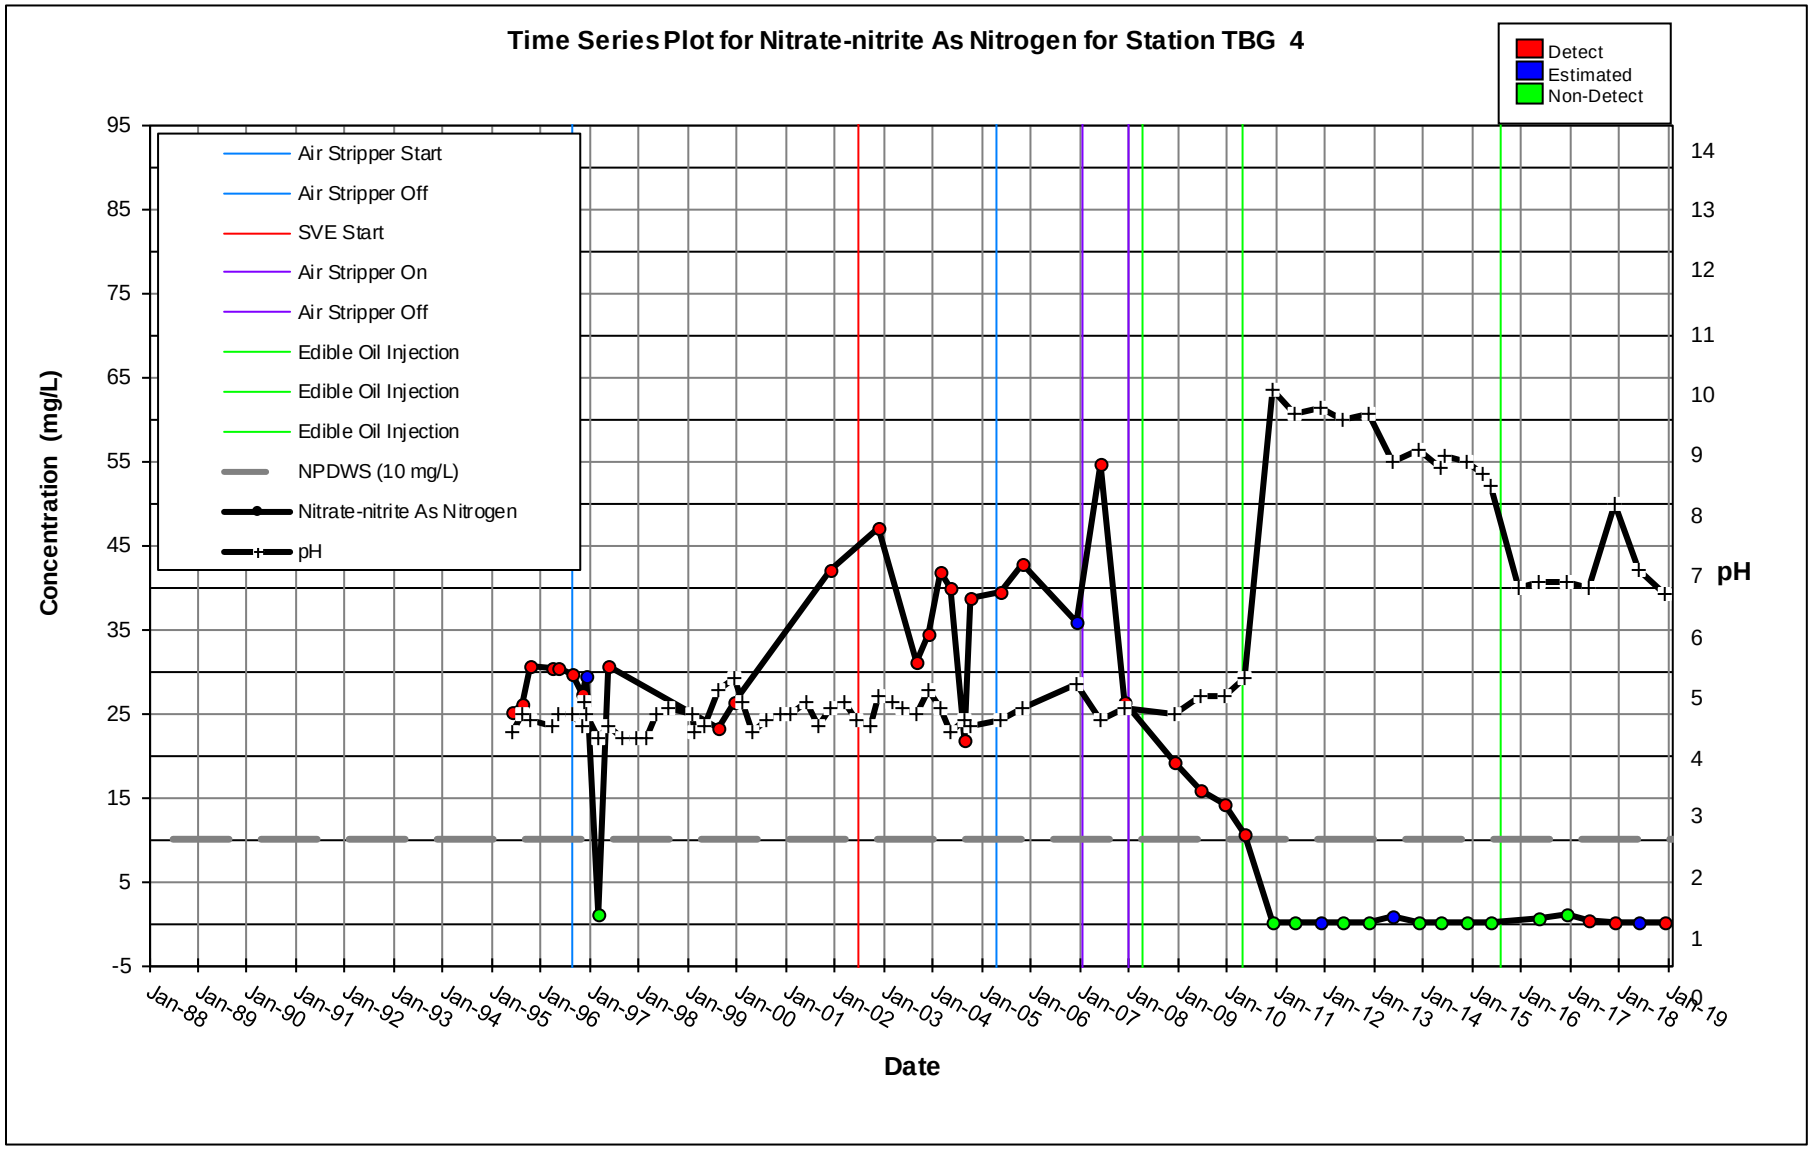
Time Series Plot for Nitrate-nitrite As Nitrogen for Station TBG 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (10 mg/L)
Nitrate-nitrite As Nitrogen
pH
Concentration (mg/L)
pH
Date
95
85
75
65
55
45
35
25
15
5
-5
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19

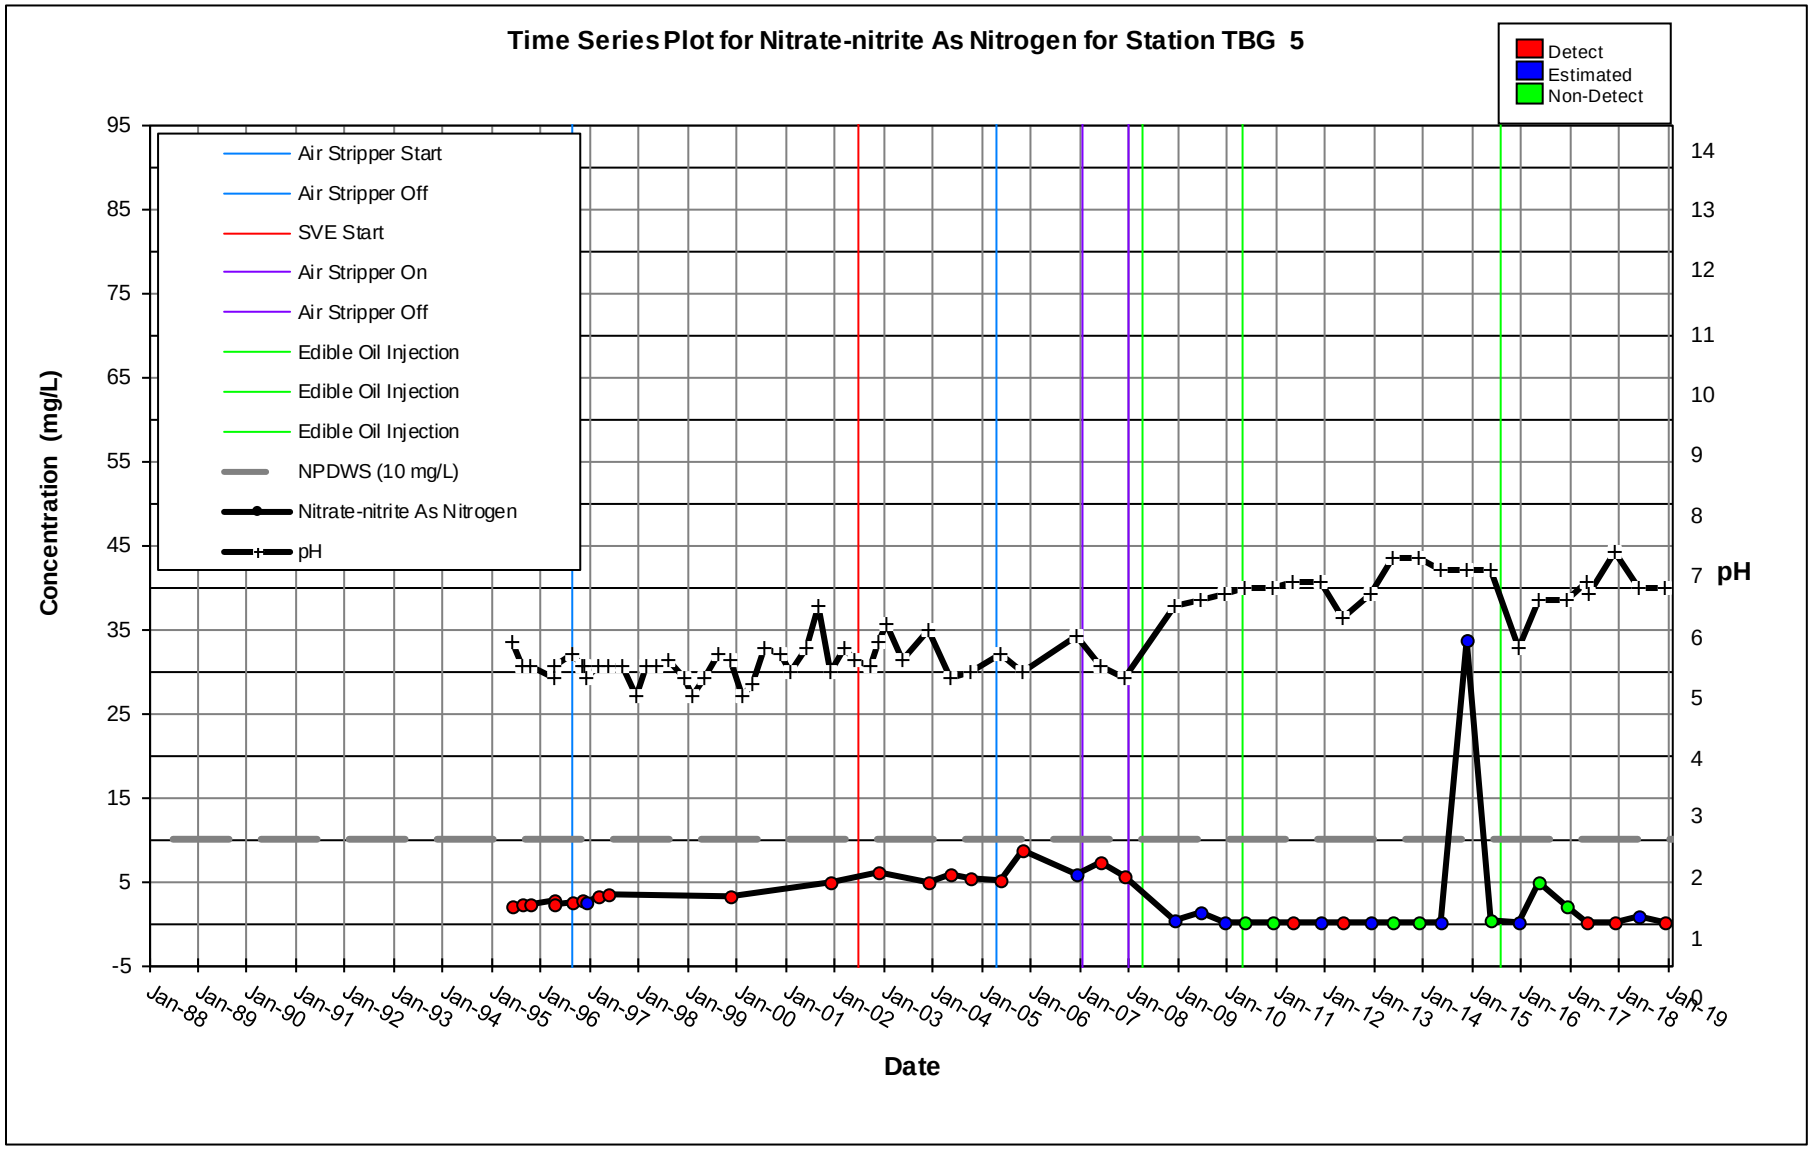
Time Series Plot for Nitrate-nitrite As Nitrogen for Station TBG 5
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (10 mg/L)
Nitrate-nitrite As Nitrogen
pH
Concentration (mg/L)
pH
Date
95
85
75
65
55
45
35
25
15
5
-5
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19

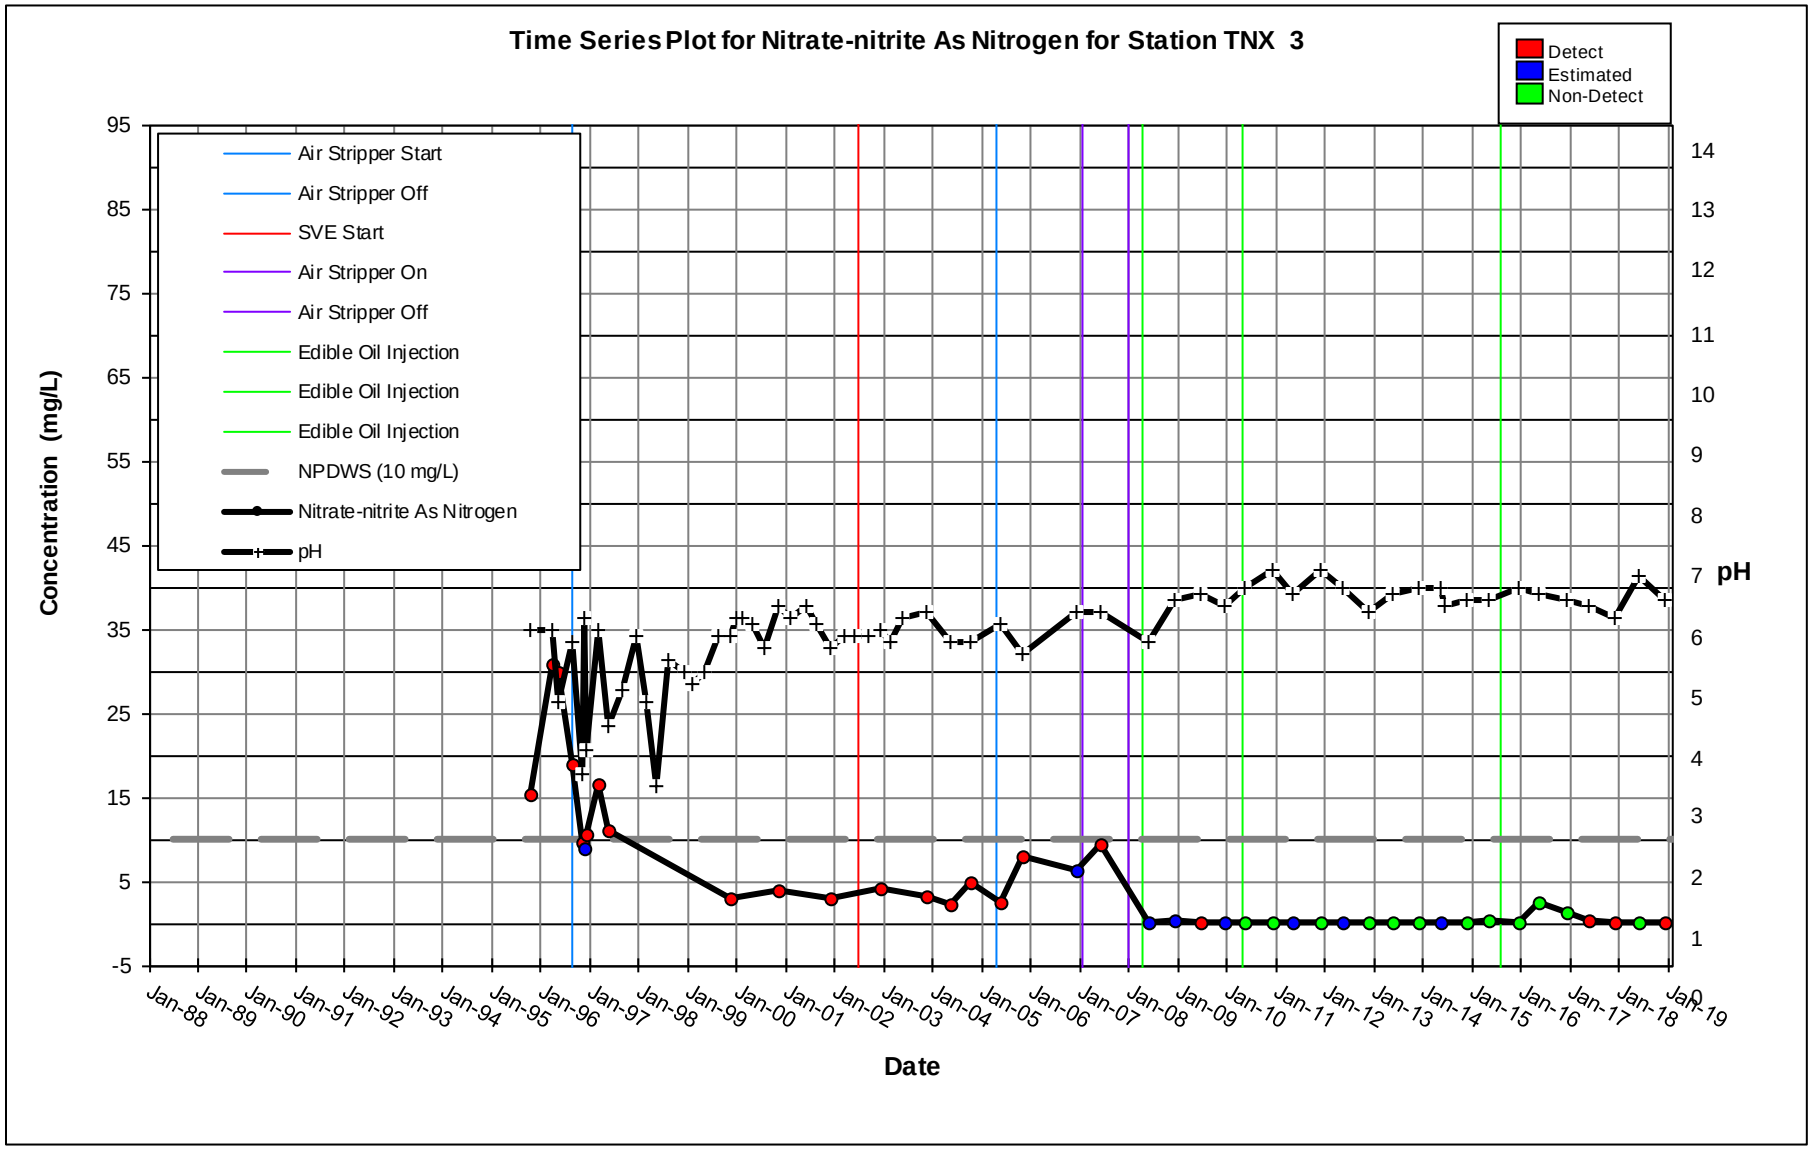
Time Series Plot for Nitrate-nitrite As Nitrogen for Station TNX 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (10 mg/L)
Nitrate-nitrite As Nitrogen
pH
Concentration (mg/L)
pH
Date
95
85
75
65
55
45
35
25
15
5
-5
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19

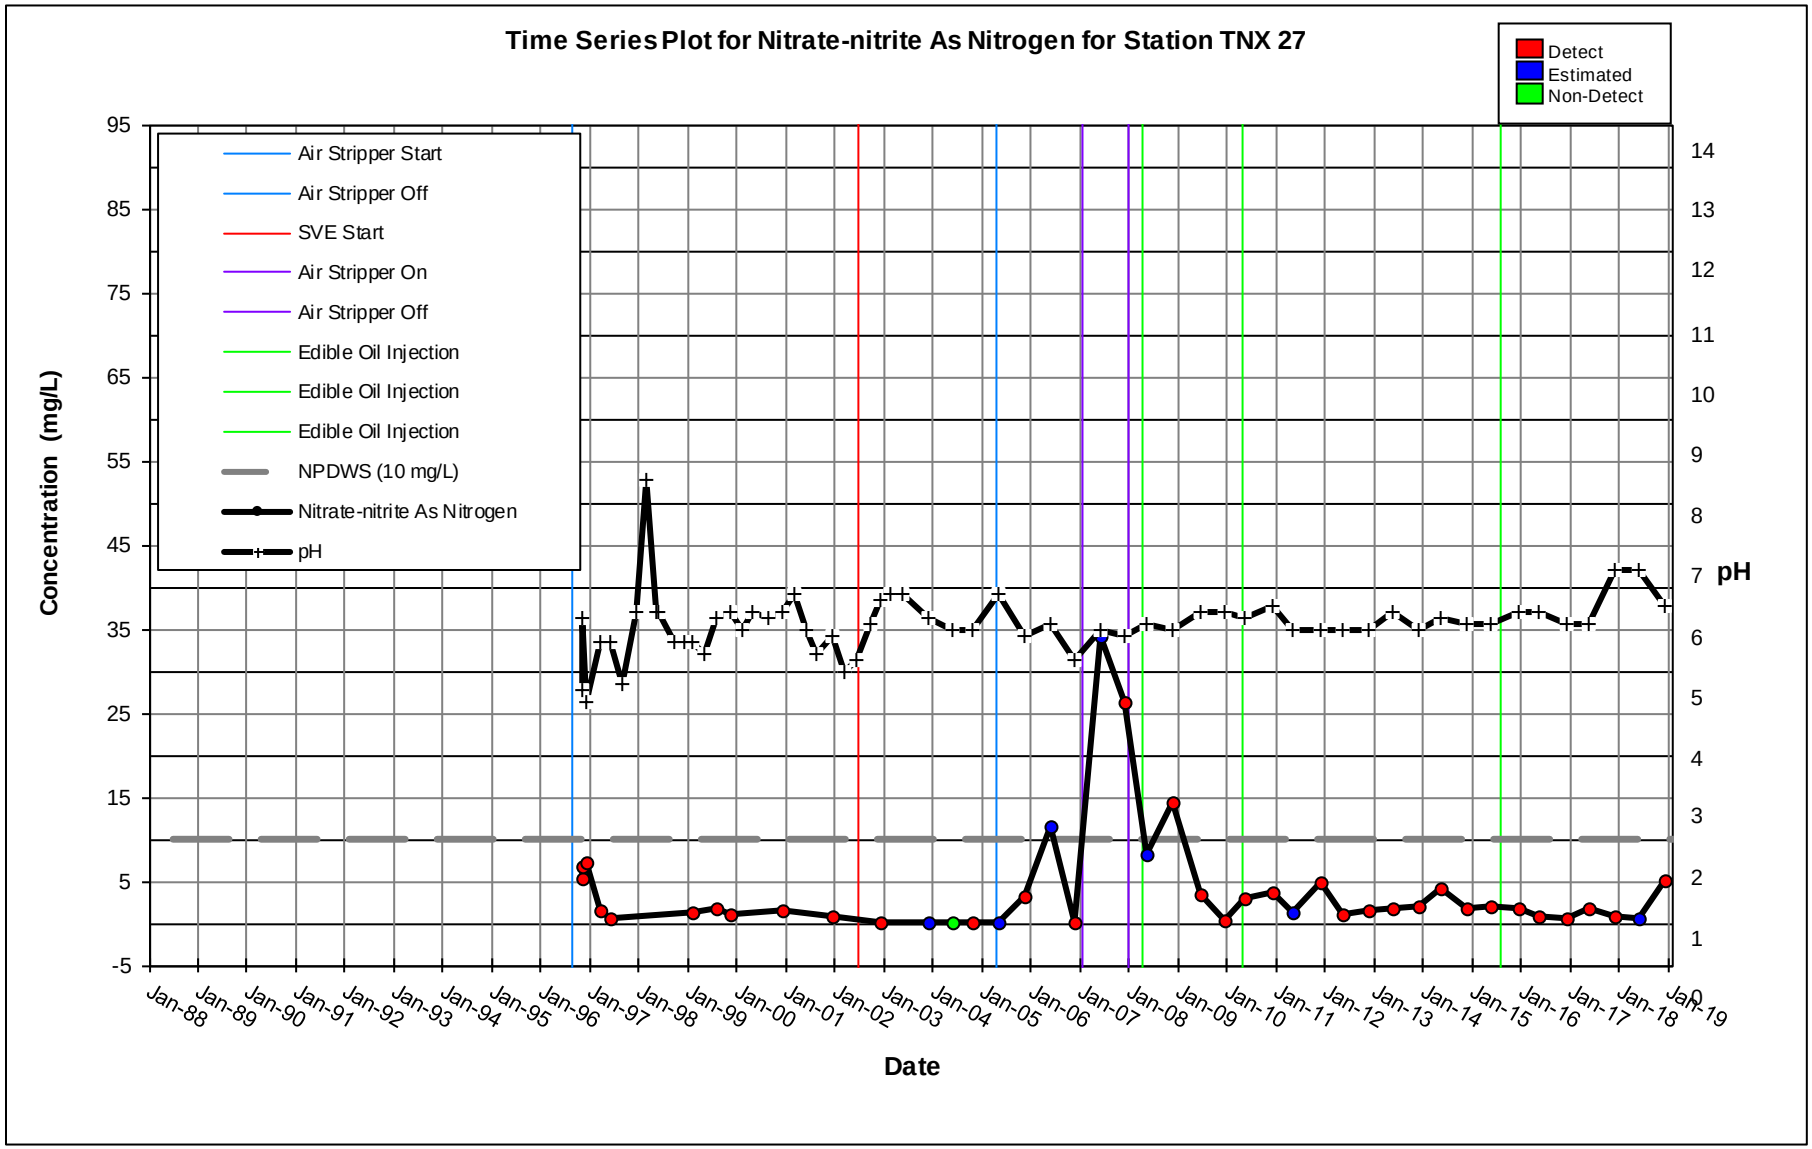
Time Series Plot for Nitrate-nitrite As Nitrogen for Station TNX 27
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (10 mg/L)
Nitrate-nitrite As Nitrogen
pH
Concentration (mg/L)
pH
Date
95
85
75
65
55
45
35
25
15
5
-5
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19

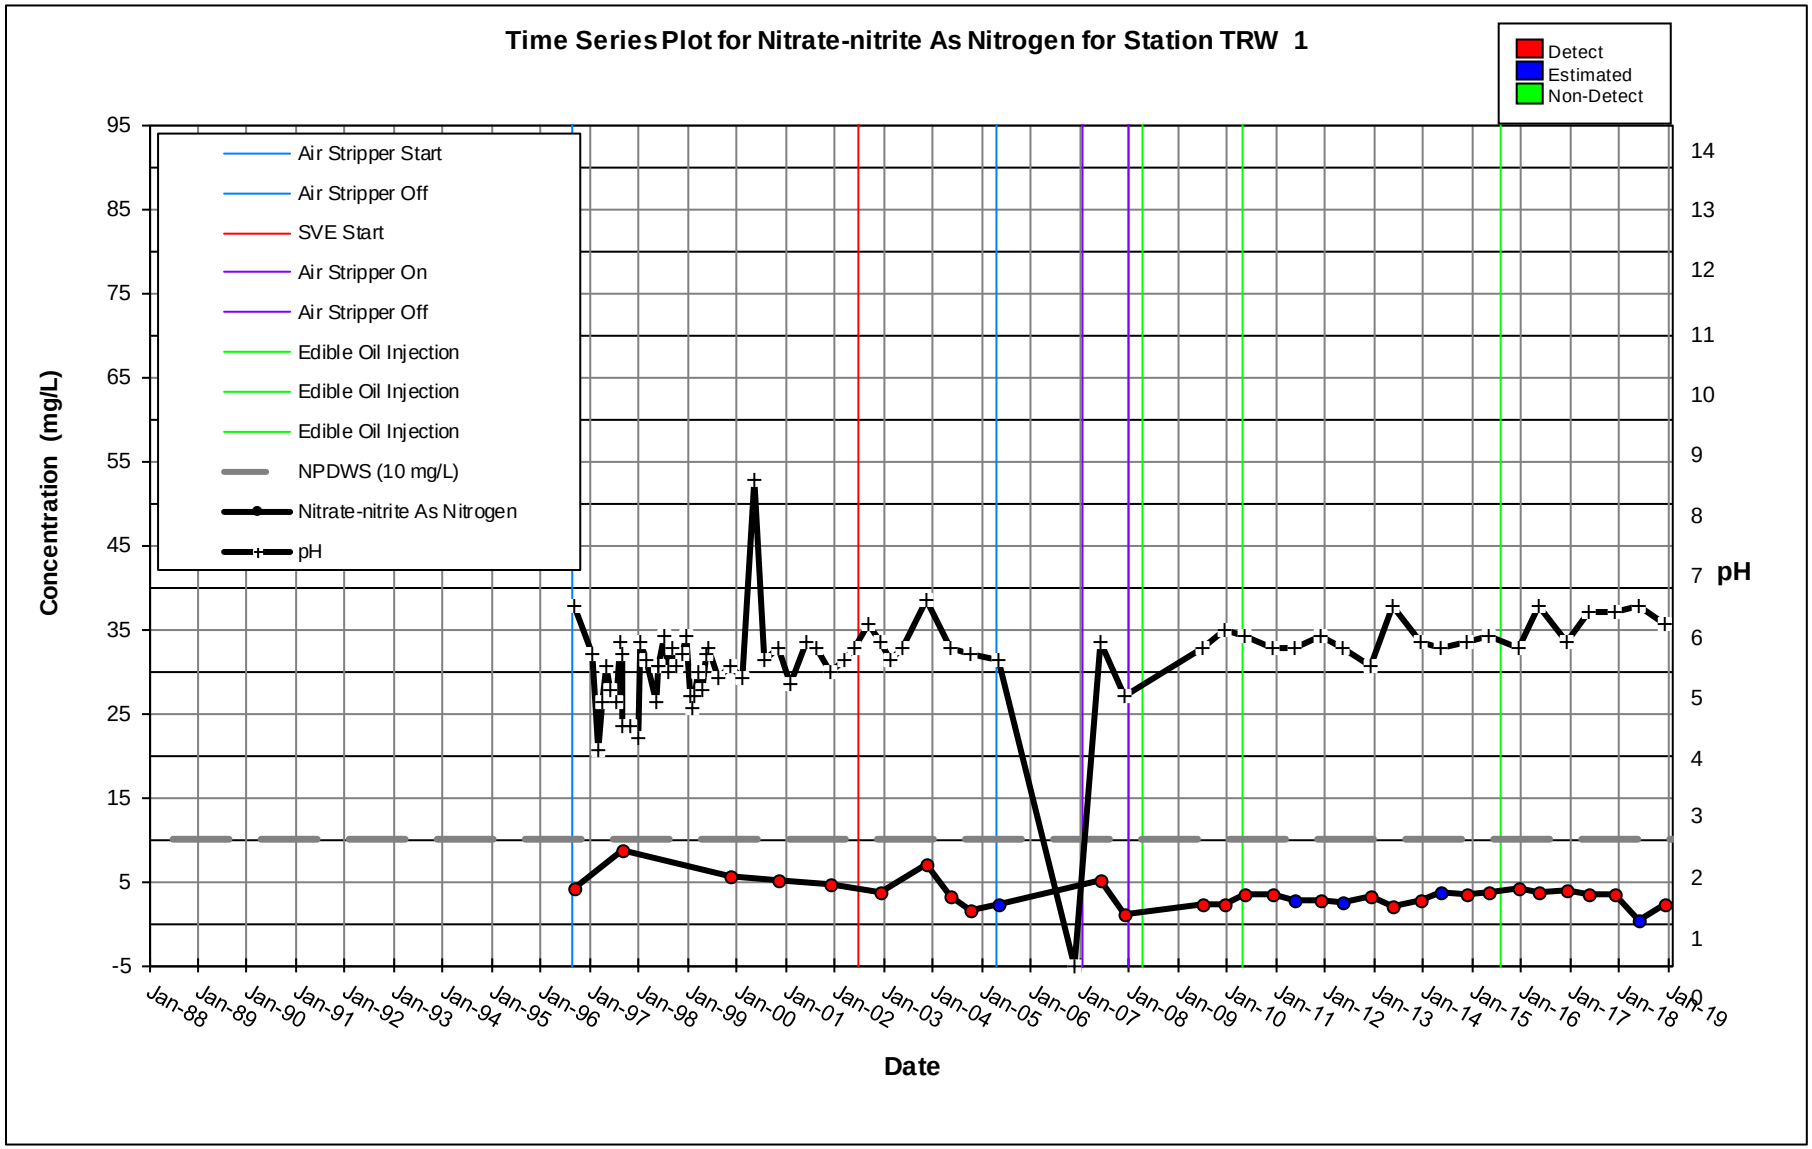
Time Series Plot for Nitrate-nitrite As Nitrogen for Station TRW 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (10 mg/L)
Nitrate-nitrite As Nitrogen
pH
Concentration (mg/L)
pH
Date
95
85
75
65
55
45
35
25
15
5
-5
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19

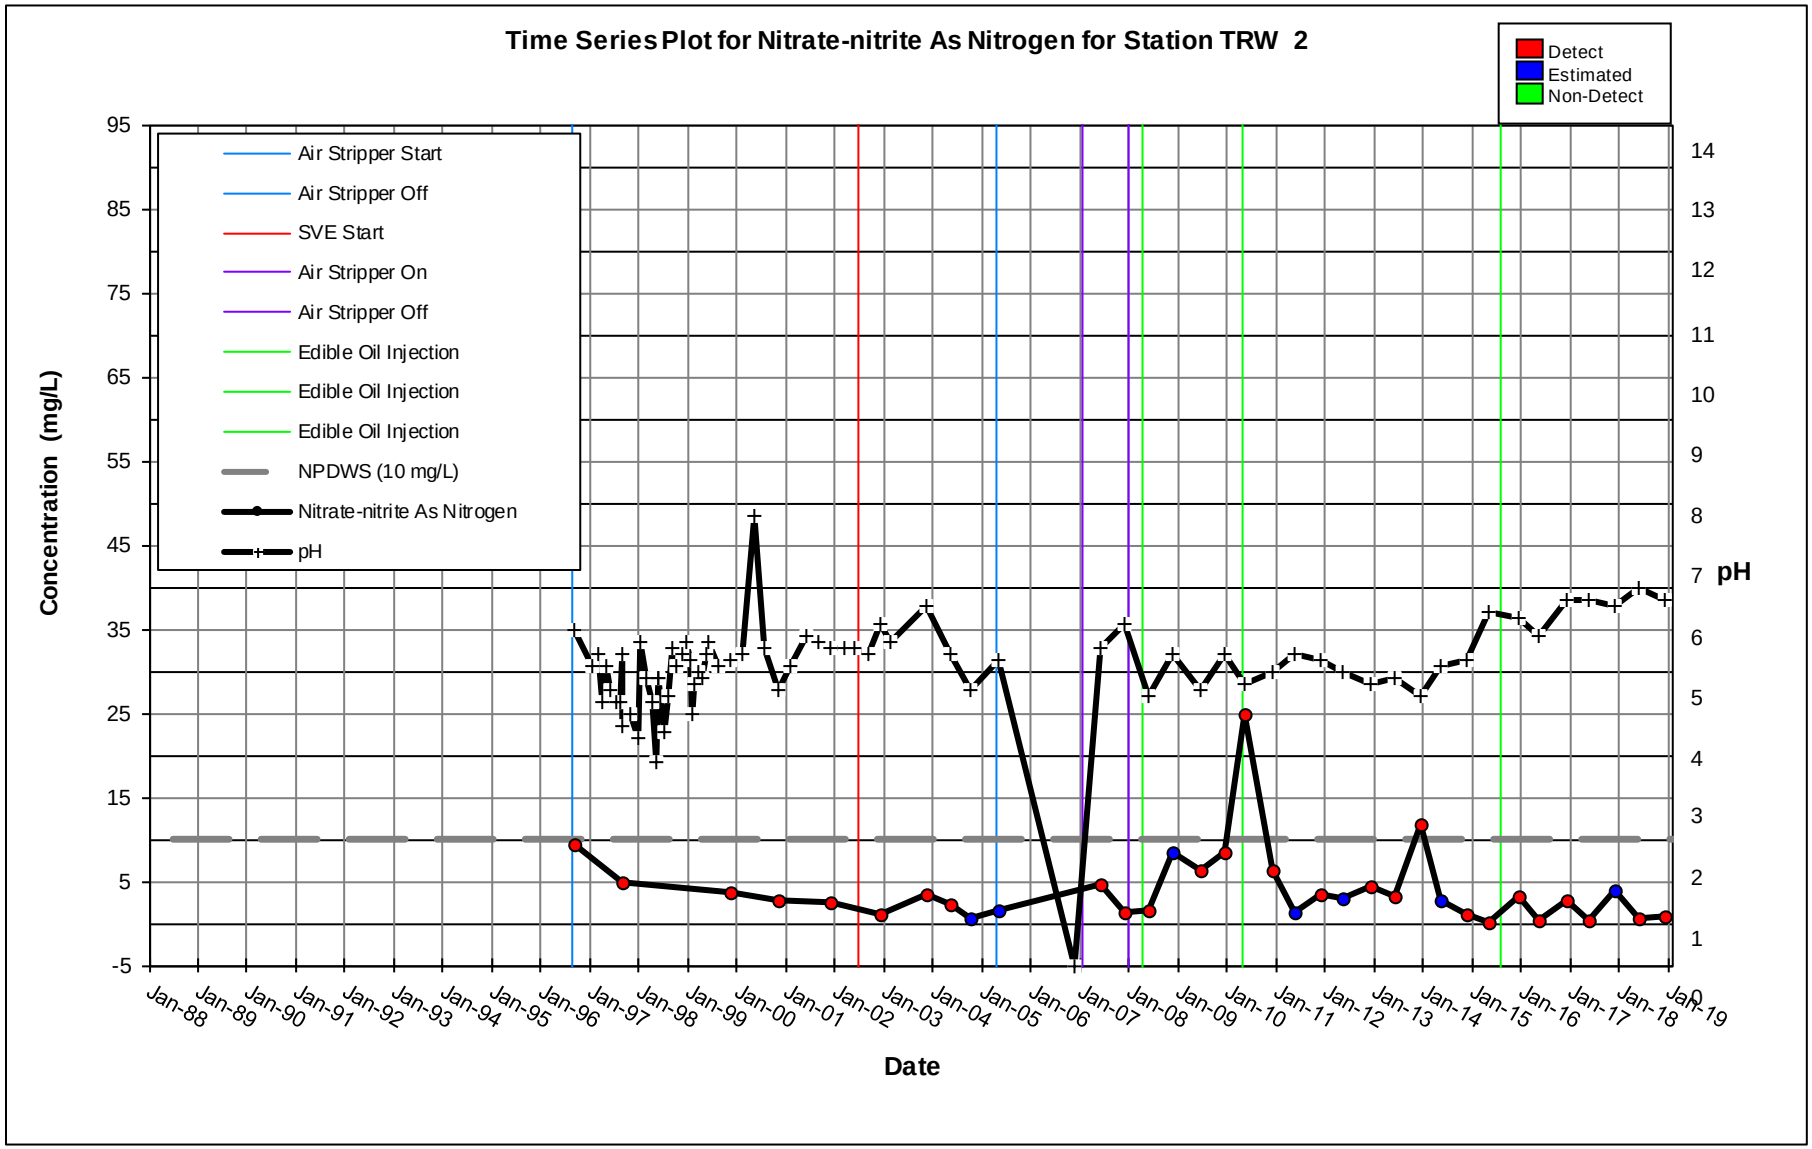
Time Series Plot for Nitrate-nitrite As Nitrogen for Station TRW 2
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (10 mg/L)
Nitrate-nitrite As Nitrogen
pH
Concentration (mg/L)
pH
Date
95
85
75
65
55
45
35
25
15
5
-5
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19

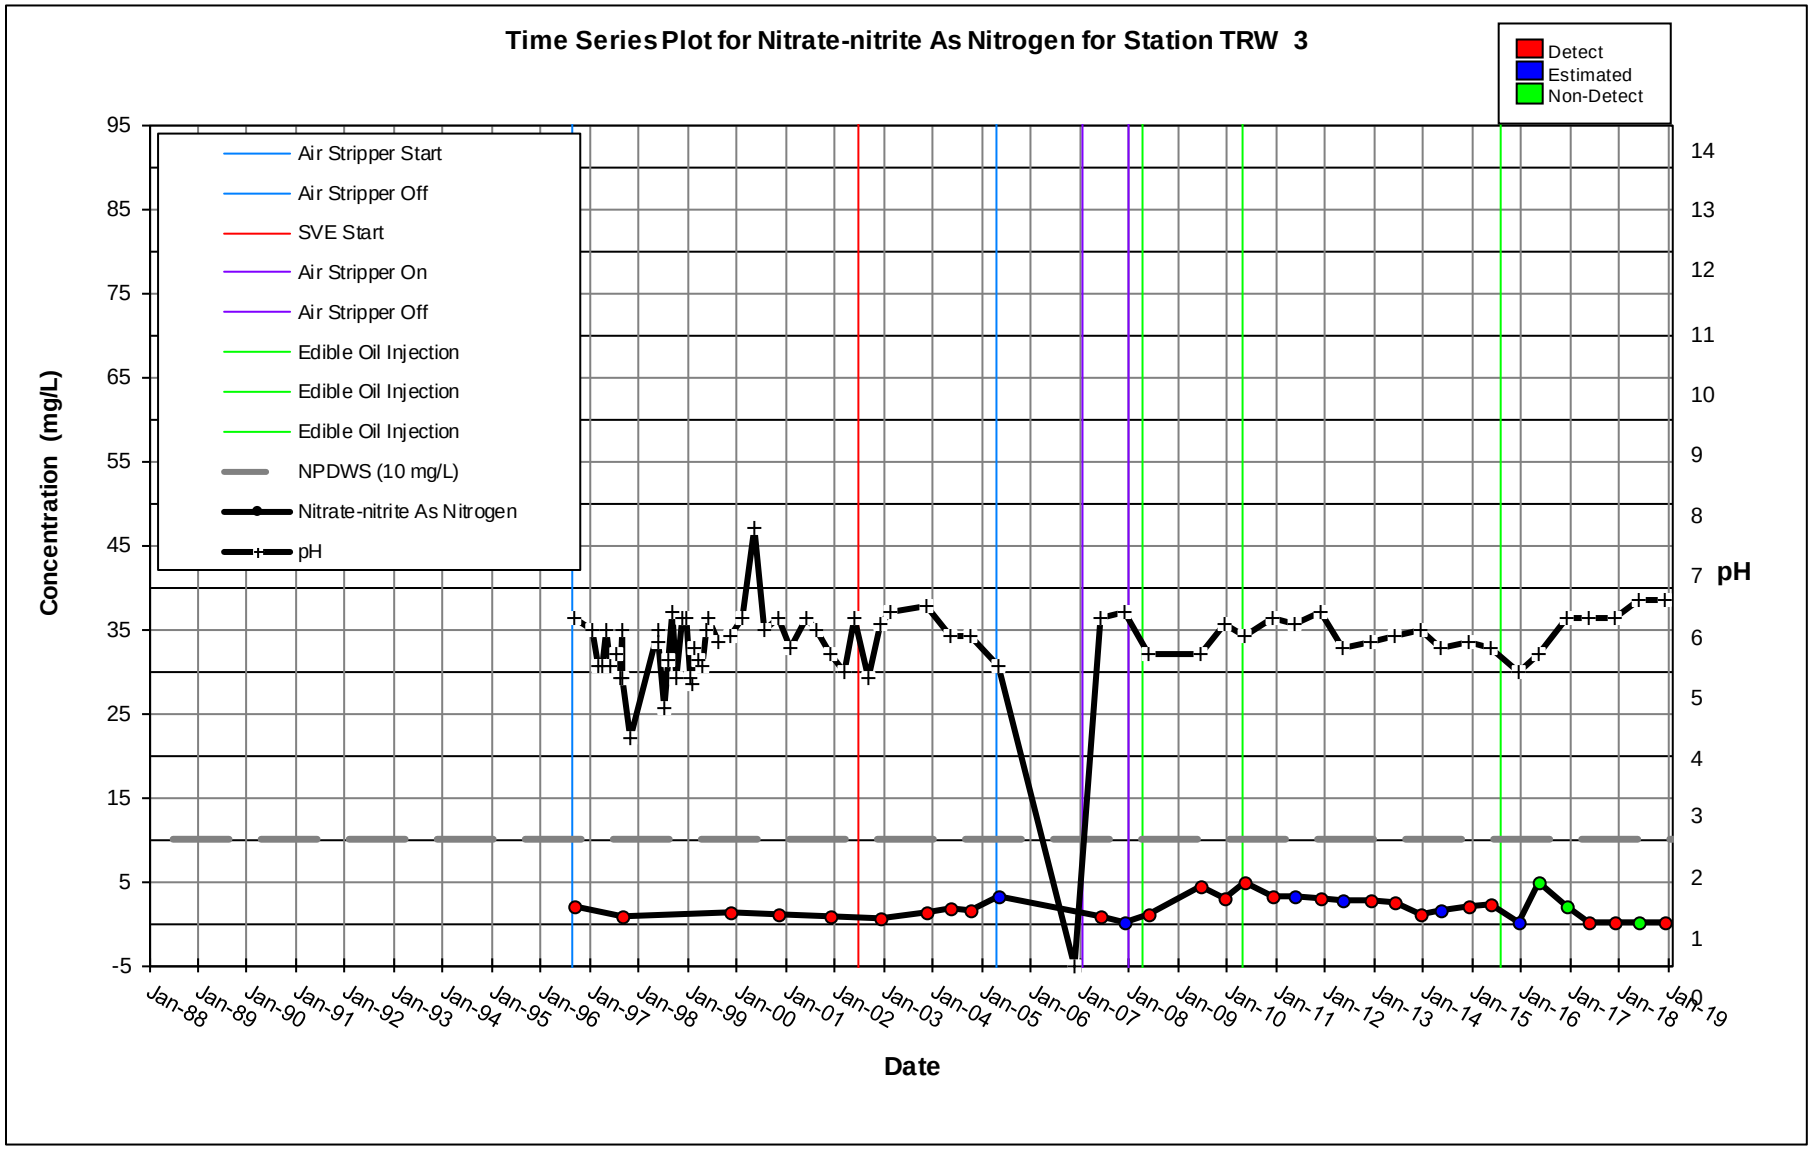
Time Series Plot for Nitrate-nitrite As Nitrogen for Station TRW 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (10 mg/L)
Nitrate-nitrite As Nitrogen
pH
Concentration (mg/L)
pH
Date
95
85
75
65
55
45
35
25
15
5
-5
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19

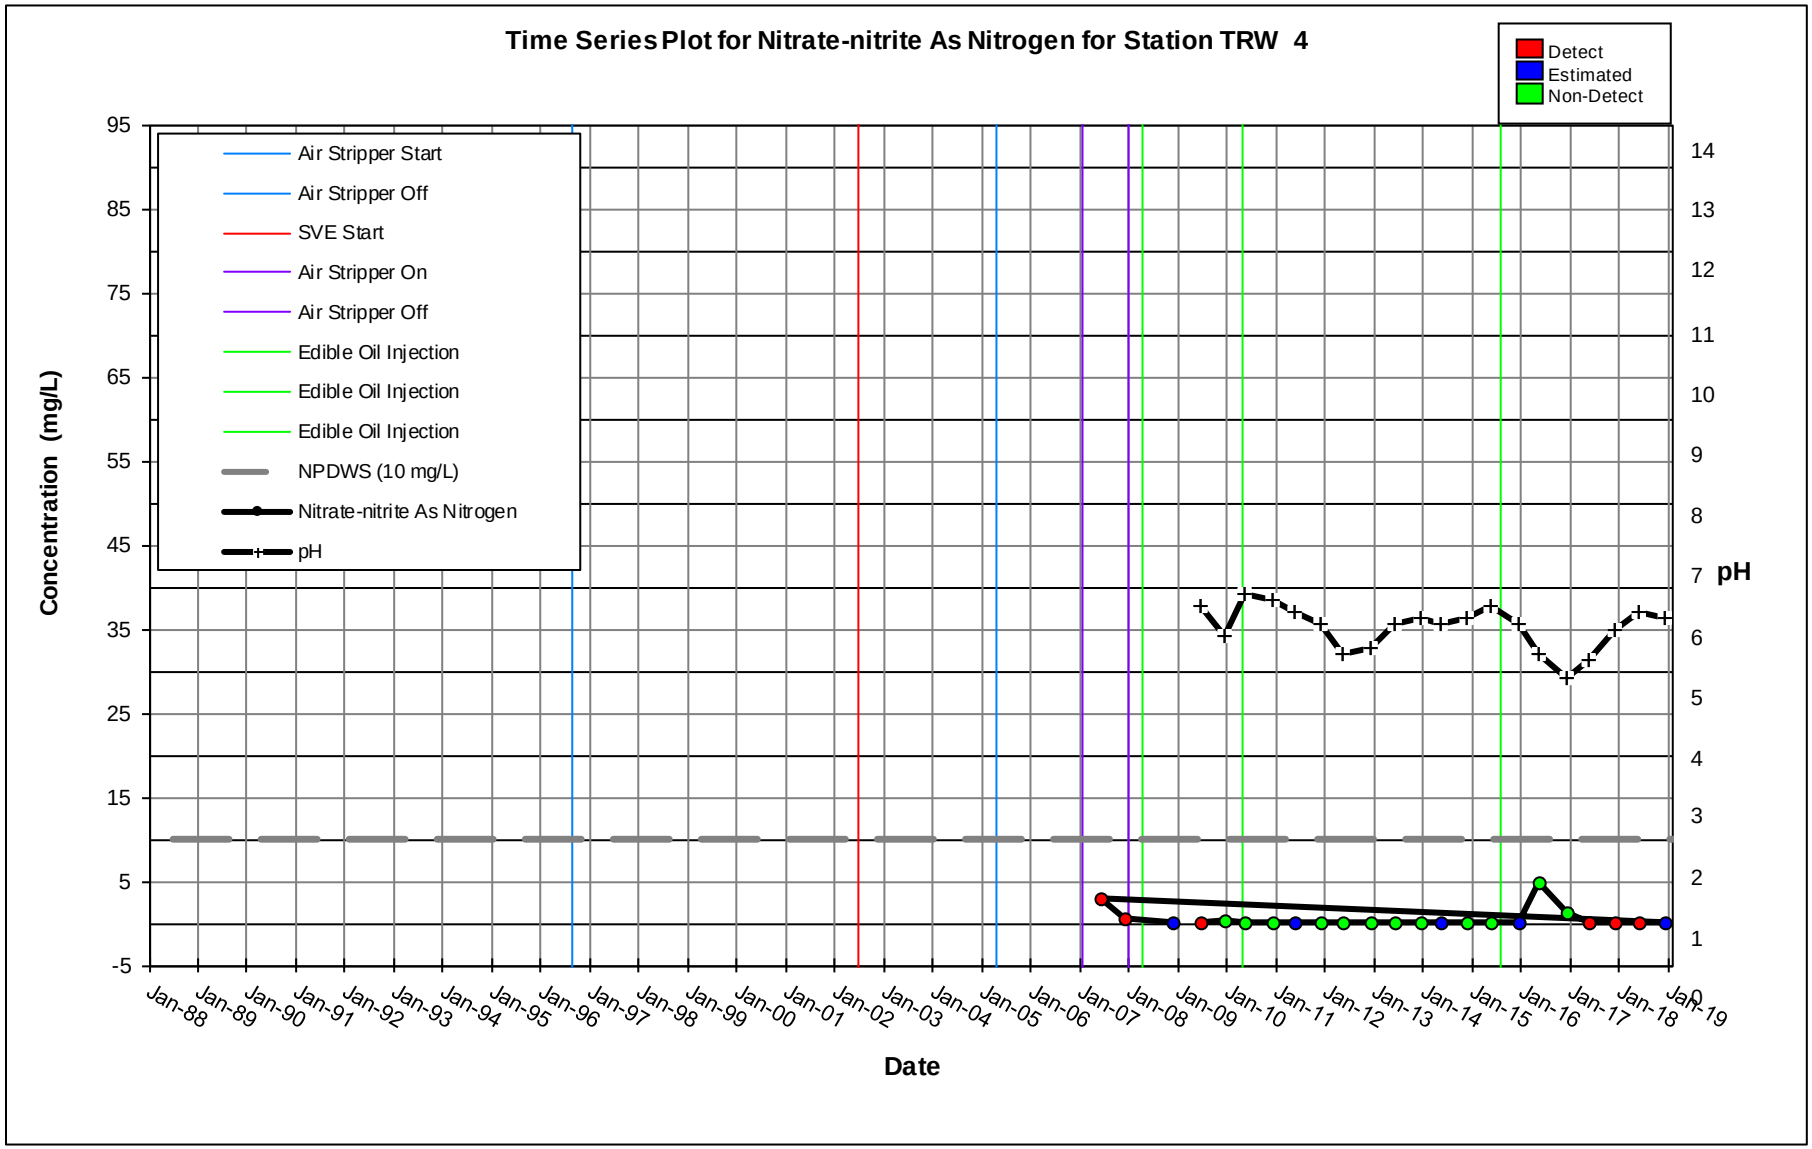
Time Series Plot for Nitrate-nitrite As Nitrogen for Station TRW 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (10 mg/L)
Nitrate-nitrite As Nitrogen
pH
Concentration (mg/L)
pH
Date
95
85
75
65
55
45
35
25
15
5
-5
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19

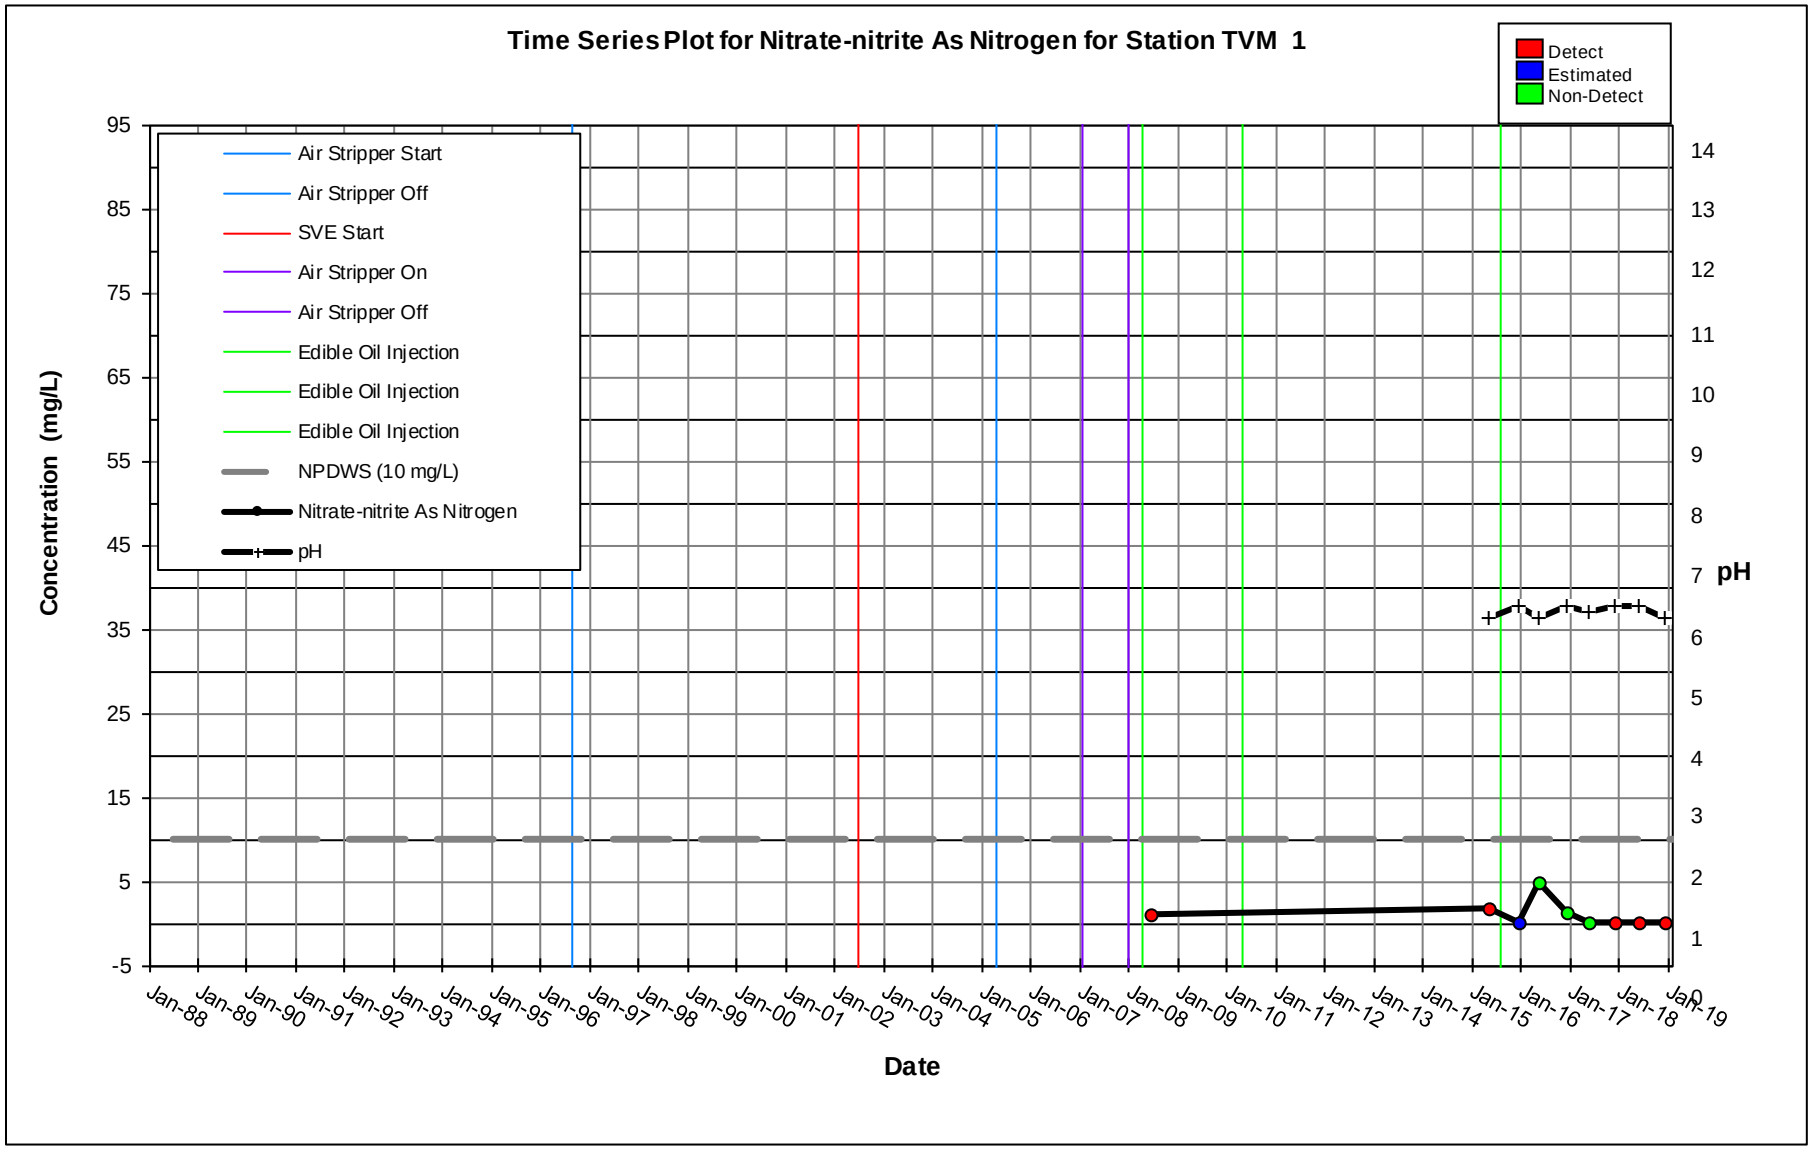
Time Series Plot for Nitrate-nitrite As Nitrogen for Station TVM 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (10 mg/L)
Nitrate-nitrite As Nitrogen
pH
Concentration (mg/L)
pH
Date
95
85
75
65
55
45
35
25
15
5
-5
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19

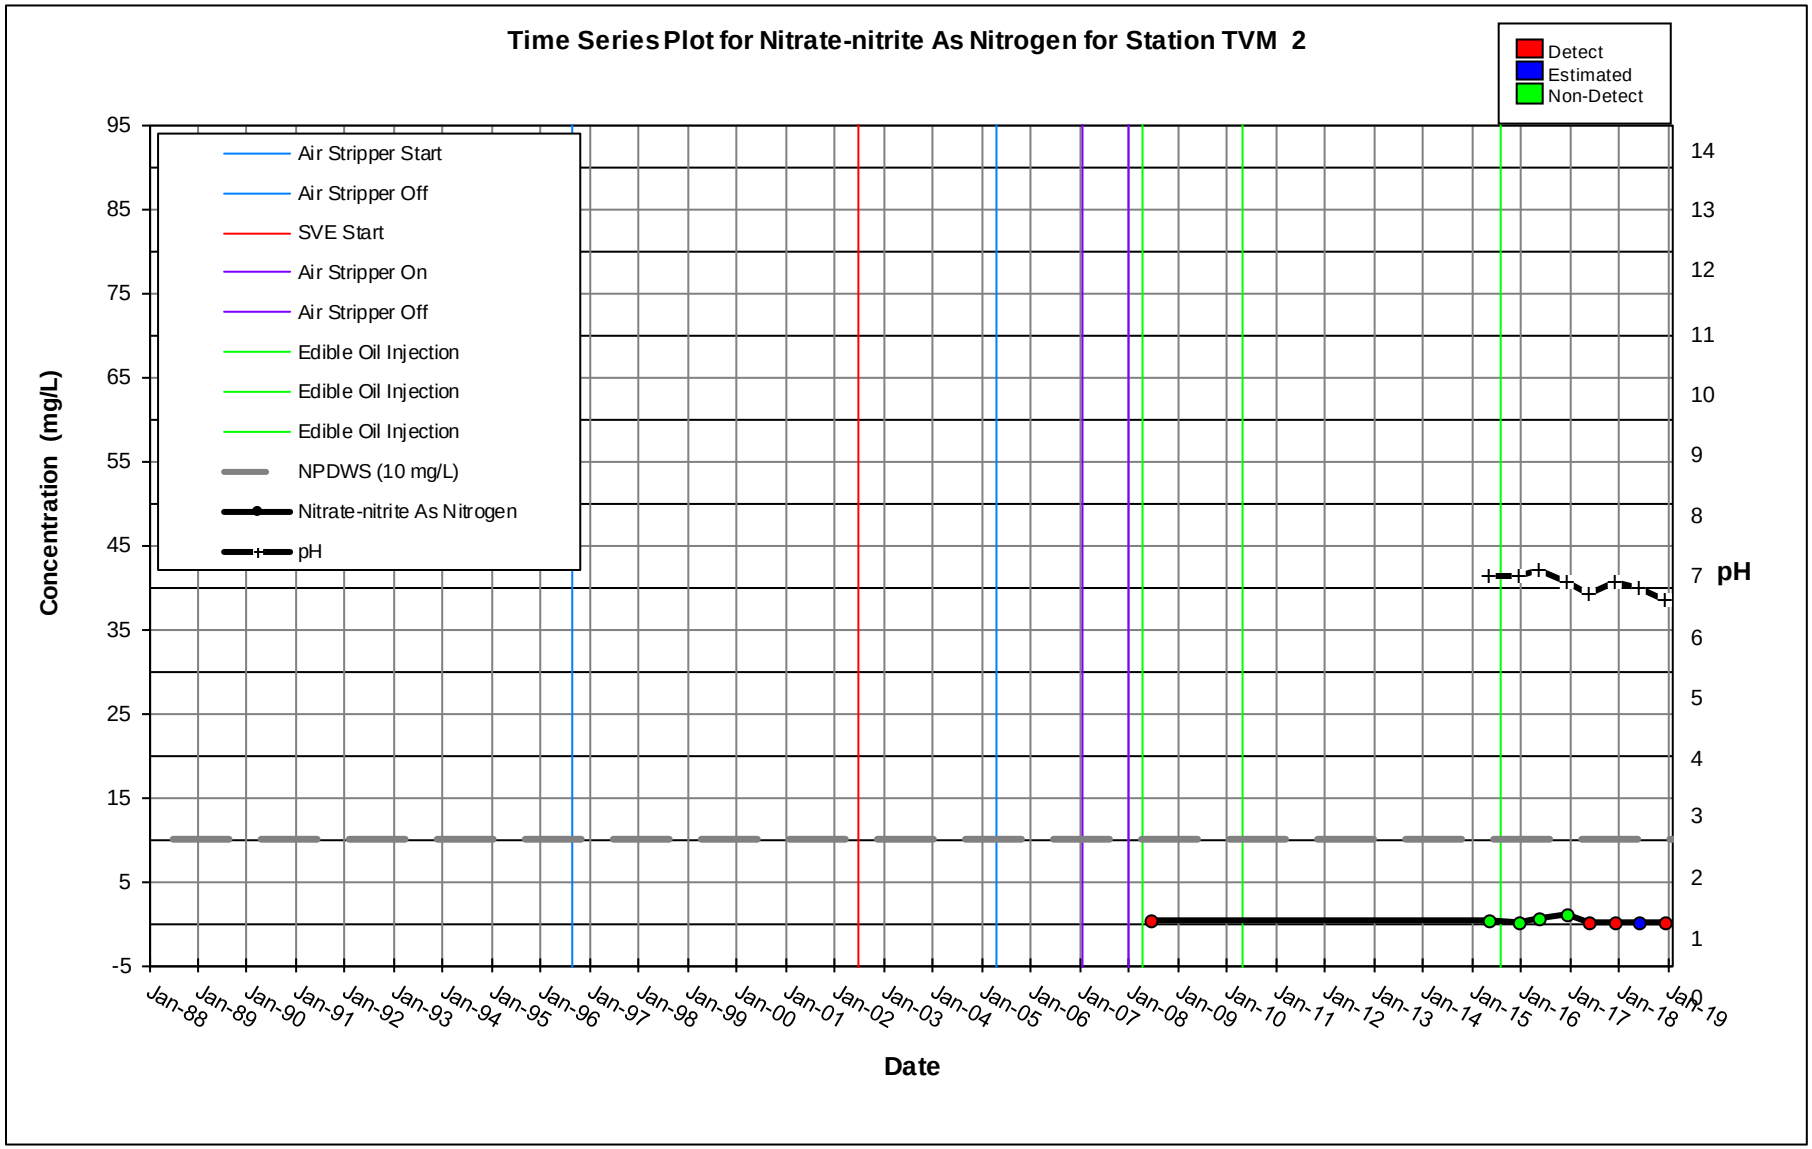
Time Series Plot for Nitrate-nitrite As Nitrogen for Station TVM 2
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (10 mg/L)
Nitrate-nitrite As Nitrogen
pH
Concentration (mg/L)
pH
Date
95
85
75
65
55
45
35
25
15
5
-5
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19

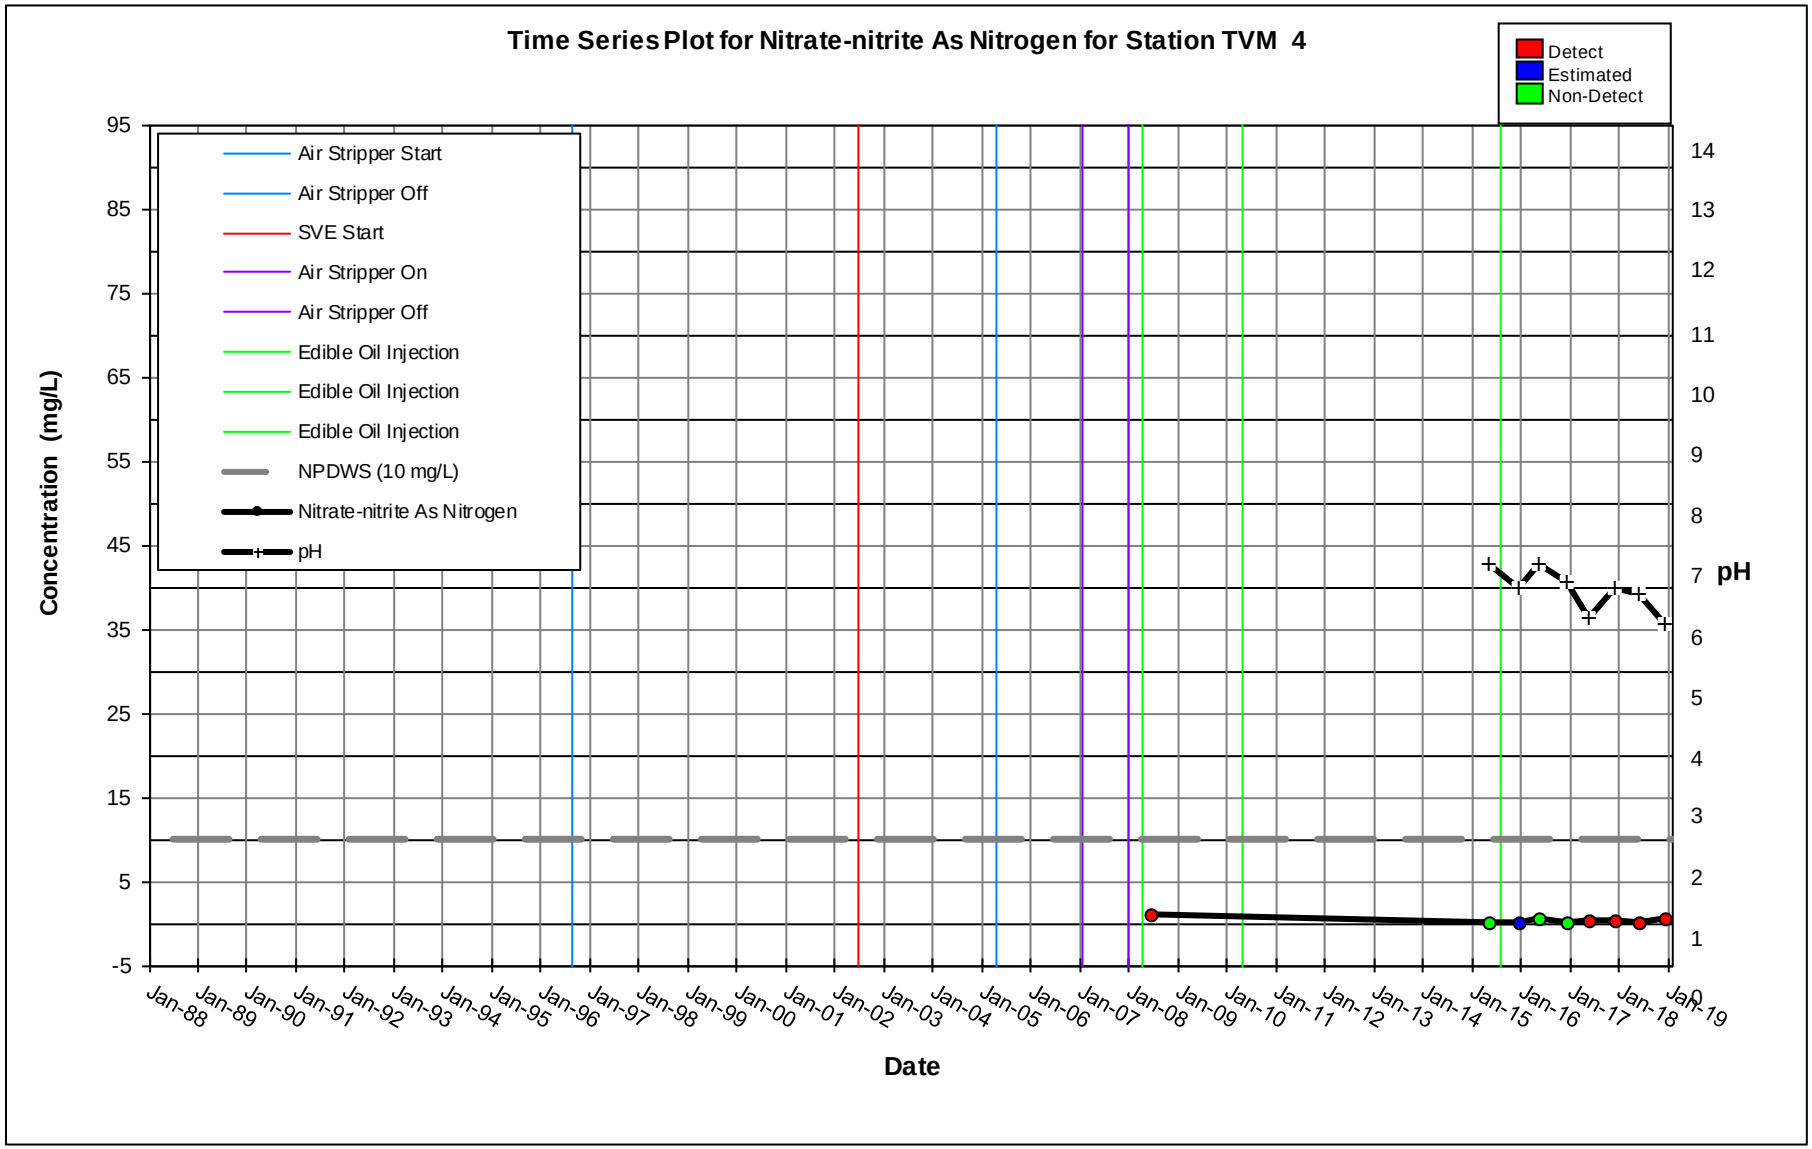
Time Series Plot for Nitrate-nitrite As Nitrogen for Station TVM 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (10 mg/L)
Nitrate-nitrite As Nitrogen
pH
Concentration (mg/L)
pH
Date
95
85
75
65
55
45
35
25
15
5
-5
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19

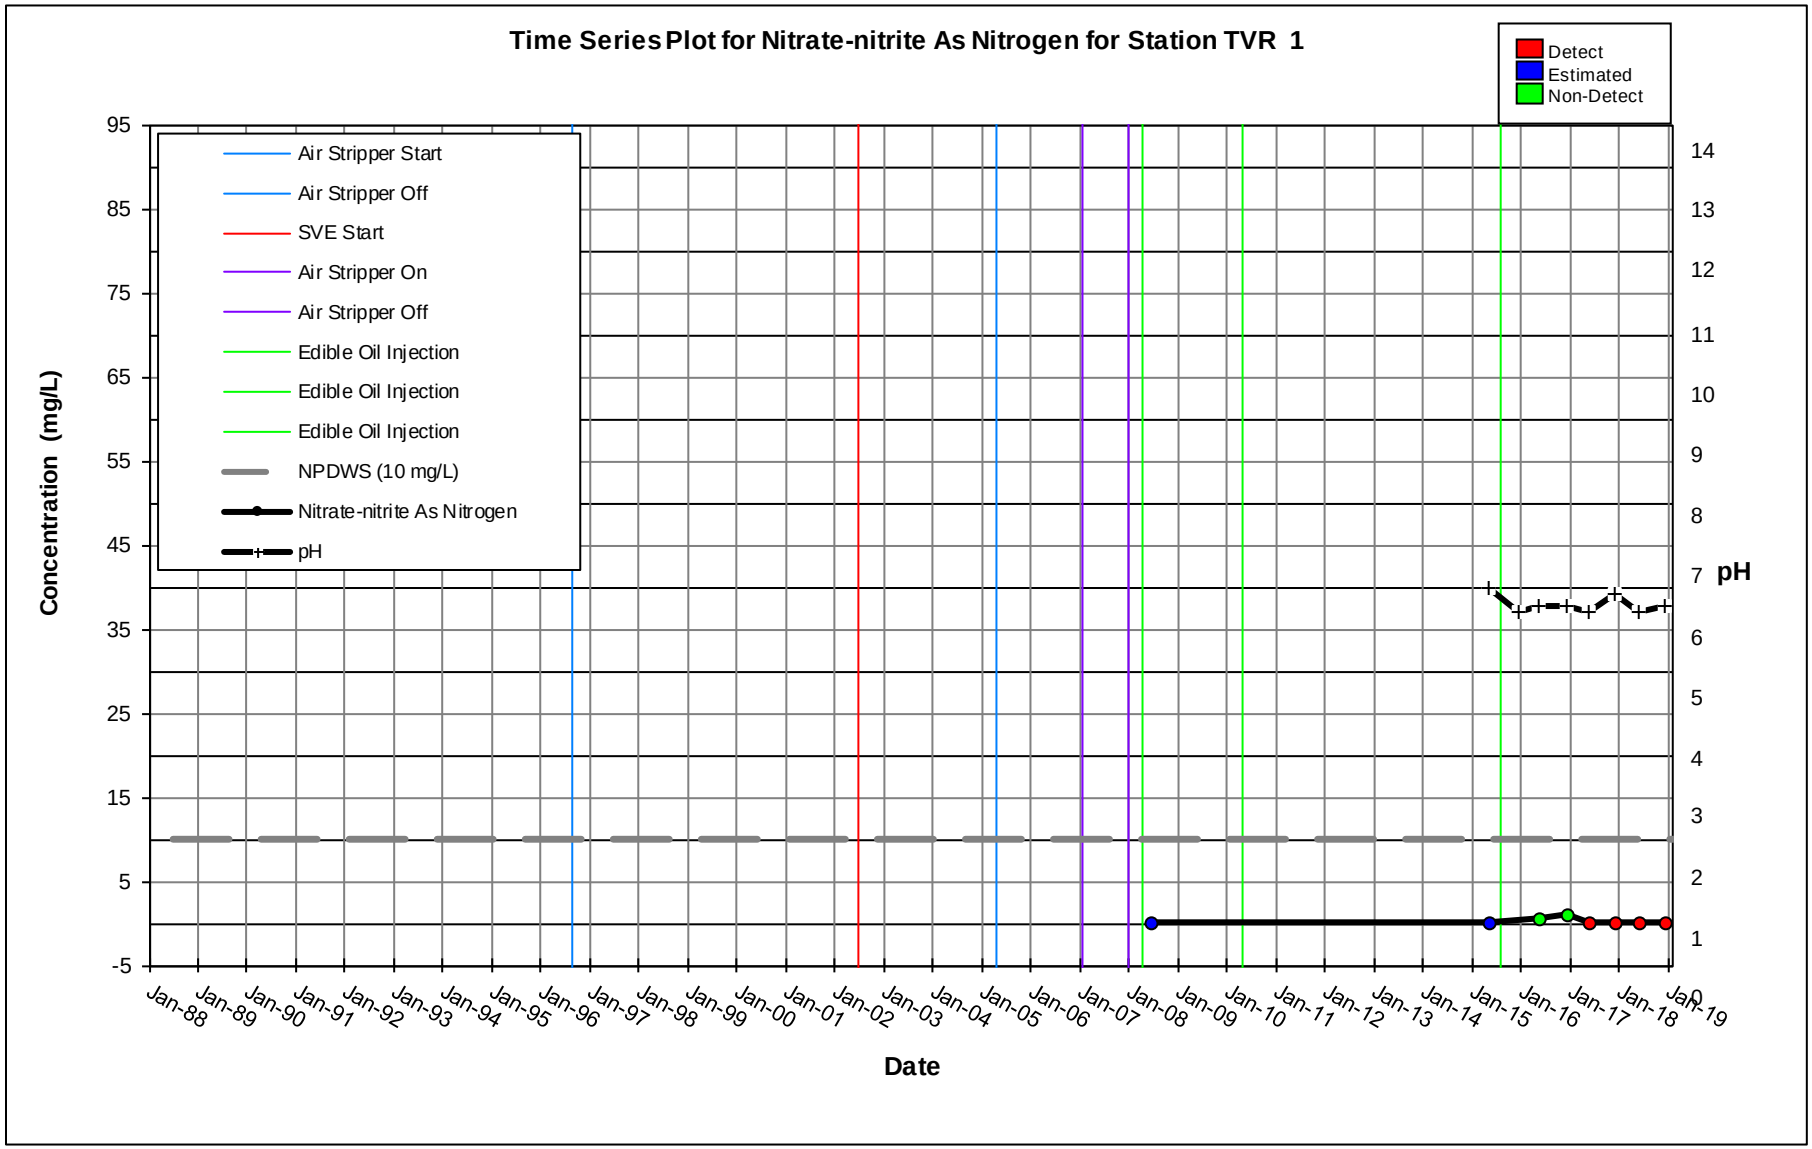
Time Series Plot for Nitrate-nitrite As Nitrogen for Station TVR 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (10 mg/L)
Nitrate-nitrite As Nitrogen
pH
Concentration (mg/L)
pH
Date
95
85
75
65
55
45
35
25
15
5
-5
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19

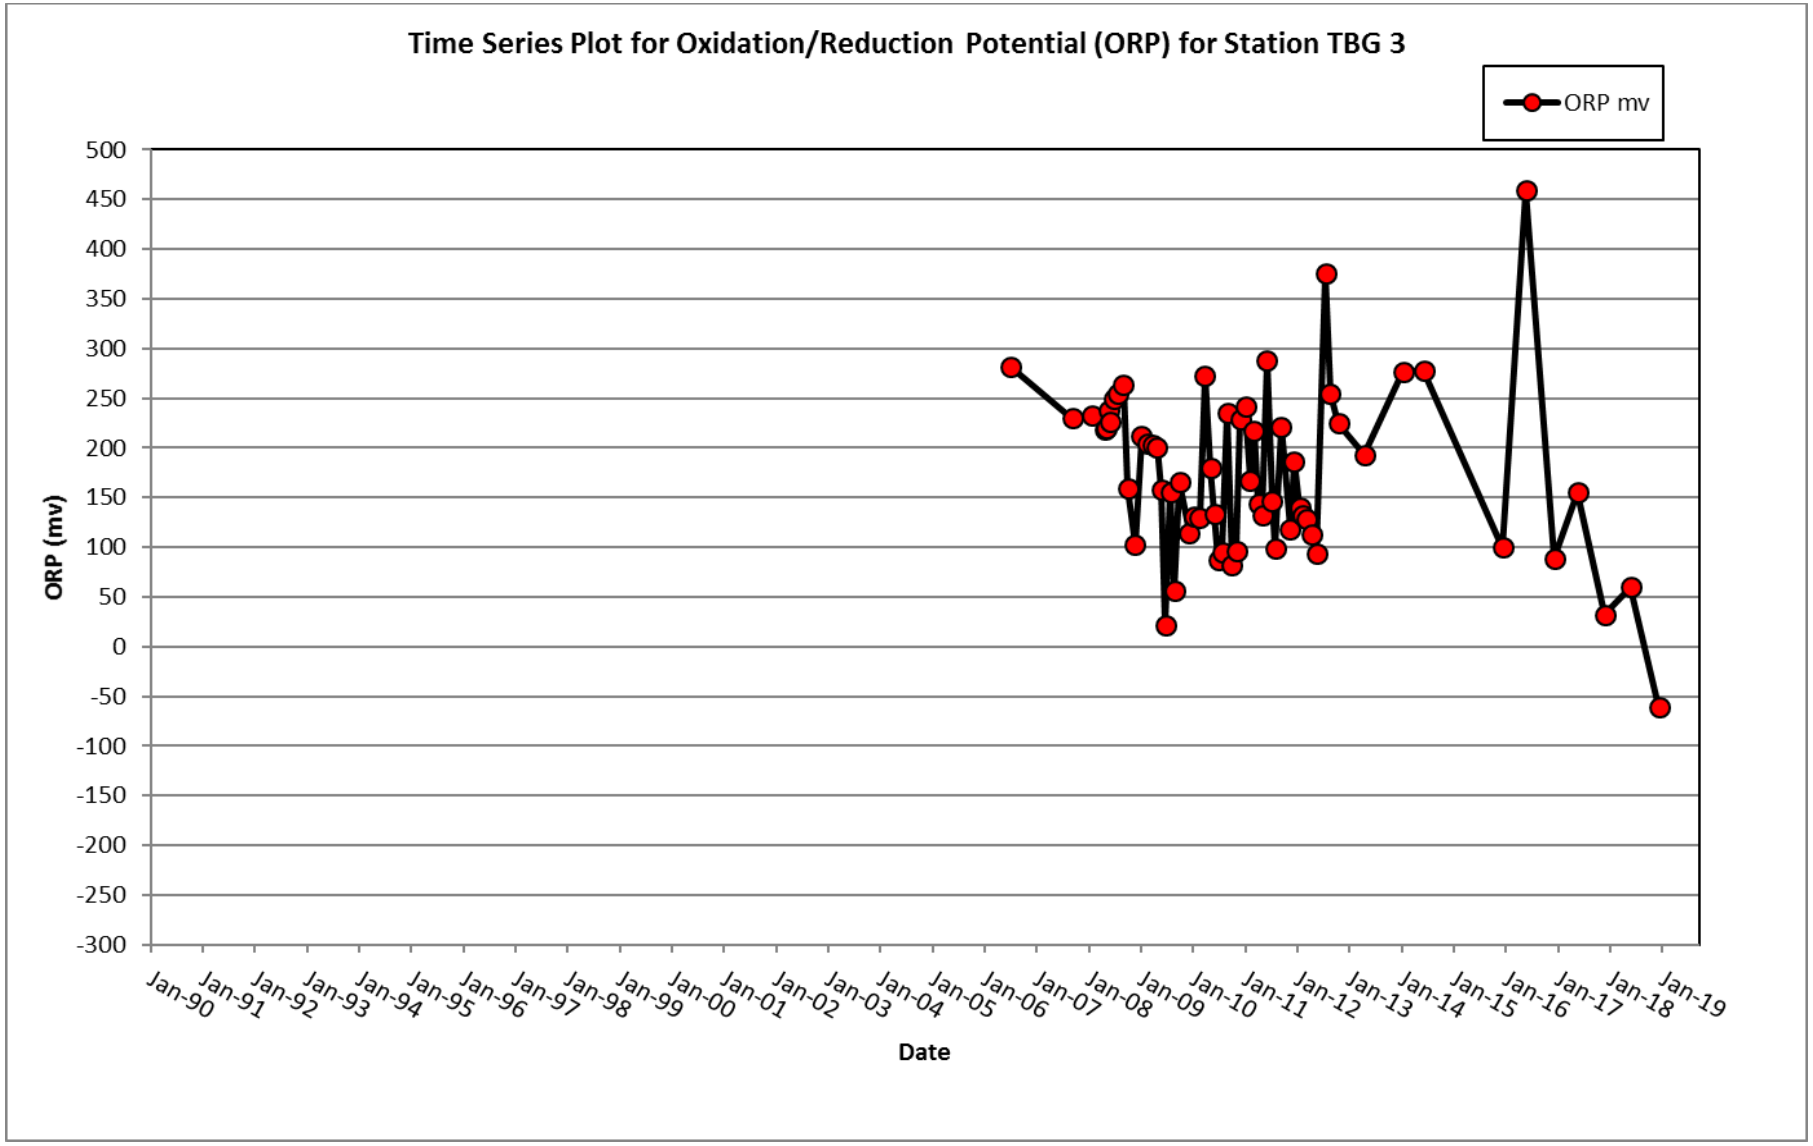
Time Series Plot for Oxidation/Reduction Potential (ORP) for Station TBG 3
ORP mv
ORP (mv)
500
450
400
350
300
250
200
150
100
50
0
-50
-100
-150
-200
-250
-300
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

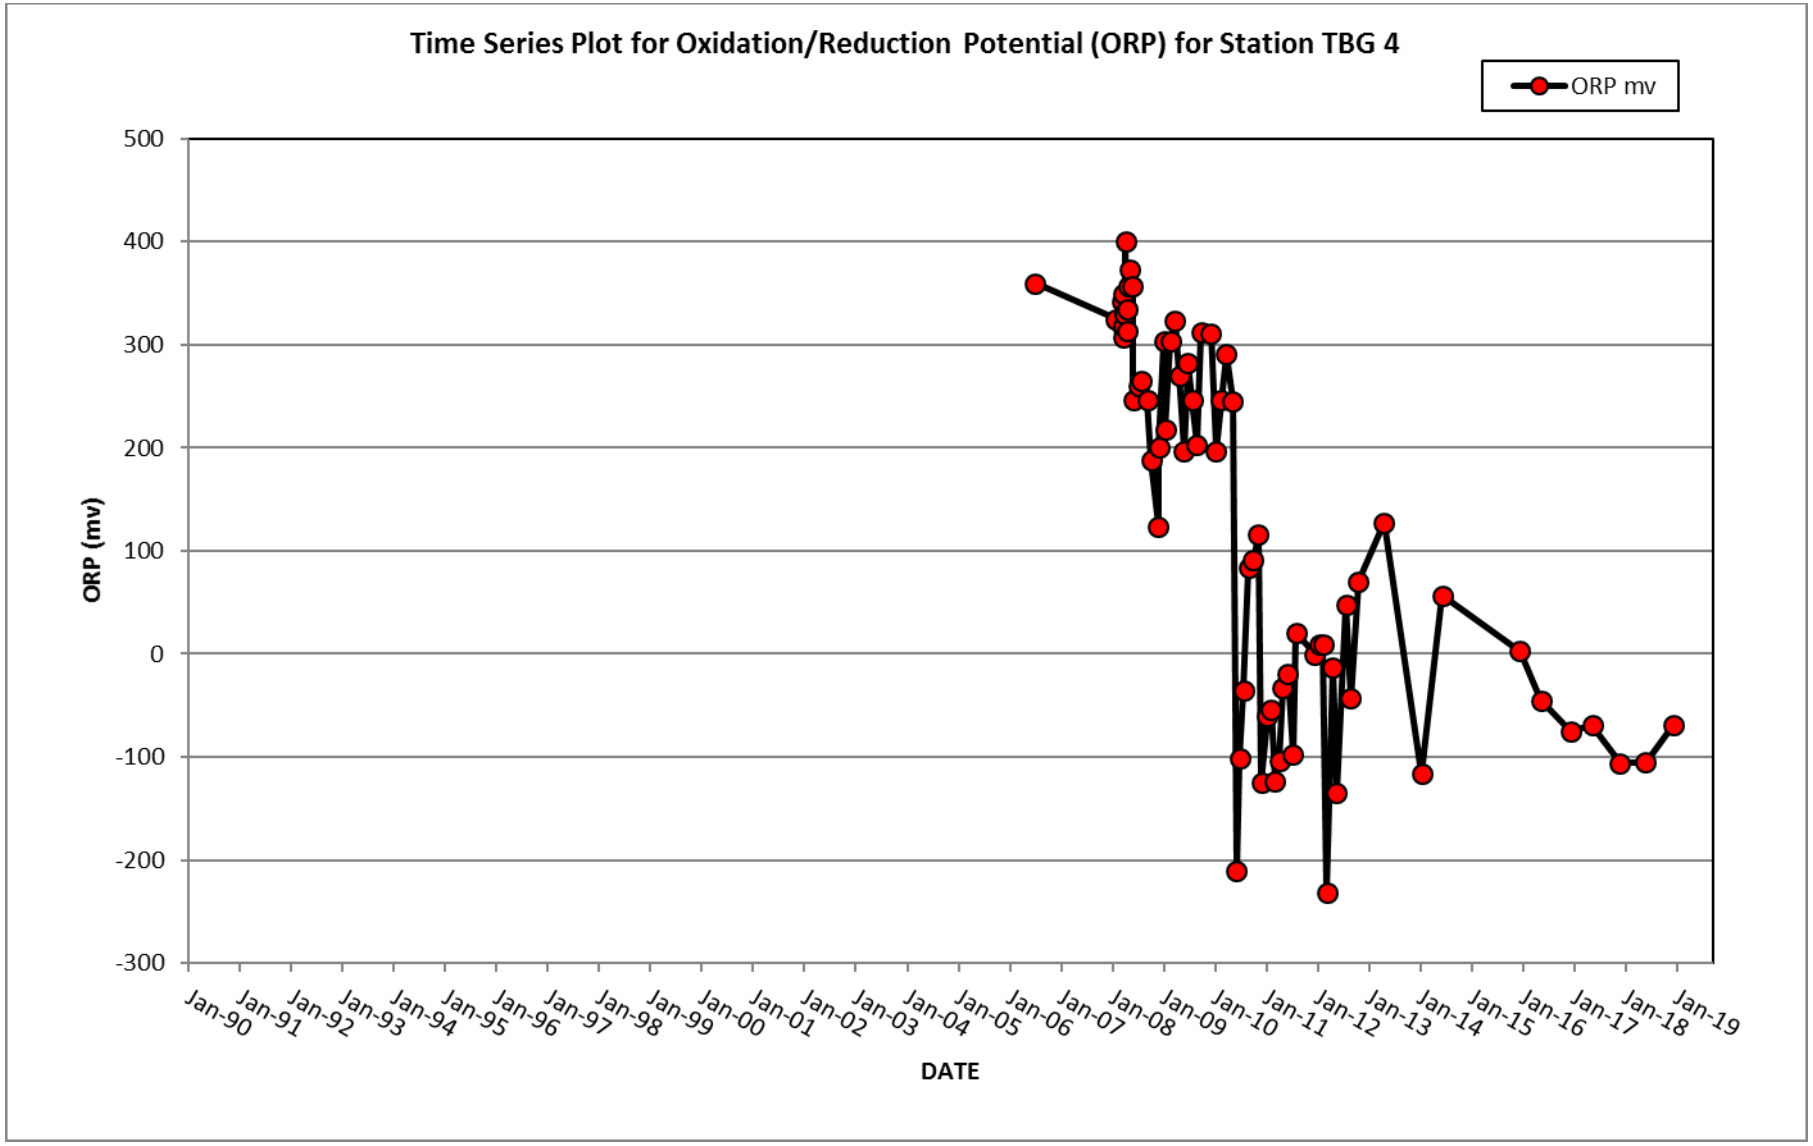
Time Series Plot for Oxidation/Reduction Potential (ORP) for Station TBG 4
ORP mv
ORP (mv)
500
400
300
200
100
0
-100
-200
-300
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
DATE

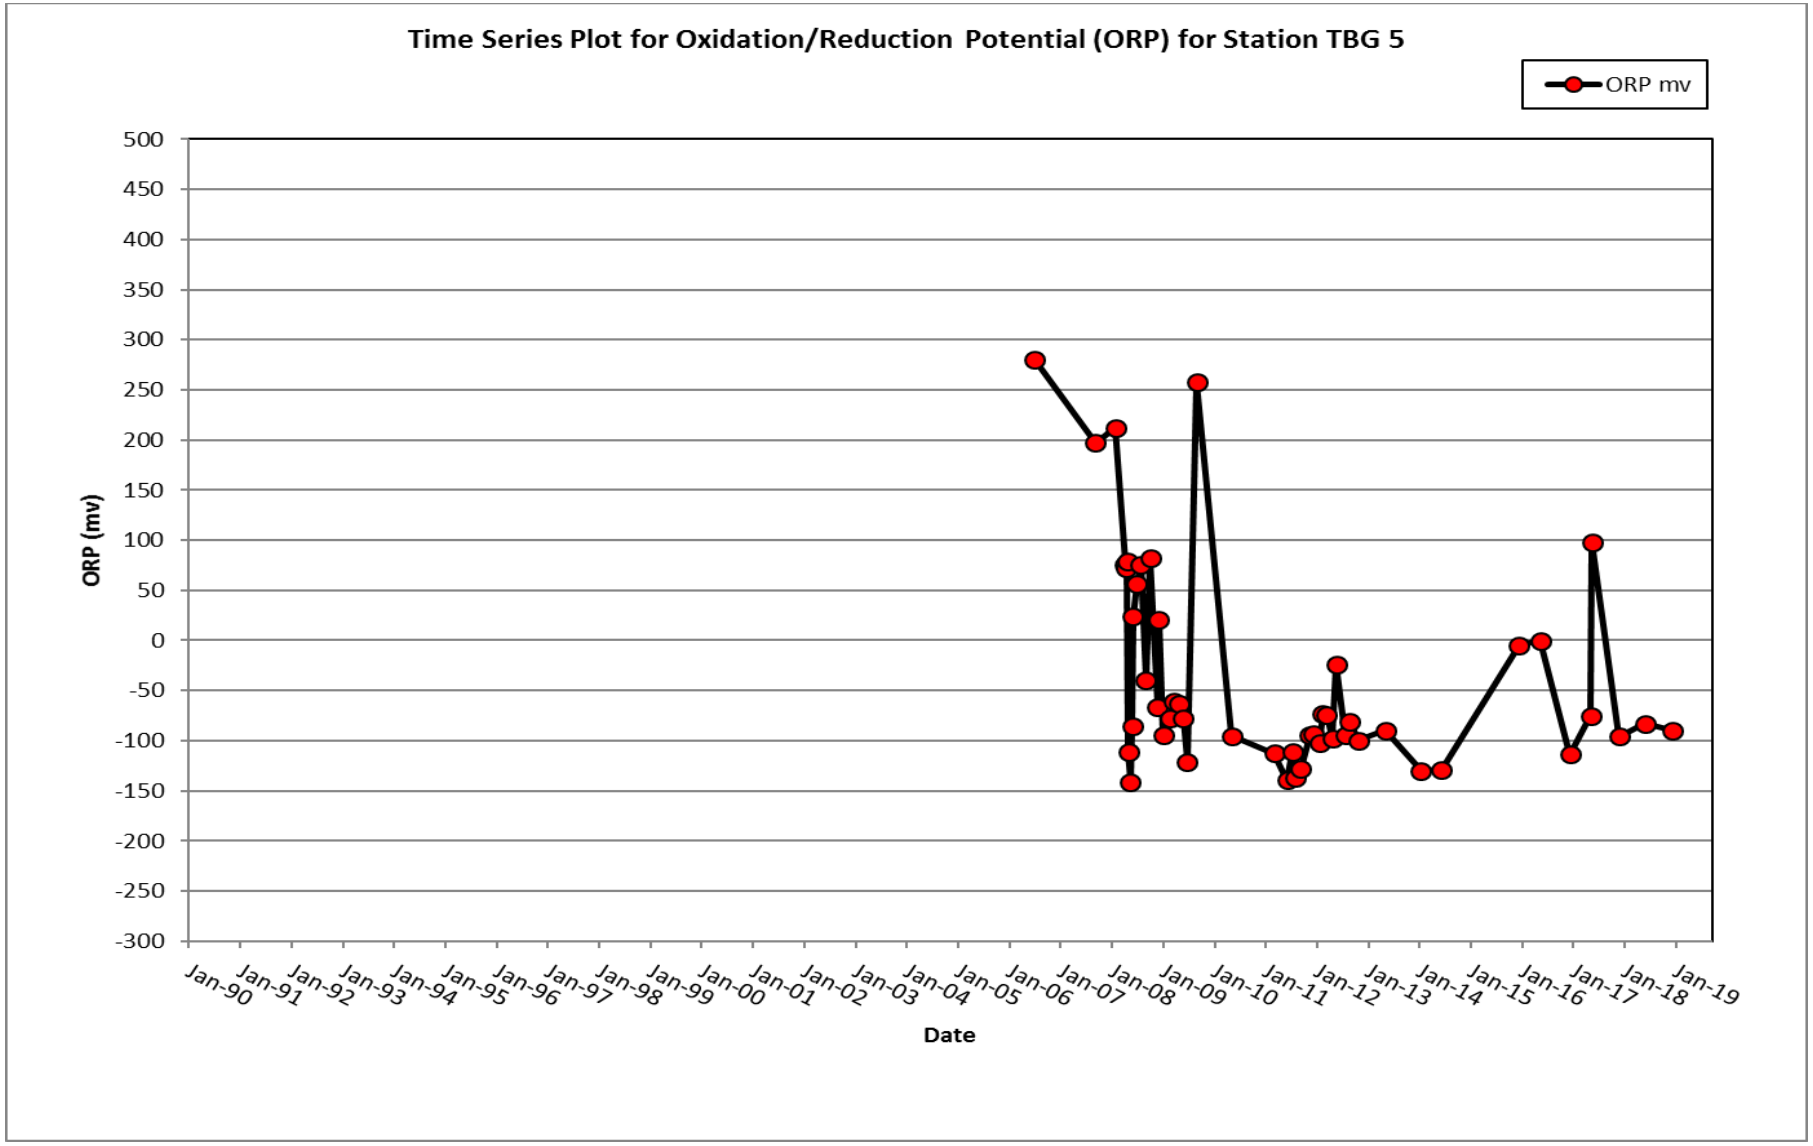
Time Series Plot for Oxidation/Reduction Potential (ORP) for Station TBG 5
ORP mv
ORP (mv)
500
450
400
350
300
250
200
150
100
50
0
-50
-100
-150
-200
-250
-300
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

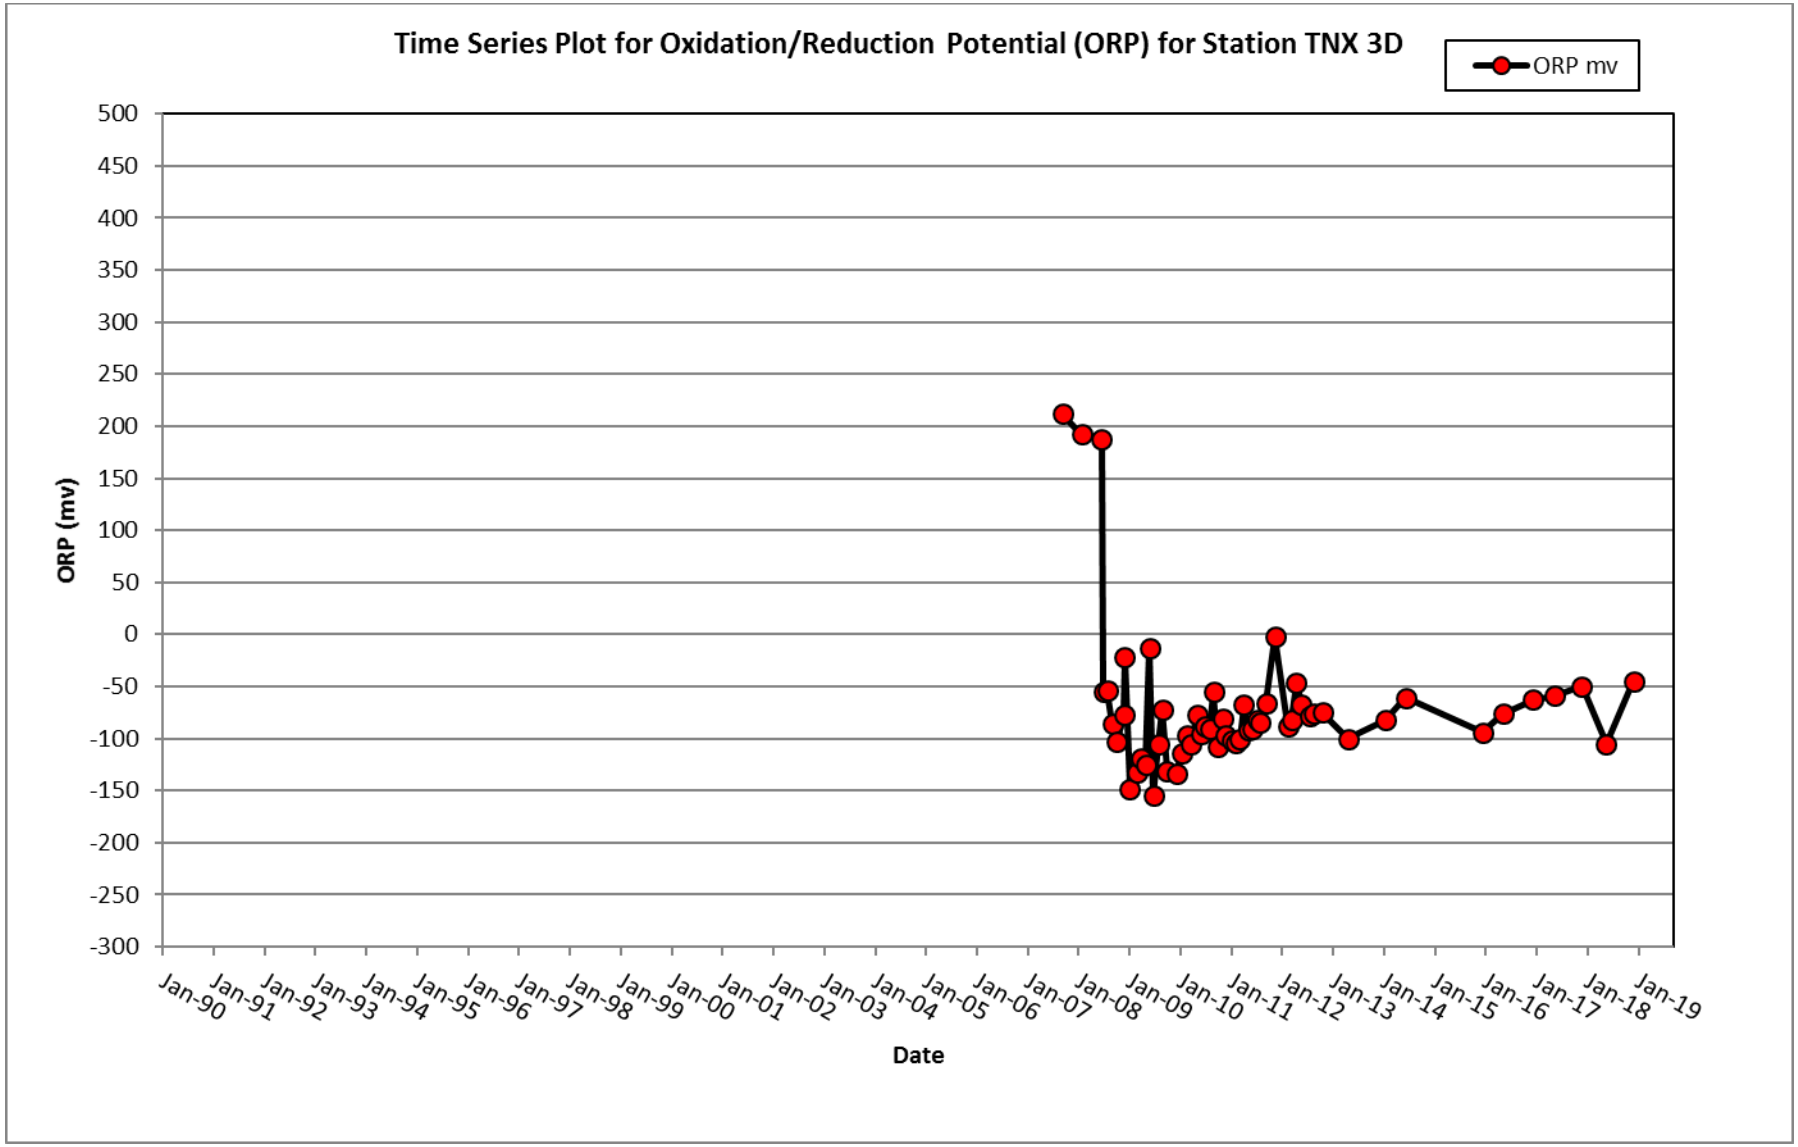
Time Series Plot for Oxidation/Reduction Potential (ORP) for Station TNX 3D
ORP mv
ORP (mv)
500
450
400
350
300
250
200
150
100
50
0
-50
-100
-150
-200
-250
-300
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

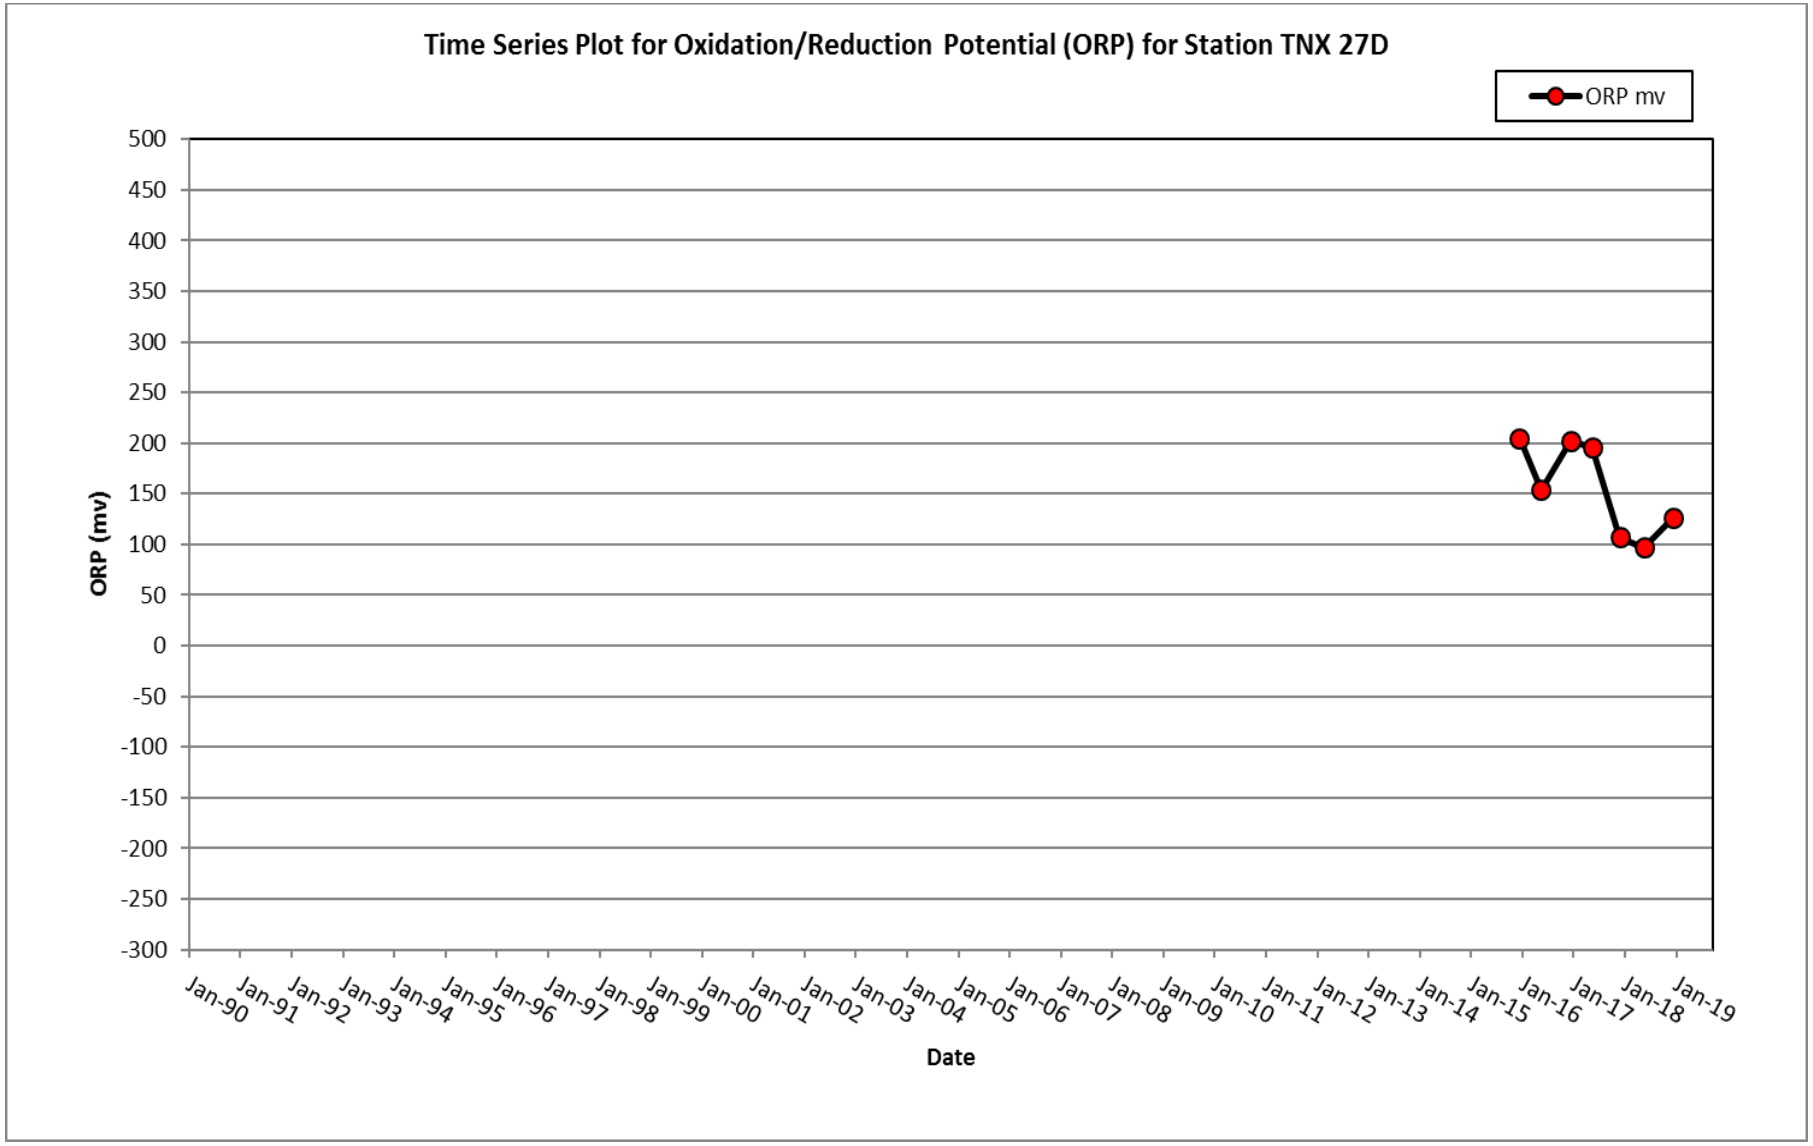
Time Series Plot for Oxidation/Reduction Potential (ORP) for Station TNX 27D
ORP mv
ORP (mv)
500
450
400
350
300
250
200
150
100
50
0
-50
-100
-150
-200
-250
-300
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

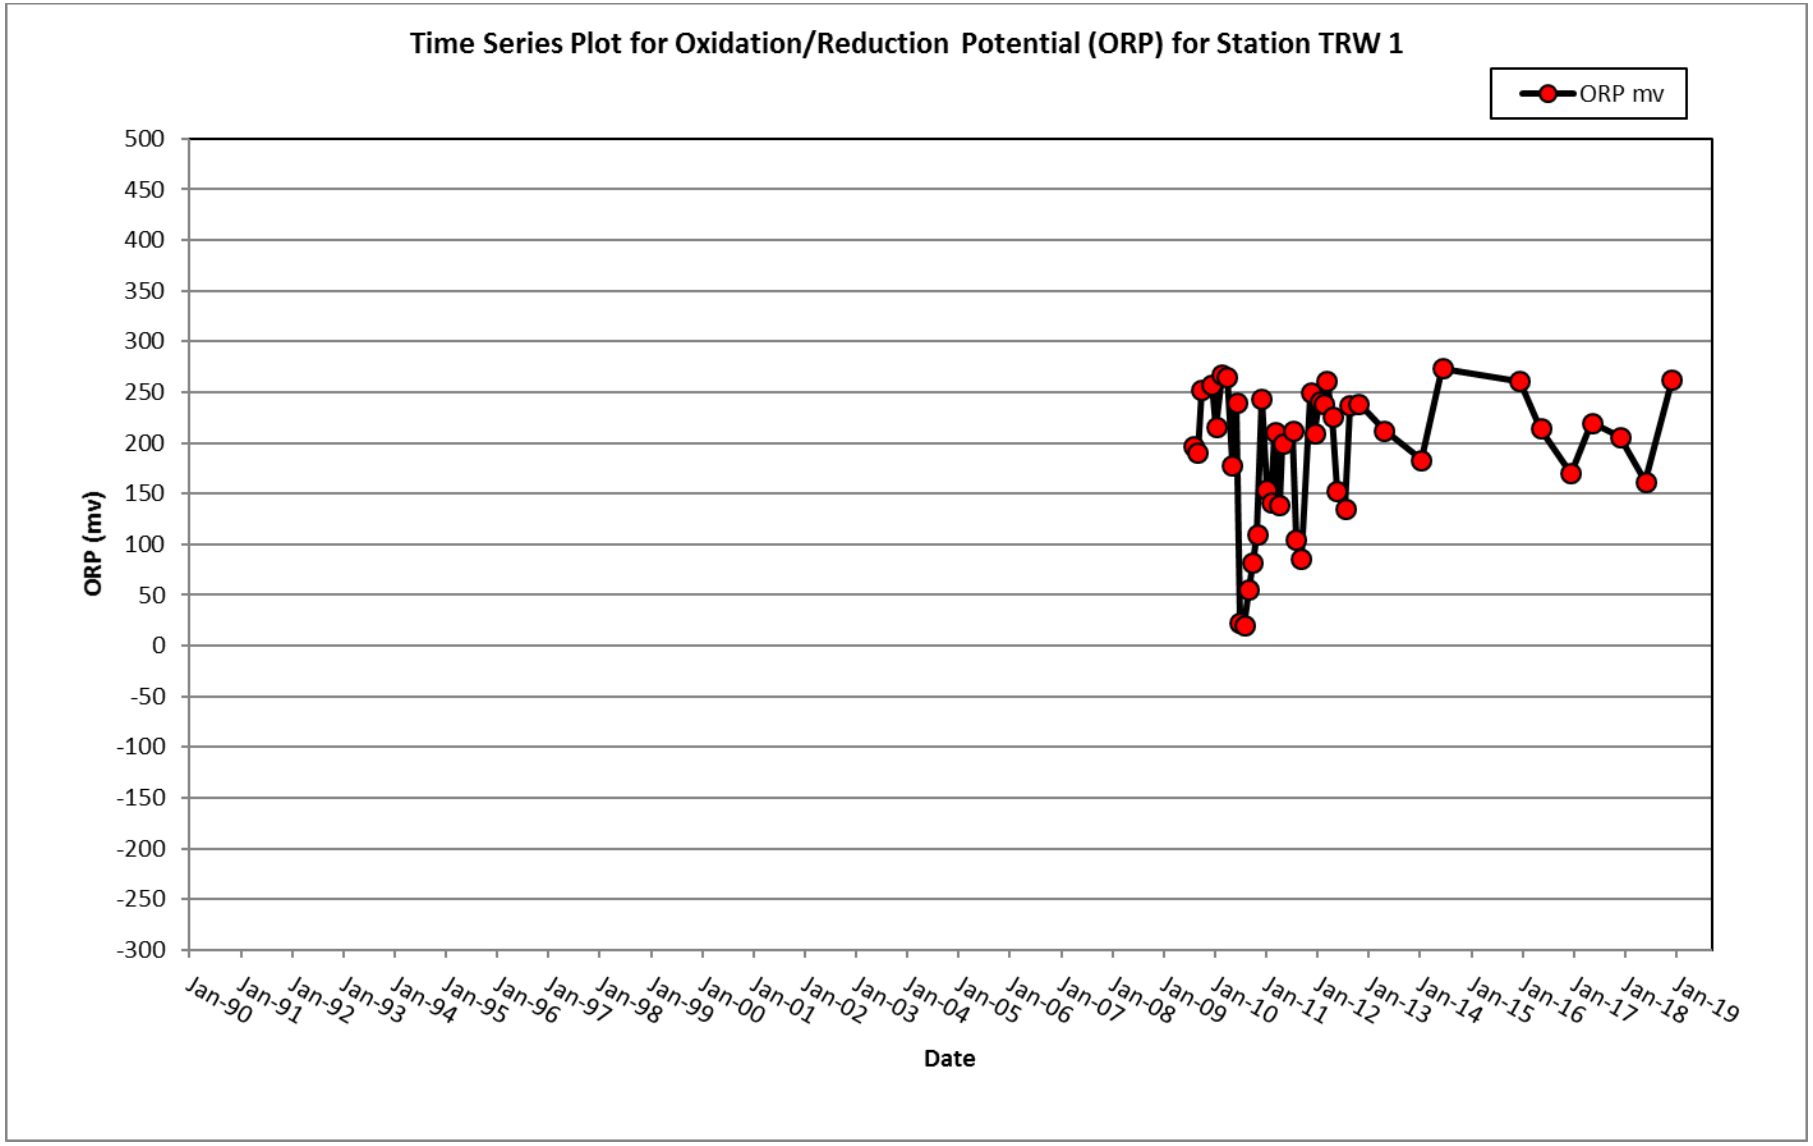
Time Series Plot for Oxidation/Reduction Potential (ORP) for Station TRW 1
ORP mv
ORP (mv)
500
450
400
350
300
250
200
150
100
50
0
-50
-100
-150
-200
-250
-300
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

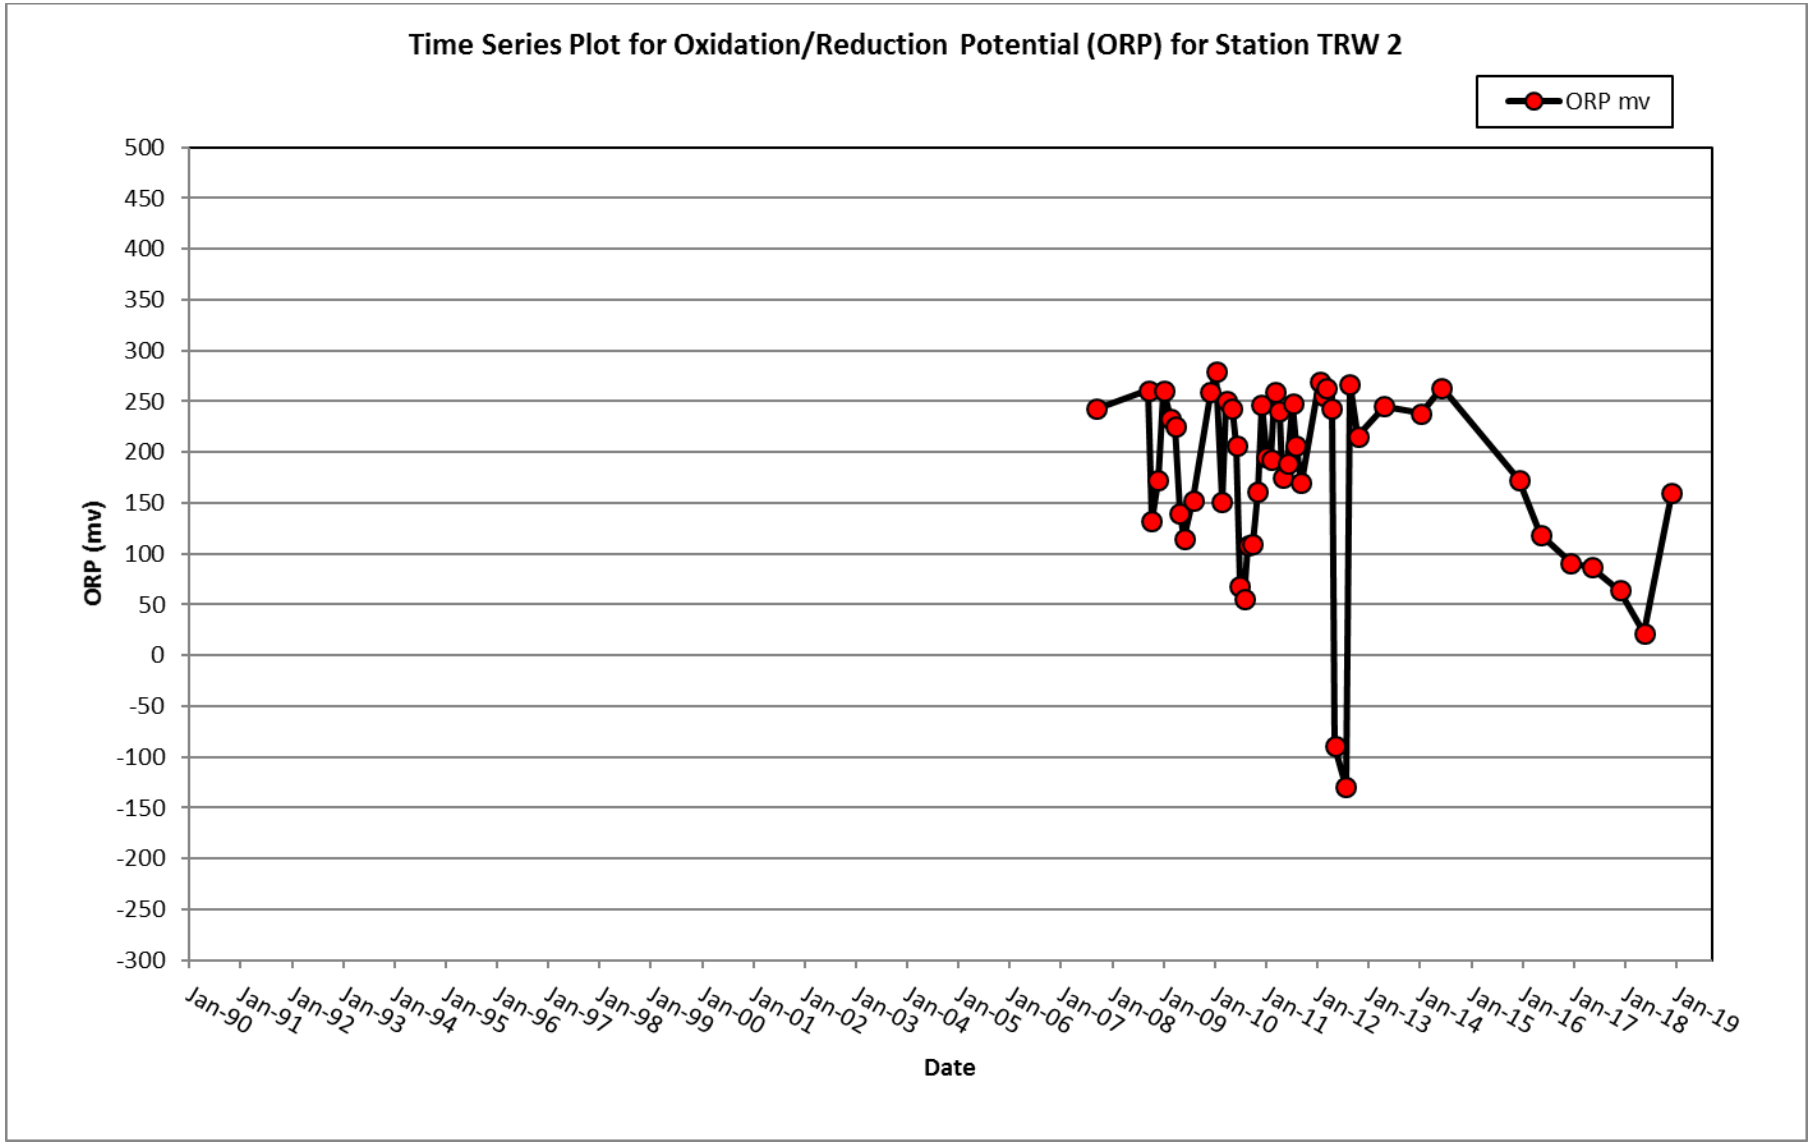
Time Series Plot for Oxidation/Reduction Potential (ORP) for Station TRW 2
ORP mv
ORP (mv)
500
450
400
350
300
250
200
150
100
50
0
-50
-100
-150
-200
-250
-300
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

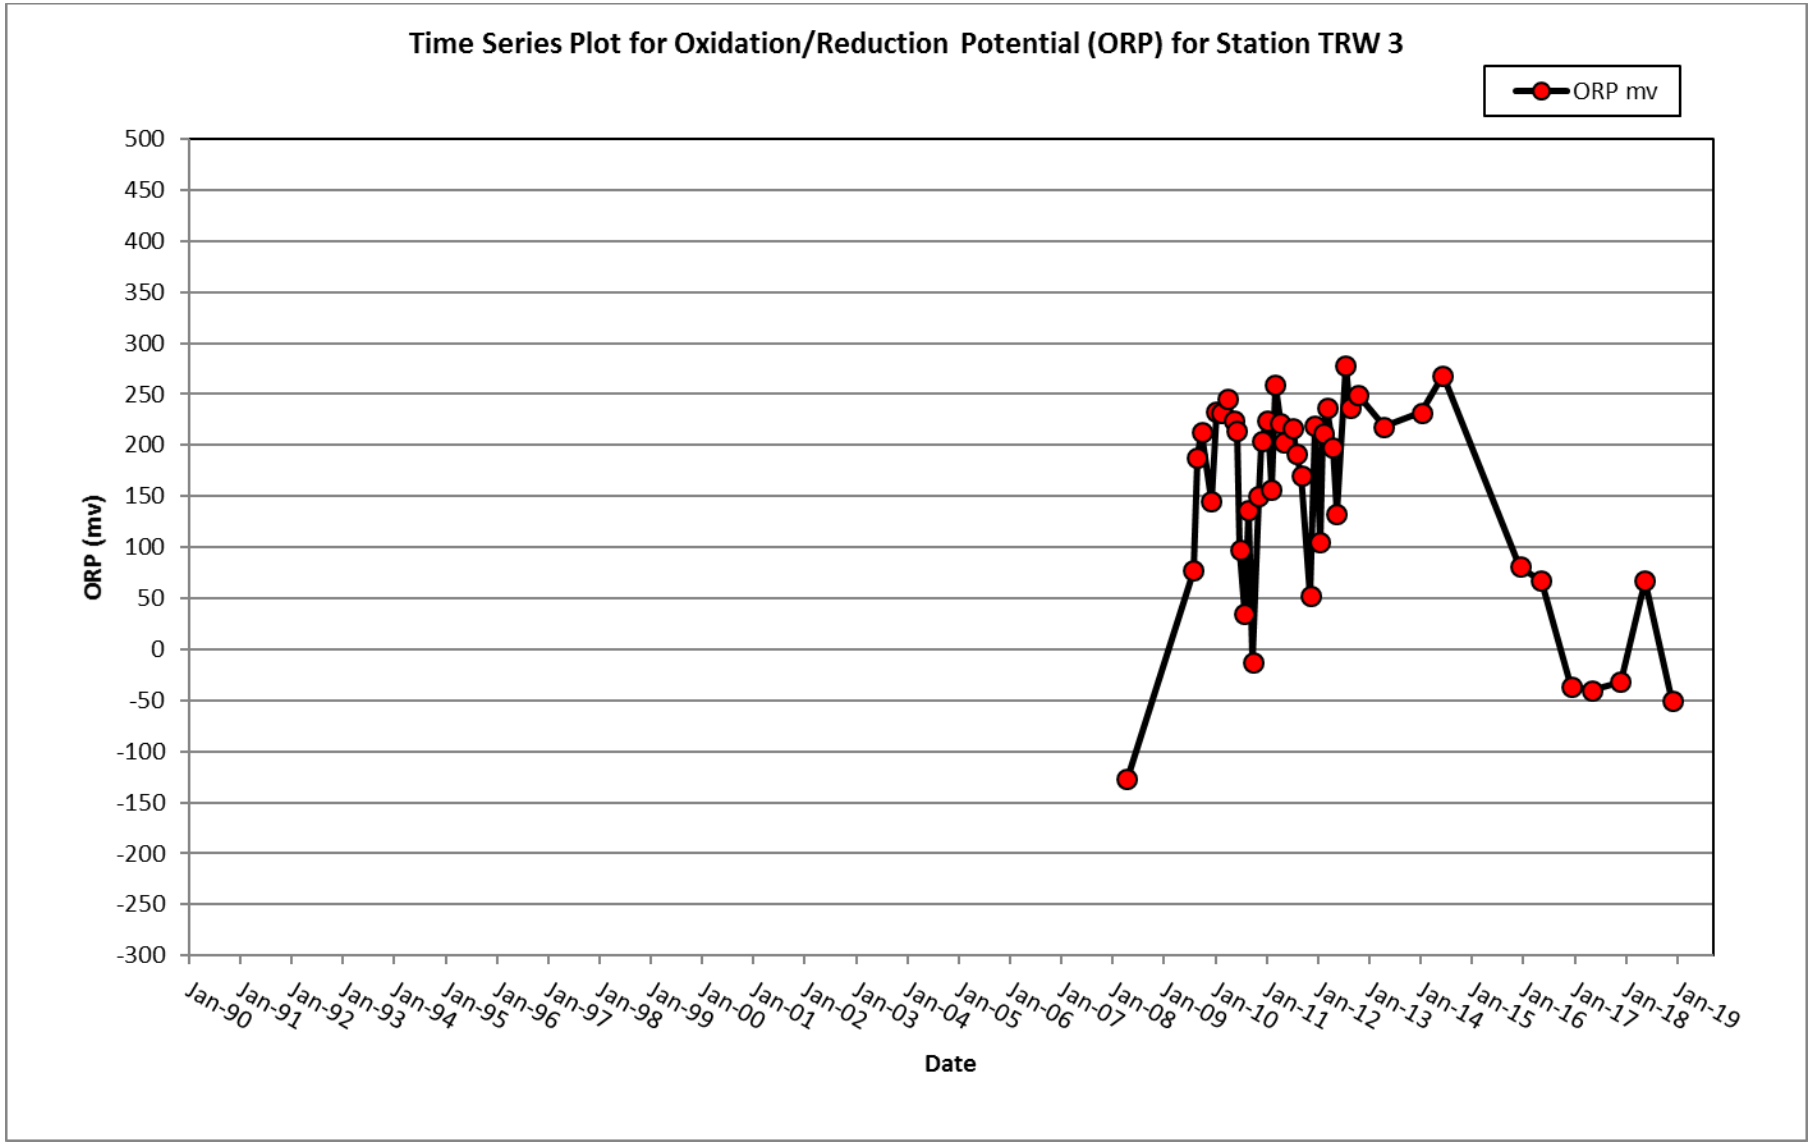
Time Series Plot for Oxidation/Reduction Potential (ORP) for Station TRW 3
ORP mv
ORP (mv)
500
450
400
350
300
250
200
150
100
50
0
-50
-100
-150
-200
-250
-300
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

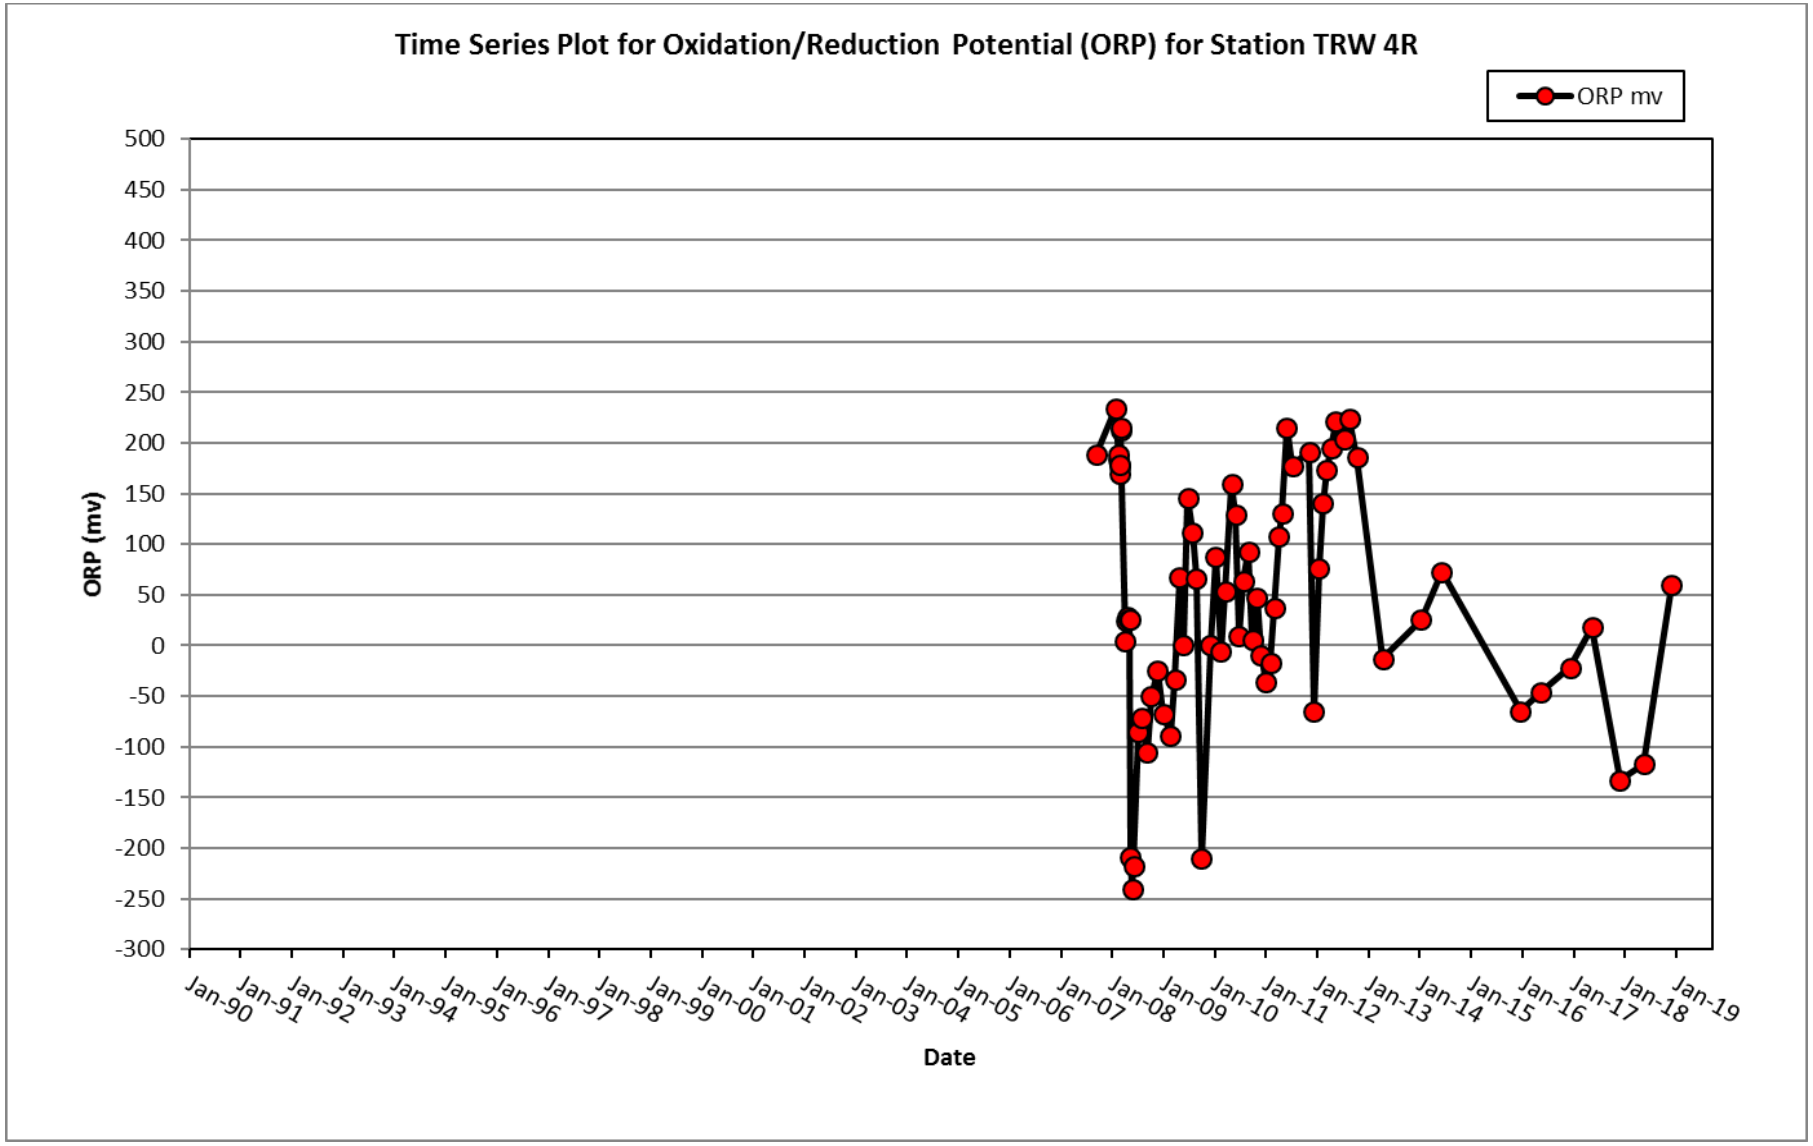
Time Series Plot for Oxidation/Reduction Potential (ORP) for Station TRW 4R
ORP mv
ORP (mv)
500
450
400
350
300
250
200
150
100
50
0
-50
-100
-150
-200
-250
-300
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

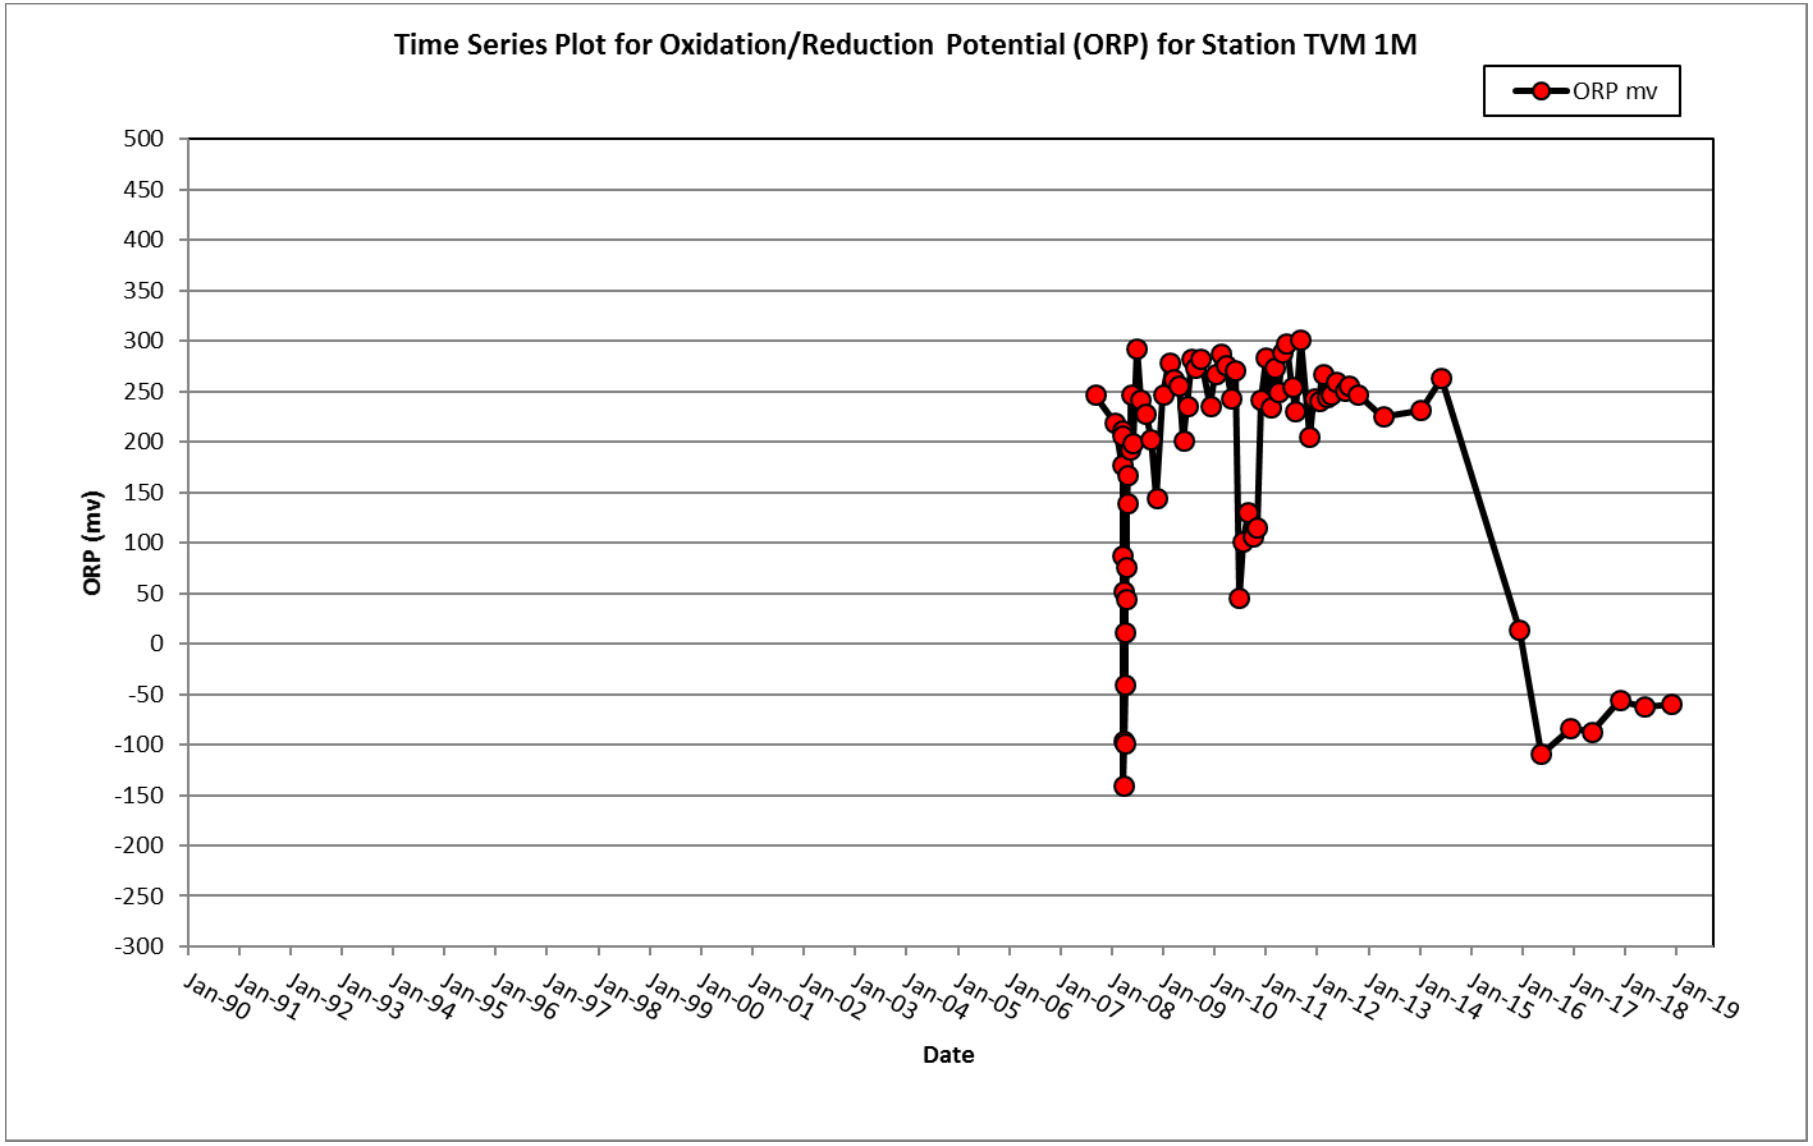
Time Series Plot for Oxidation/Reduction Potential (ORP) for Station TVM 1M
ORP mv
ORP (mv)
500
450
400
350
300
250
200
150
100
50
0
-50
-100
-150
-200
-250
-300
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

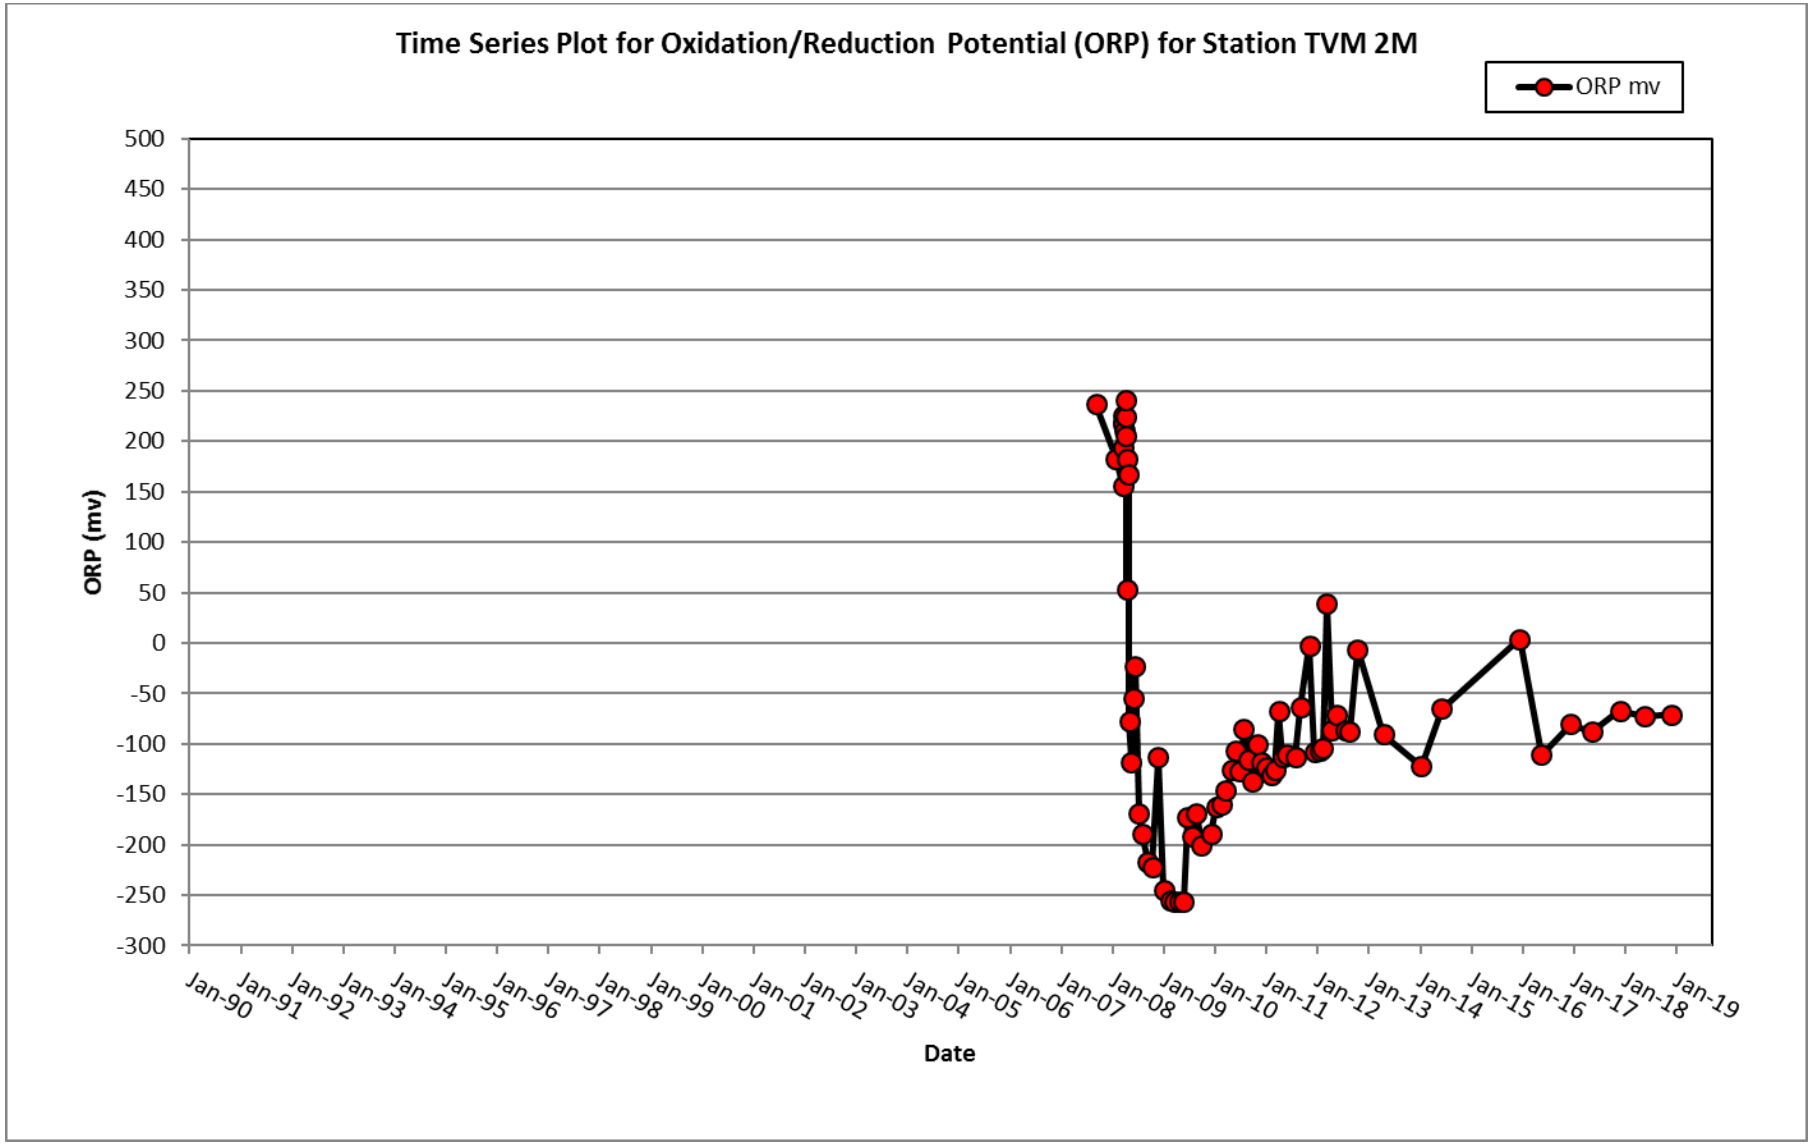
Time Series Plot for Oxidation/Reduction Potential (ORP) for Station TVM 2M
ORP mv
ORP (mv)
500
450
400
350
300
250
200
150
100
50
0
-50
-100
-150
-200
-250
-300
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

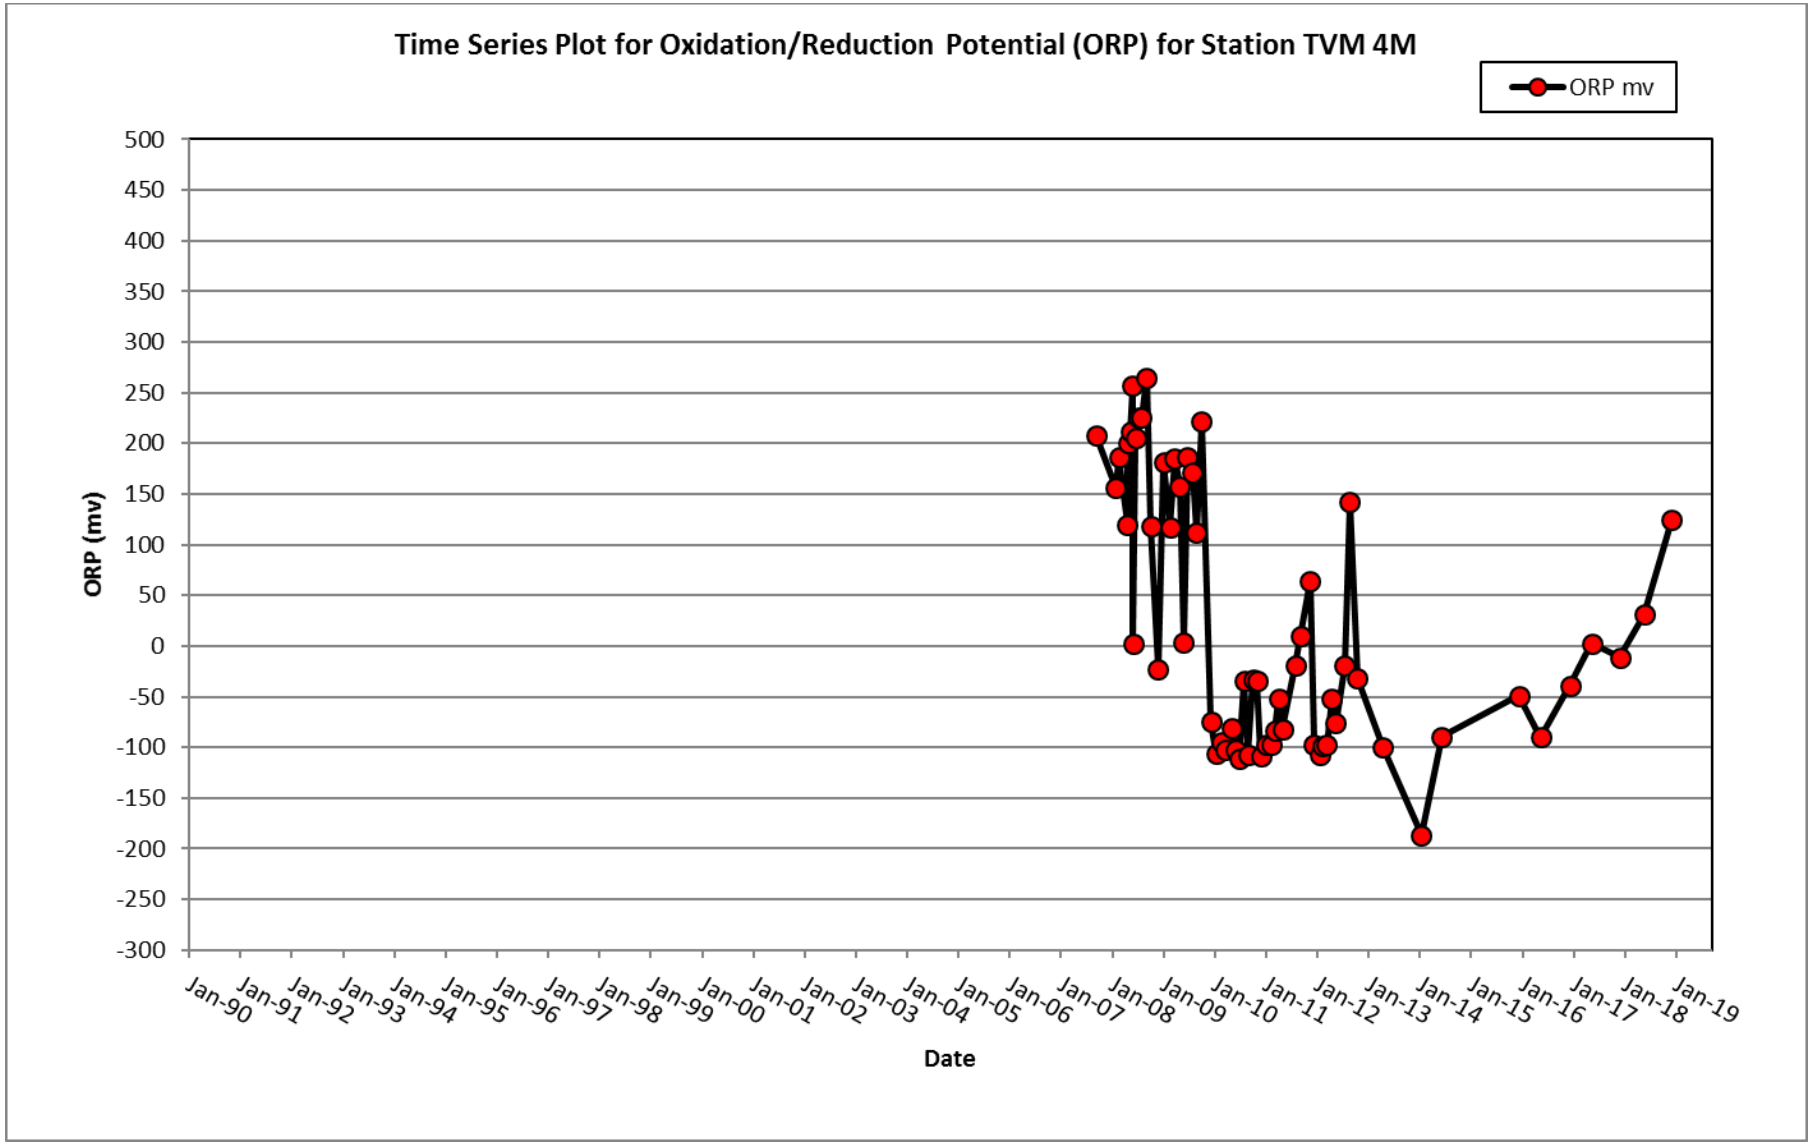
Time Series Plot for Oxidation/Reduction Potential (ORP) for Station TVM 4M
ORP mv
ORP (mv)
500
450
400
350
300
250
200
150
100
50
0
-50
-100
-150
-200
-250
-300
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

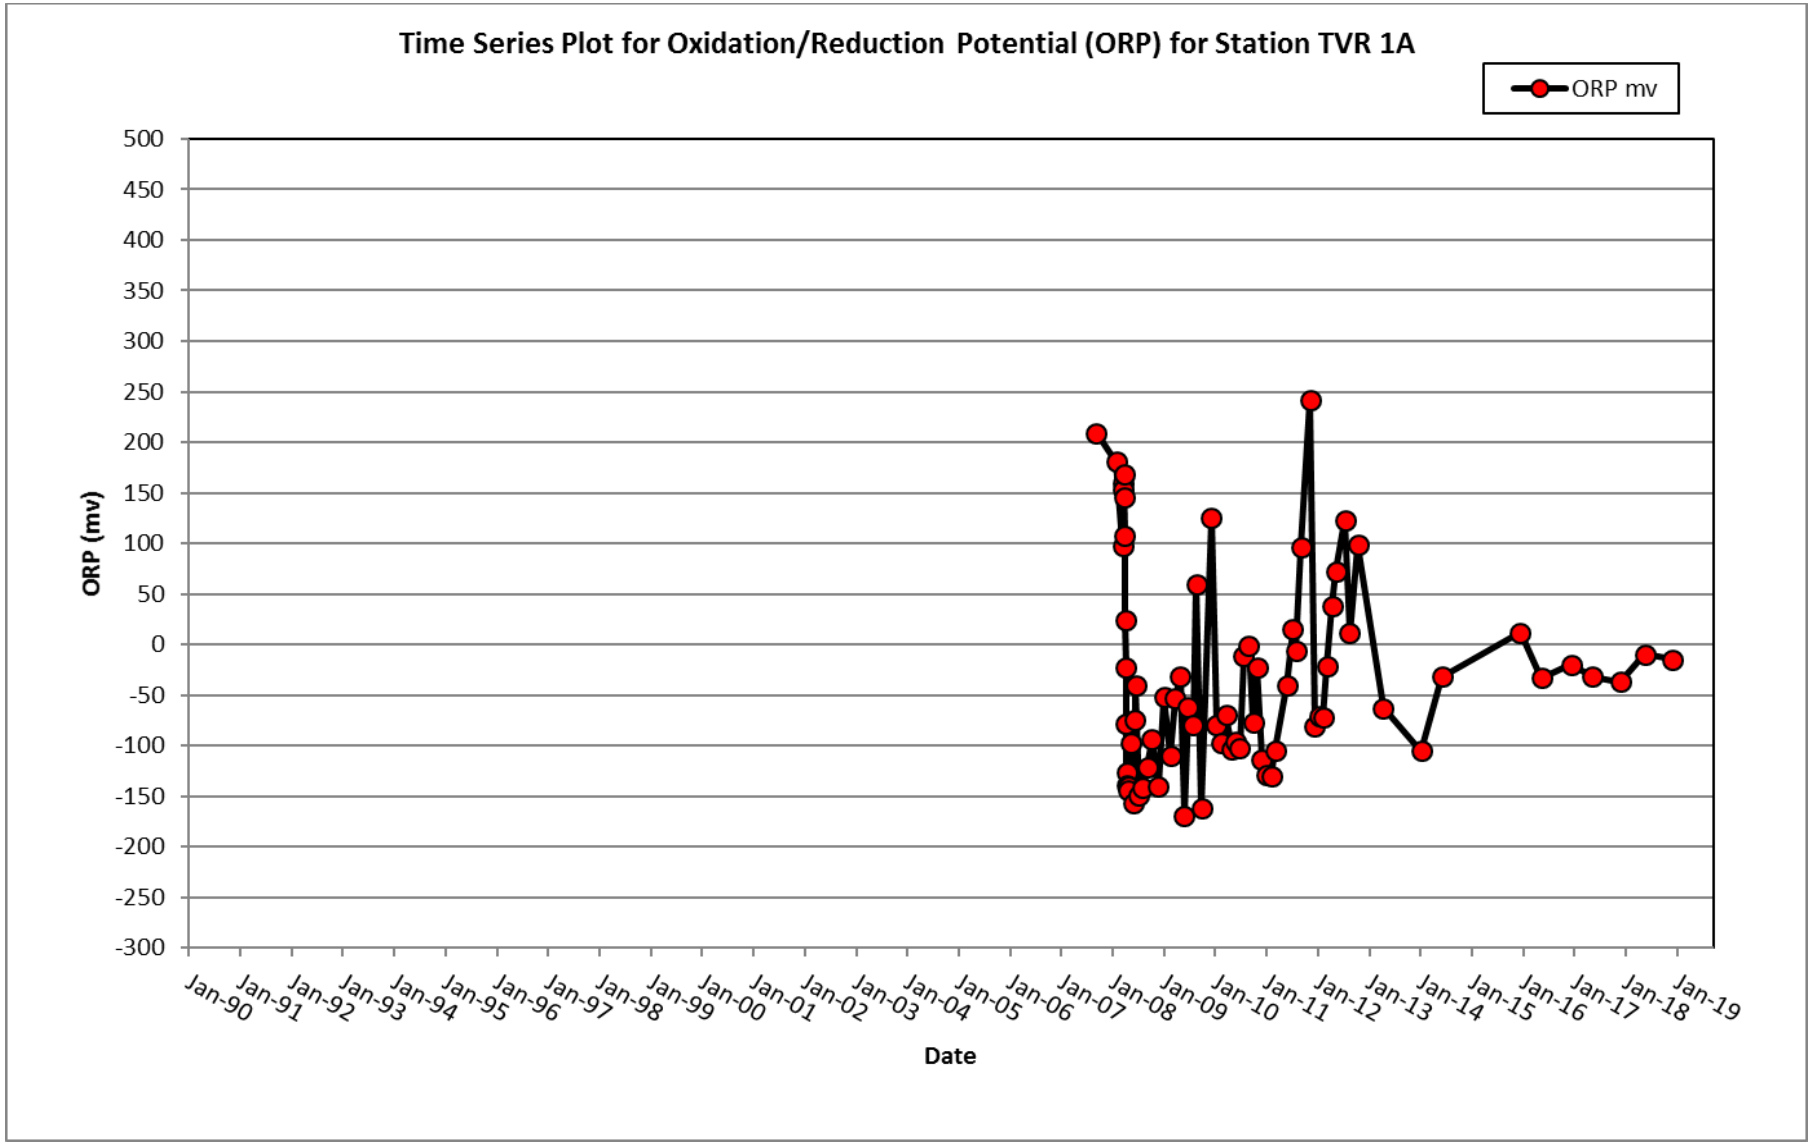
Time Series Plot for Oxidation/Reduction Potential (ORP) for Station TVR 1A
ORP mv
ORP (mv)
500
450
400
350
300
250
200
150
100
50
0
-50
-100
-150
-200
-250
-300
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

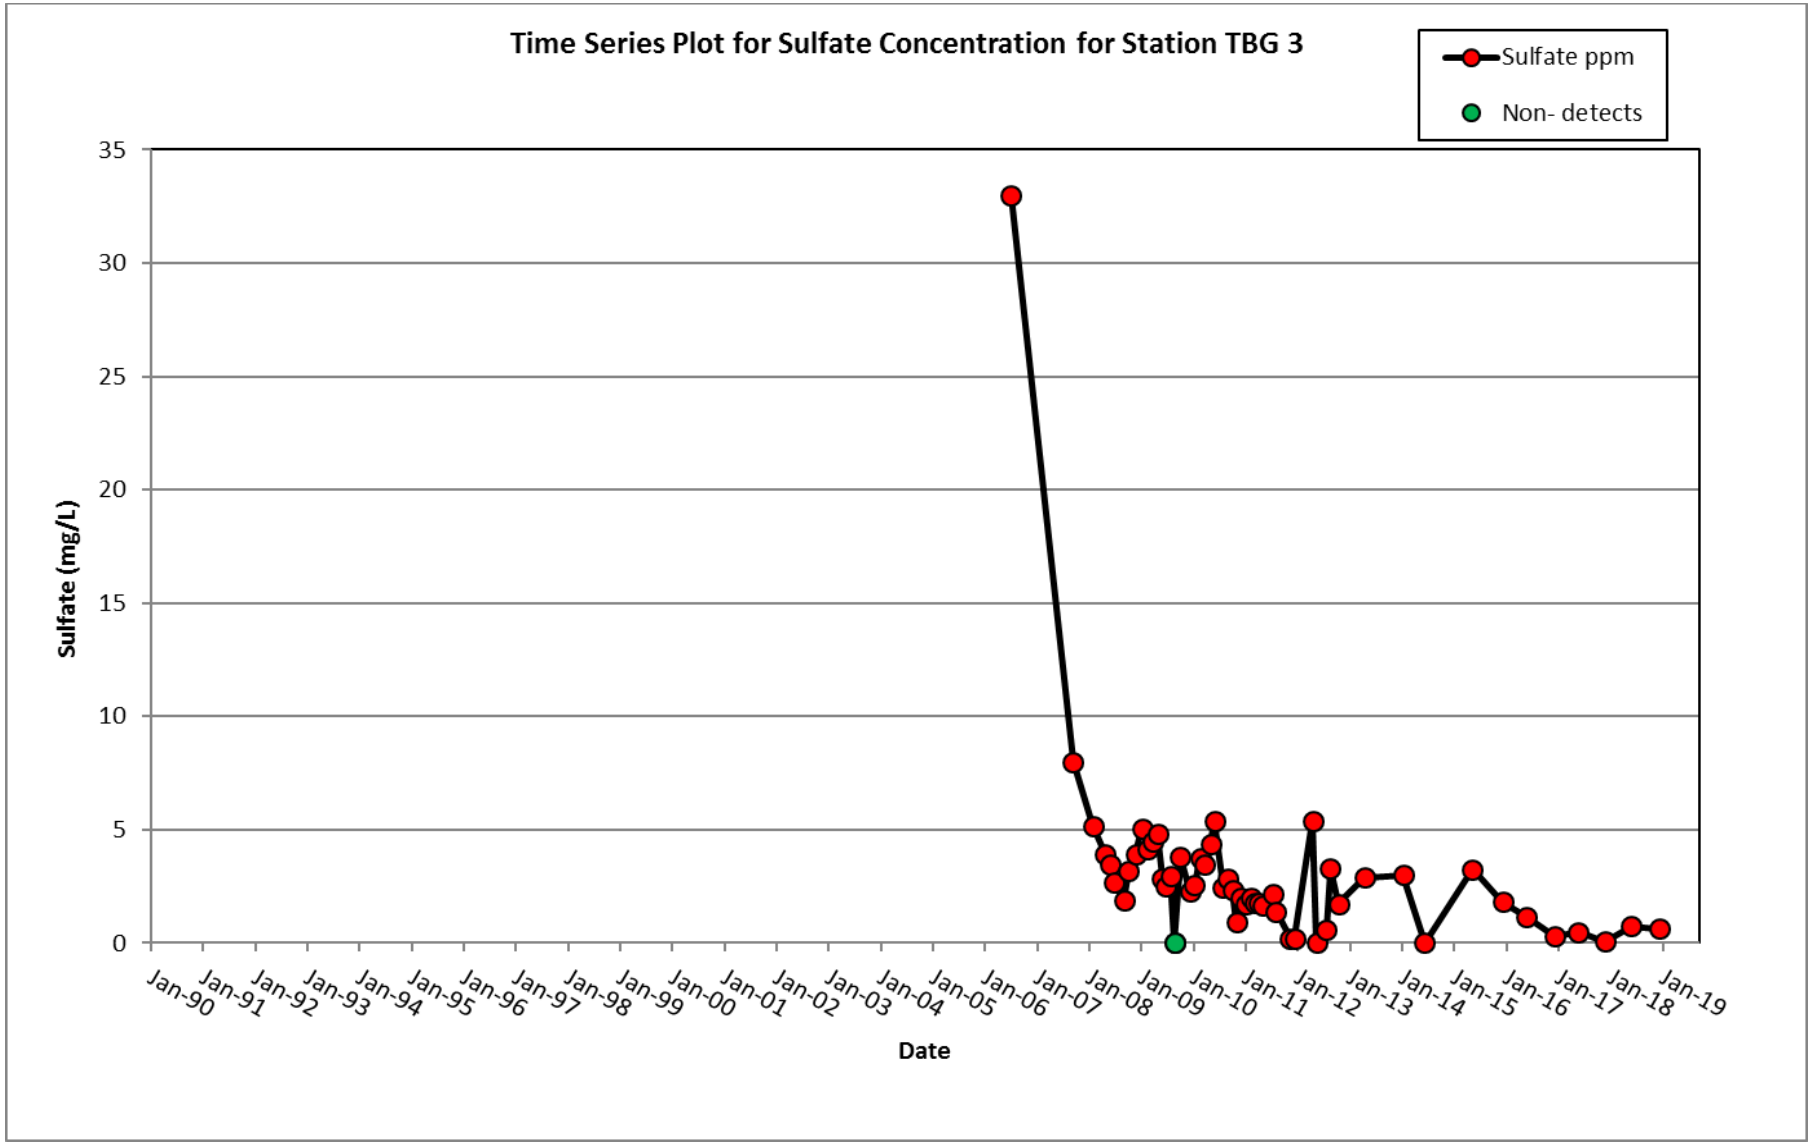
Time Series Plot for Sulfate Concentration for Station TBG 3
Sulfate ppm
Non- detects
Sulfate (mg/L)
35
30
25
20
15
10
5
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

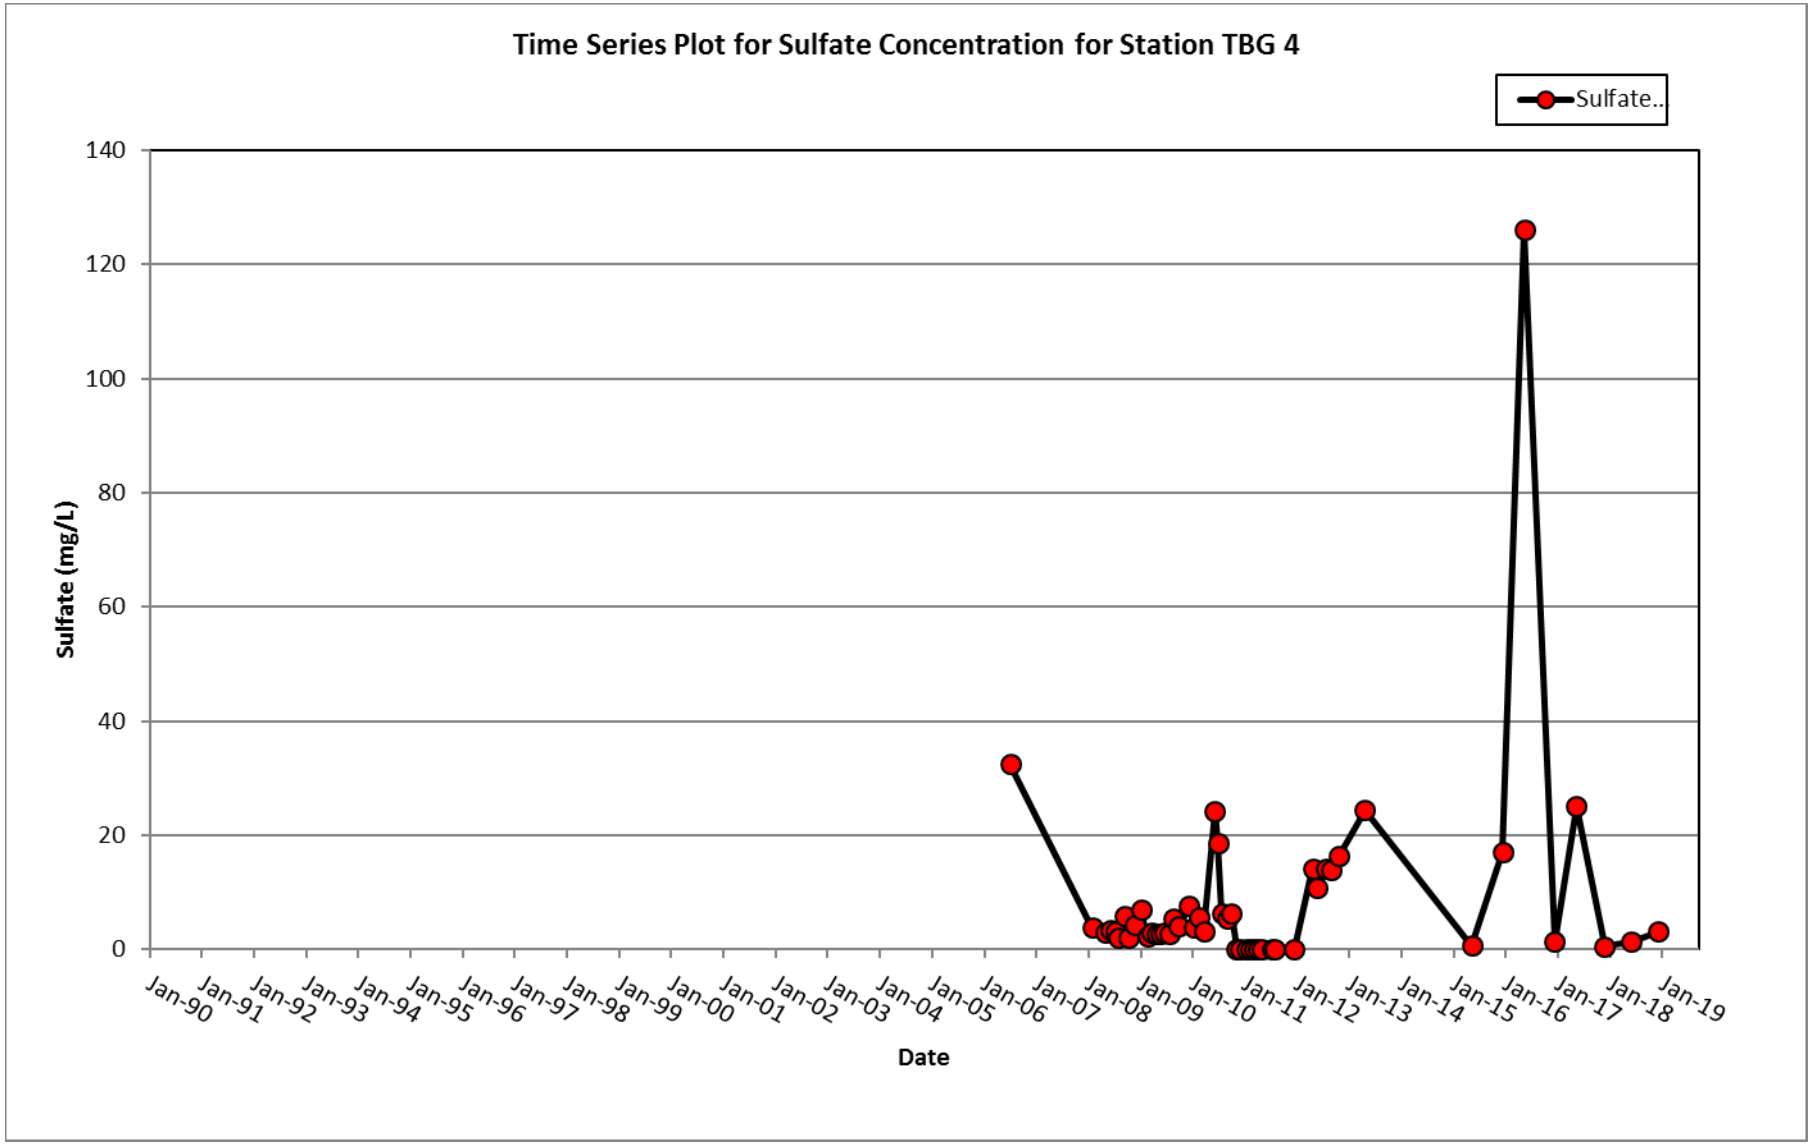
Time Series Plot for Sulfate Concentration for Station TBG 4
Sulfate..
Sulfate (mg/L)
140
120
100
80
60
40
20
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

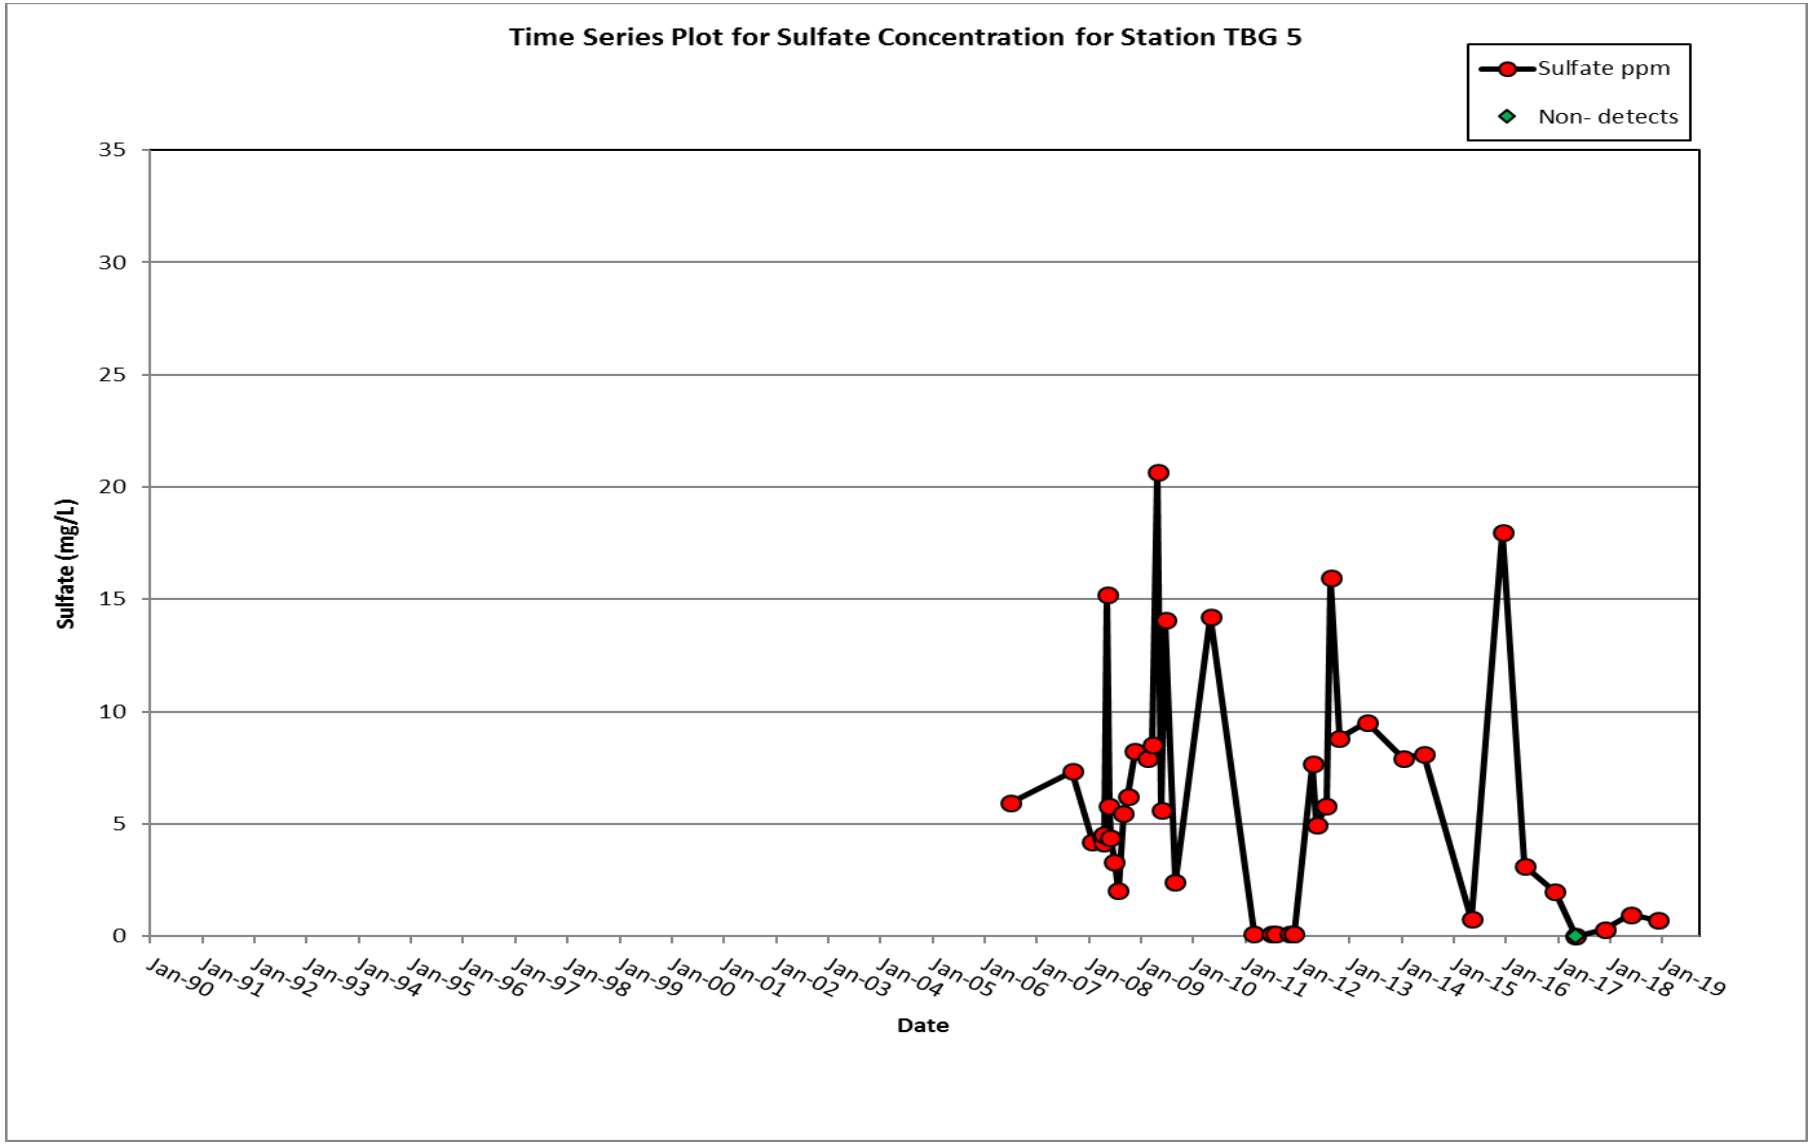
Time Series Plot for Sulfate Concentration for Station TBG 5
Sulfate ppm
Non- detects
Sulfate (mg/L)
35
30
25
20
15
10
5
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

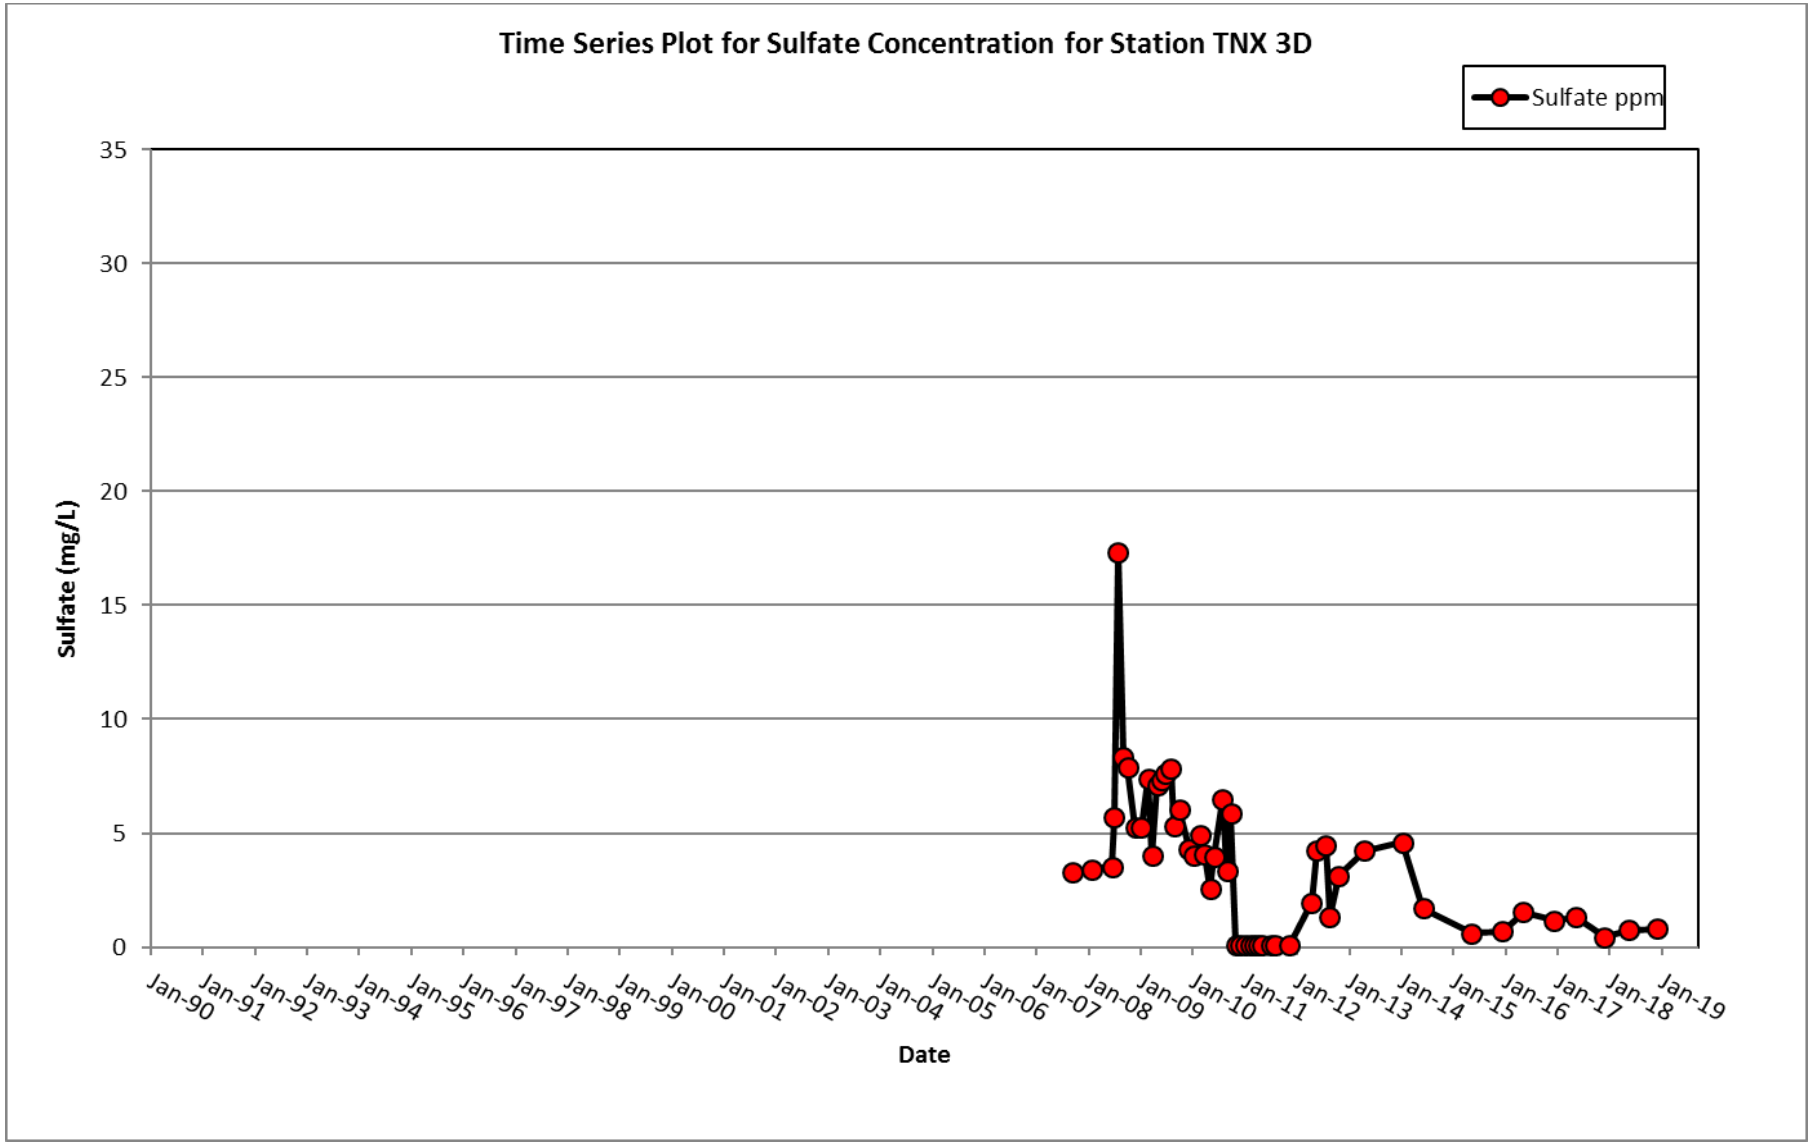
Time Series Plot for Sulfate Concentration for Station TNX 3D
Sulfate ppm
Sulfate (mg/L)
35
30
25
20
15
10
5
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

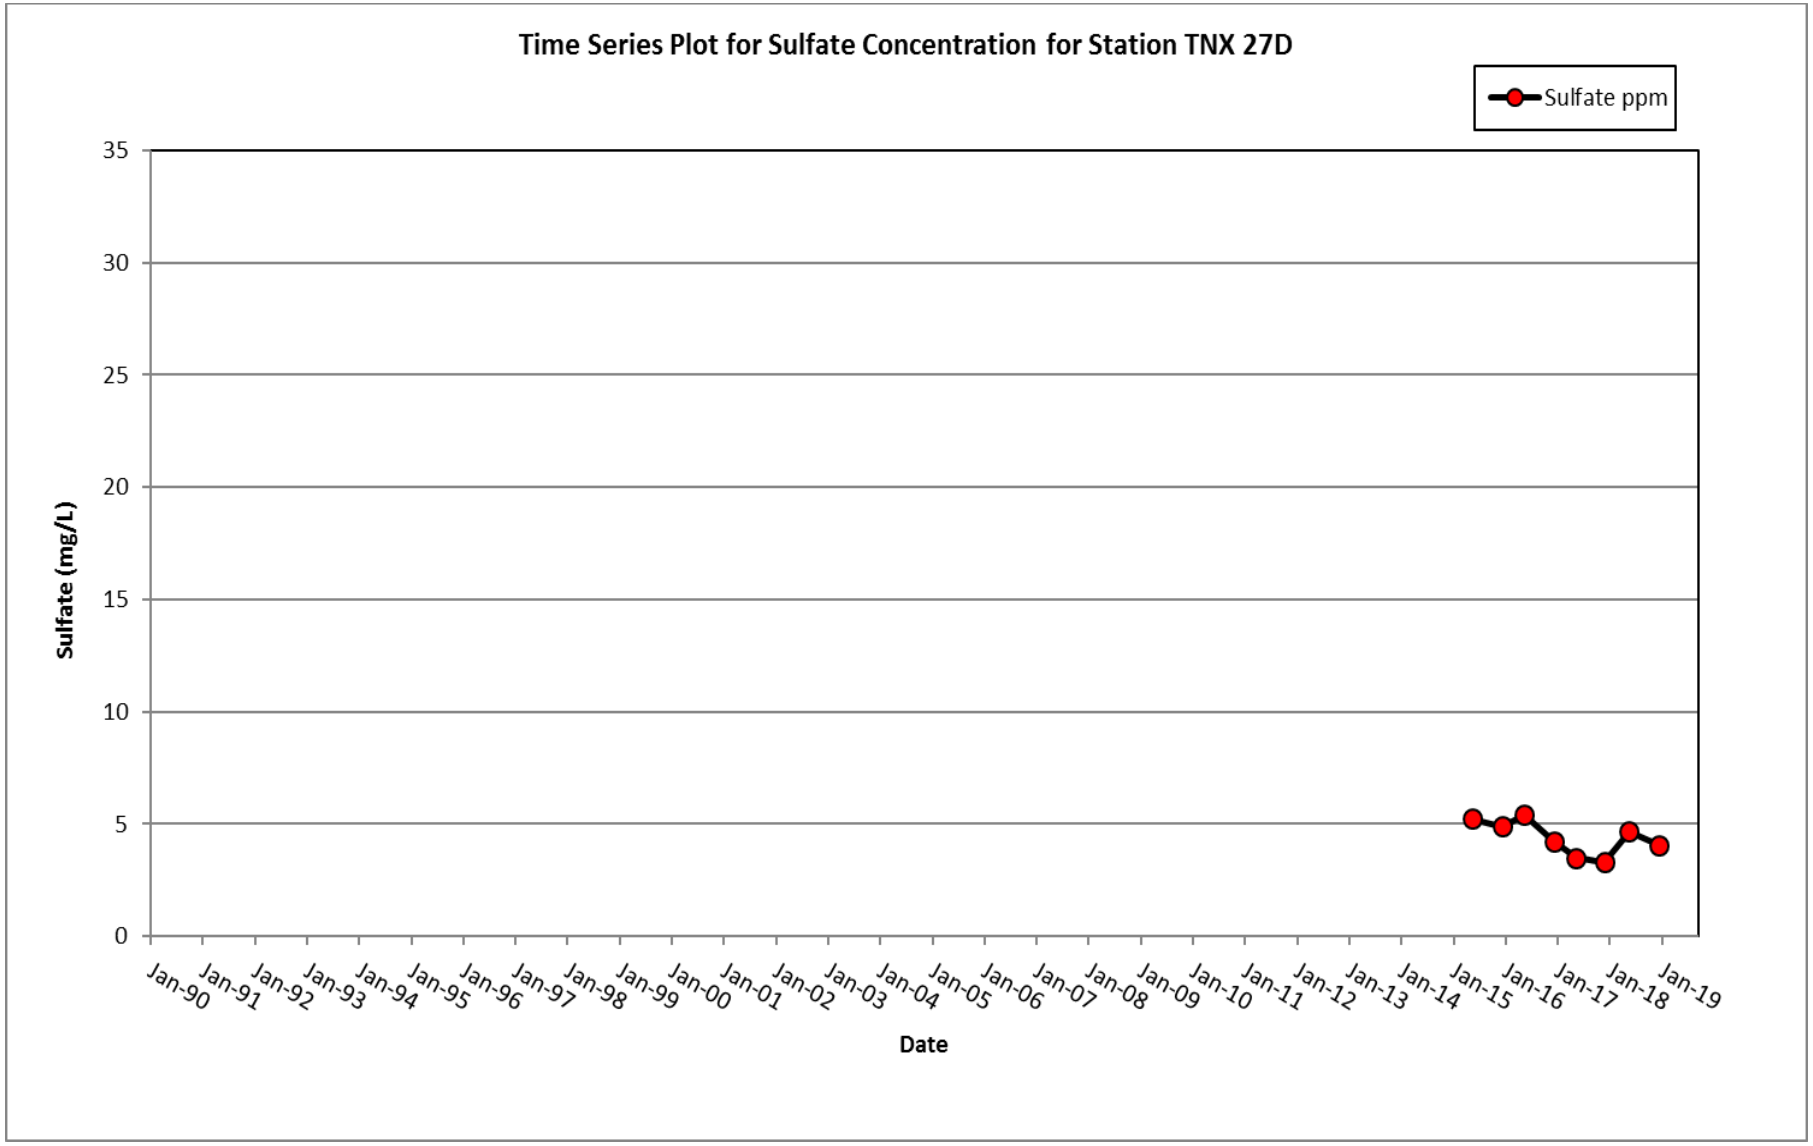
Time Series Plot for Sulfate Concentration for Station TNX 27D
Sulfate ppm
Sulfate (mg/L)
35
30
25
20
15
10
5
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

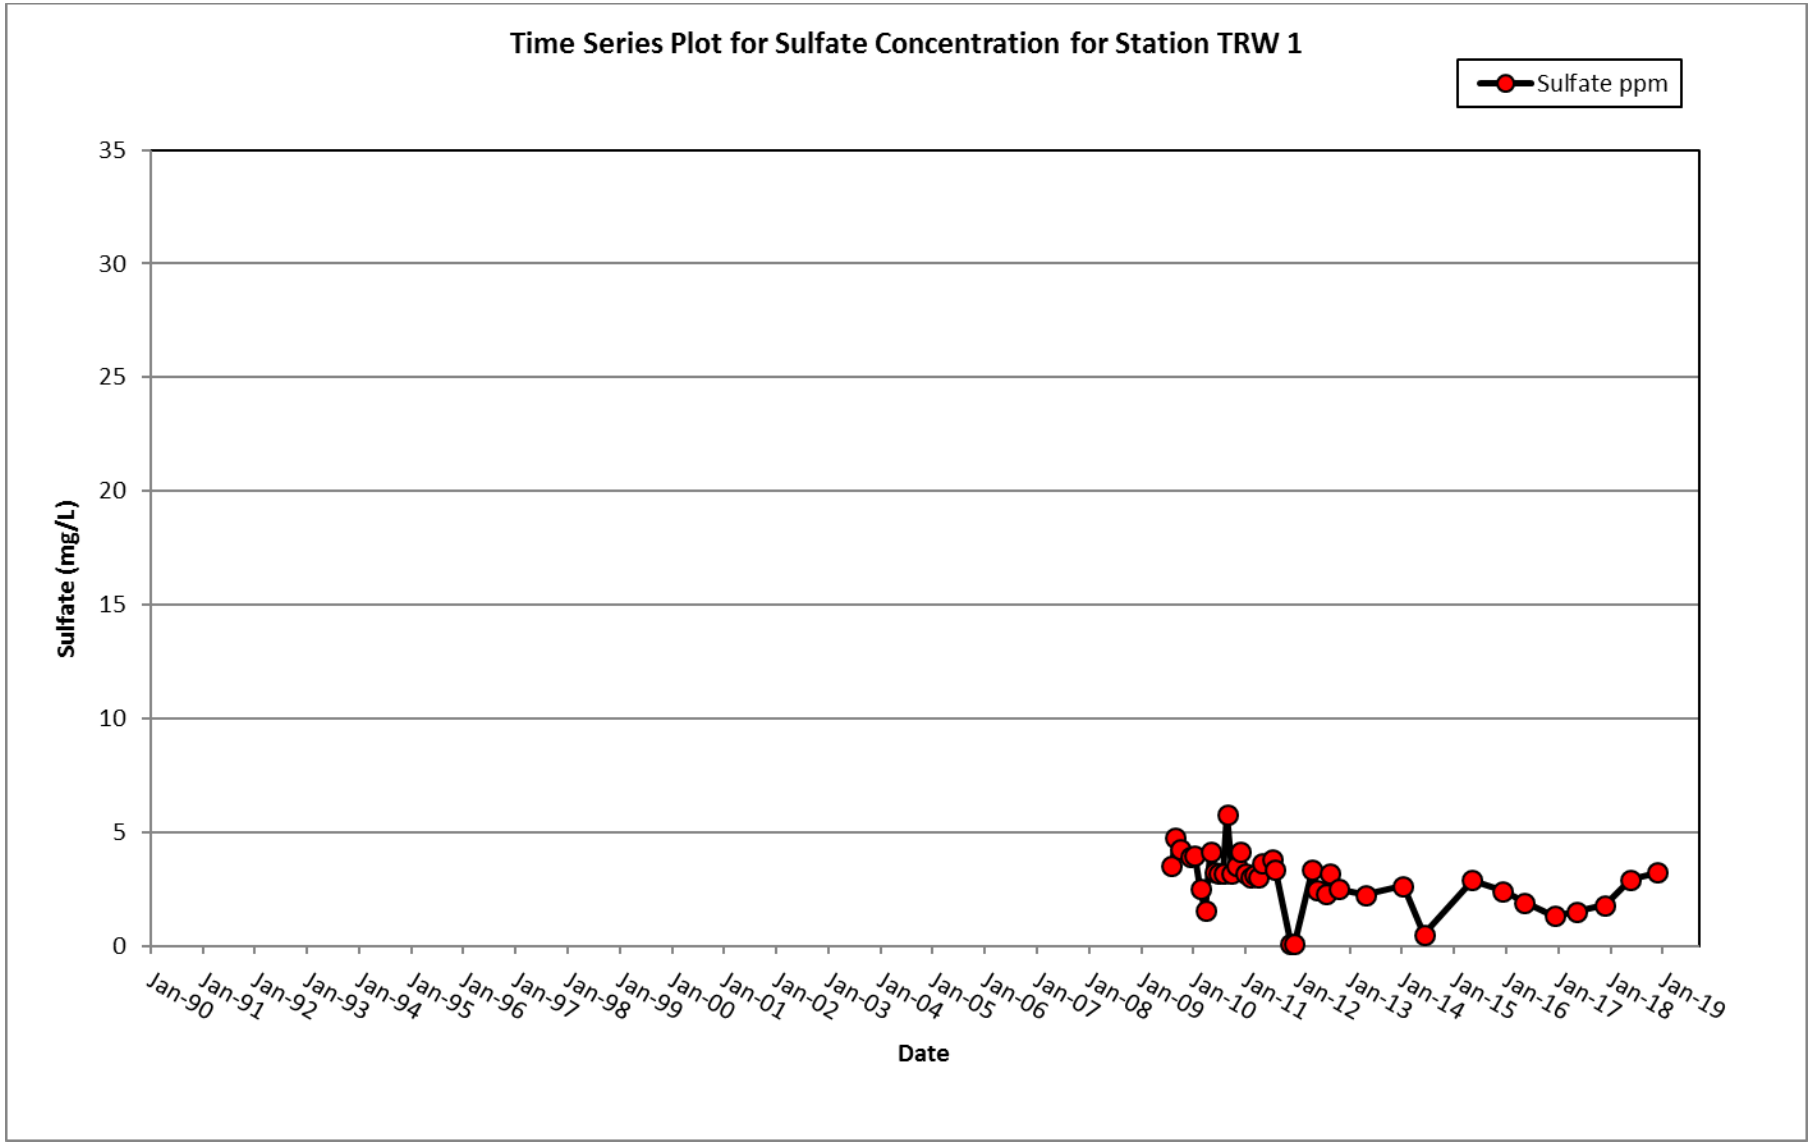
Time Series Plot for Sulfate Concentration for Station TRW 1
Sulfate ppm
Sulfate (mg/L)
35
30
25
20
15
10
5
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

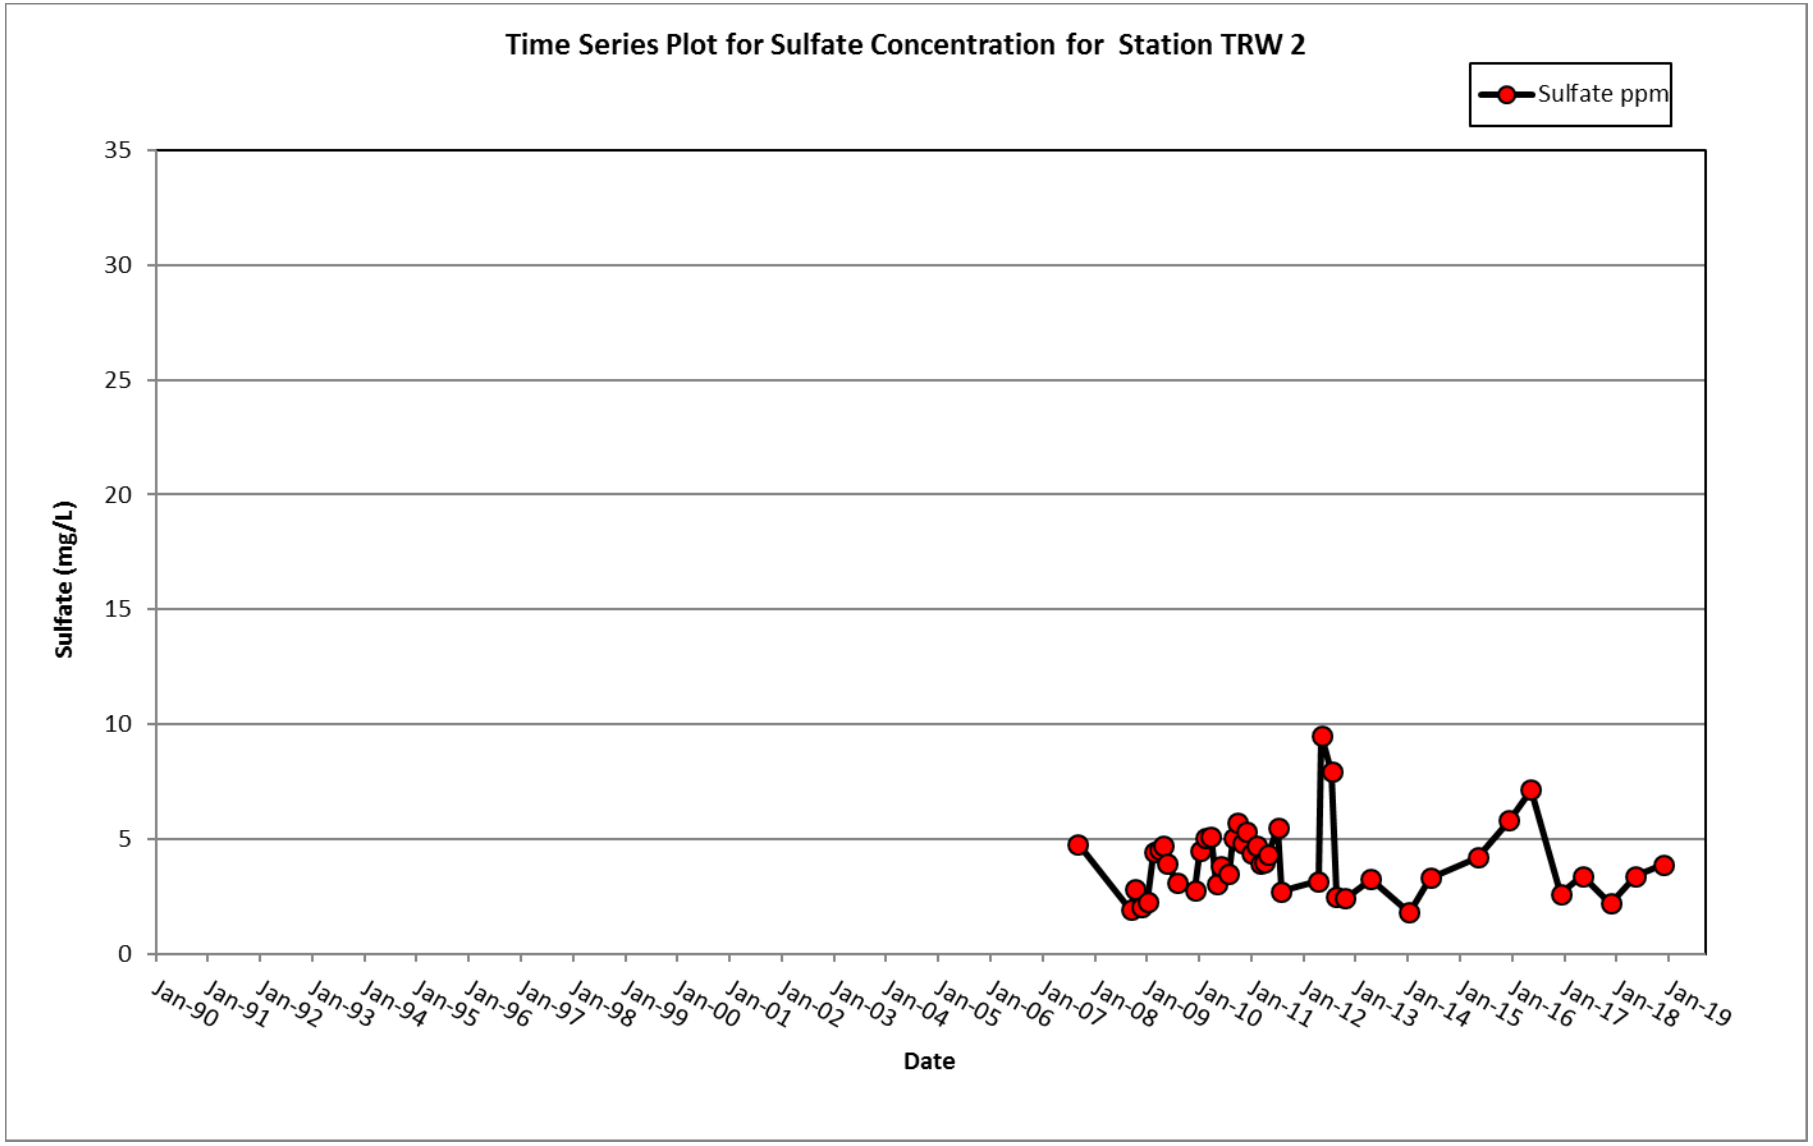
Time Series Plot for Sulfate Concentration for Station TRW 2
Sulfate ppm
Sulfate (mg/L)
35
30
25
20
15
10
5
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

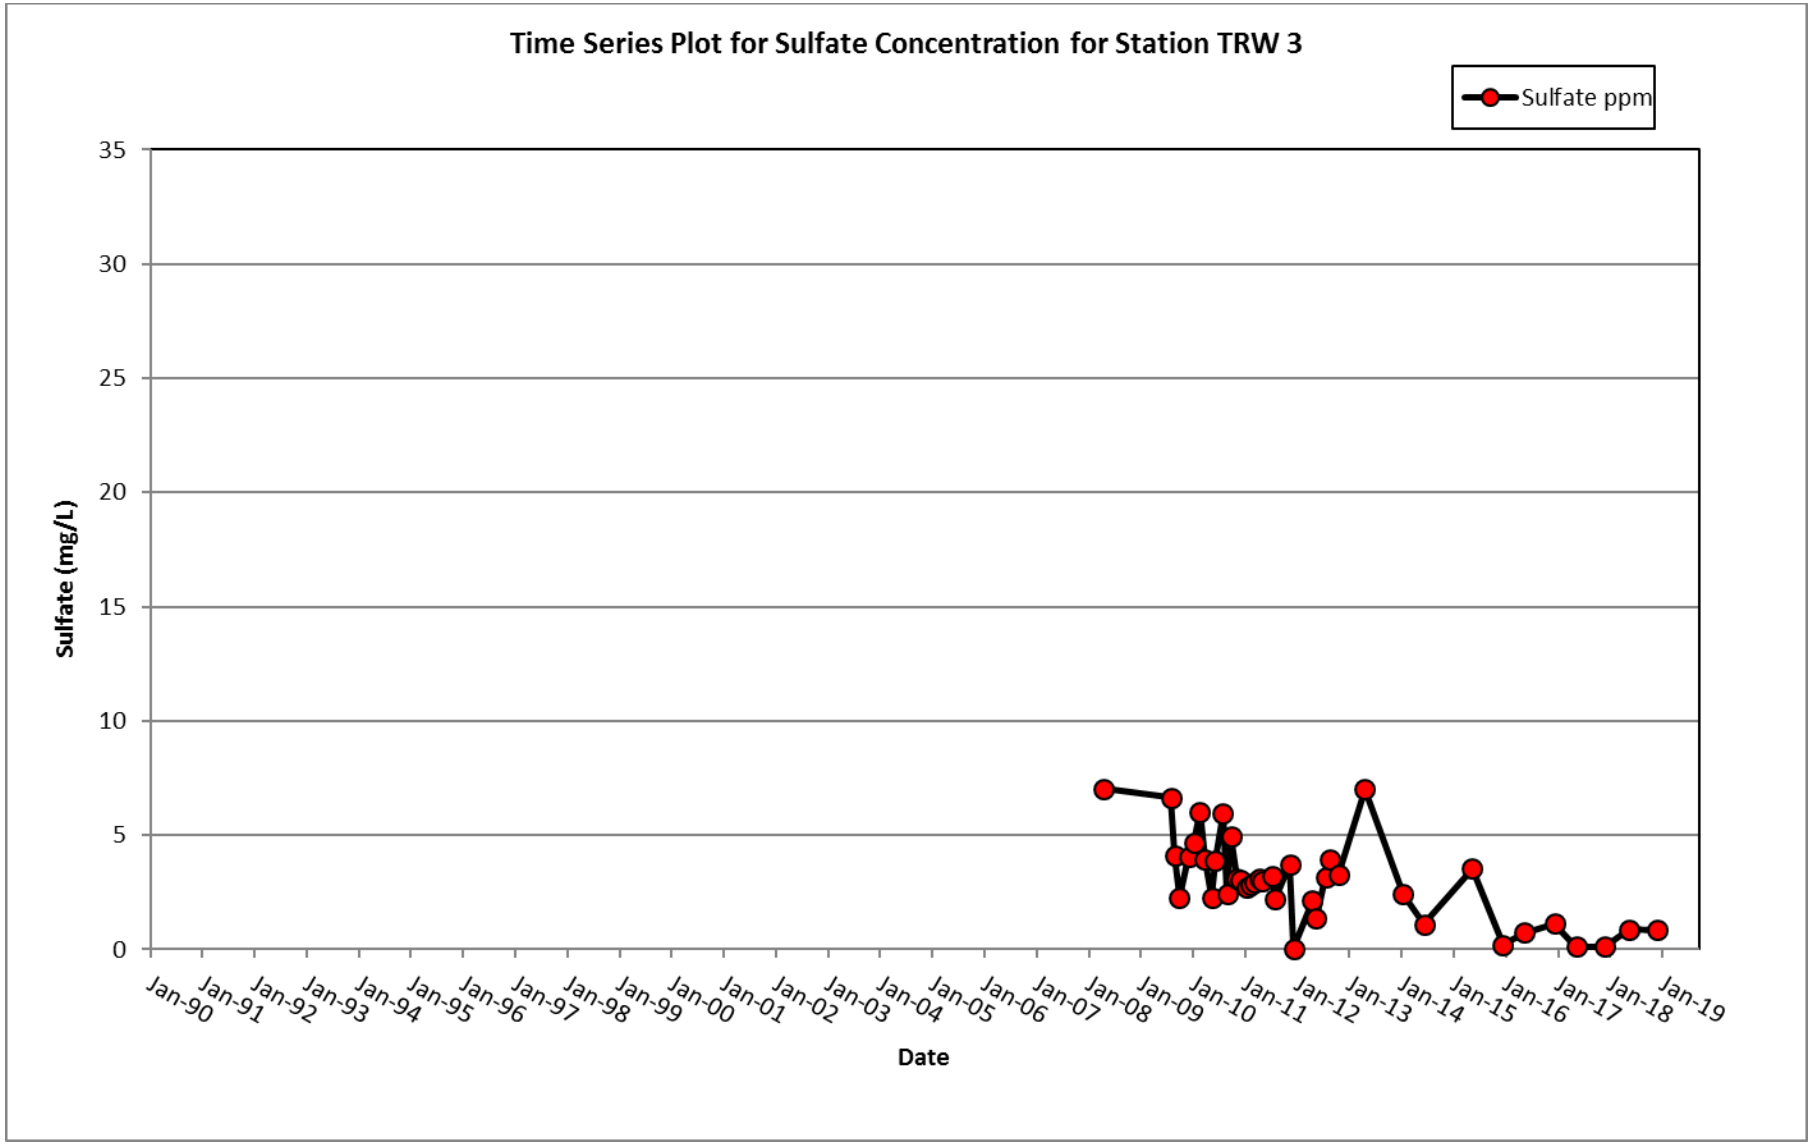
Time Series Plot for Sulfate Concentration for Station TRW 3
Sulfate ppm
Sulfate (mg/L)
35
30
25
20
15
10
5
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

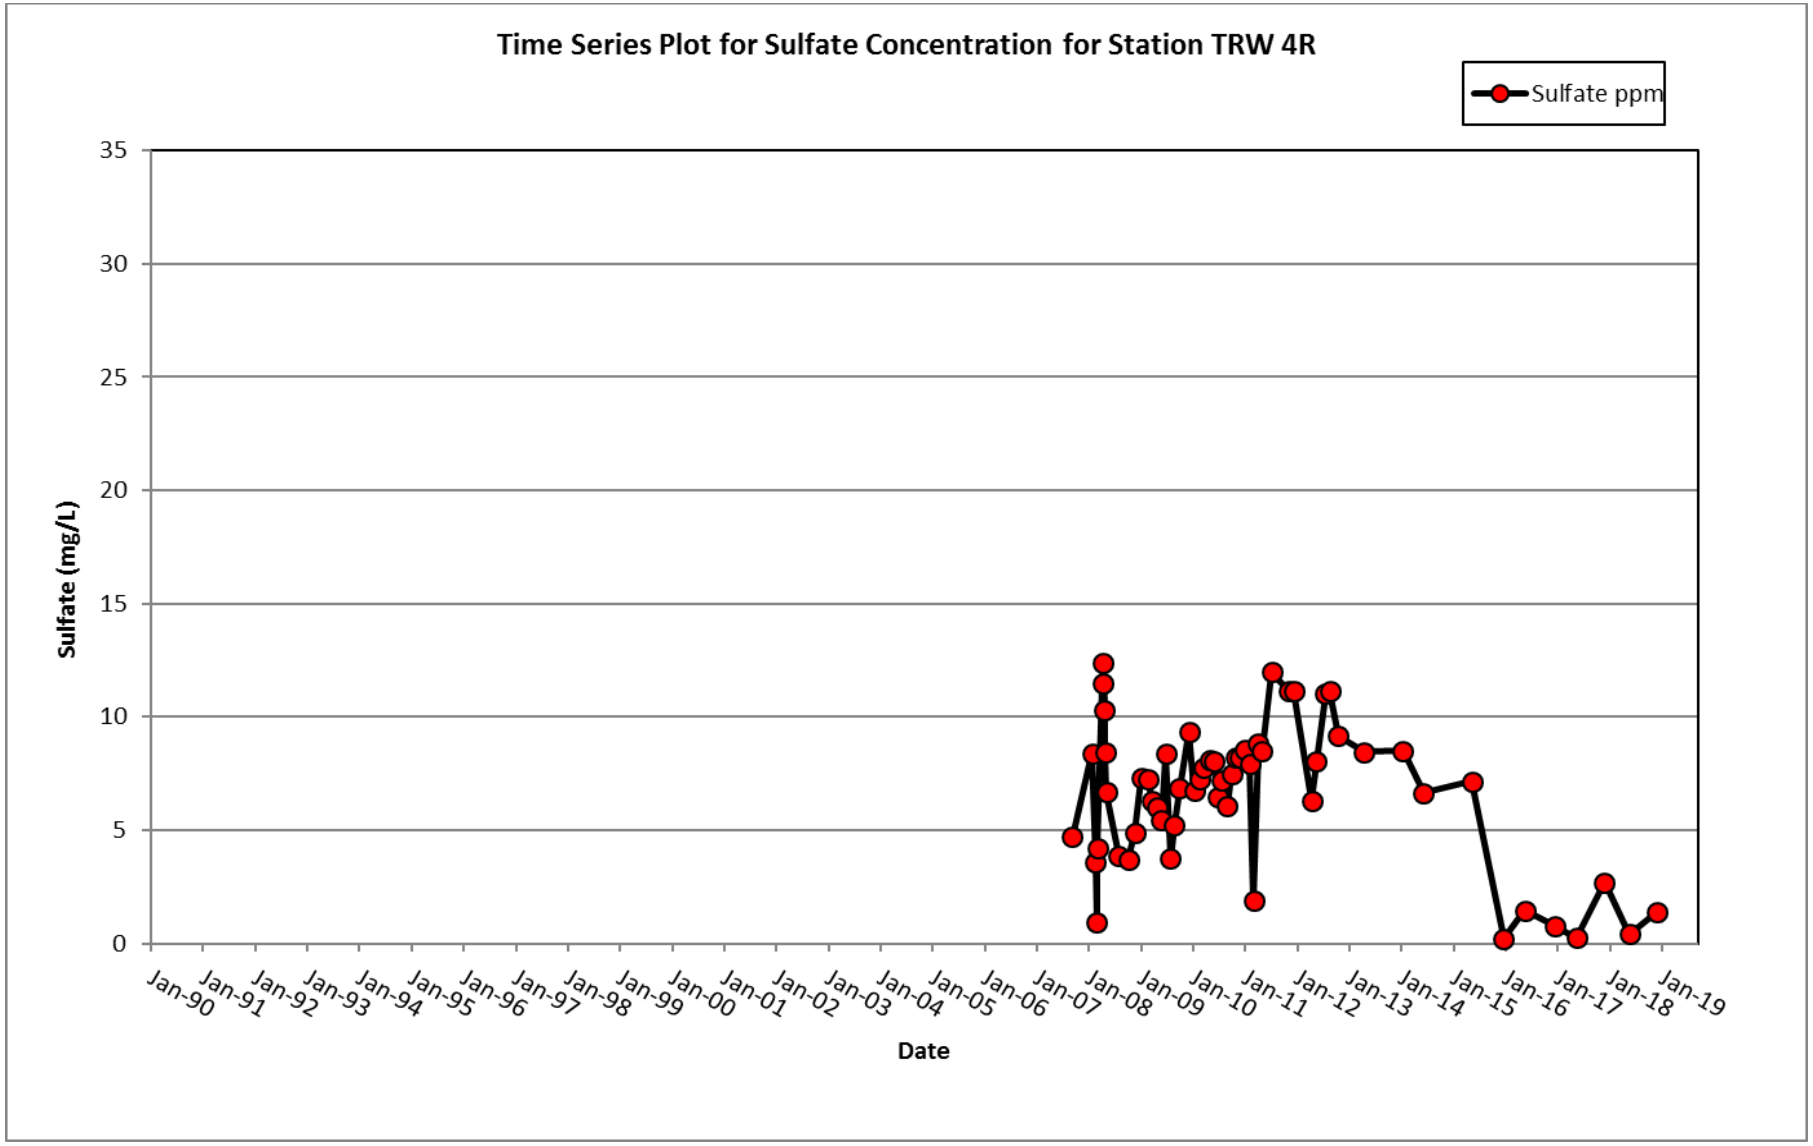
Time Series Plot for Sulfate Concentration for Station TRW 4R
Sulfate ppm
Sulfate (mg/L)
35
30
25
20
15
10
5
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

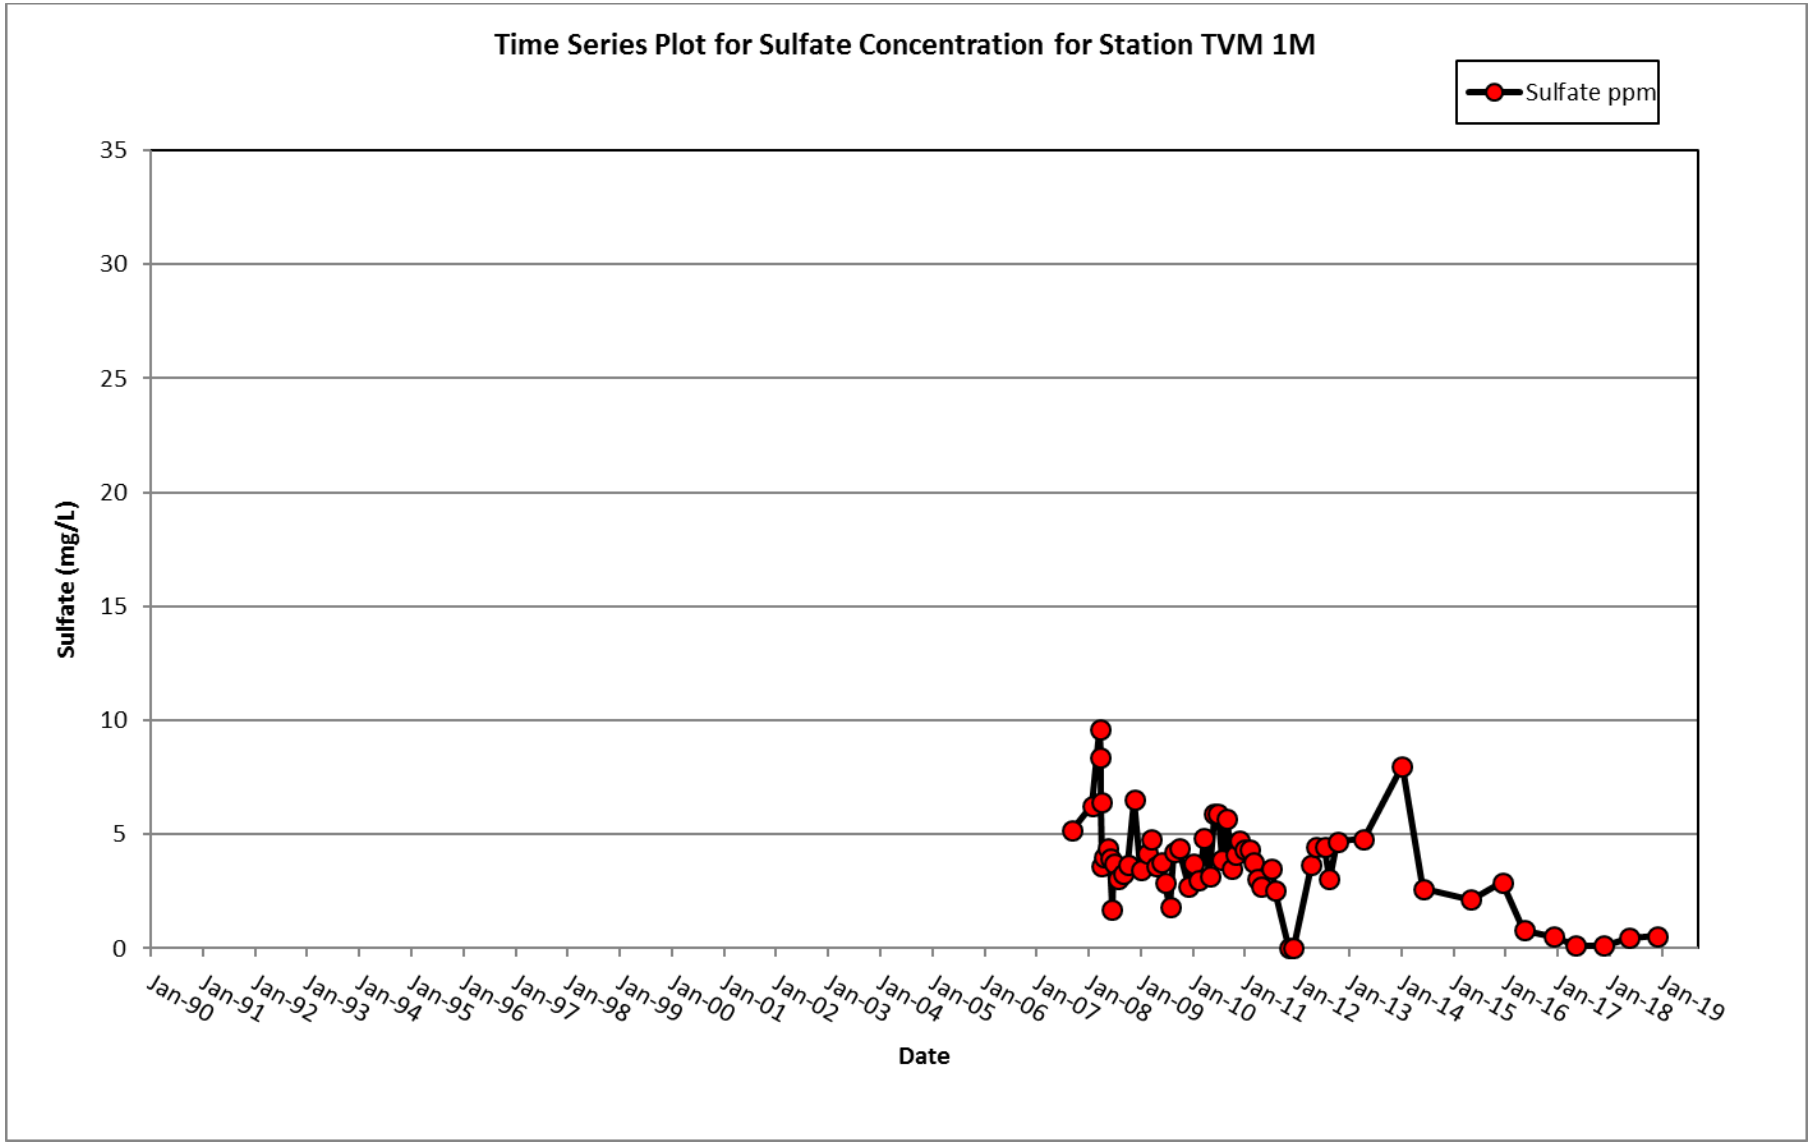
Time Series Plot for Sulfate Concentration for Station TVM 1M
Sulfate ppm
Sulfate (mg/L)
35
30
25
20
15
10
5
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

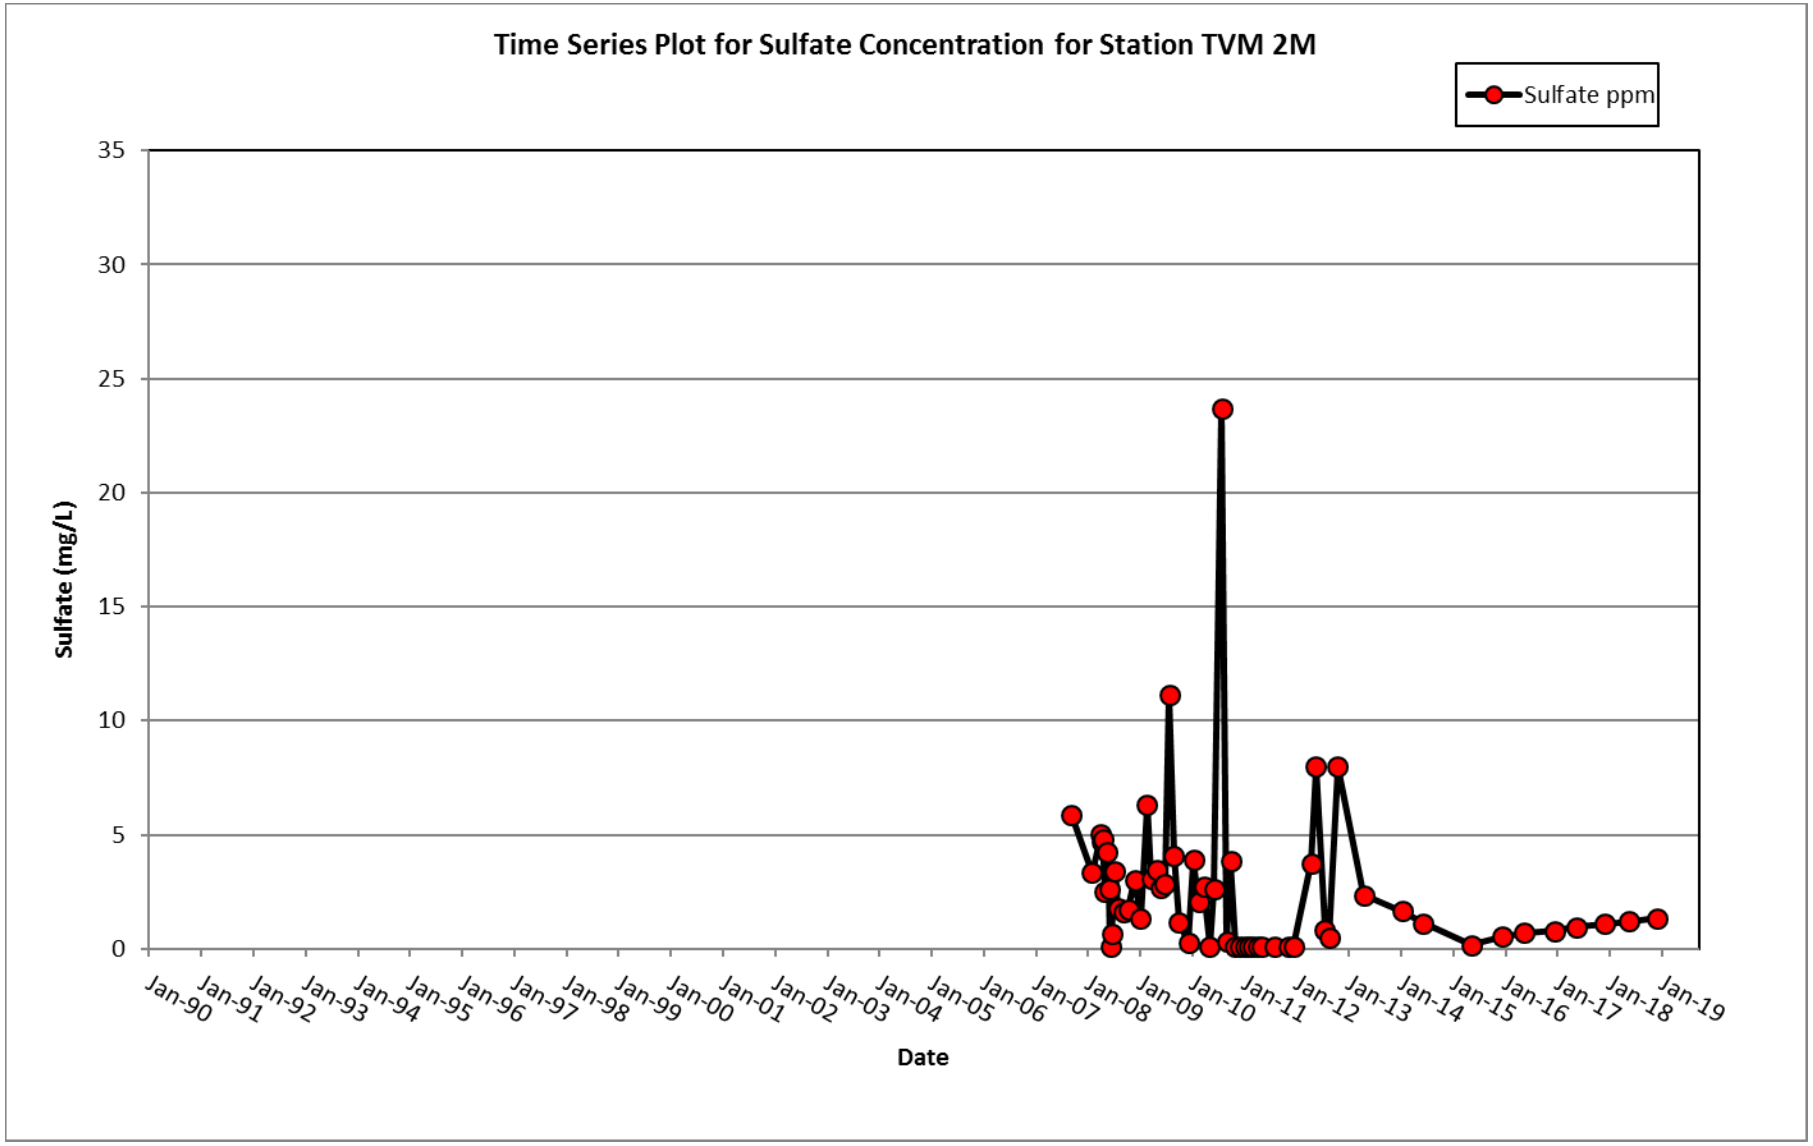
Time Series Plot for Sulfate Concentration for Station TVM 2M
Sulfate ppm
Sulfate (mg/L)
35
30
25
20
15
10
5
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

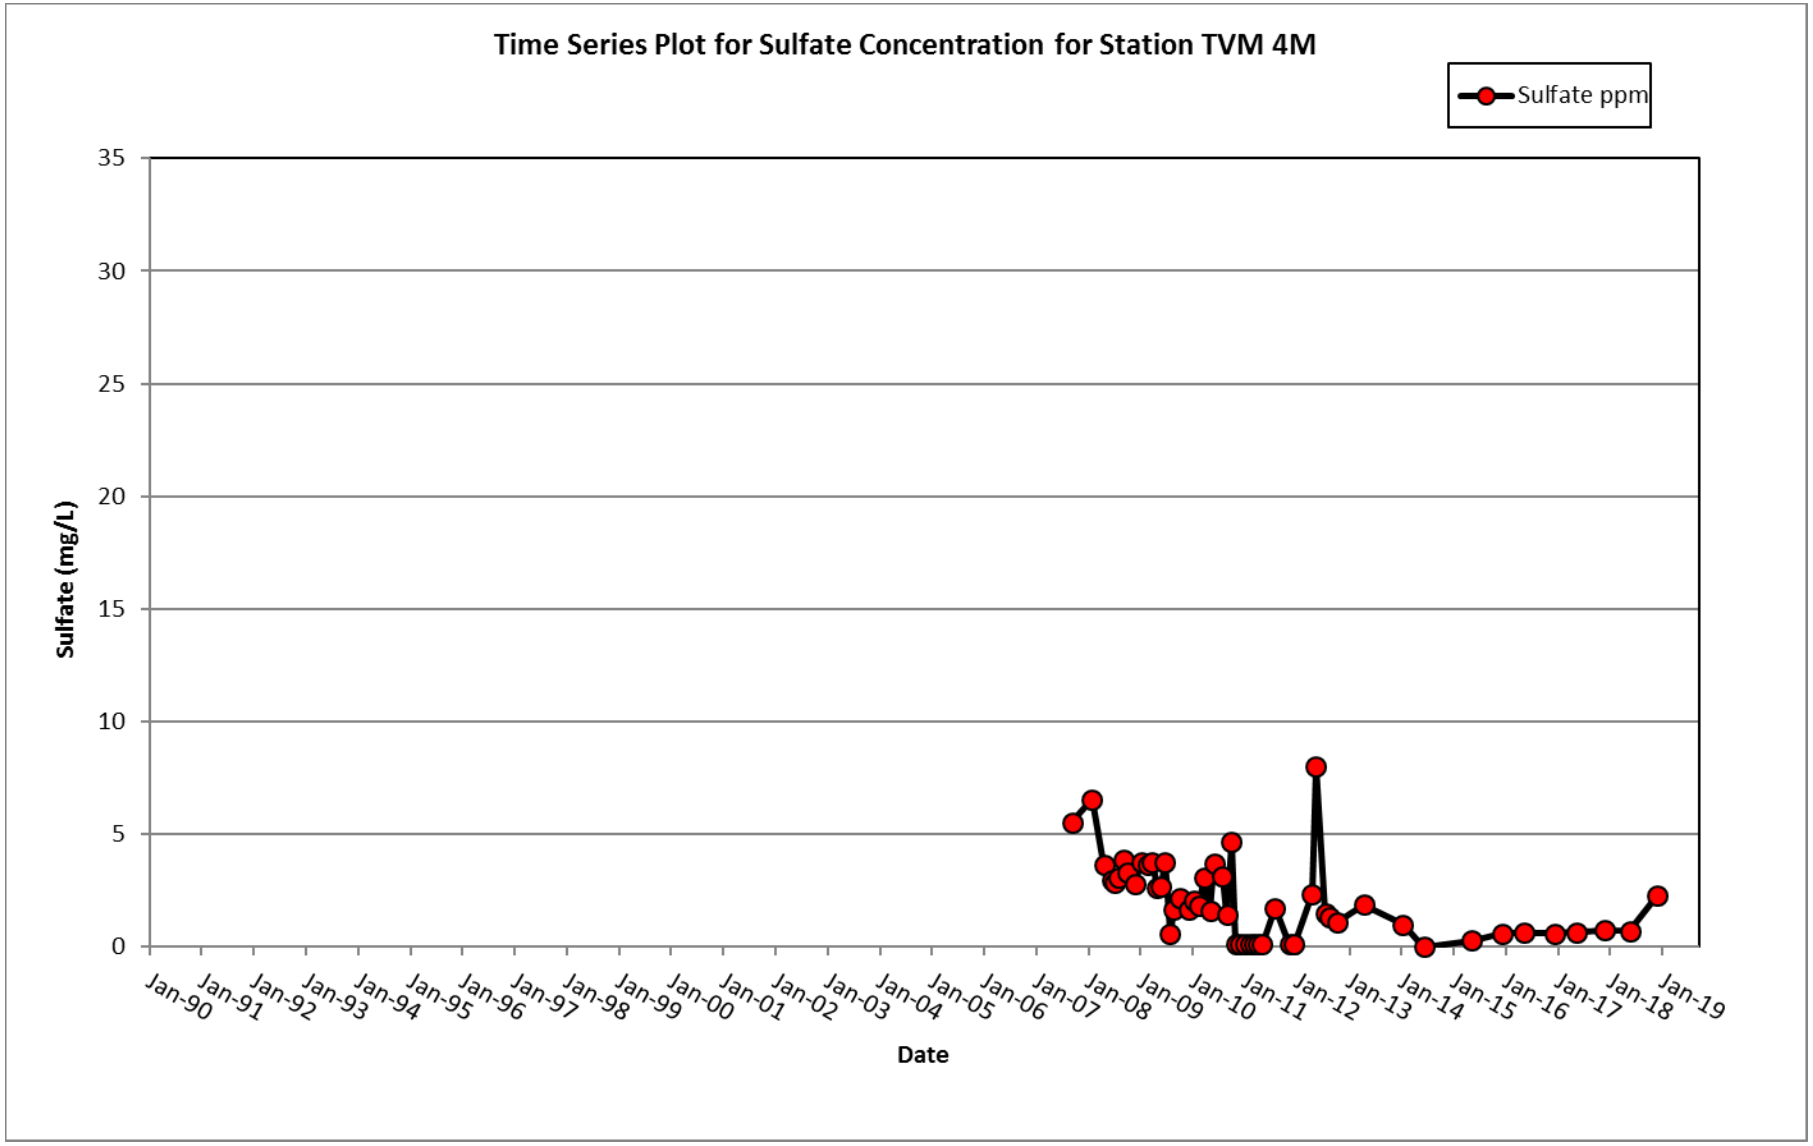
Time Series Plot for Sulfate Concentration for Station TVM 4M
Sulfate ppm
Sulfate (mg/L)
35
30
25
20
15
10
5
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

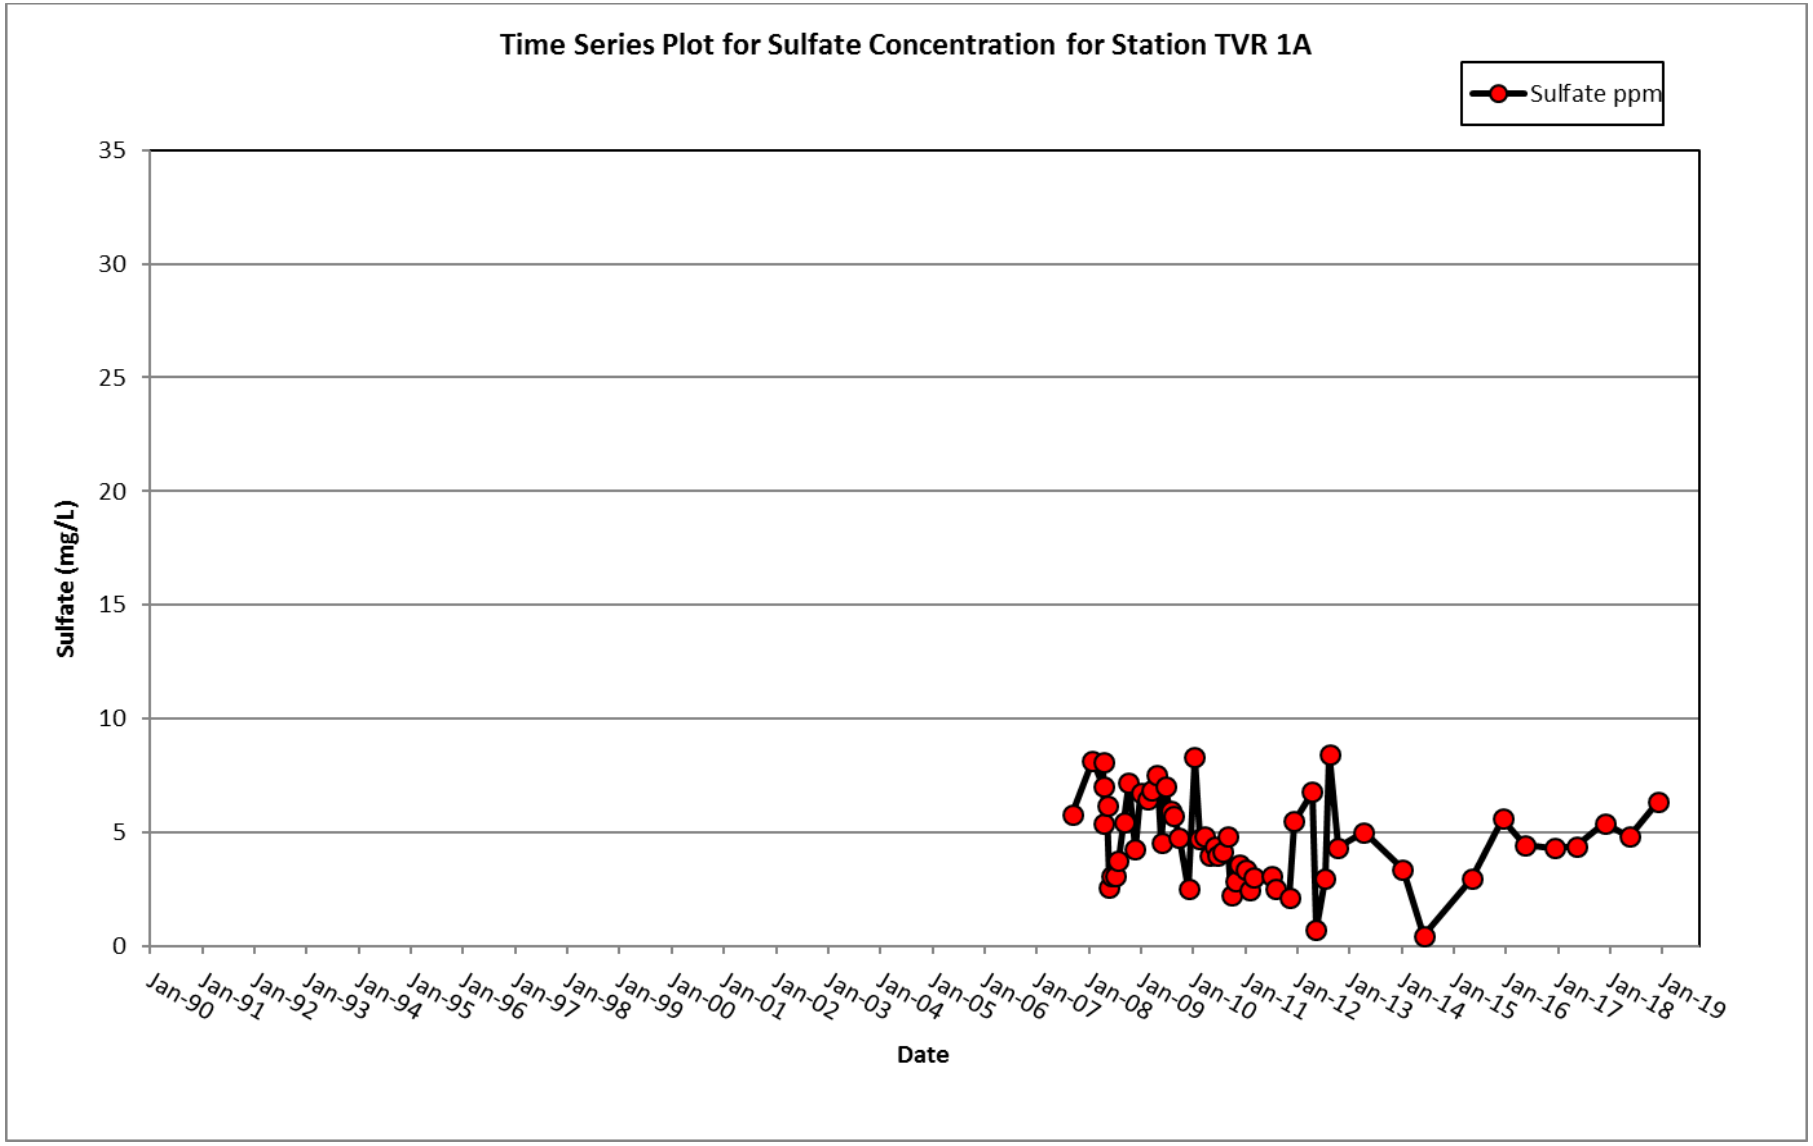
Time Series Plot for Sulfate Concentration for Station TVR 1A
Sulfate ppm
Sulfate (mg/L)
35
30
25
20
15
10
5
0
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

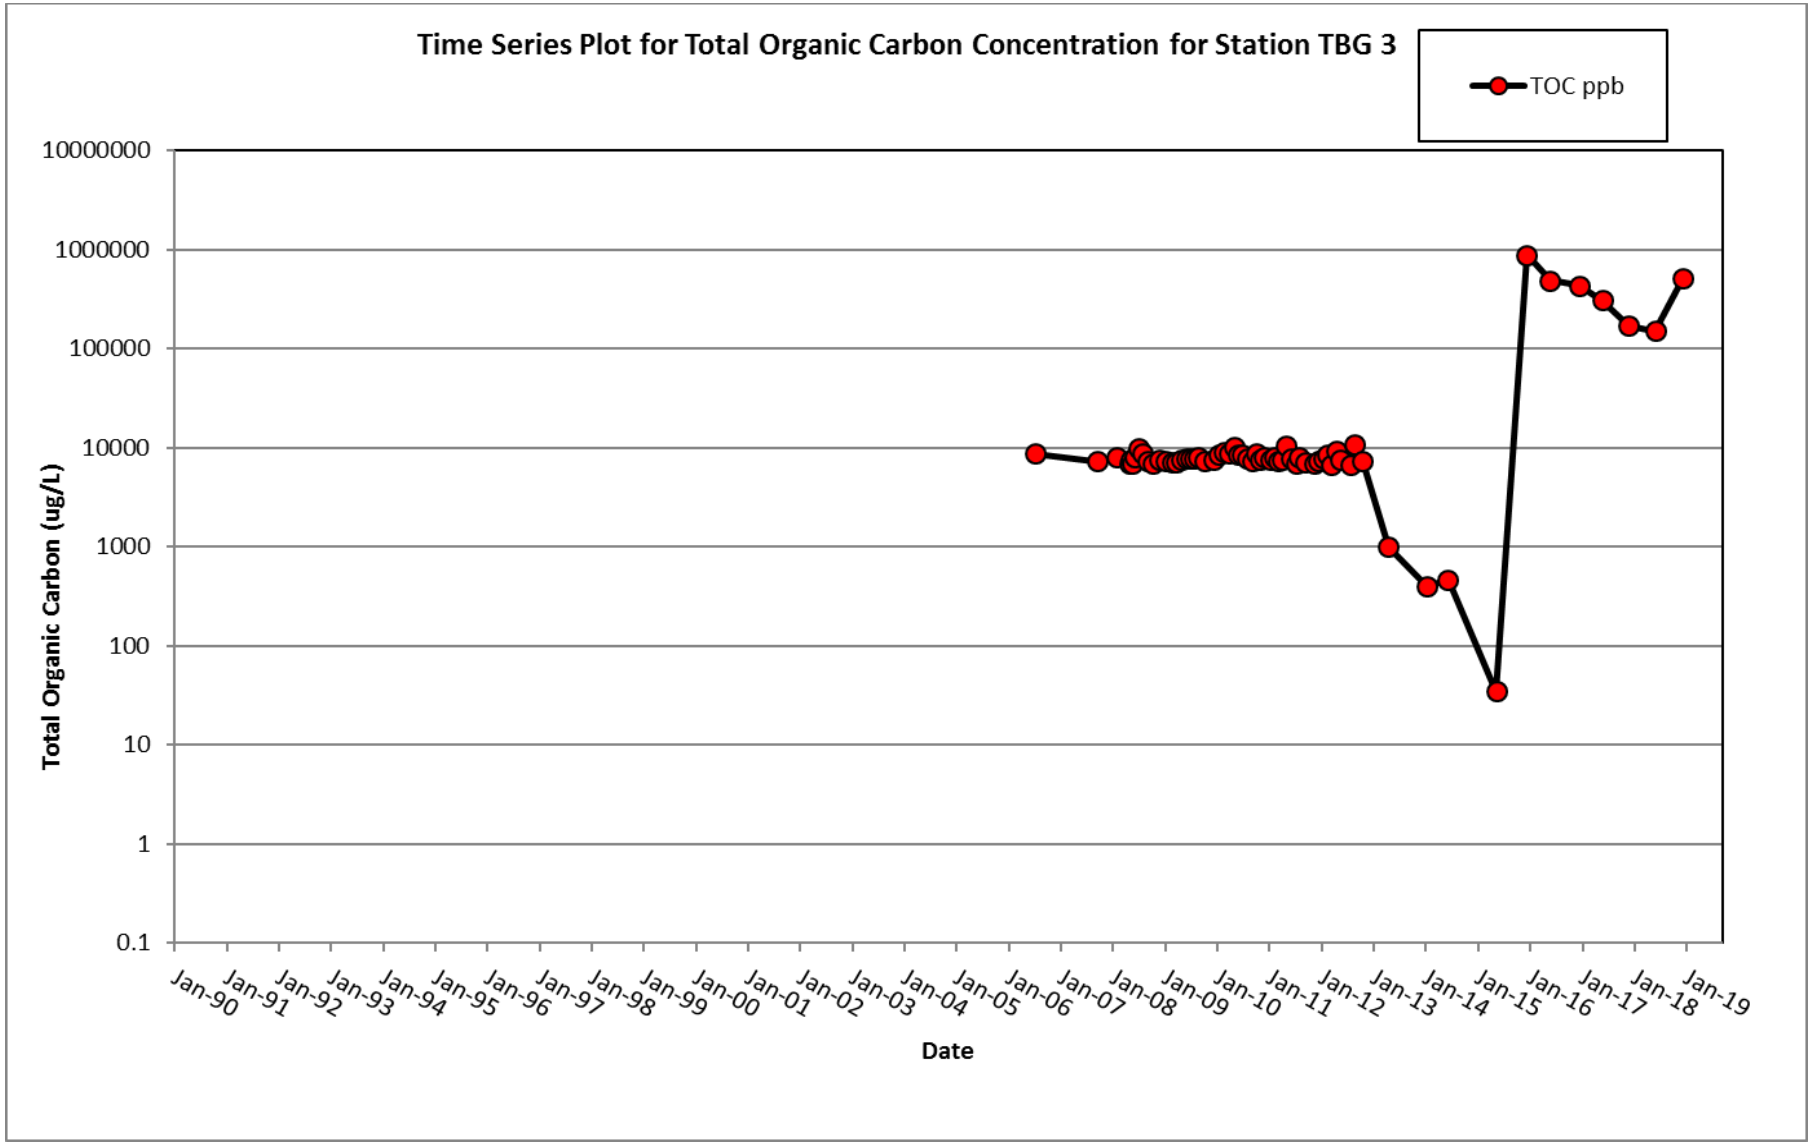
Time Series Plot for Total Organic Carbon Concentration for Station TBG 3
TOC ppb
Total Organic Carbon (ug/L)
10000000
1000000
100000
10000
1000
100
10
1
0.1
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

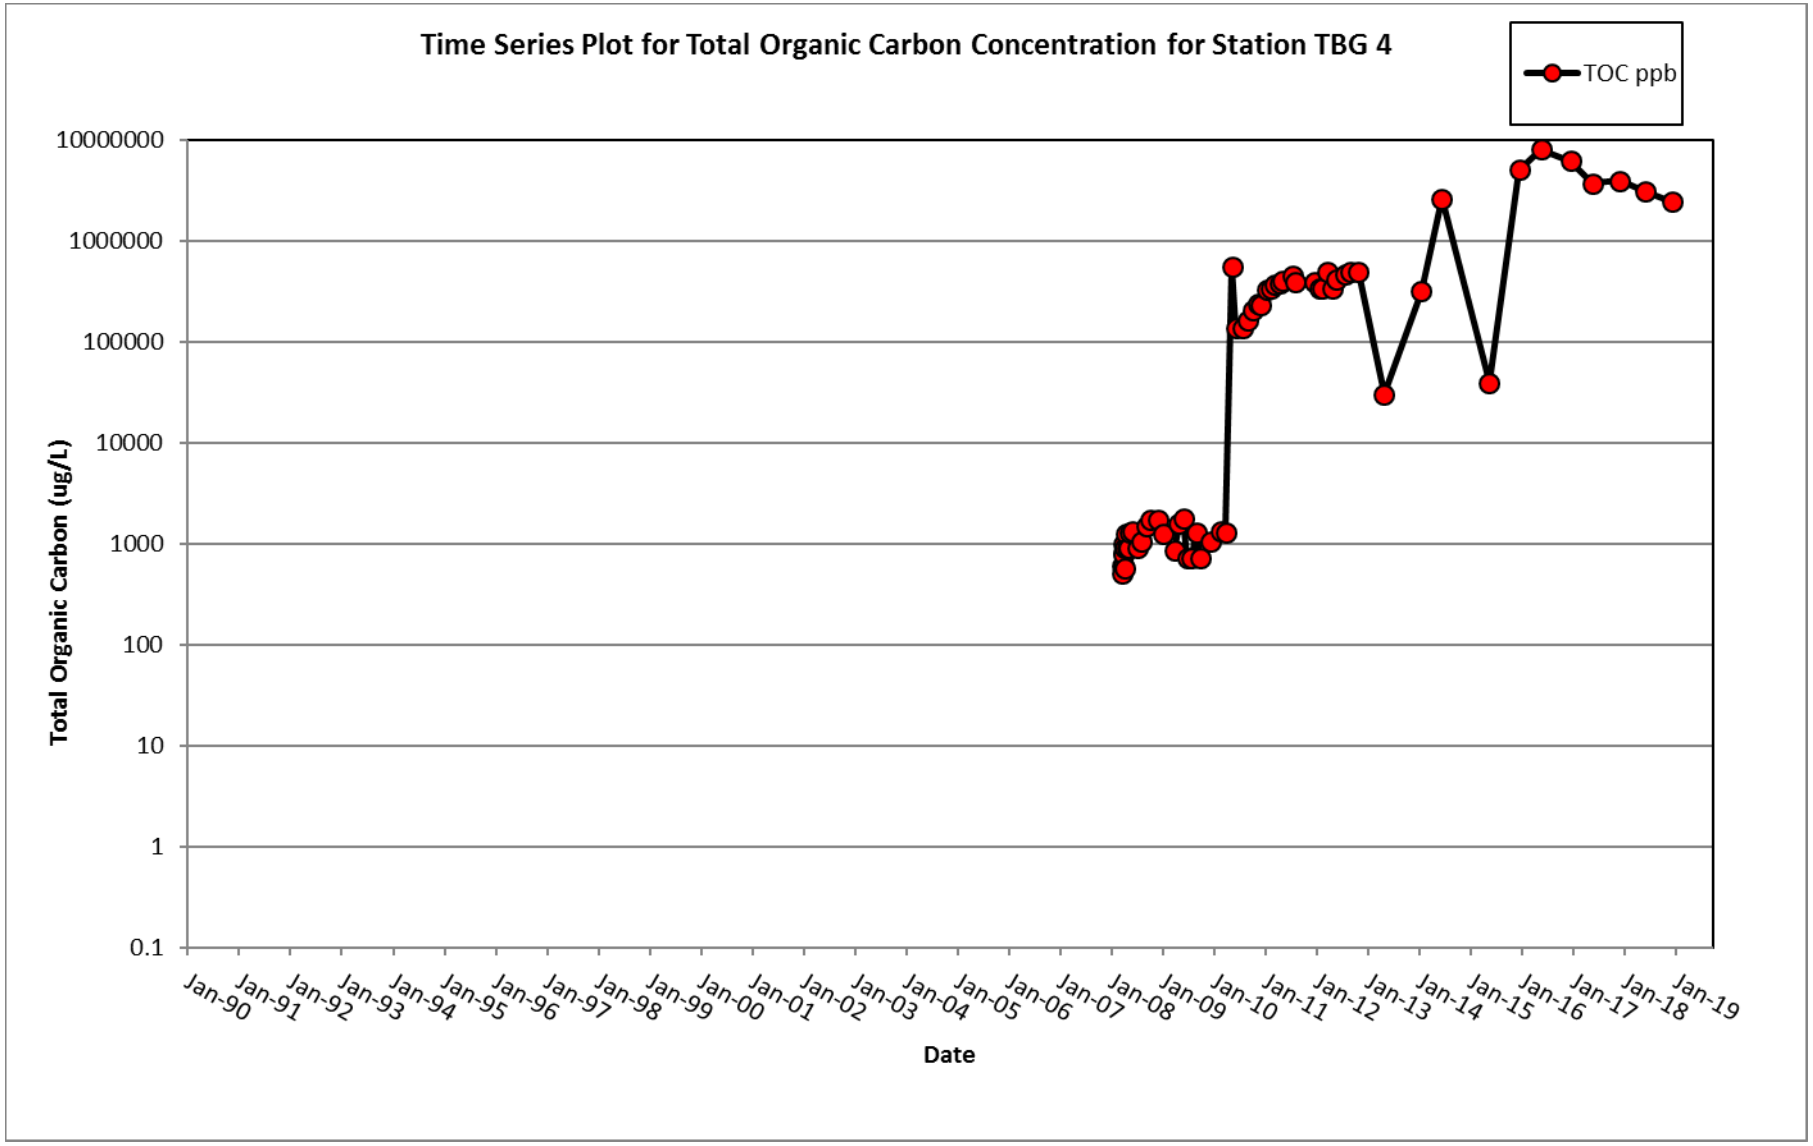
Time Series Plot for Total Organic Carbon Concentration for Station TBG 4
TOC ppb
Total Organic Carbon (ug/L)
10000000
1000000
100000
10000
1000
100
10
1
0.1
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

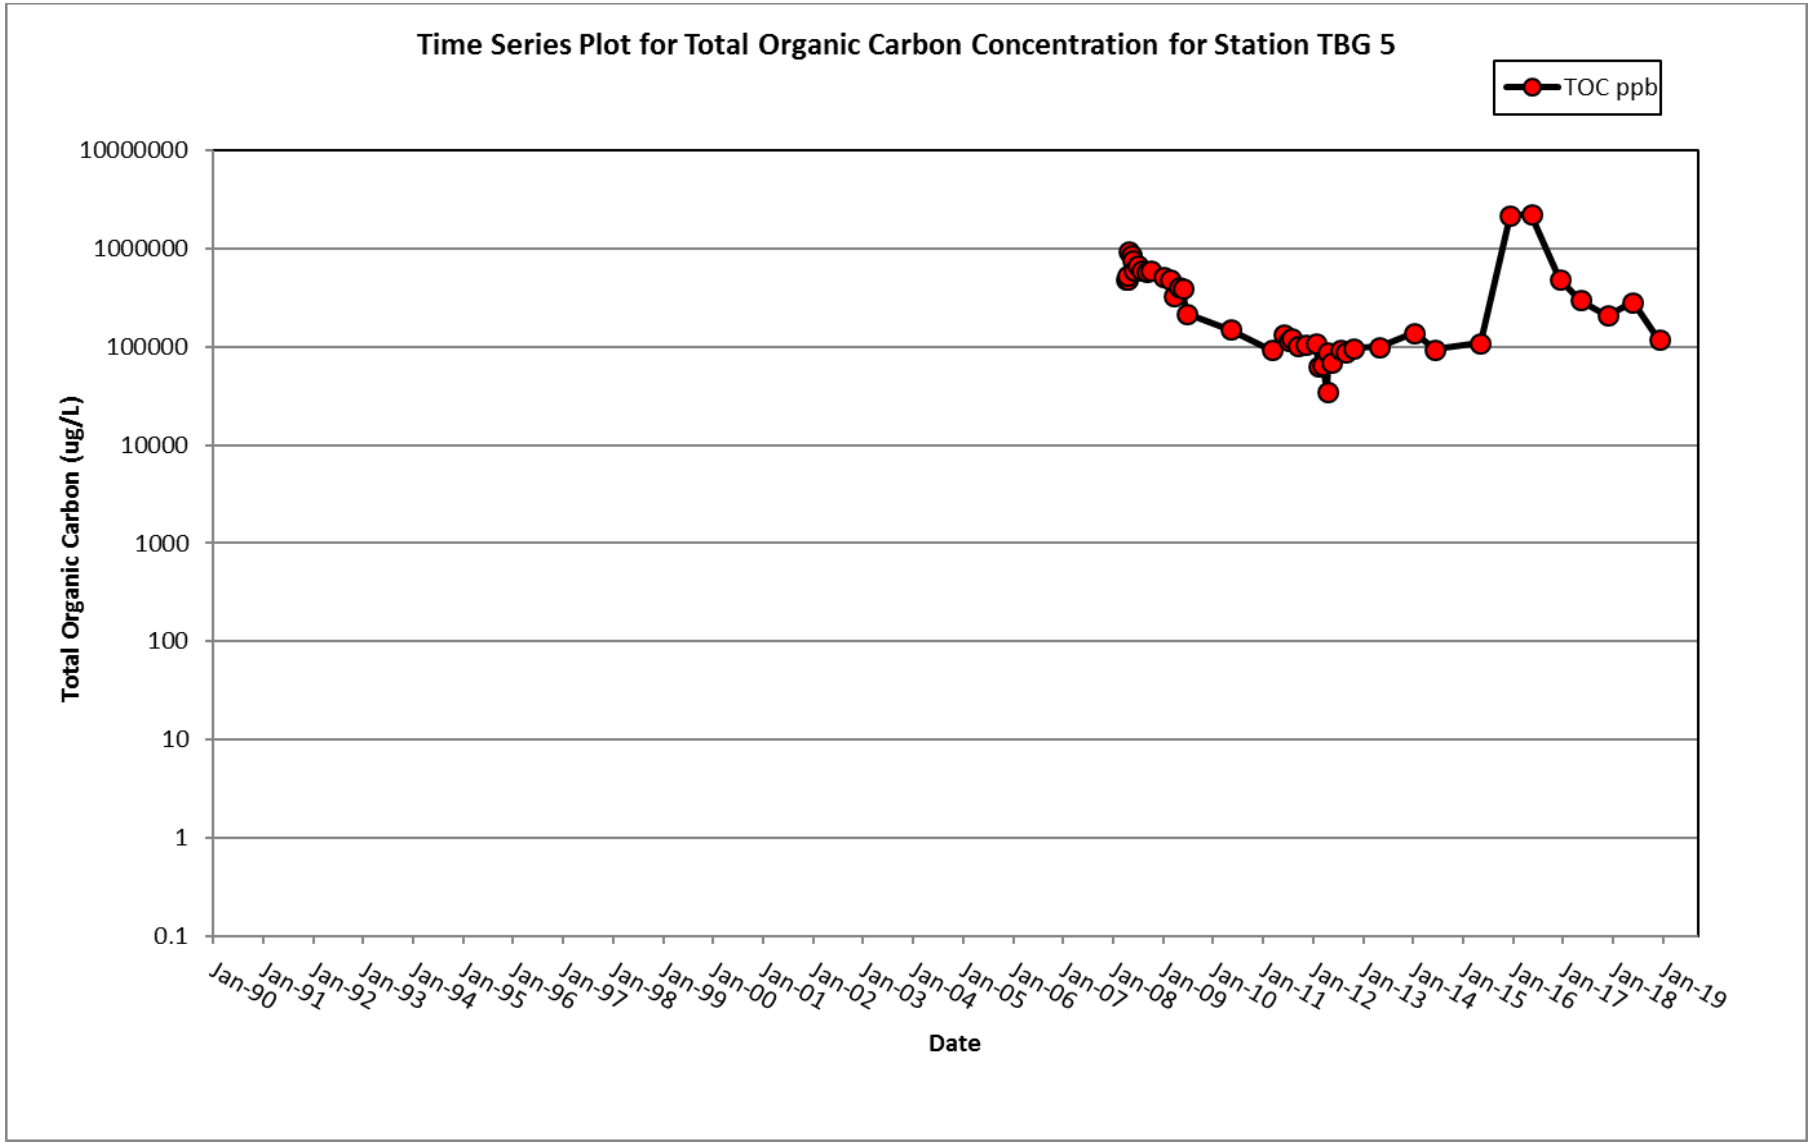
Time Series Plot for Total Organic Carbon Concentration for Station TBG 5
TOC ppb
Total Organic Carbon (ug/L)
10000000
1000000
100000
10000
1000
100
10
1
0.1
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

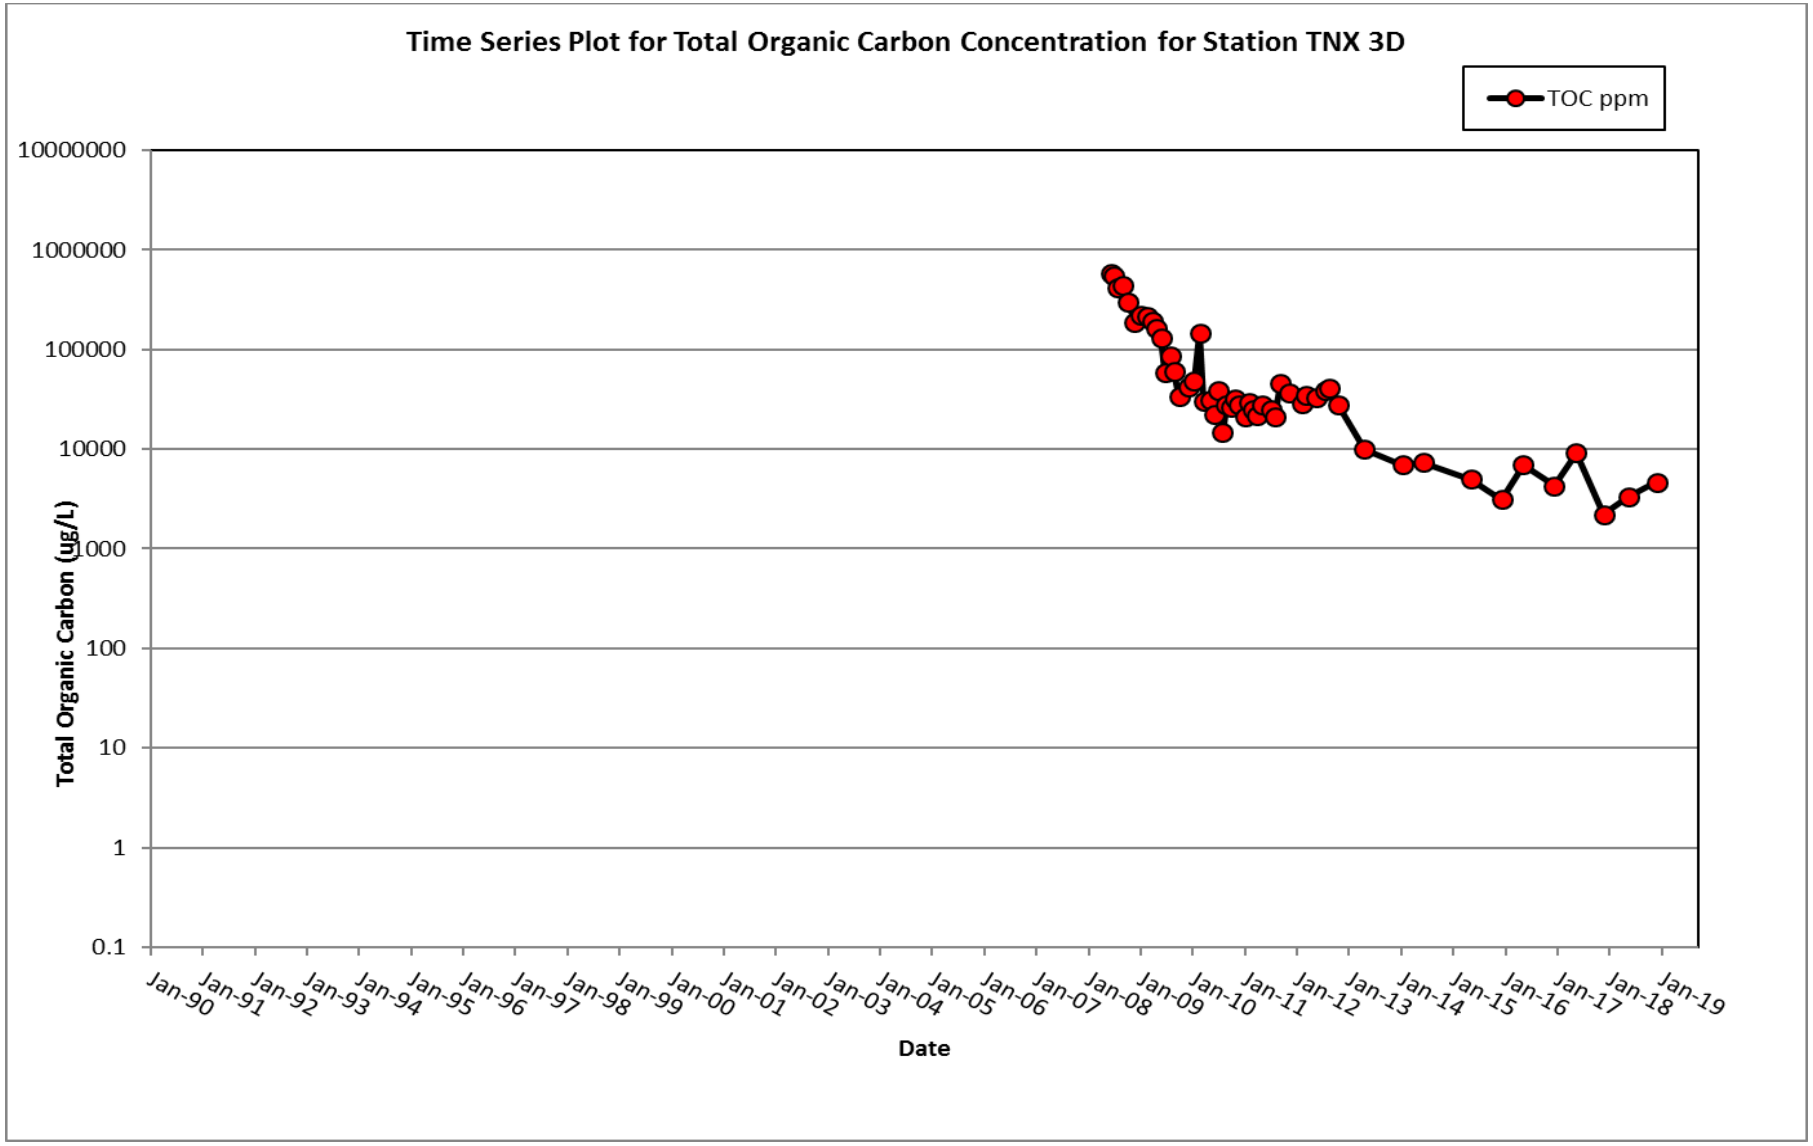
Time Series Plot for Total Organic Carbon Concentration for Station TNX 3D
TOC ppm
10000000
1000000
100000
10000
1000
100
10
1
0.1
Total Organic Carbon (ug/L)
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

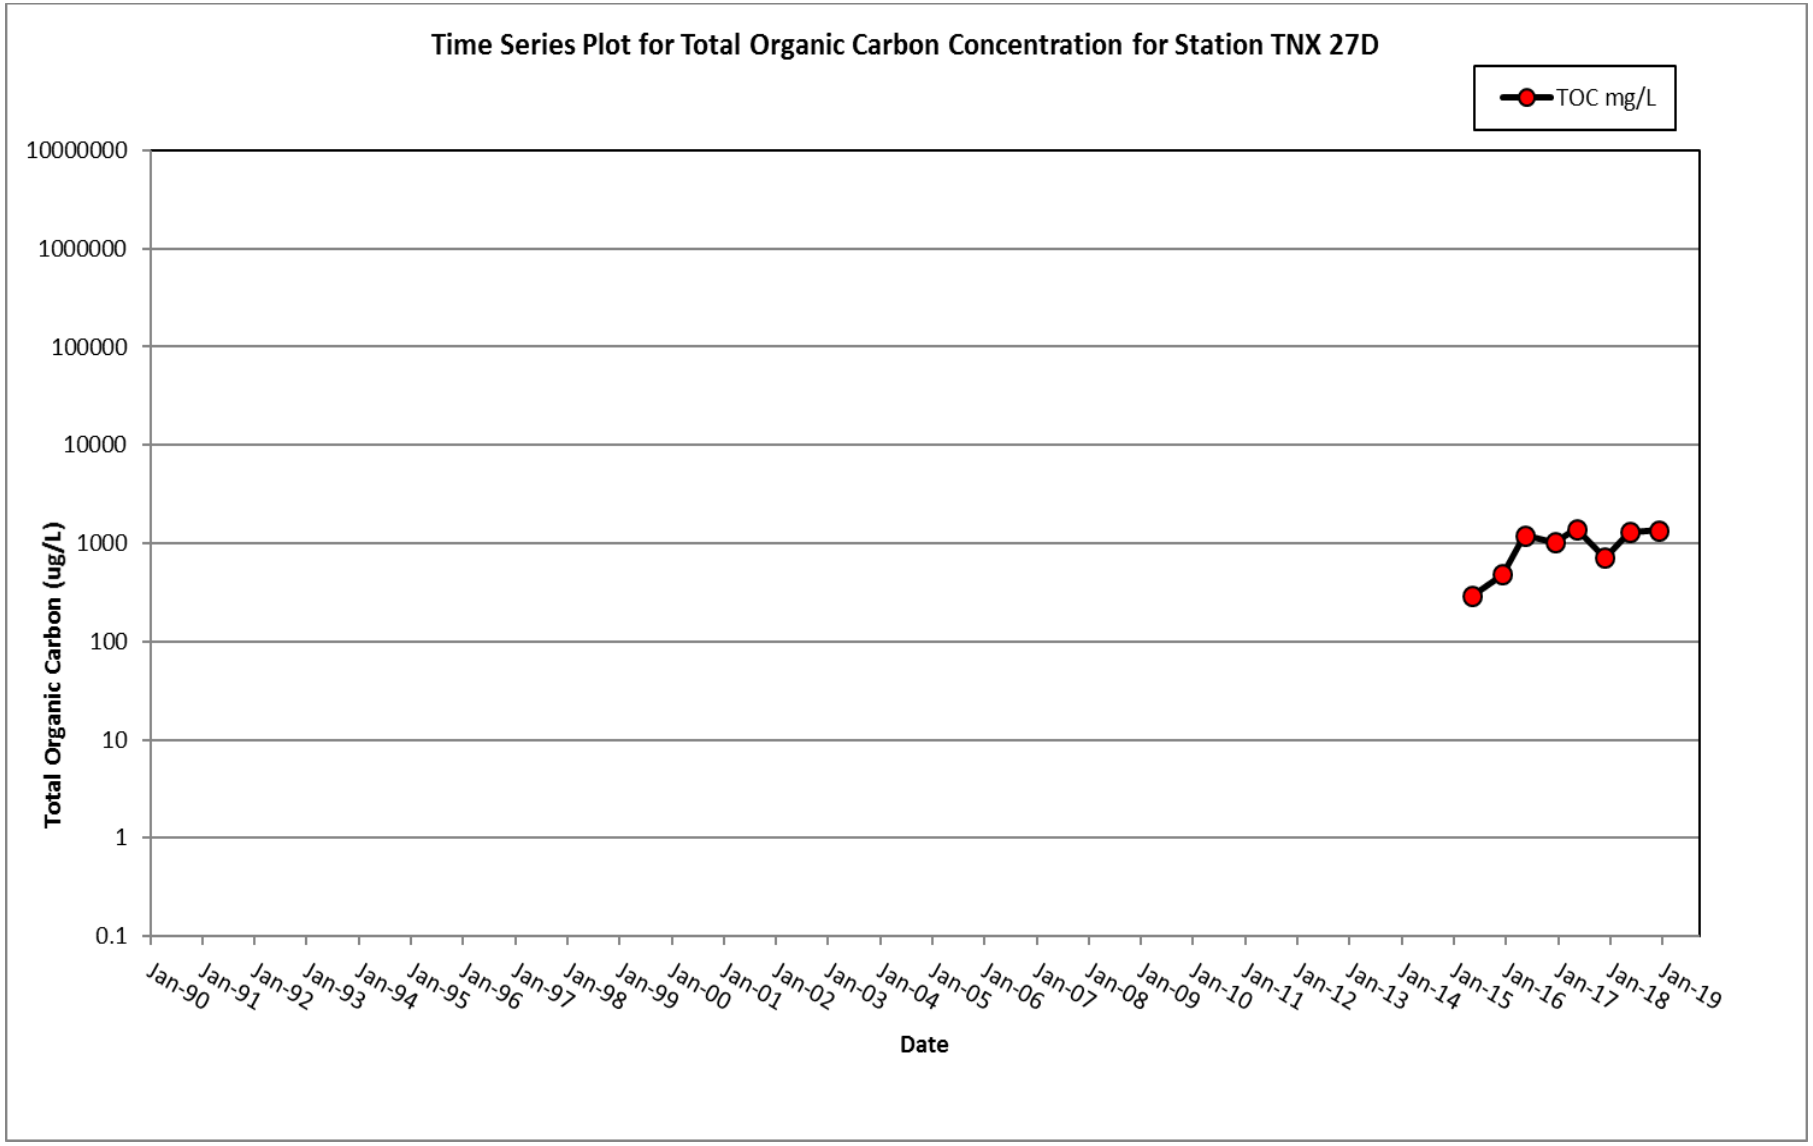
Time Series Plot for Total Organic Carbon Concentration for Station TNX 27D
TOC mg/L
10000000
1000000
100000
10000
1000
100
10
1
0.1
Total Organic Carbon (ug/L)
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

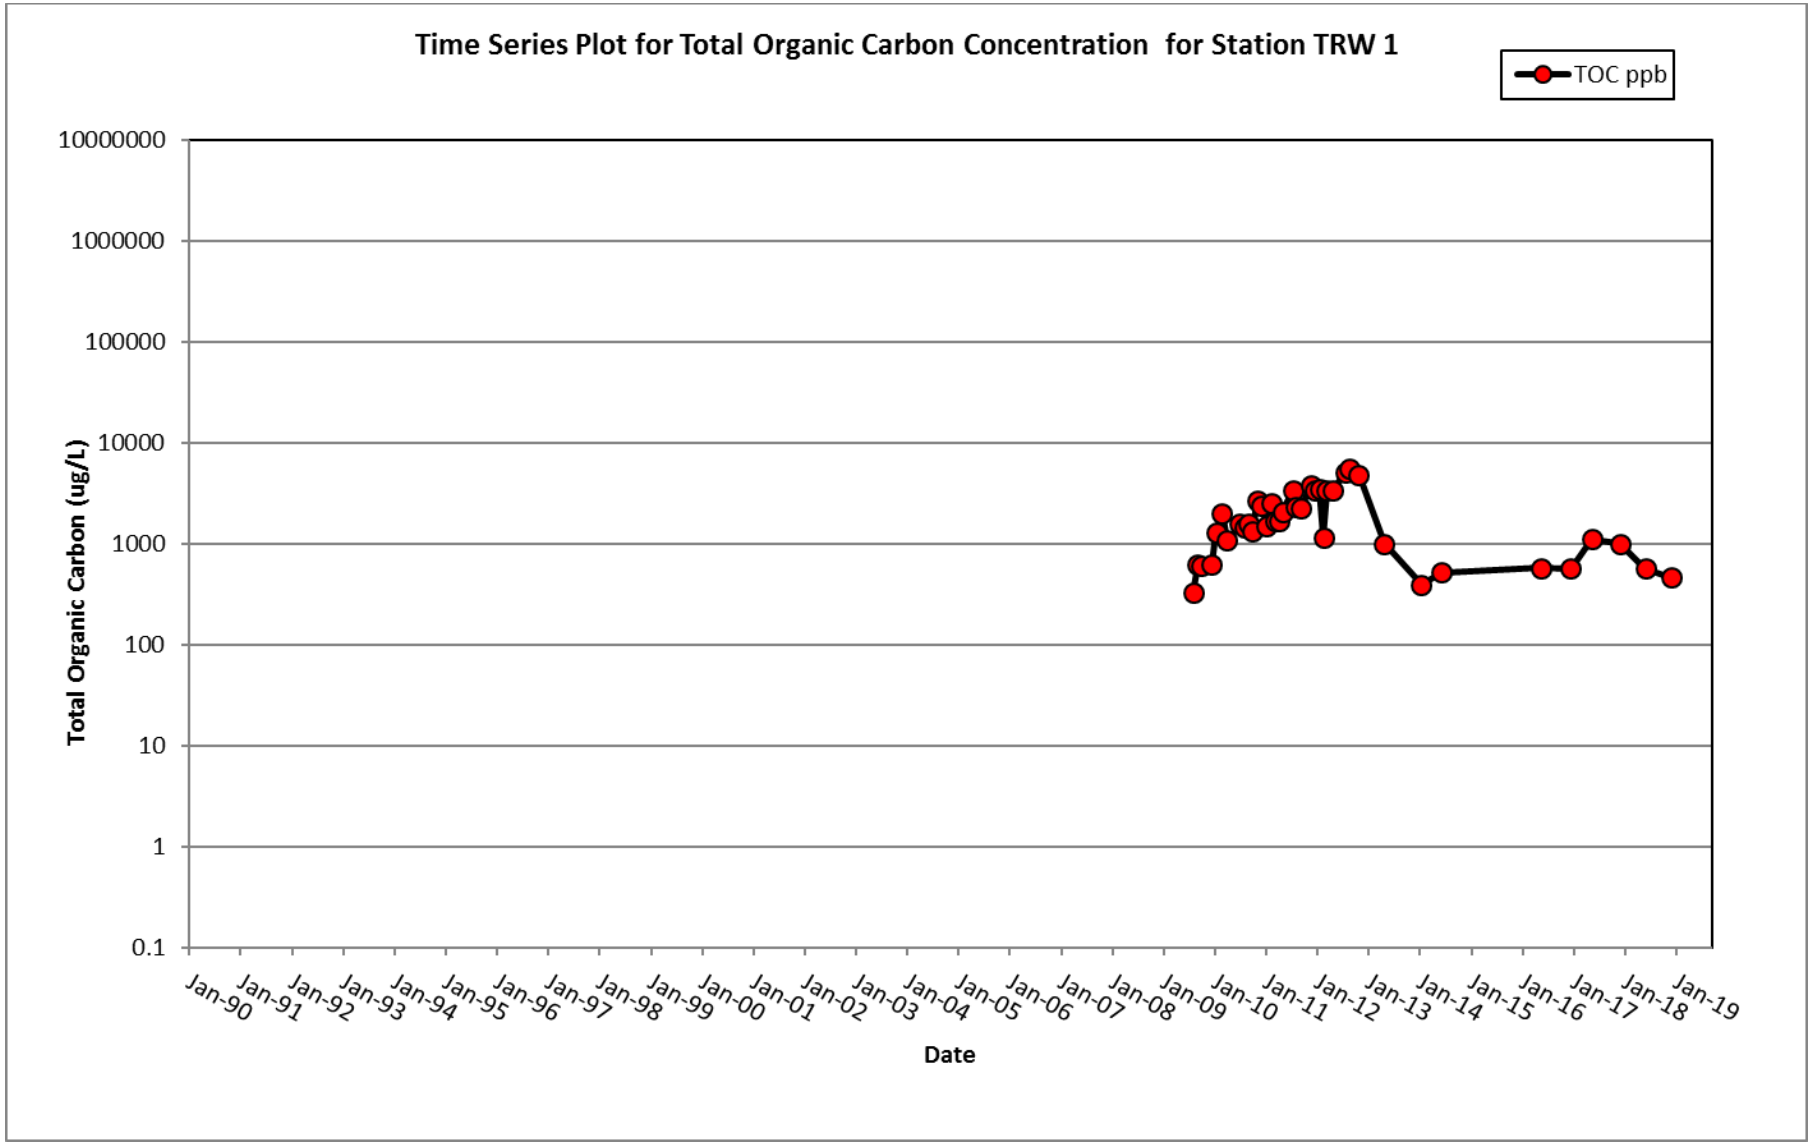
Time Series Plot for Total Organic Carbon Concentration for Station TRW 1
TOC ppb
Total Organic Carbon (ug/L)
10000000
1000000
100000
10000
1000
100
10
1
0.1
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

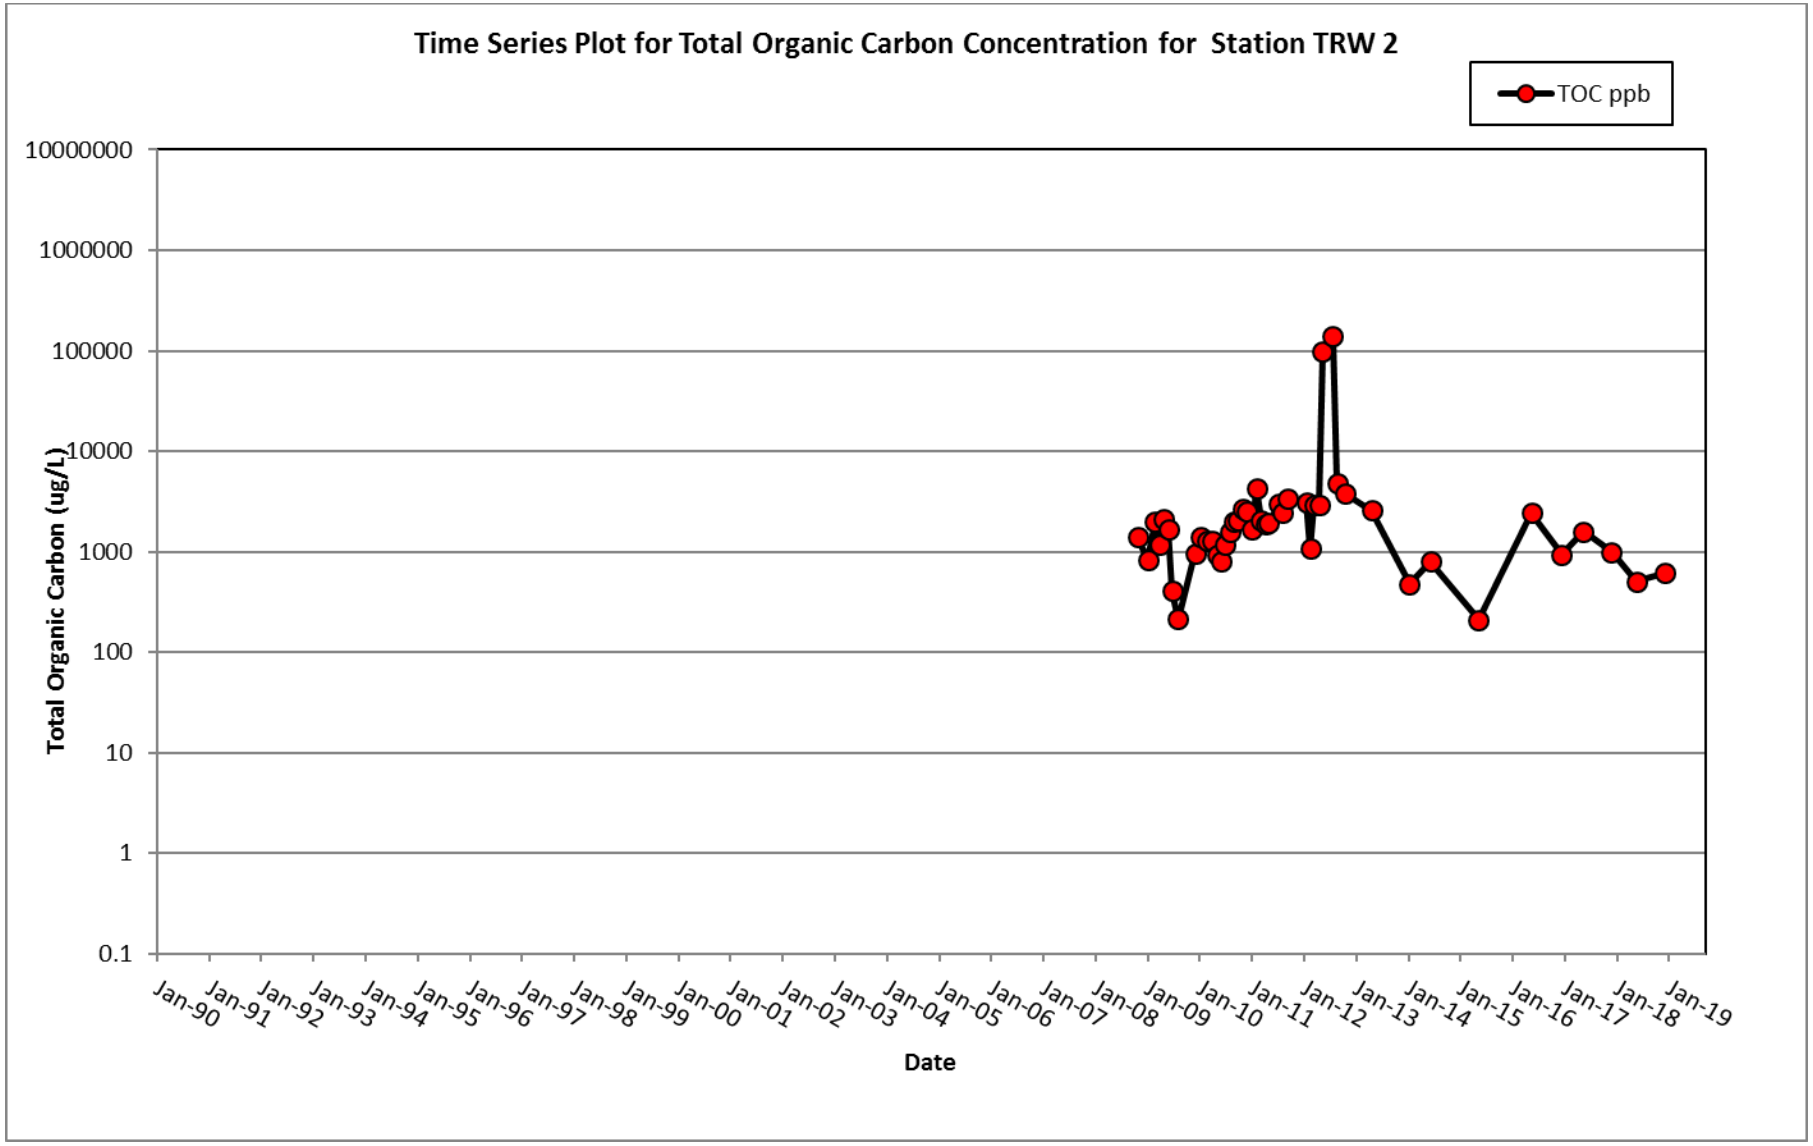
Time Series Plot for Total Organic Carbon Concentration for Station TRW 2
TOC ppb
Total Organic Carbon (ug/L)
10000000
1000000
100000
10000
1000
100
10
1
0.1
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

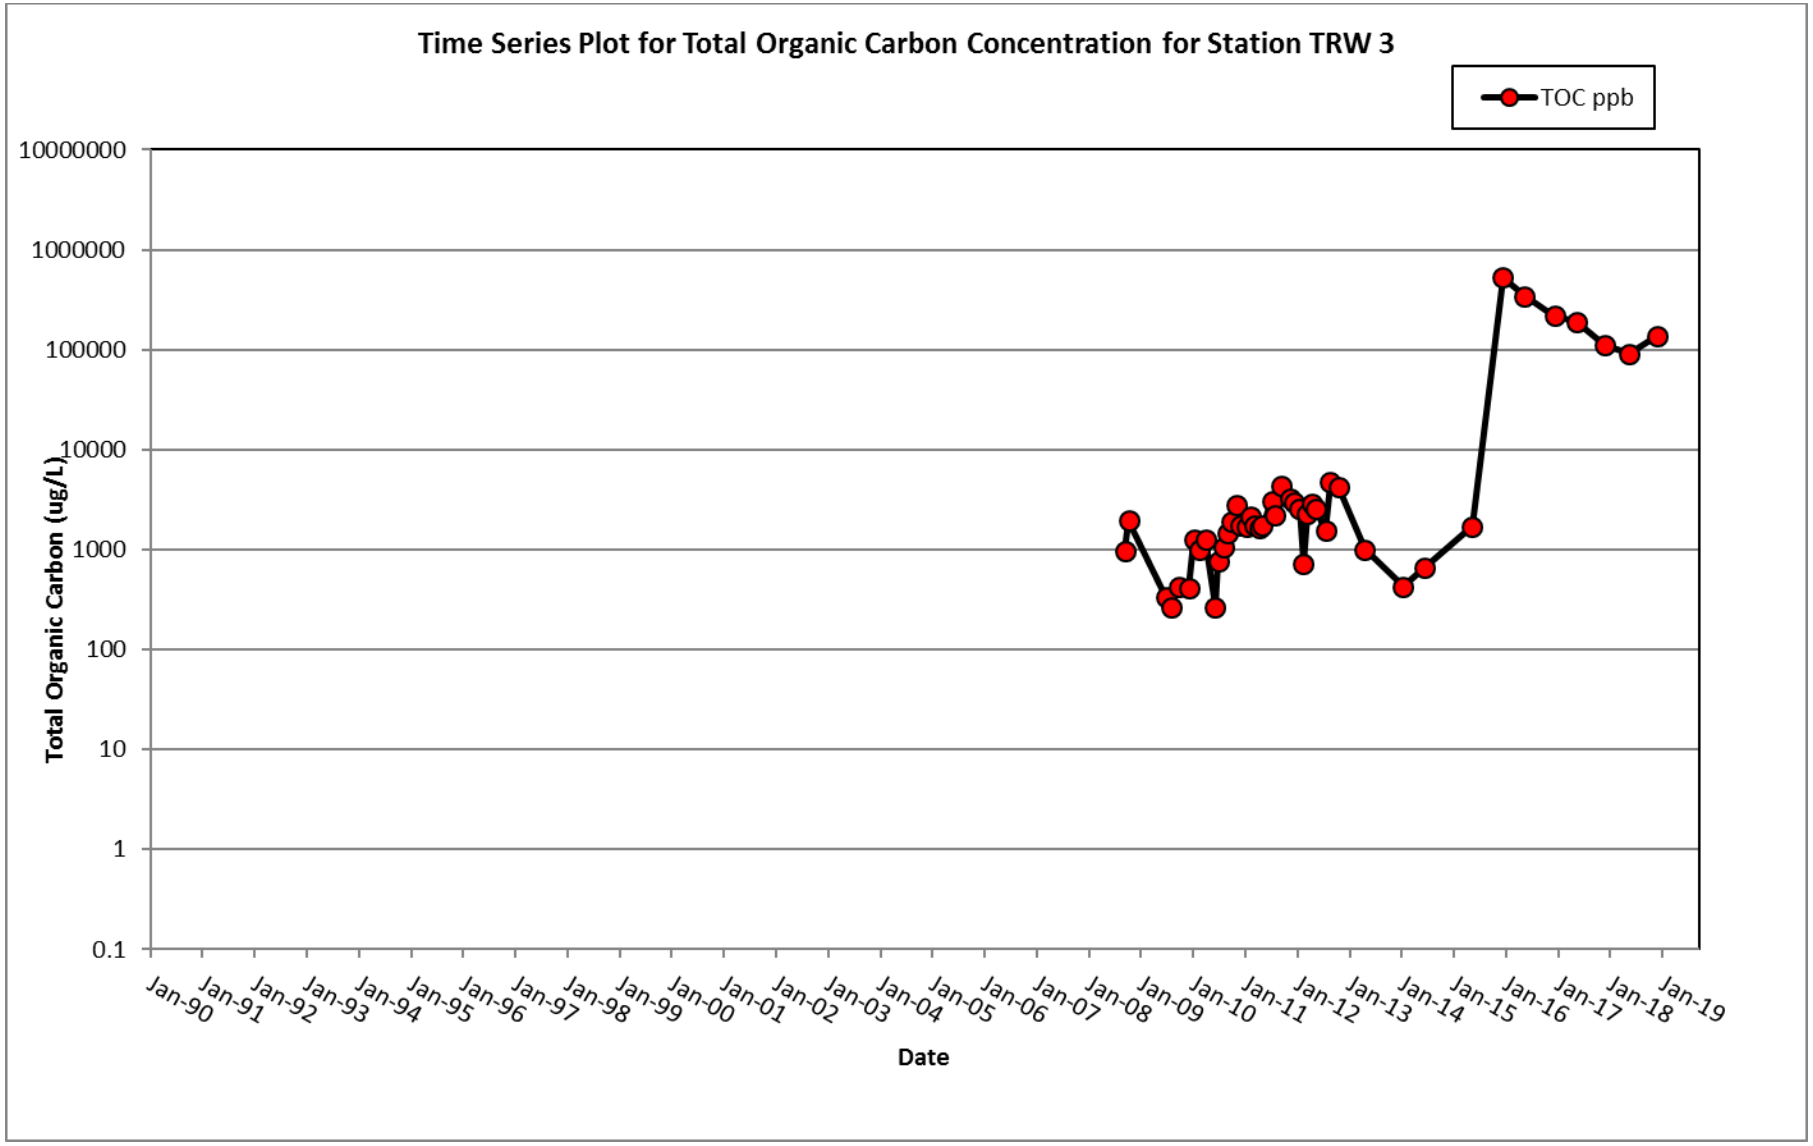
Time Series Plot for Total Organic Carbon Concentration for Station TRW 3
TOC ppb
Total Organic Carbon (ug/L)
10000000
1000000
100000
10000
1000
100
10
1
0.1
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

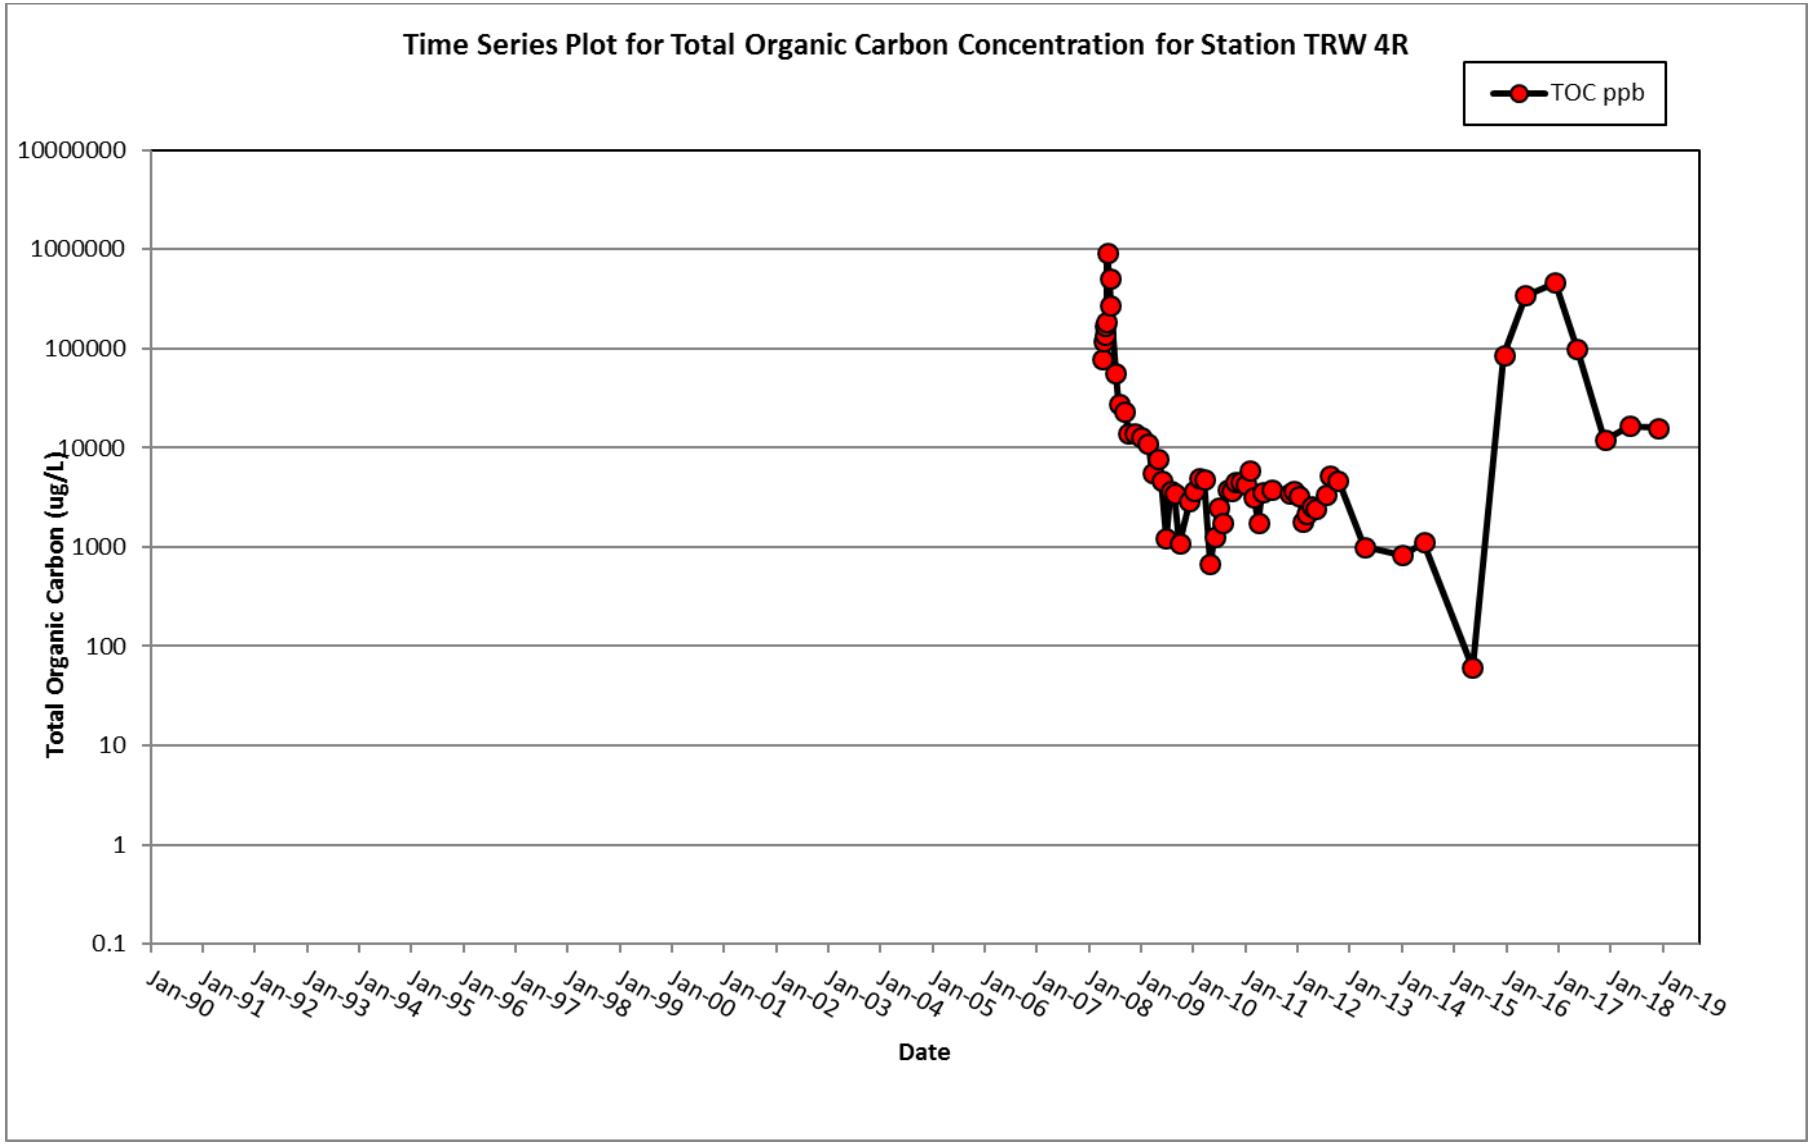
Time Series Plot for Total Organic Carbon Concentration for Station TRW 4R
TOC ppb
Total Organic Carbon (ug/L)
10000000
1000000
100000
10000
1000
100
10
1
0.1
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

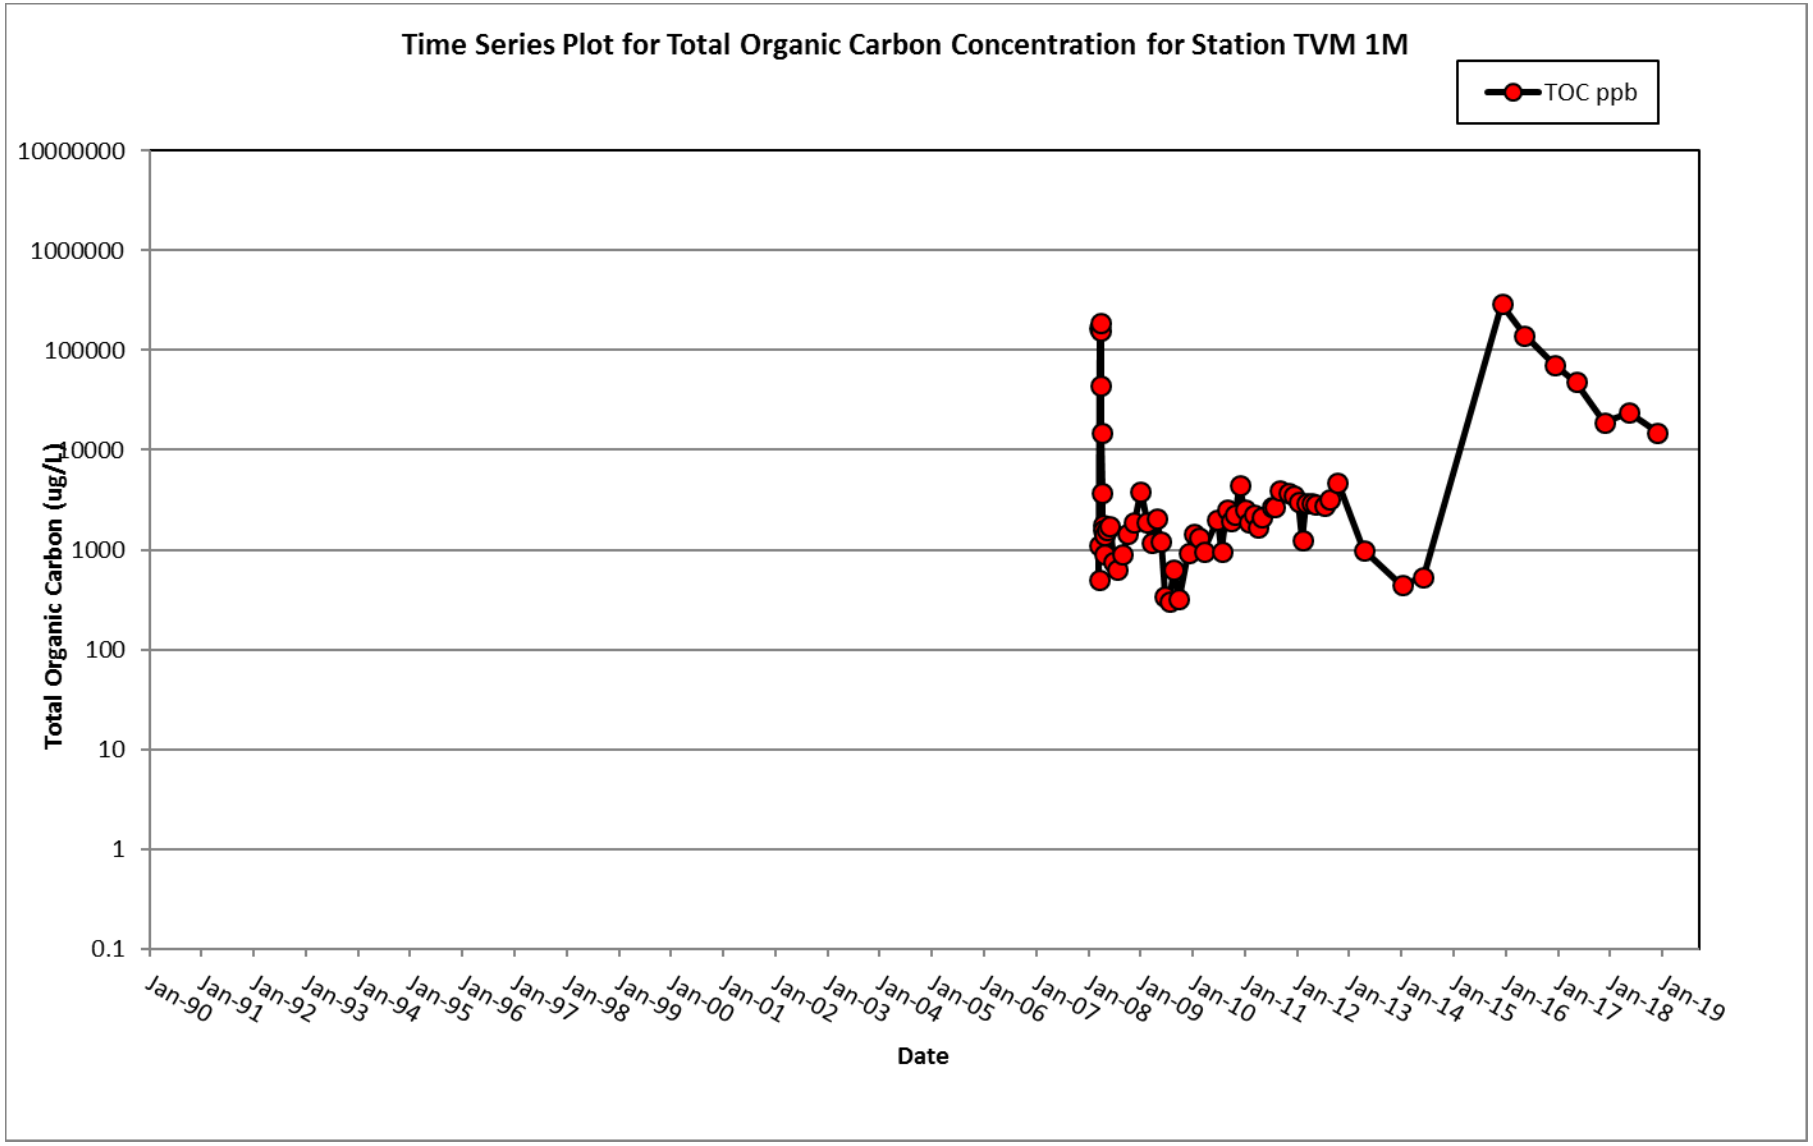
Time Series Plot for Total Organic Carbon Concentration for Station TVM 1M
TOC ppb
Total Organic Carbon (ug/L)
10000000
1000000
100000
10000
1000
100
10
1
0.1
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

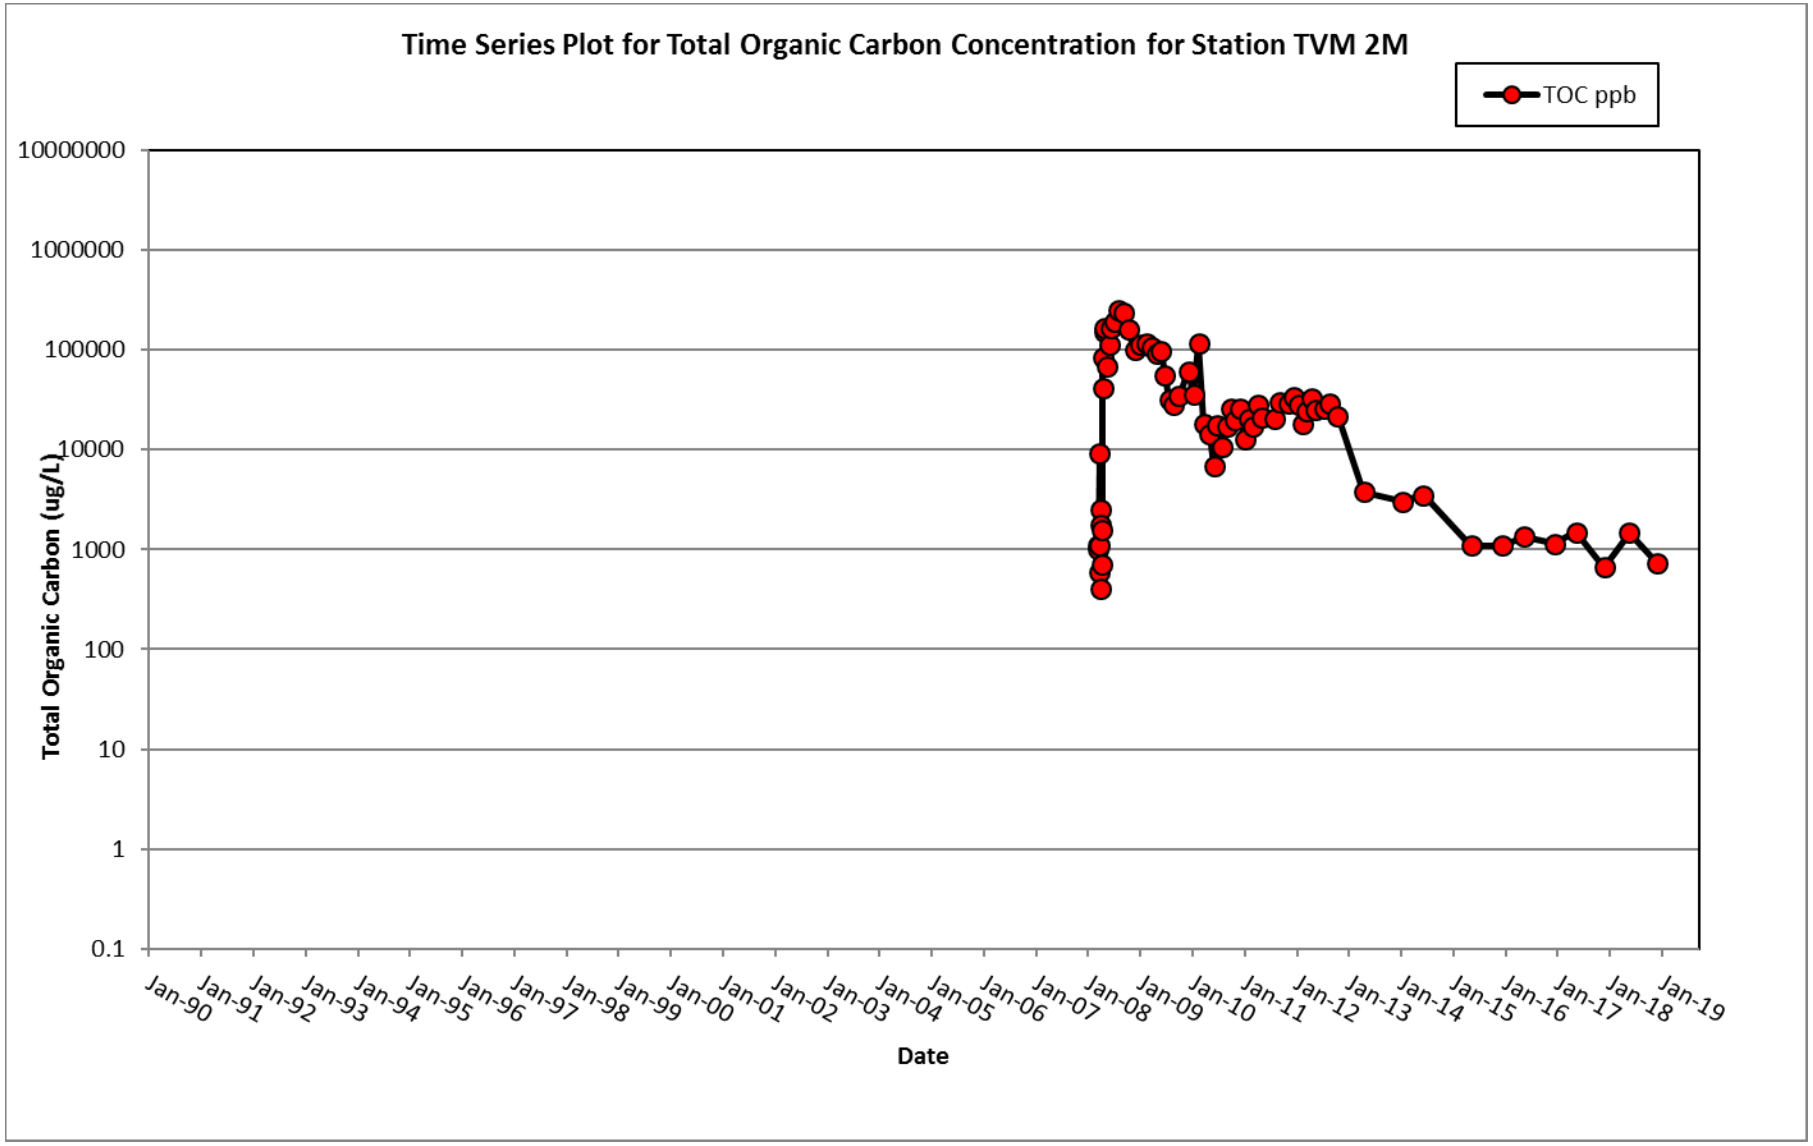
Time Series Plot for Total Organic Carbon Concentration for Station TVM 2M
TOC ppb
Total Organic Carbon (ug/L)
10000000
1000000
100000
10000
1000
100
10
1
0.1
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

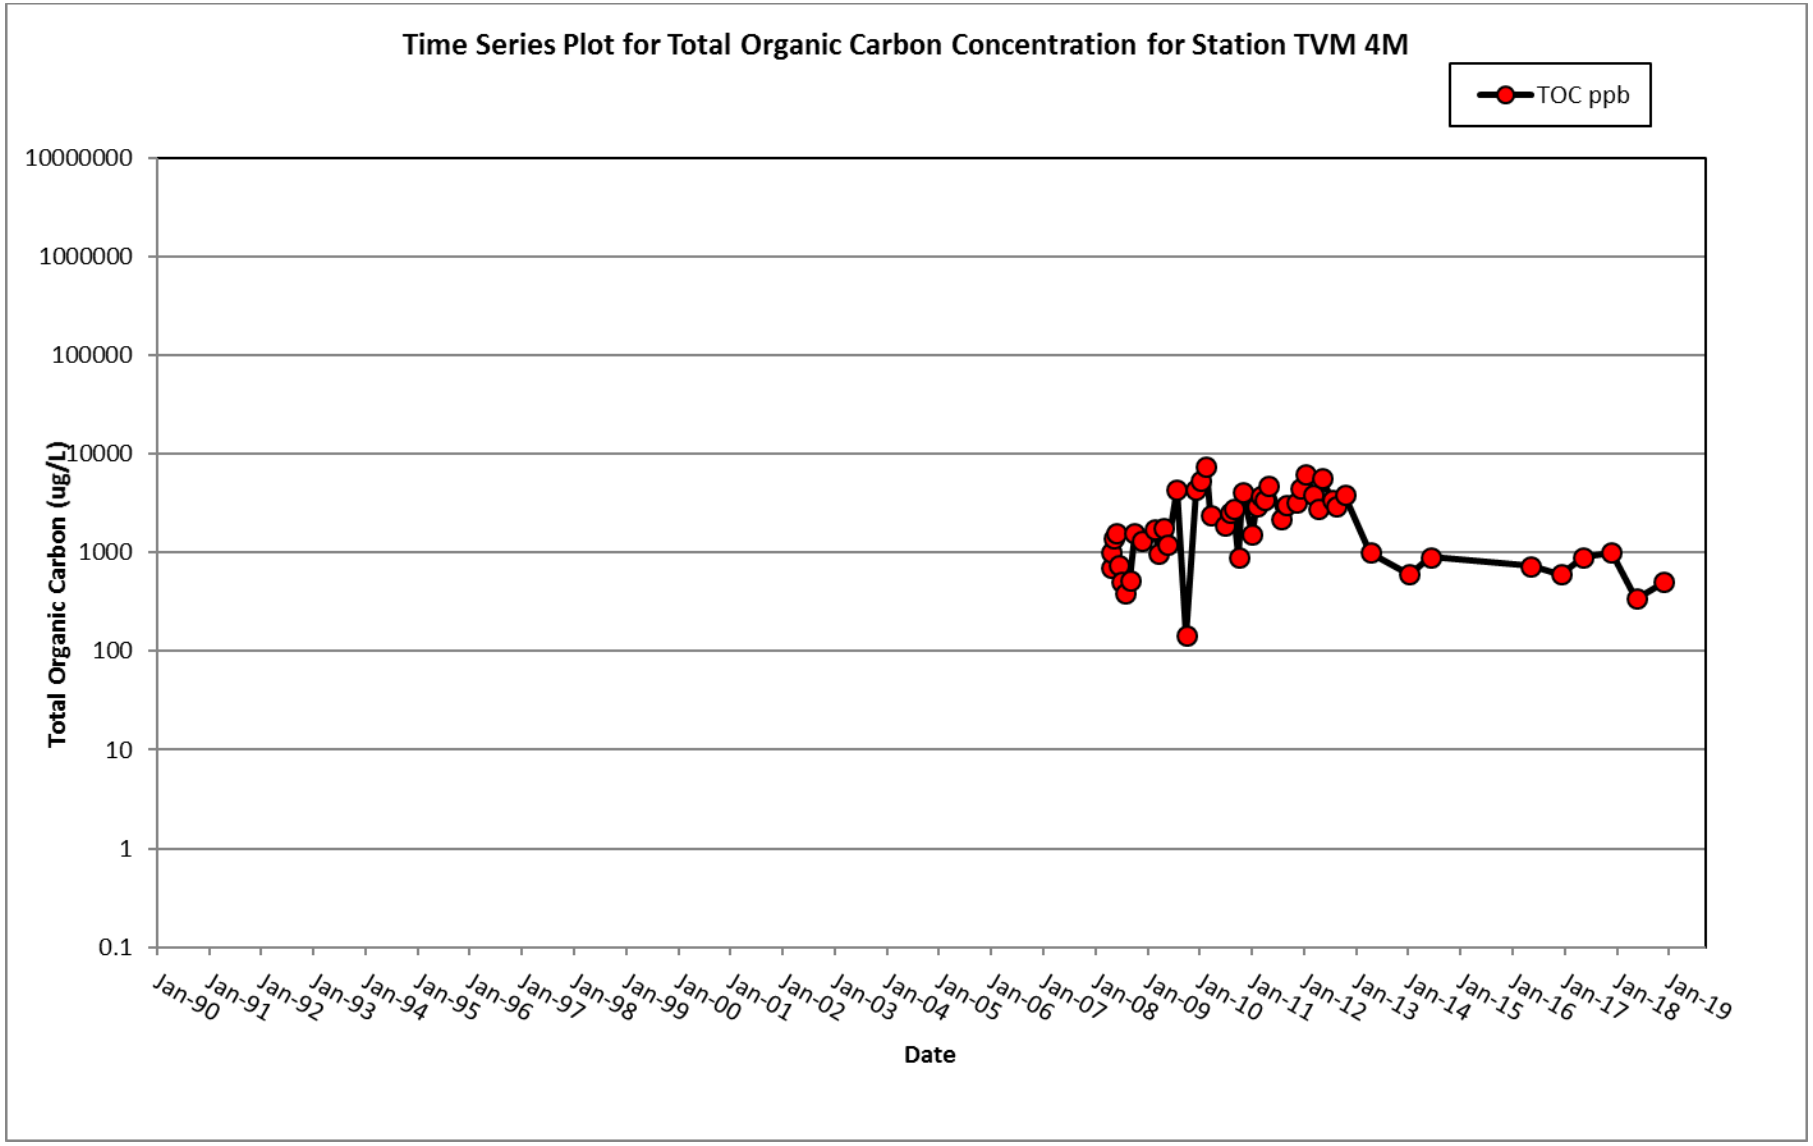
Time Series Plot for Total Organic Carbon Concentration for Station TVM 4M
TOC ppb
Total Organic Carbon (ug/L)
10000000
1000000
100000
10000
1000
100
10
1
0.1
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

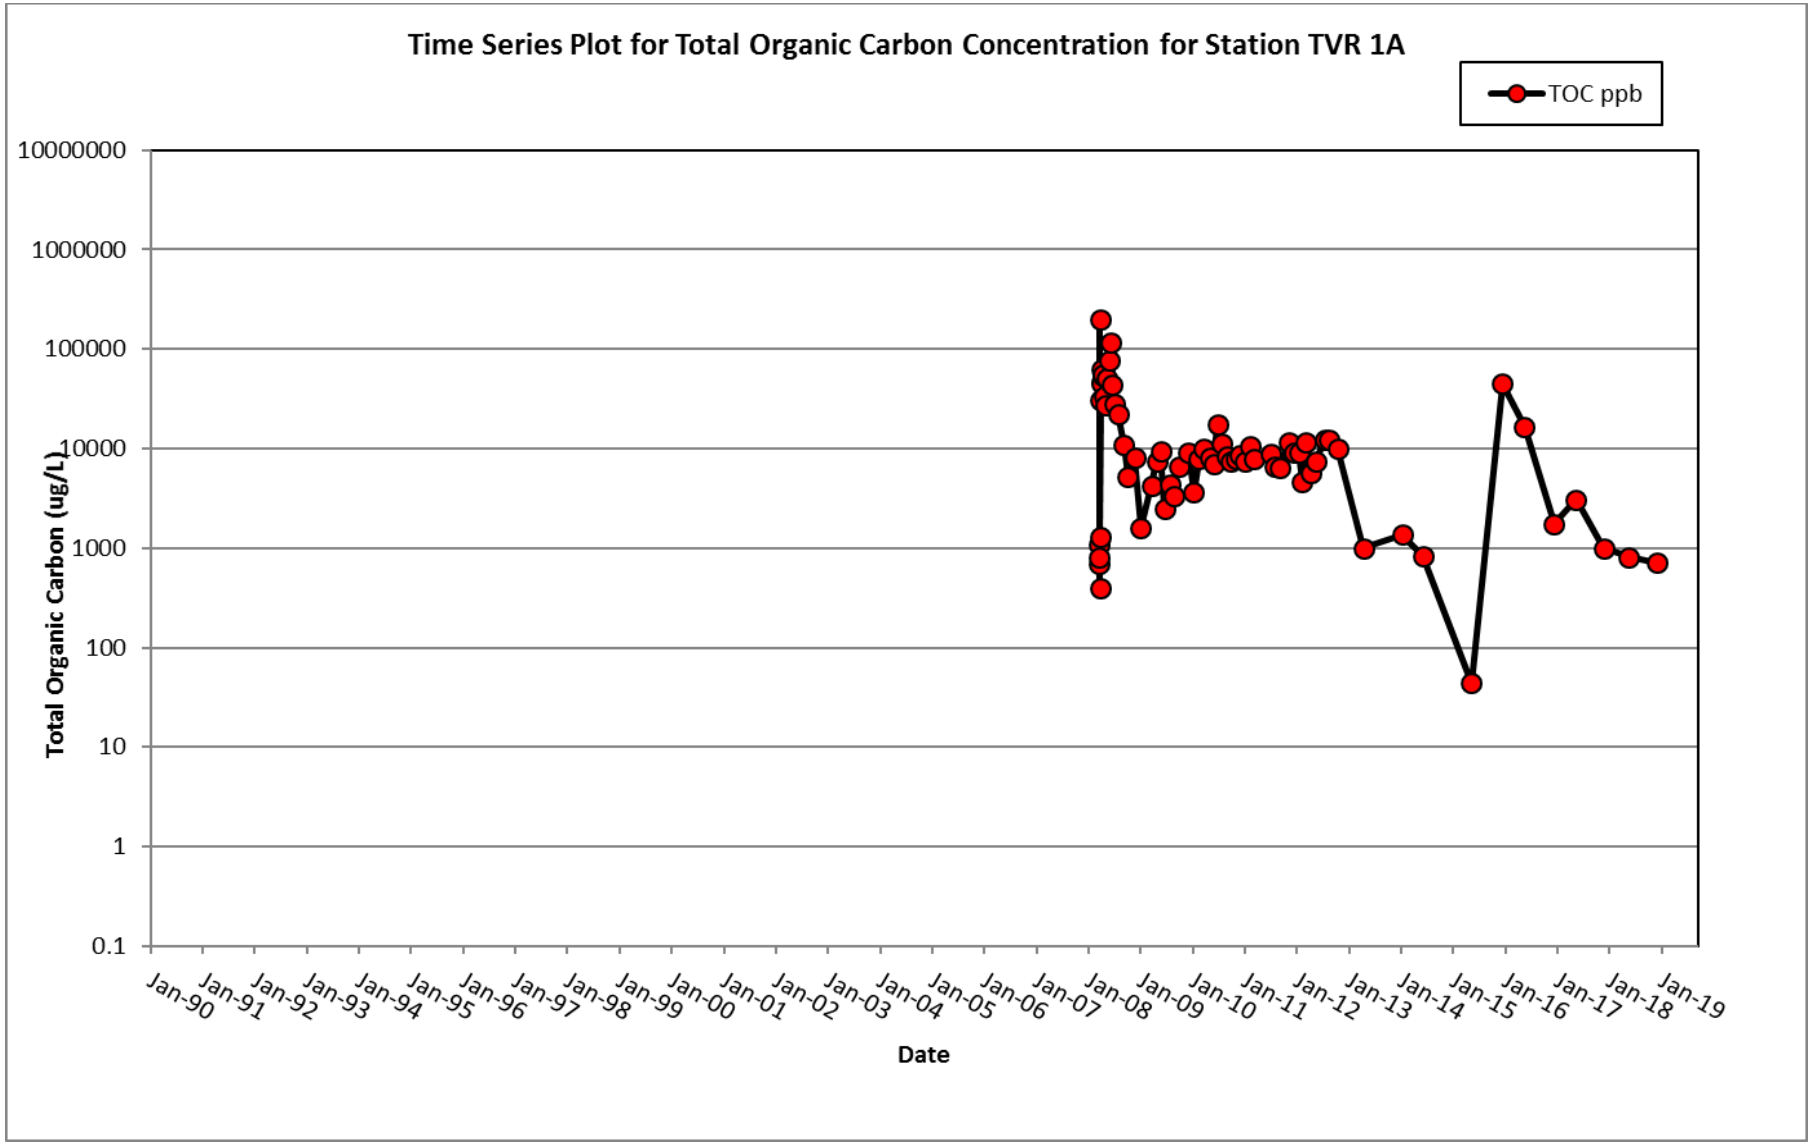
Time Series Plot for Total Organic Carbon Concentration for Station TVR 1A
TOC ppb
Total Organic Carbon (ug/L)
10000000
1000000
100000
10000
1000
100
10
1
0.1
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

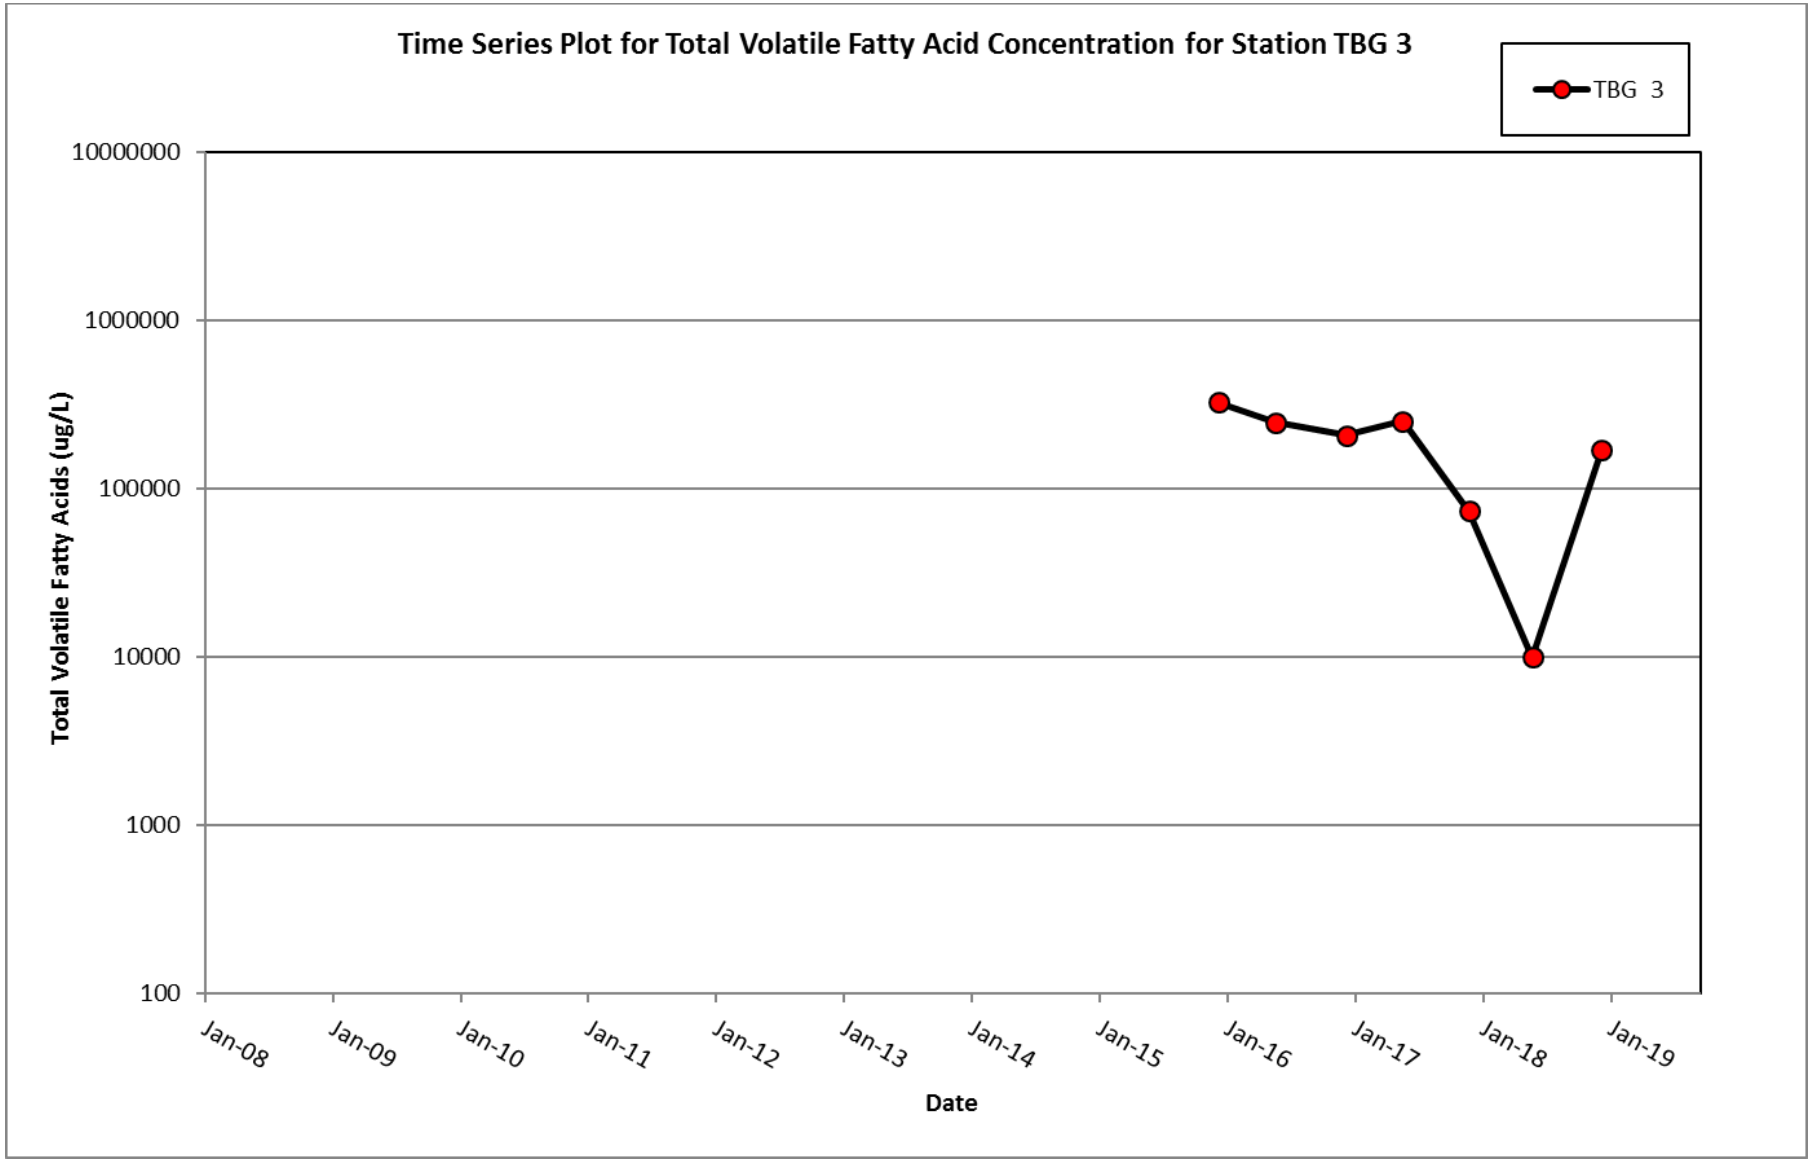
Time Series Plot for Total Volatile Fatty Acid Concentration for Station TBG 3
TBG 3
Total Volatile Fatty Acids (ug/L)
10000000
1000000
100000
10000
1000
100
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

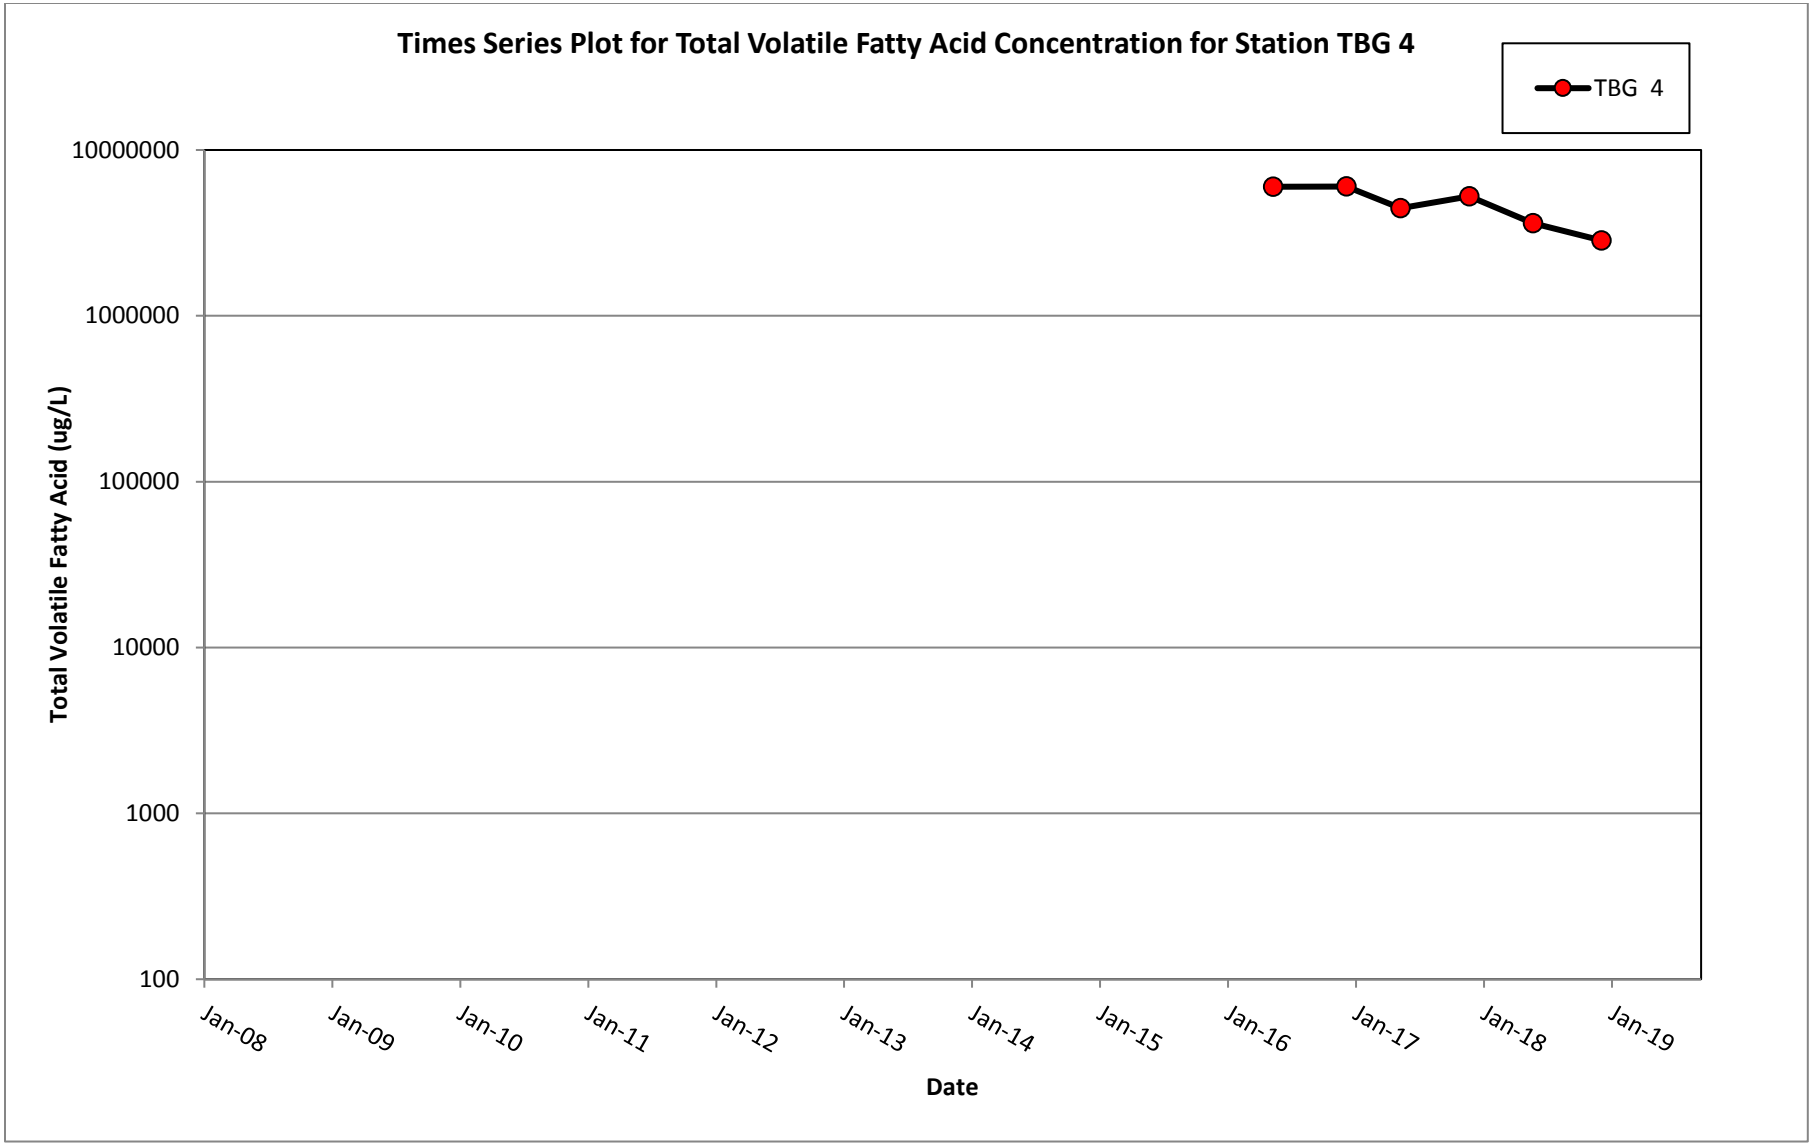
Times Series Plot for Total Volatile Fatty Acid Concentration for Station TBG 4
TBG 4
Total Volatile Fatty Acid (ug/L)
10000000
1000000
100000
10000
1000
100
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

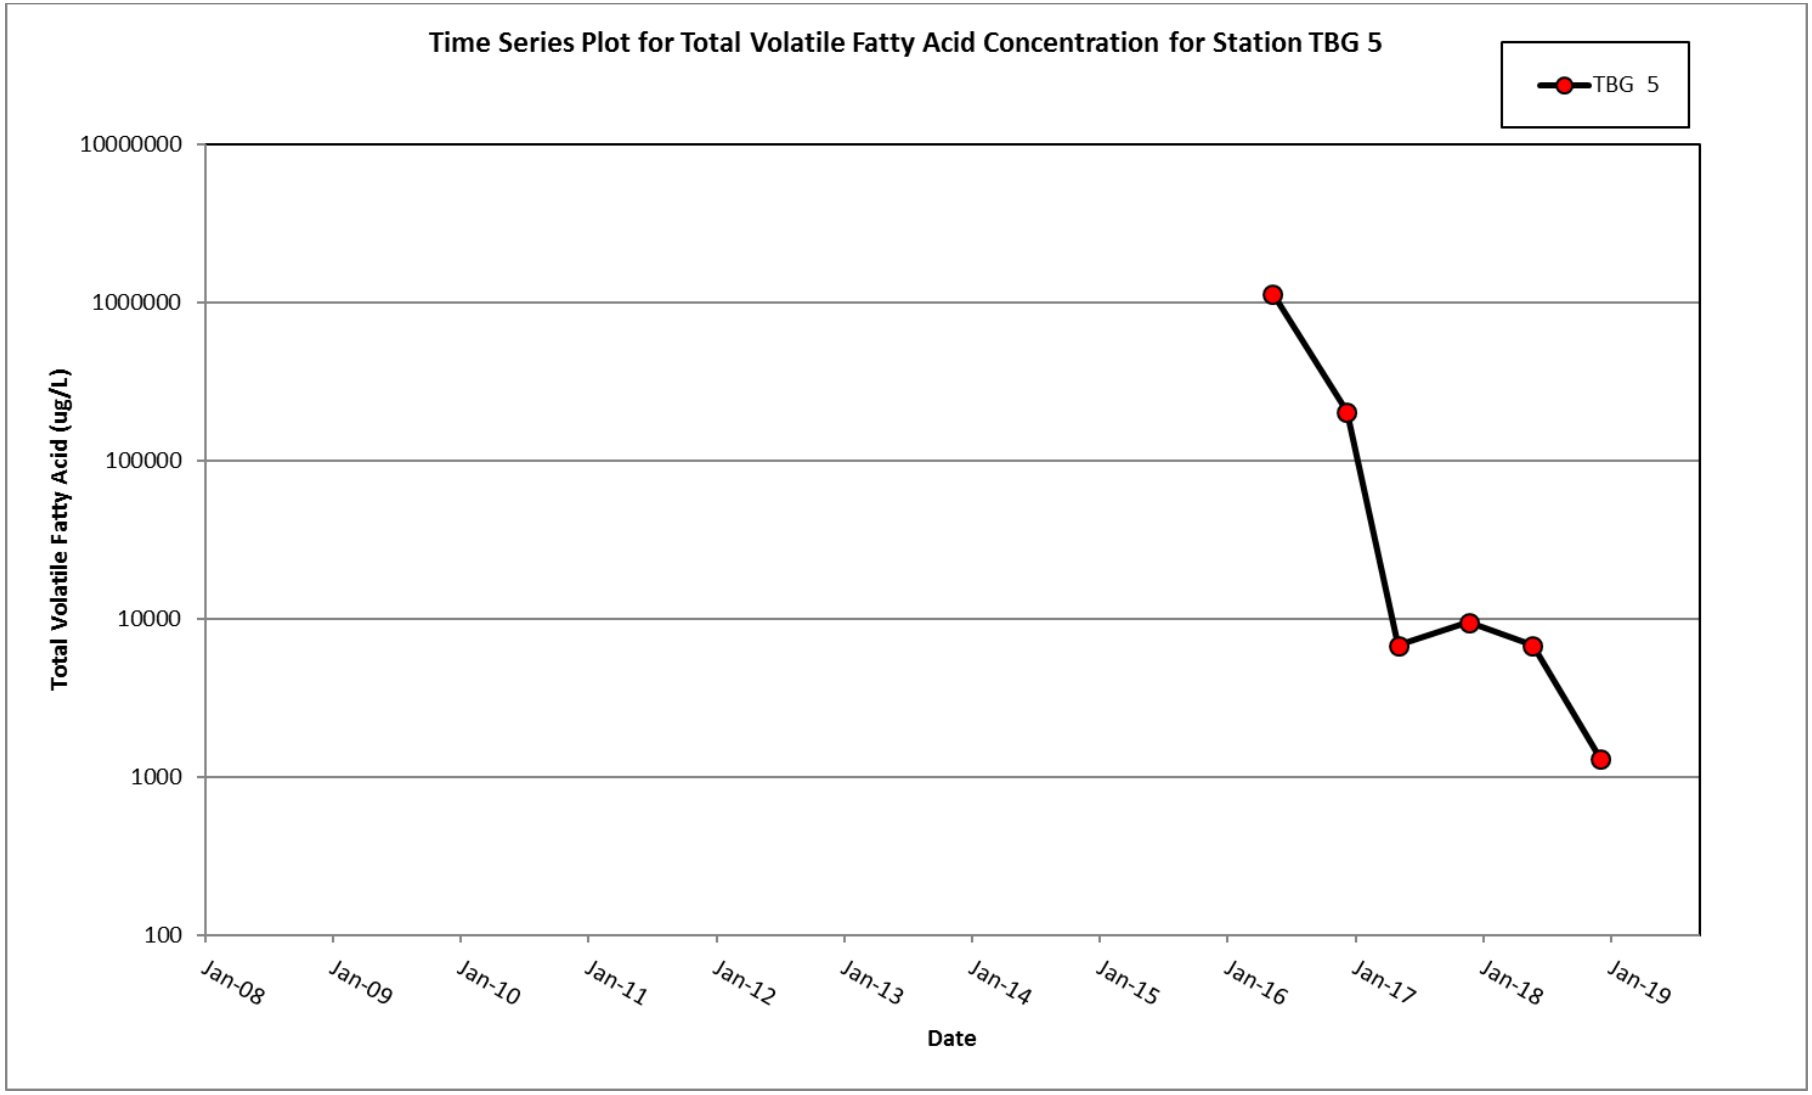
Time Series Plot for Total Volatile Fatty Acid Concentration for Station TBG 5
TBG 5
Total Volatile Fatty Acid (ug/L)
10000000
1000000
100000
10000
1000
100
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

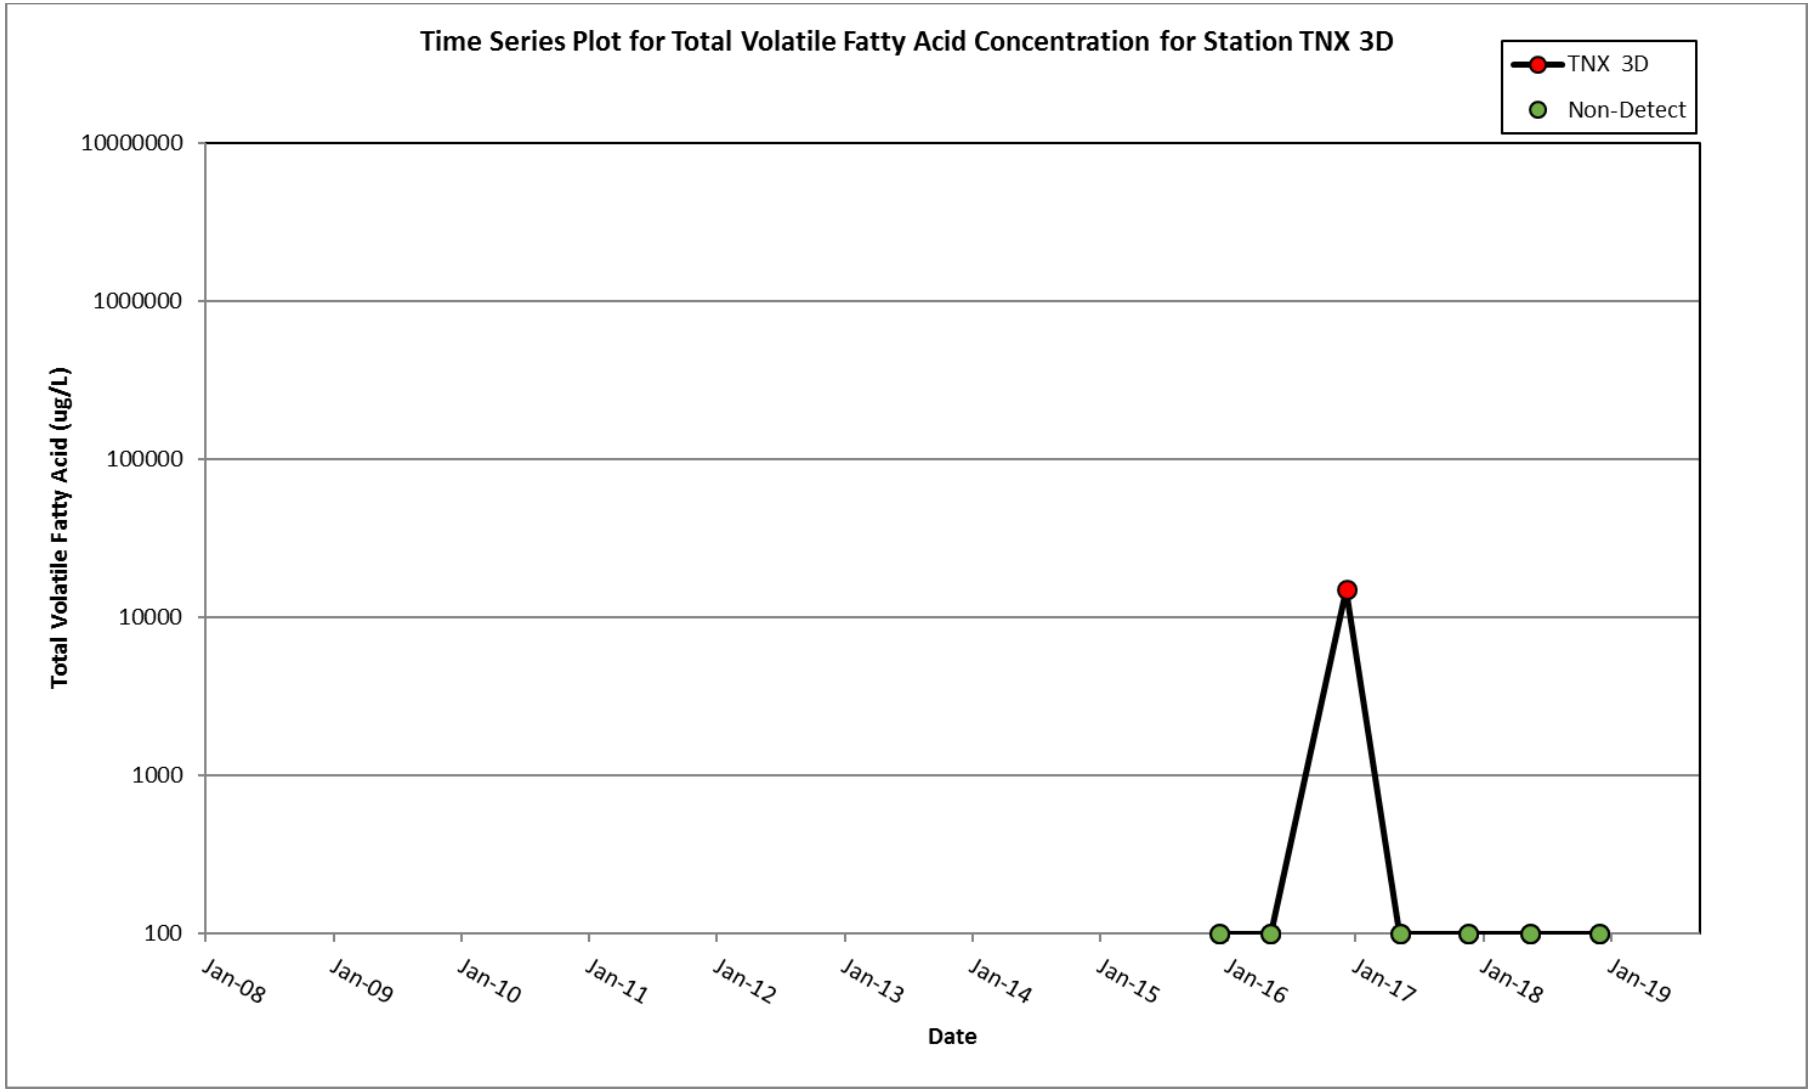
Time Series Plot for Total Volatile Fatty Acid Concentration for Station TNX 3D
TNX 3D
Non-Detect
Total Volatile Fatty Acid (ug/L)
10000000
1000000
100000
10000
1000
100
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

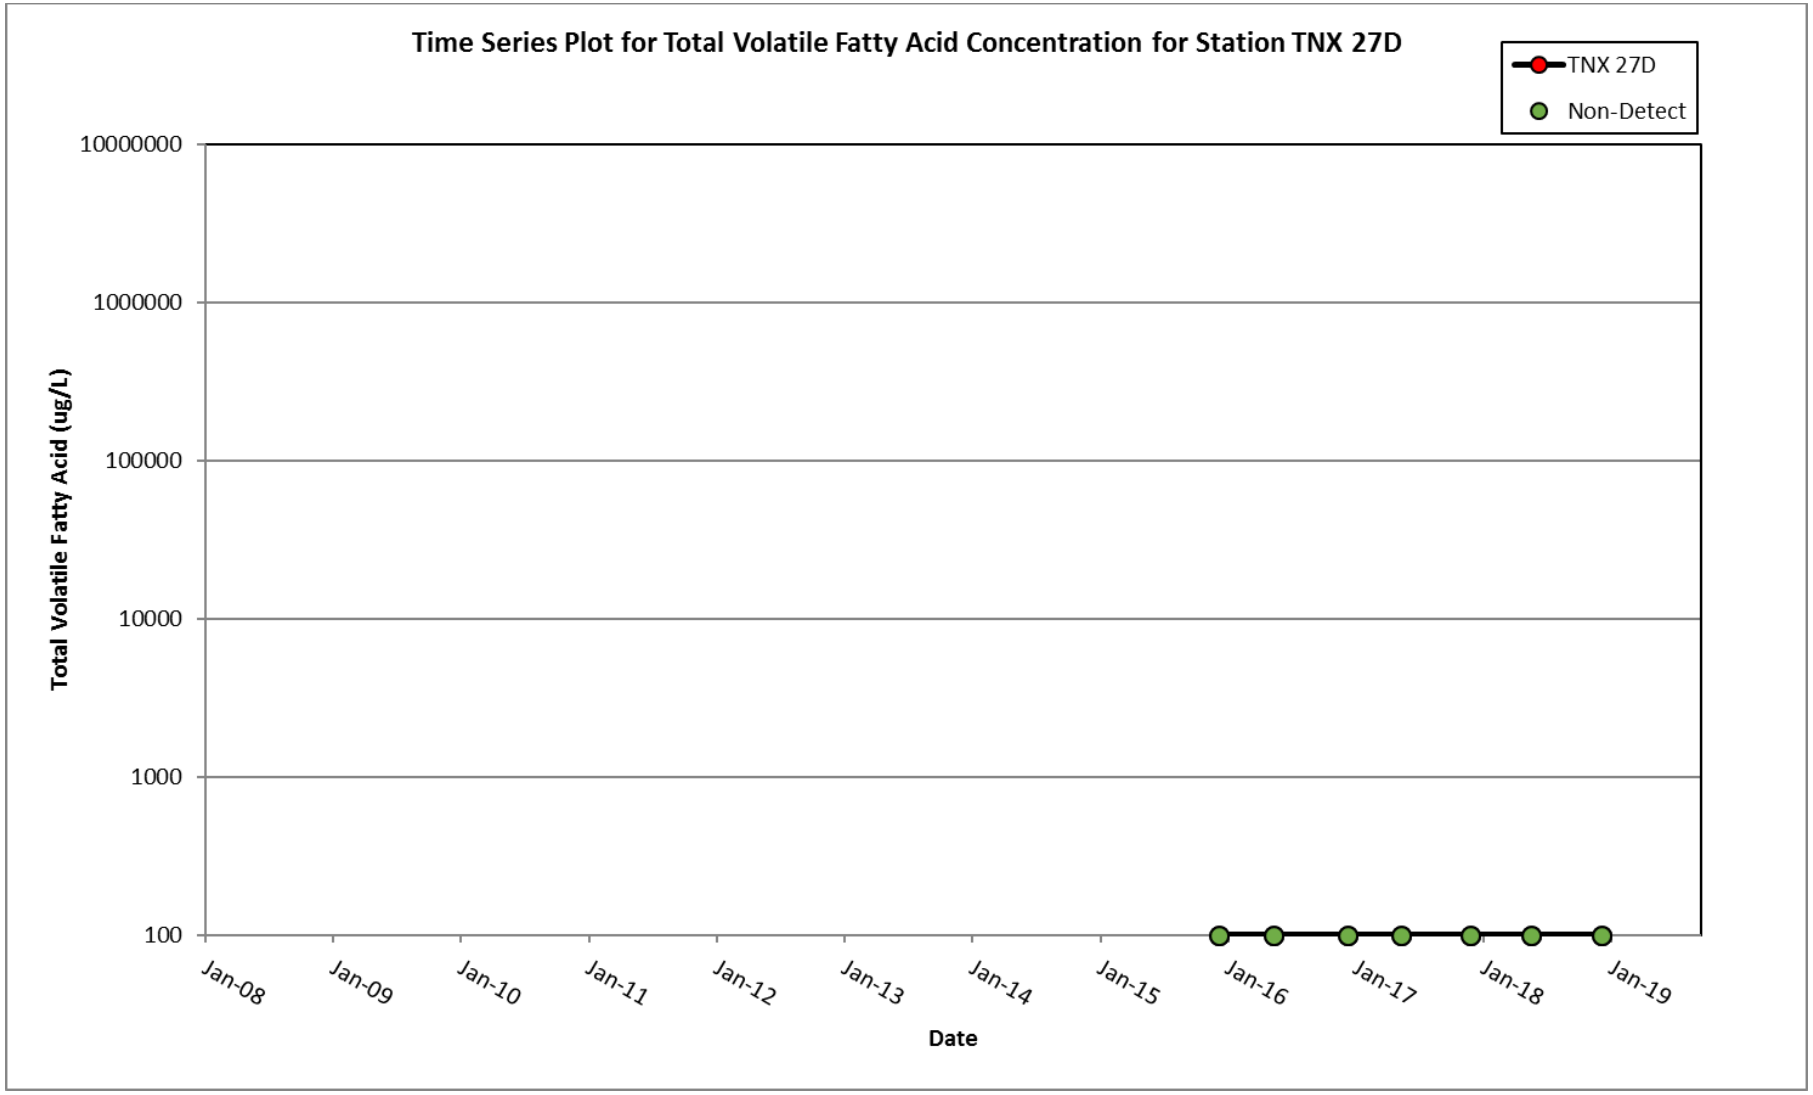
Time Series Plot for Total Volatile Fatty Acid Concentration for Station TNX 27D
TNX 27D
Non-Detect
Total Volatile Fatty Acid (ug/L)
10000000
1000000
100000
10000
1000
100
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

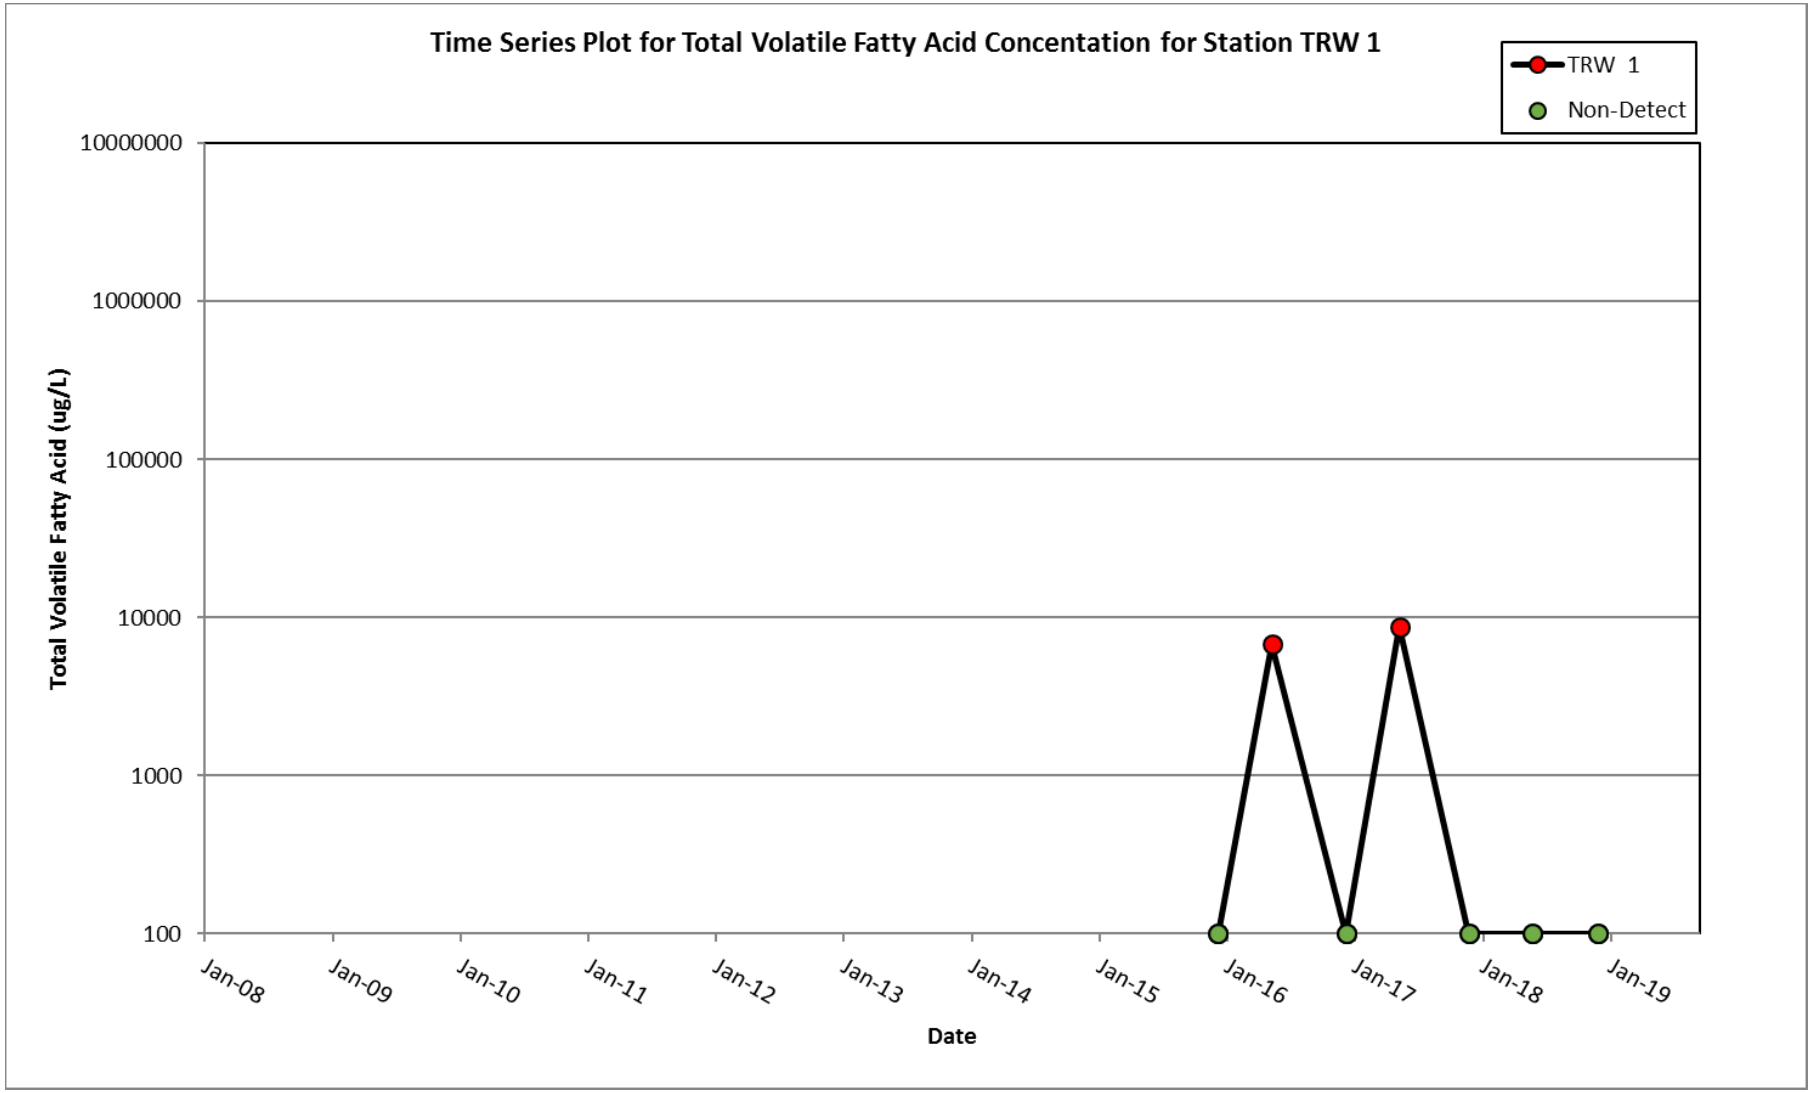
Time Series Plot for Total Volatile Fatty Acid Concentation for Station TRW 1
TRW 1
Non-Detect
Total Volatile Fatty Acid (ug/L)
10000000
1000000
100000
10000
1000
100
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

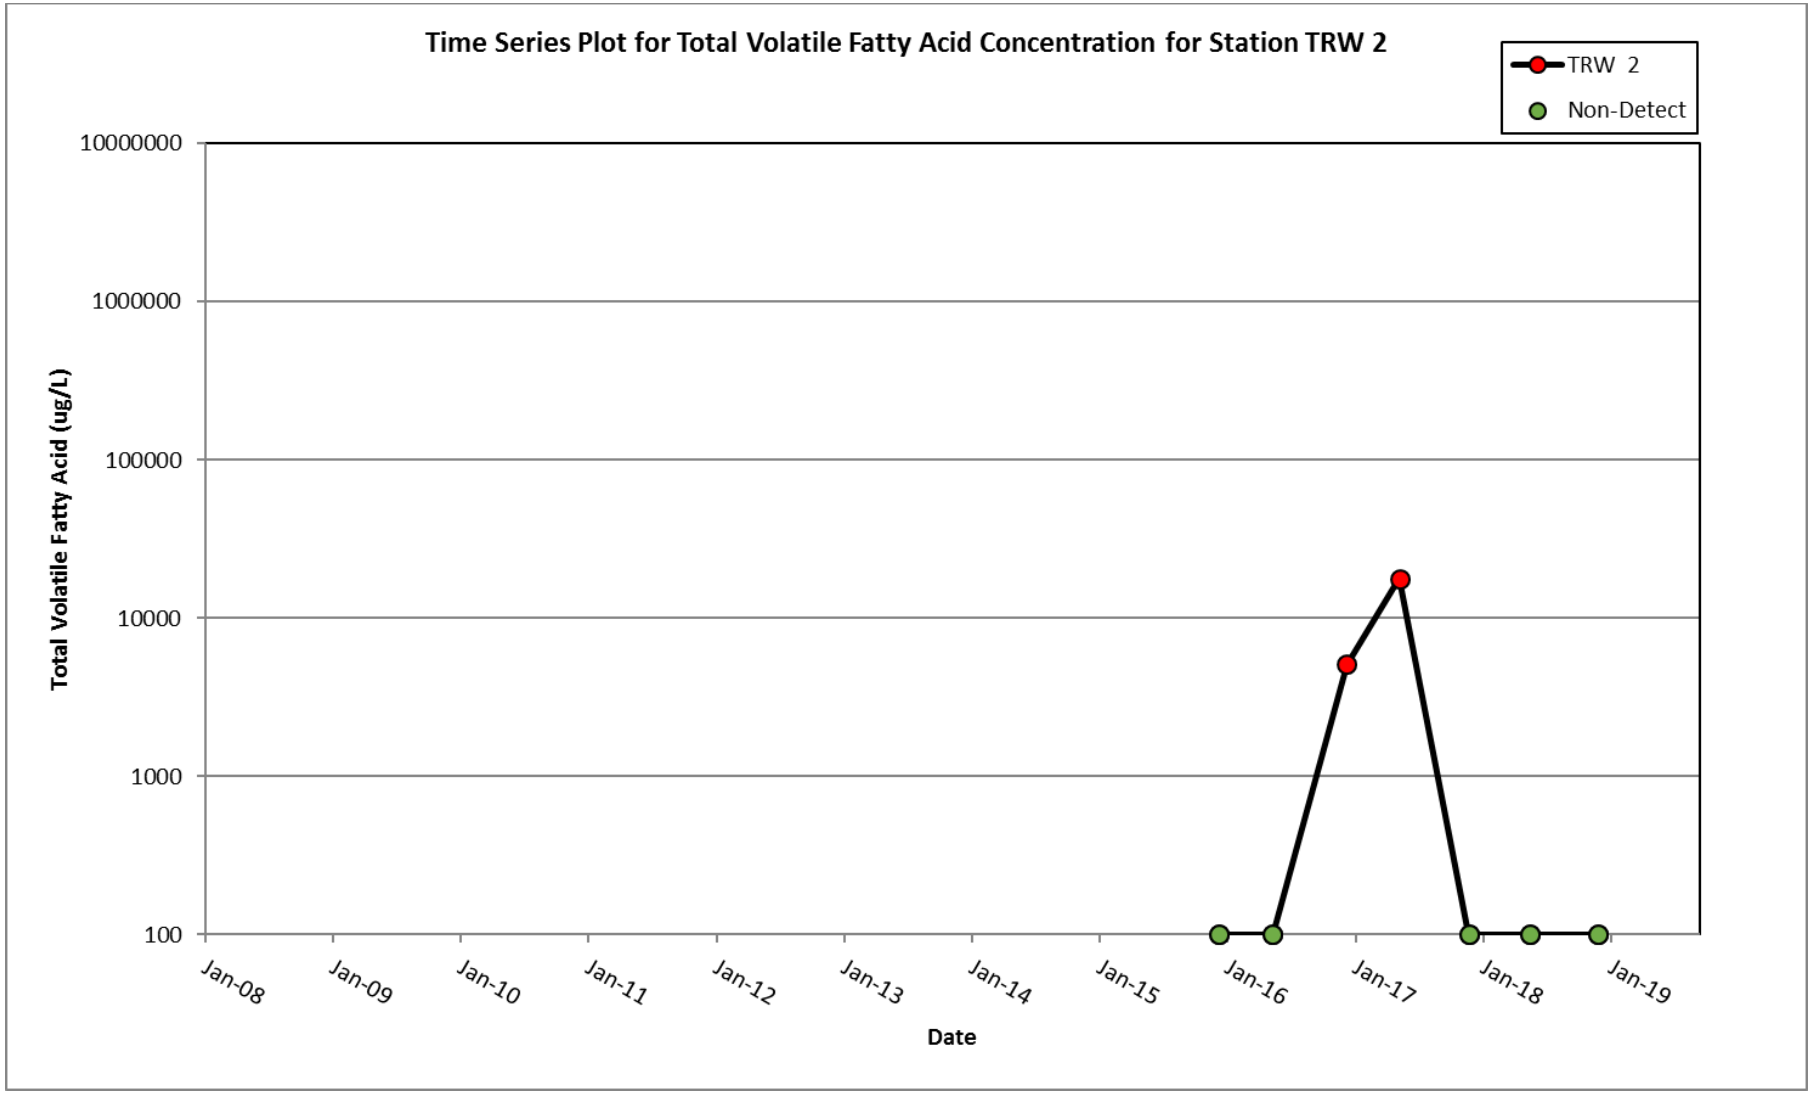
Time Series Plot for Total Volatile Fatty Acid Concentration for Station TRW 2
TRW 2
Non-Detect
Total Volatile Fatty Acid (ug/L)
10000000
1000000
100000
10000
1000
100
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

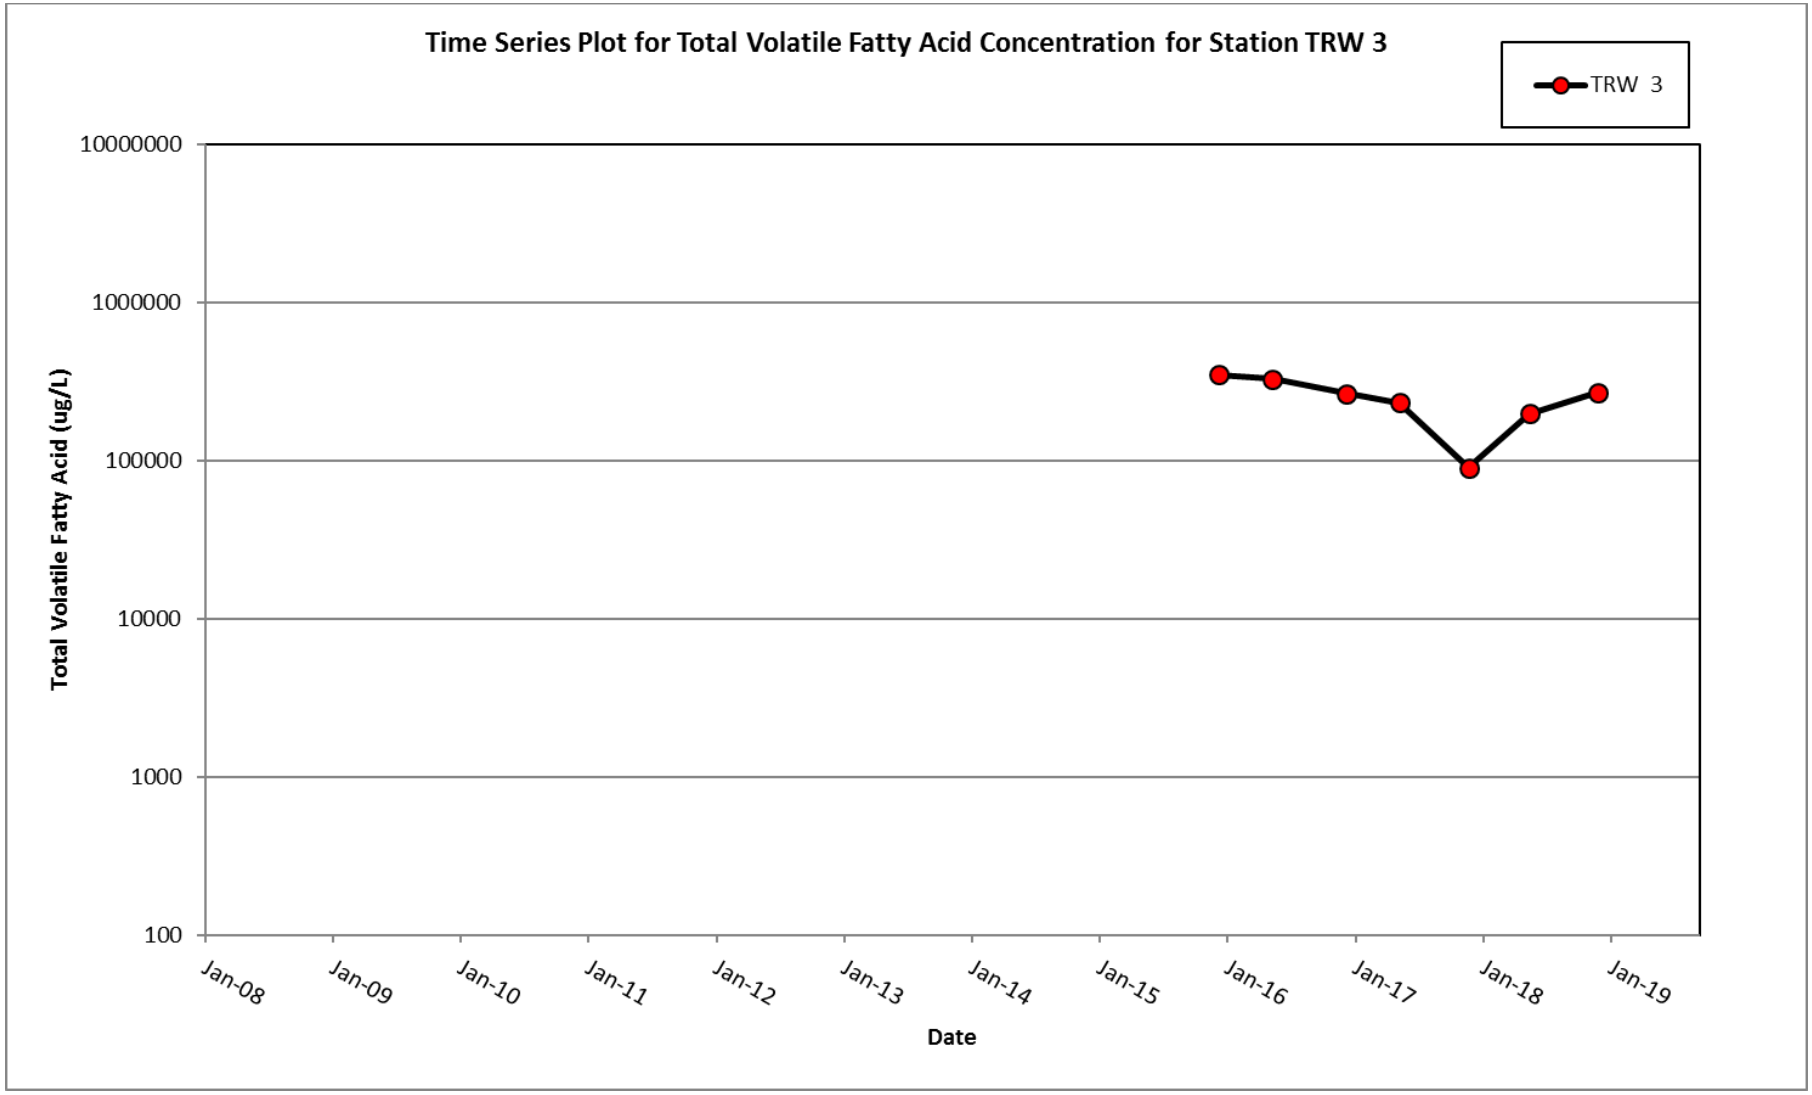
Time Series Plot for Total Volatile Fatty Acid Concentration for Station TRW 3
TRW 3
Total Volatile Fatty Acid (ug/L)
10000000
1000000
100000
10000
1000
100
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

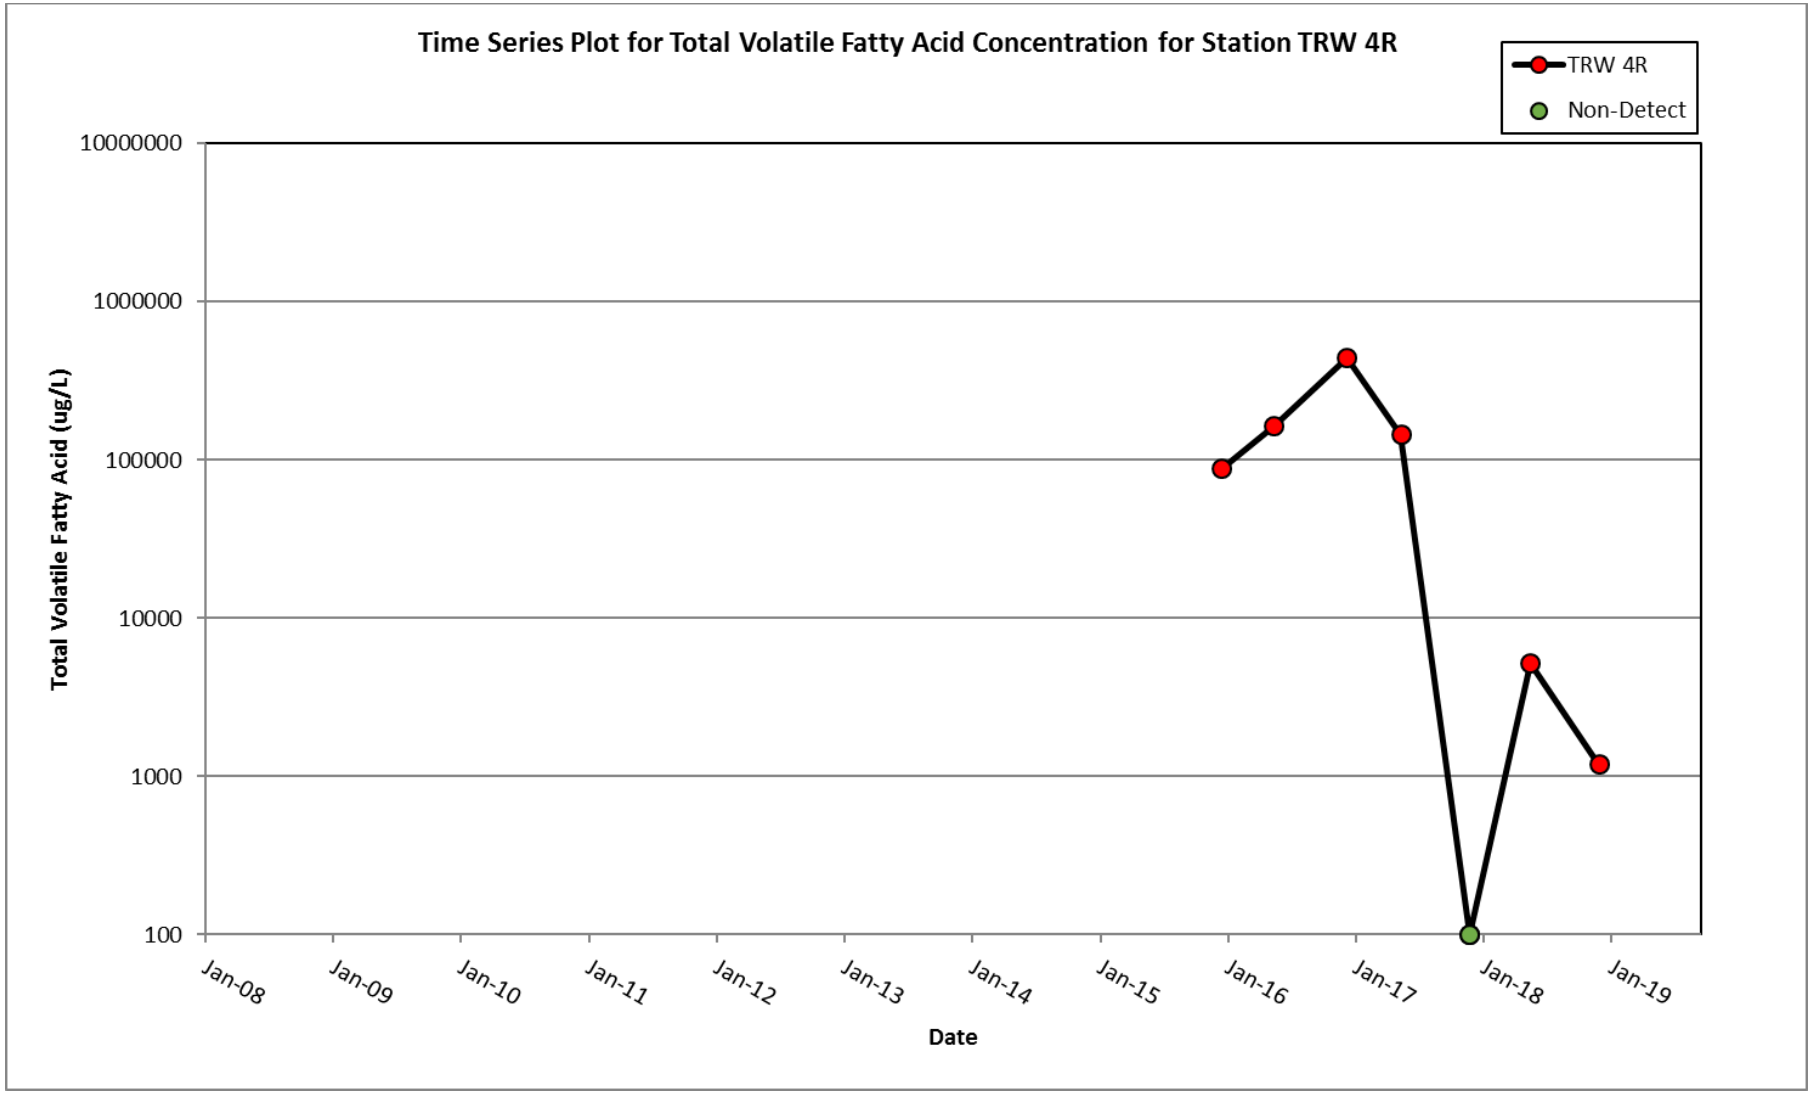
Time Series Plot for Total Volatile Fatty Acid Concentration for Station TRW 4R
TRW 4R
Non-Detect
Total Volatile Fatty Acid (ug/L)
10000000
1000000
100000
10000
1000
100
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

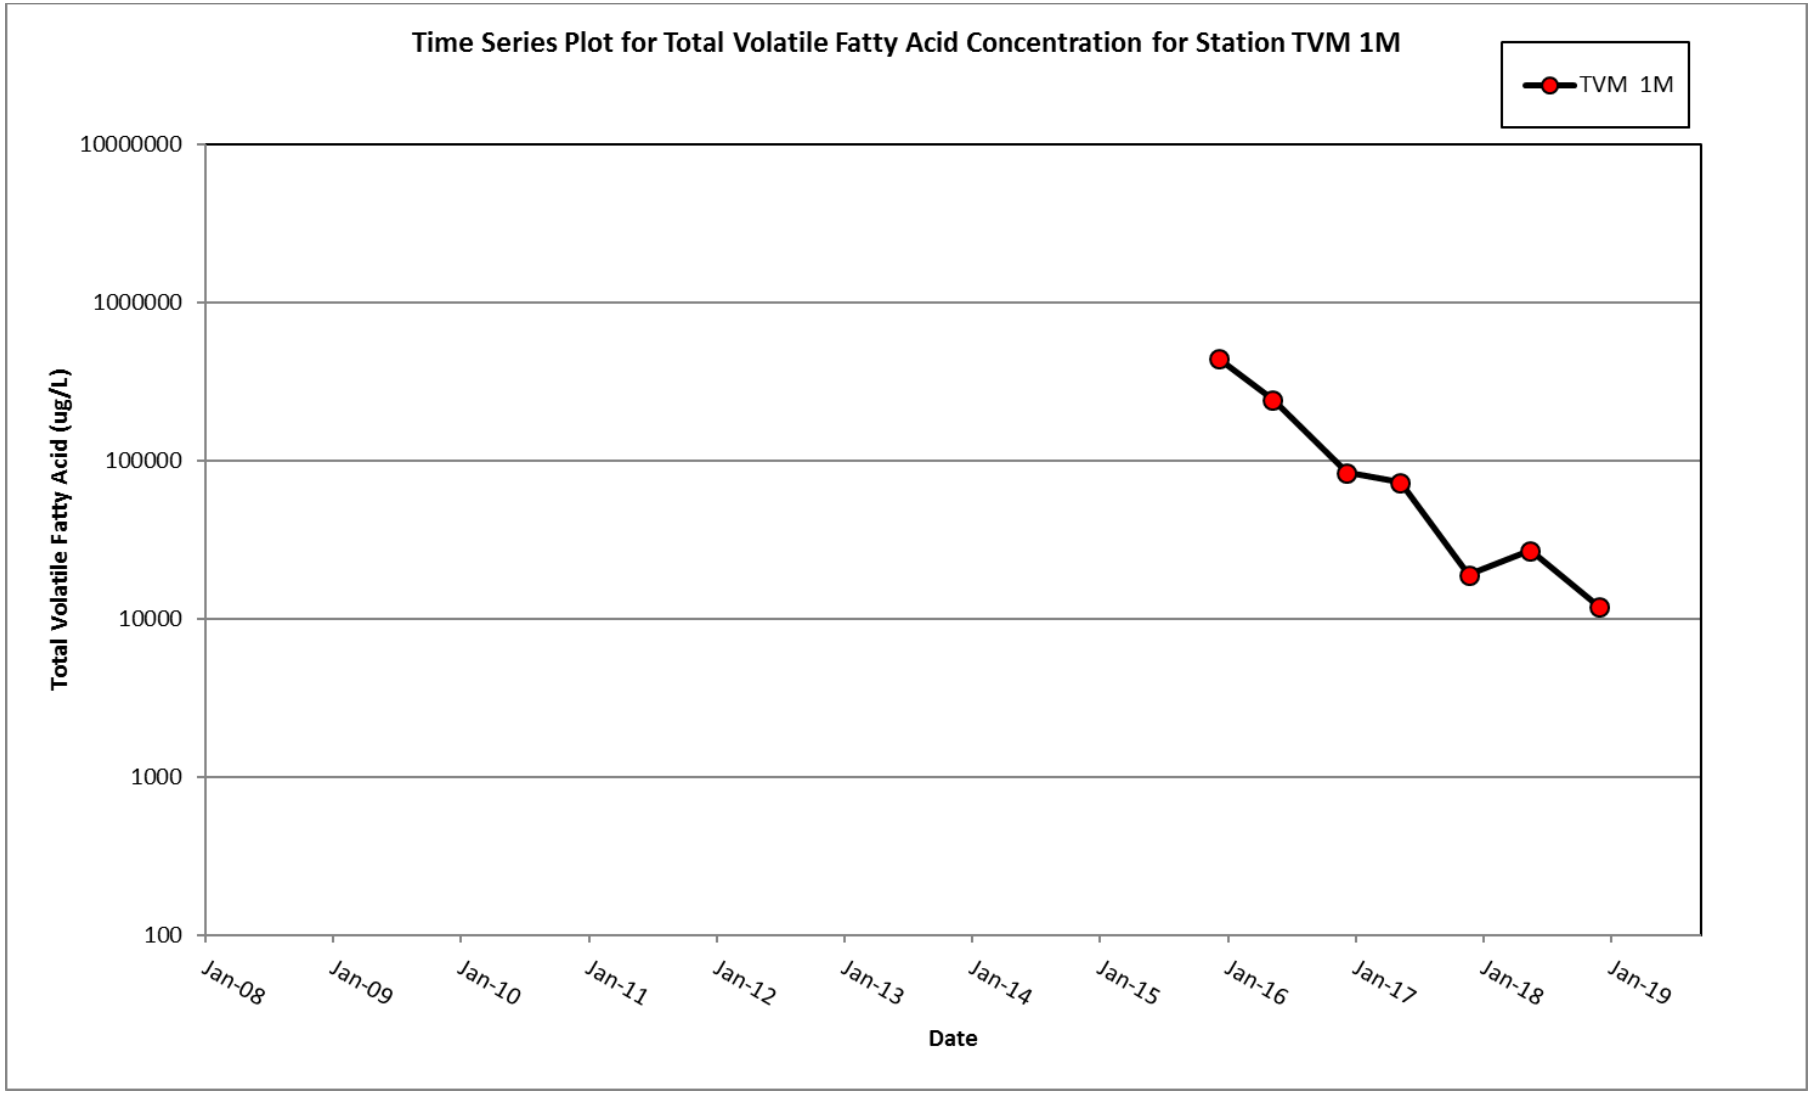
Time Series Plot for Total Volatile Fatty Acid Concentration for Station TVM 1M
TVM 1M
Total Volatile Fatty Acid (ug/L)
10000000
1000000
100000
10000
1000
100
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

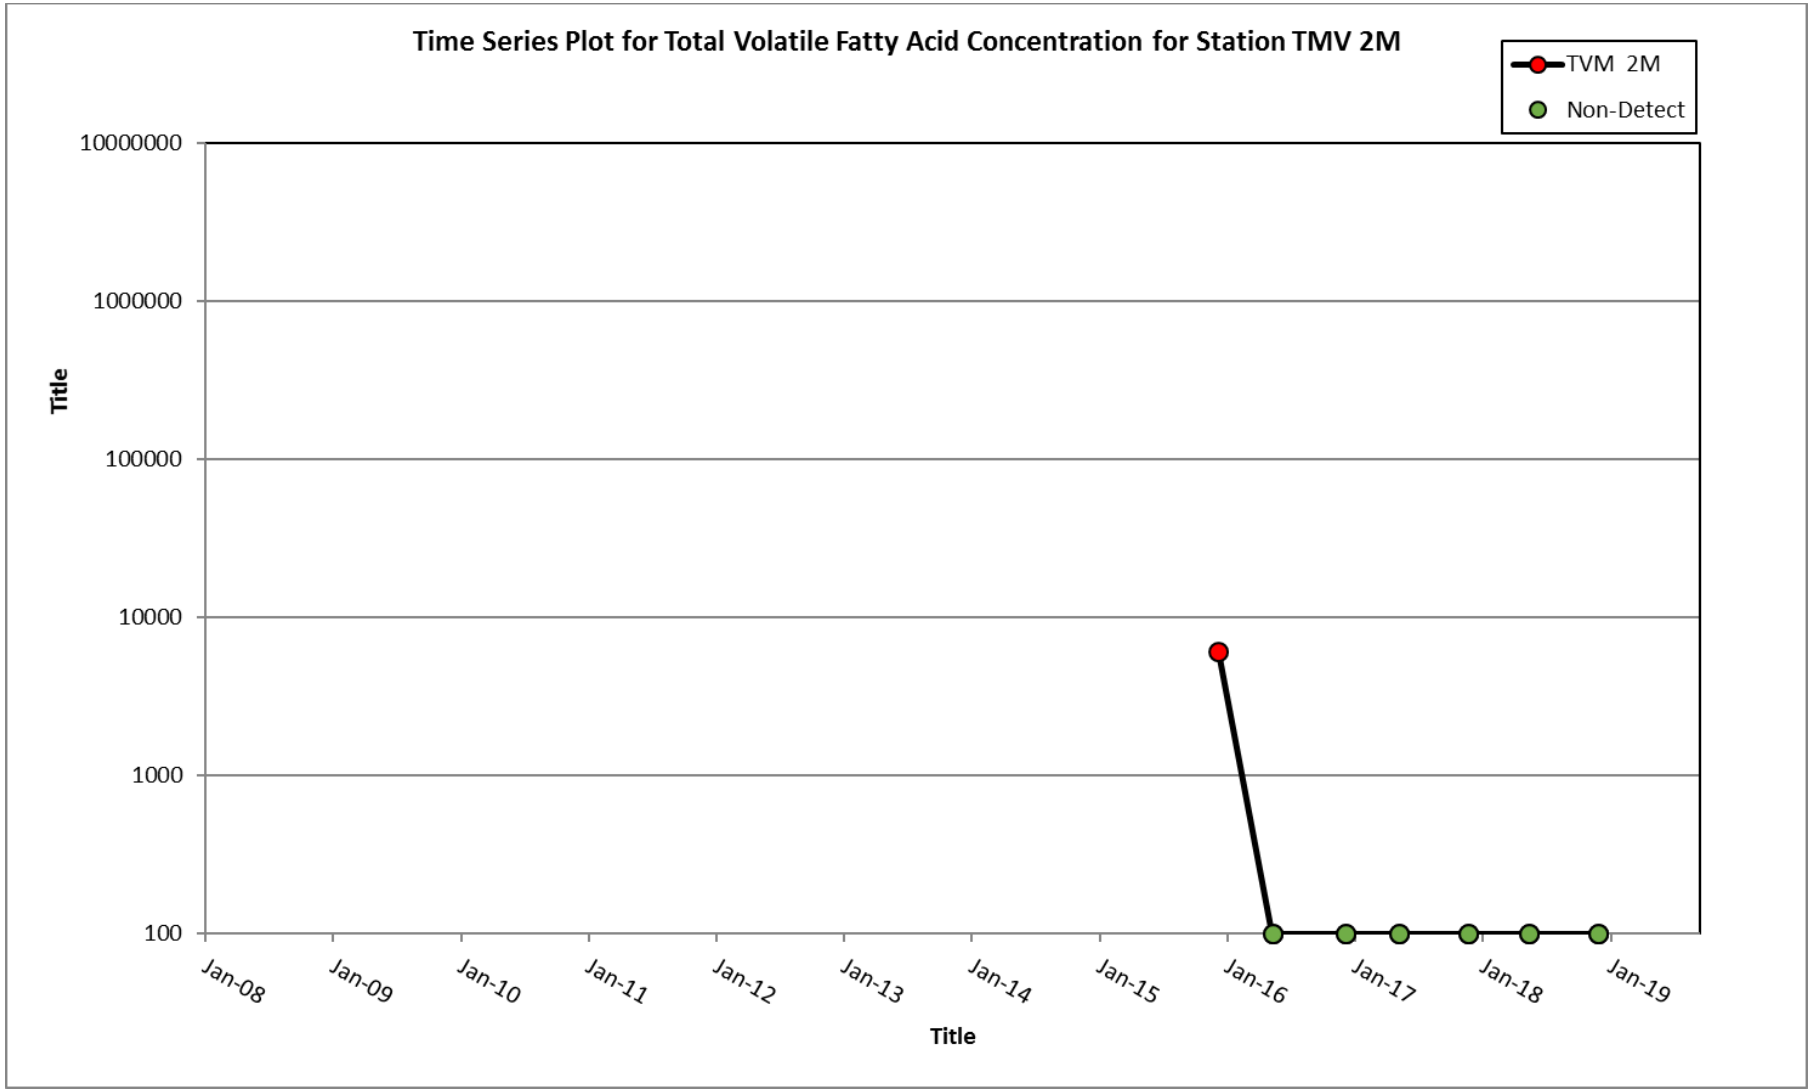
Time Series Plot for Total Volatile Fatty Acid Concentration for Station TMV 2M
TVM 2M
Non-Detect
10000000
1000000
100000
10000
1000
100
Title
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Title

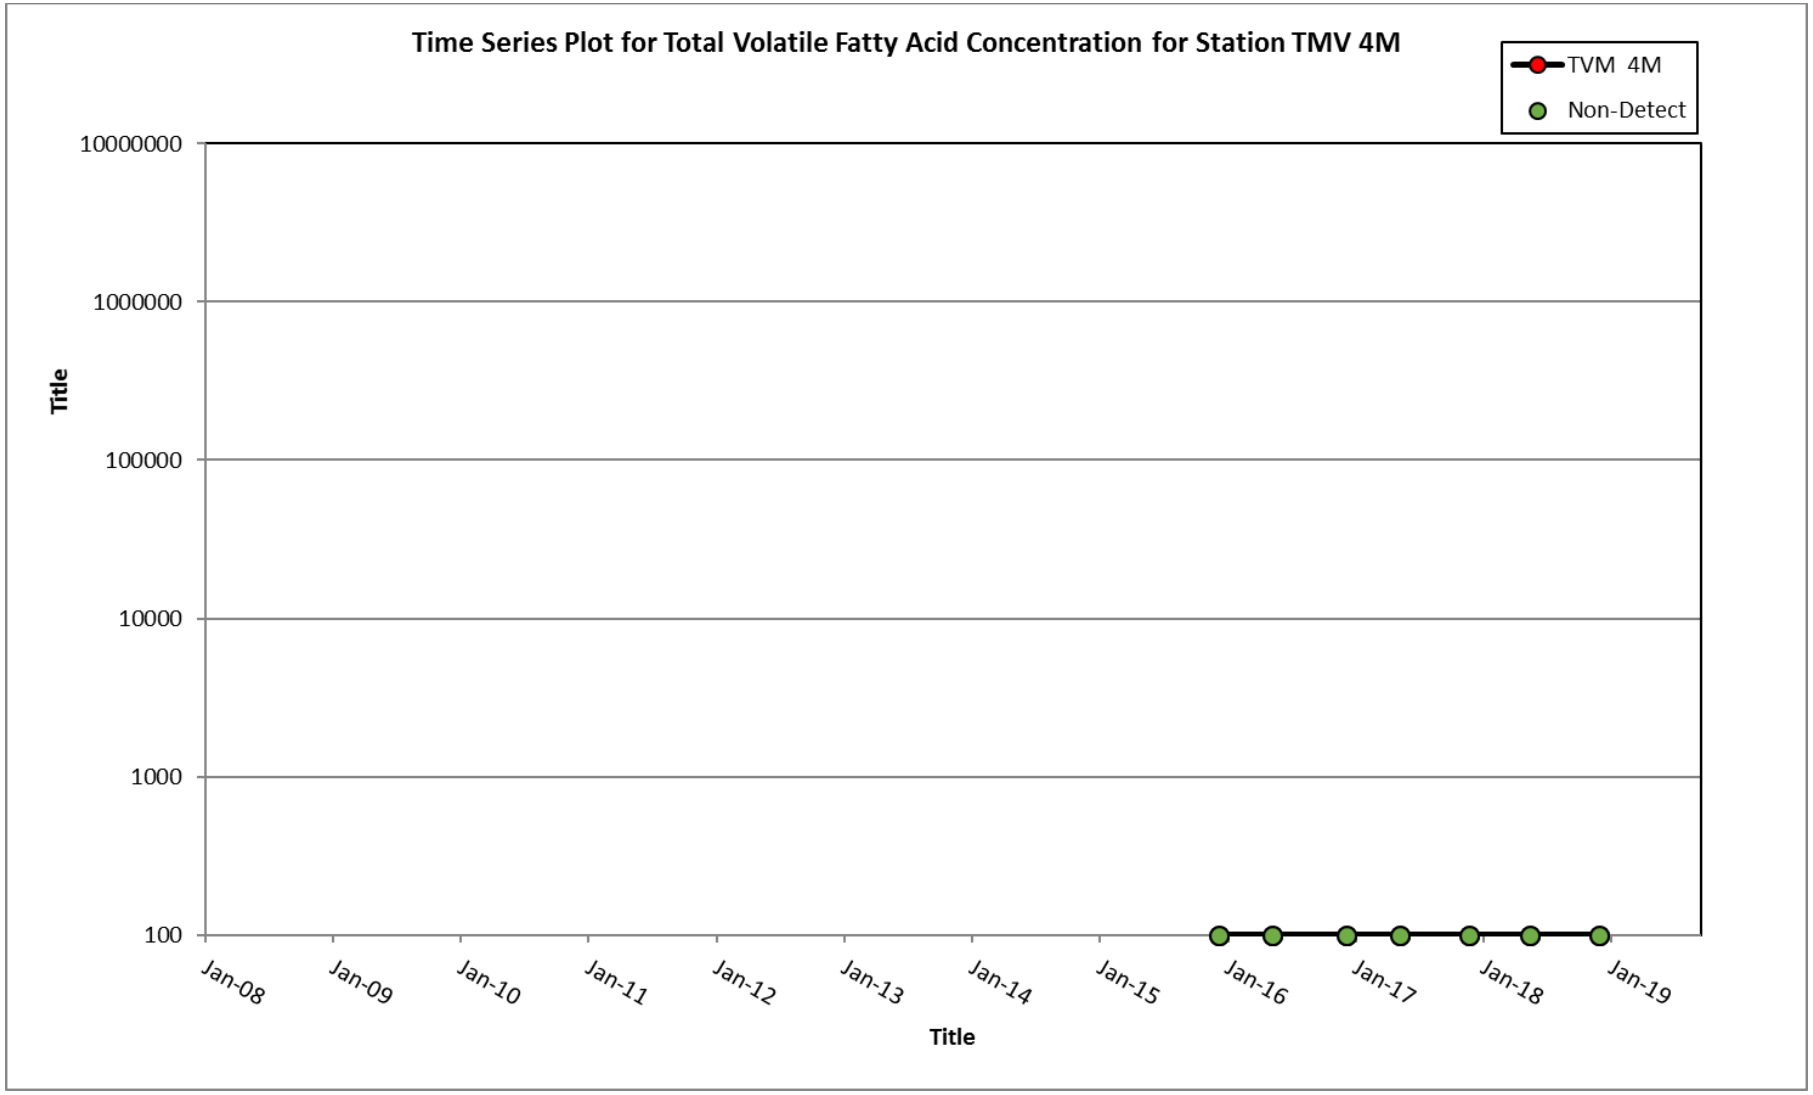
Time Series Plot for Total Volatile Fatty Acid Concentration for Station TMV 4M
TVM 4M
Non-Detect
10000000
1000000
100000
10000
1000
100
Title
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Title

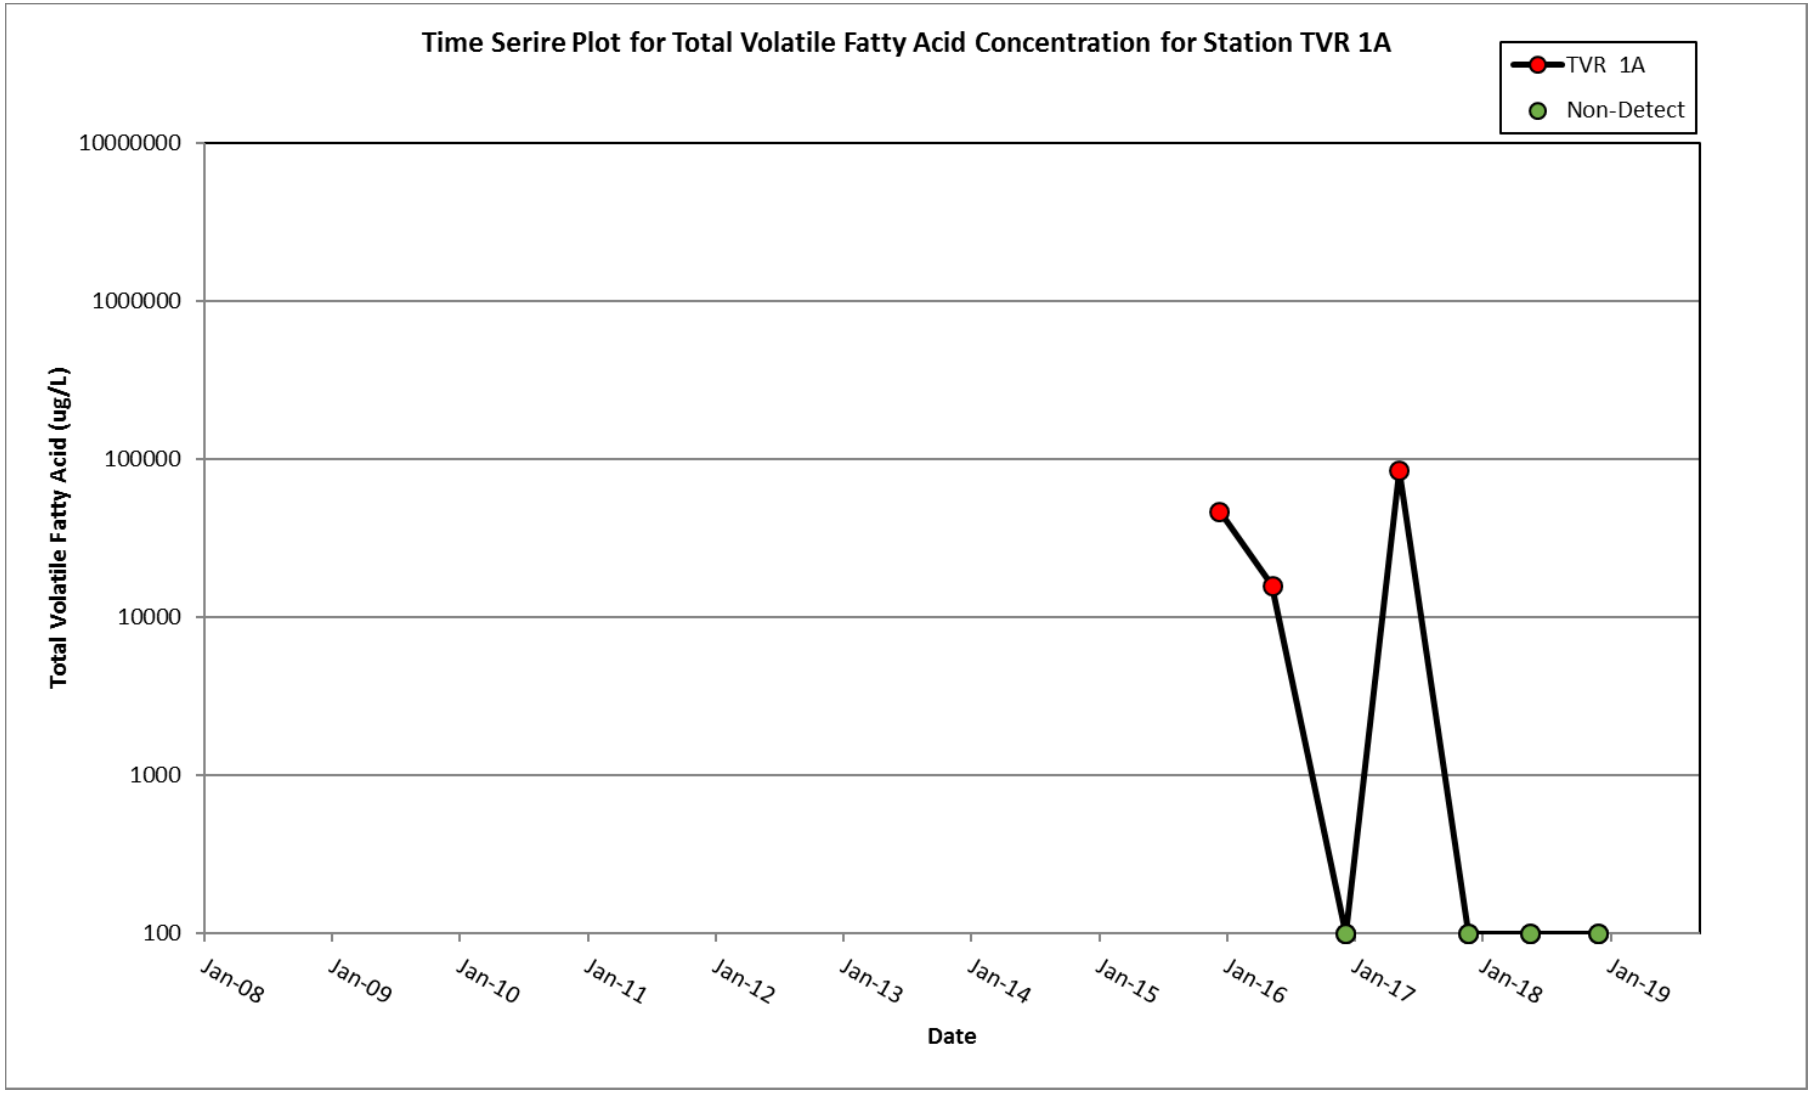
Time Serire Plot for Total Volatile Fatty Acid Concentration for Station TVR 1A
TVR 1A
Non-Detect
Total Volatile Fatty Acid (ug/L)
10000000
1000000
100000
10000
1000
100
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

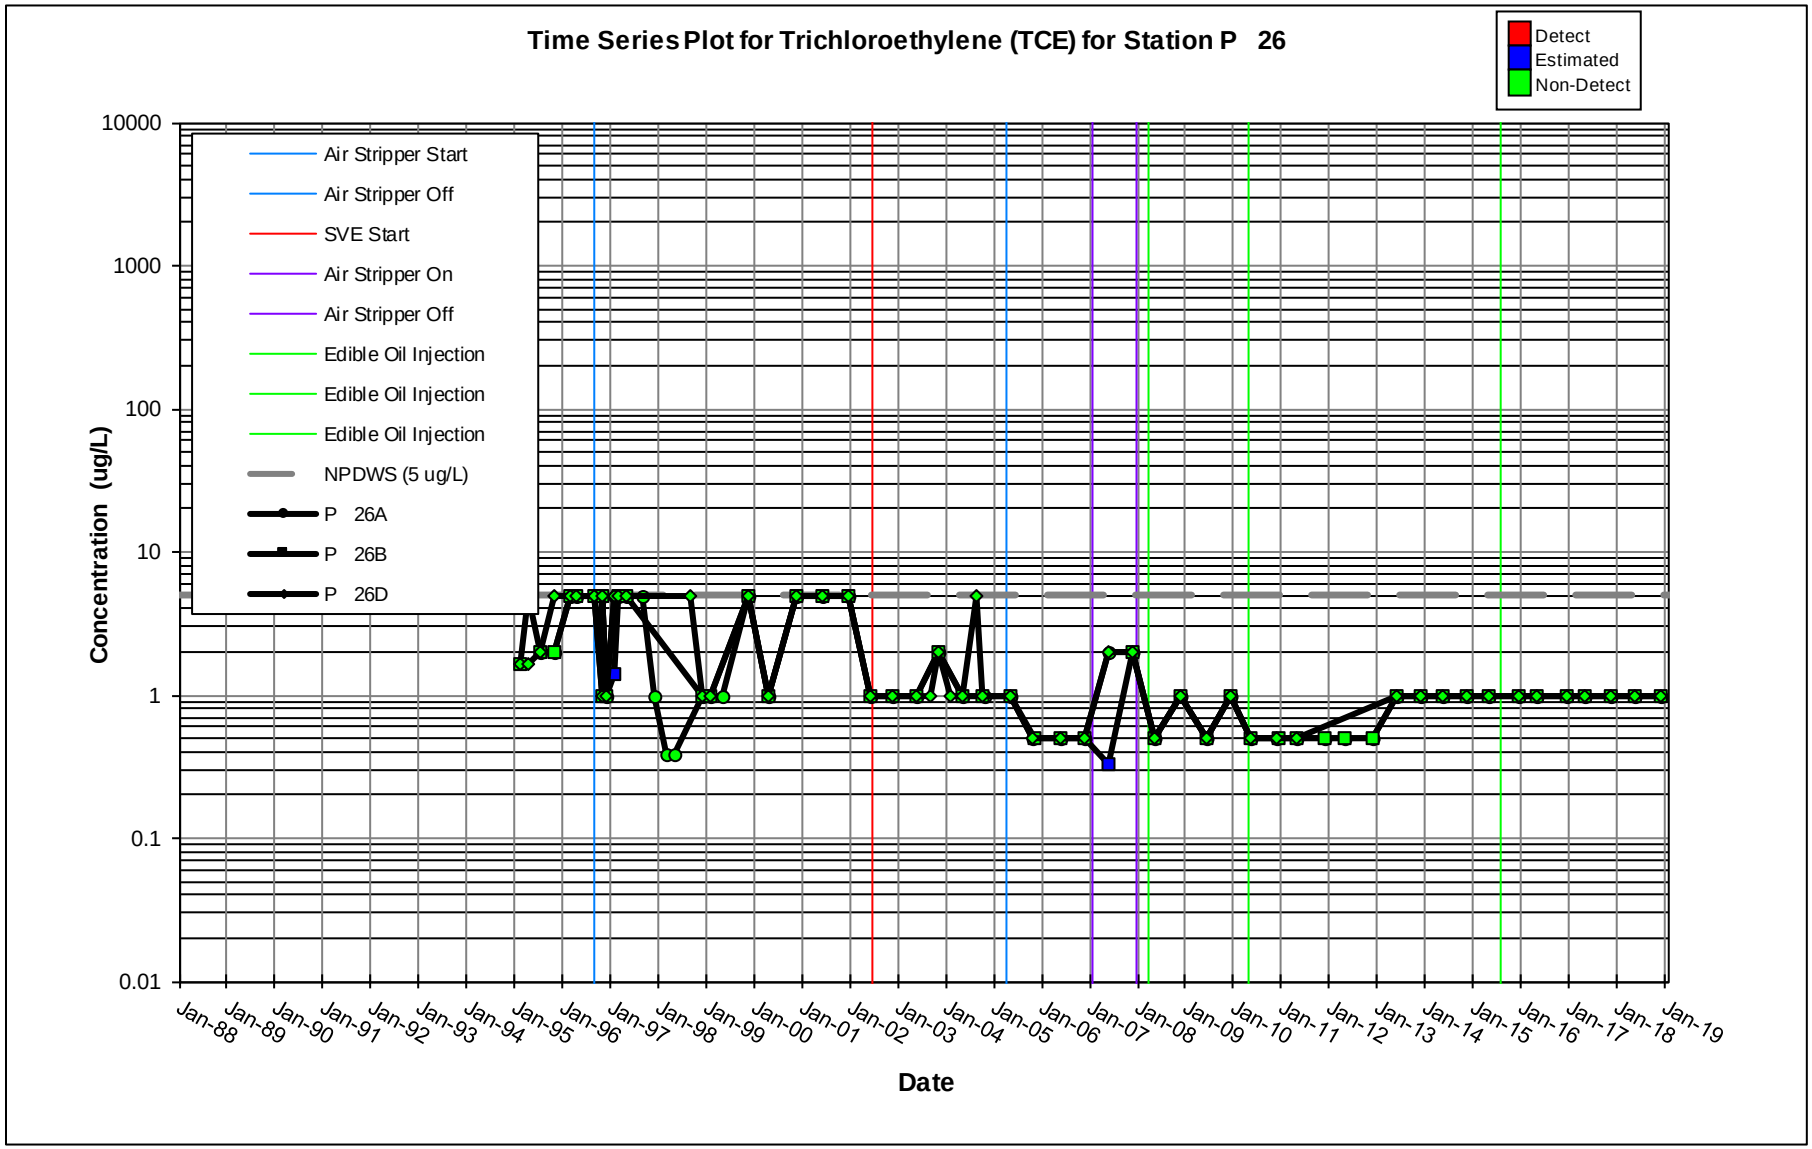
Time Series Plot for Trichloroethylene (TCE) for Station P 26
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
P 26A
P 26B
P 26D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

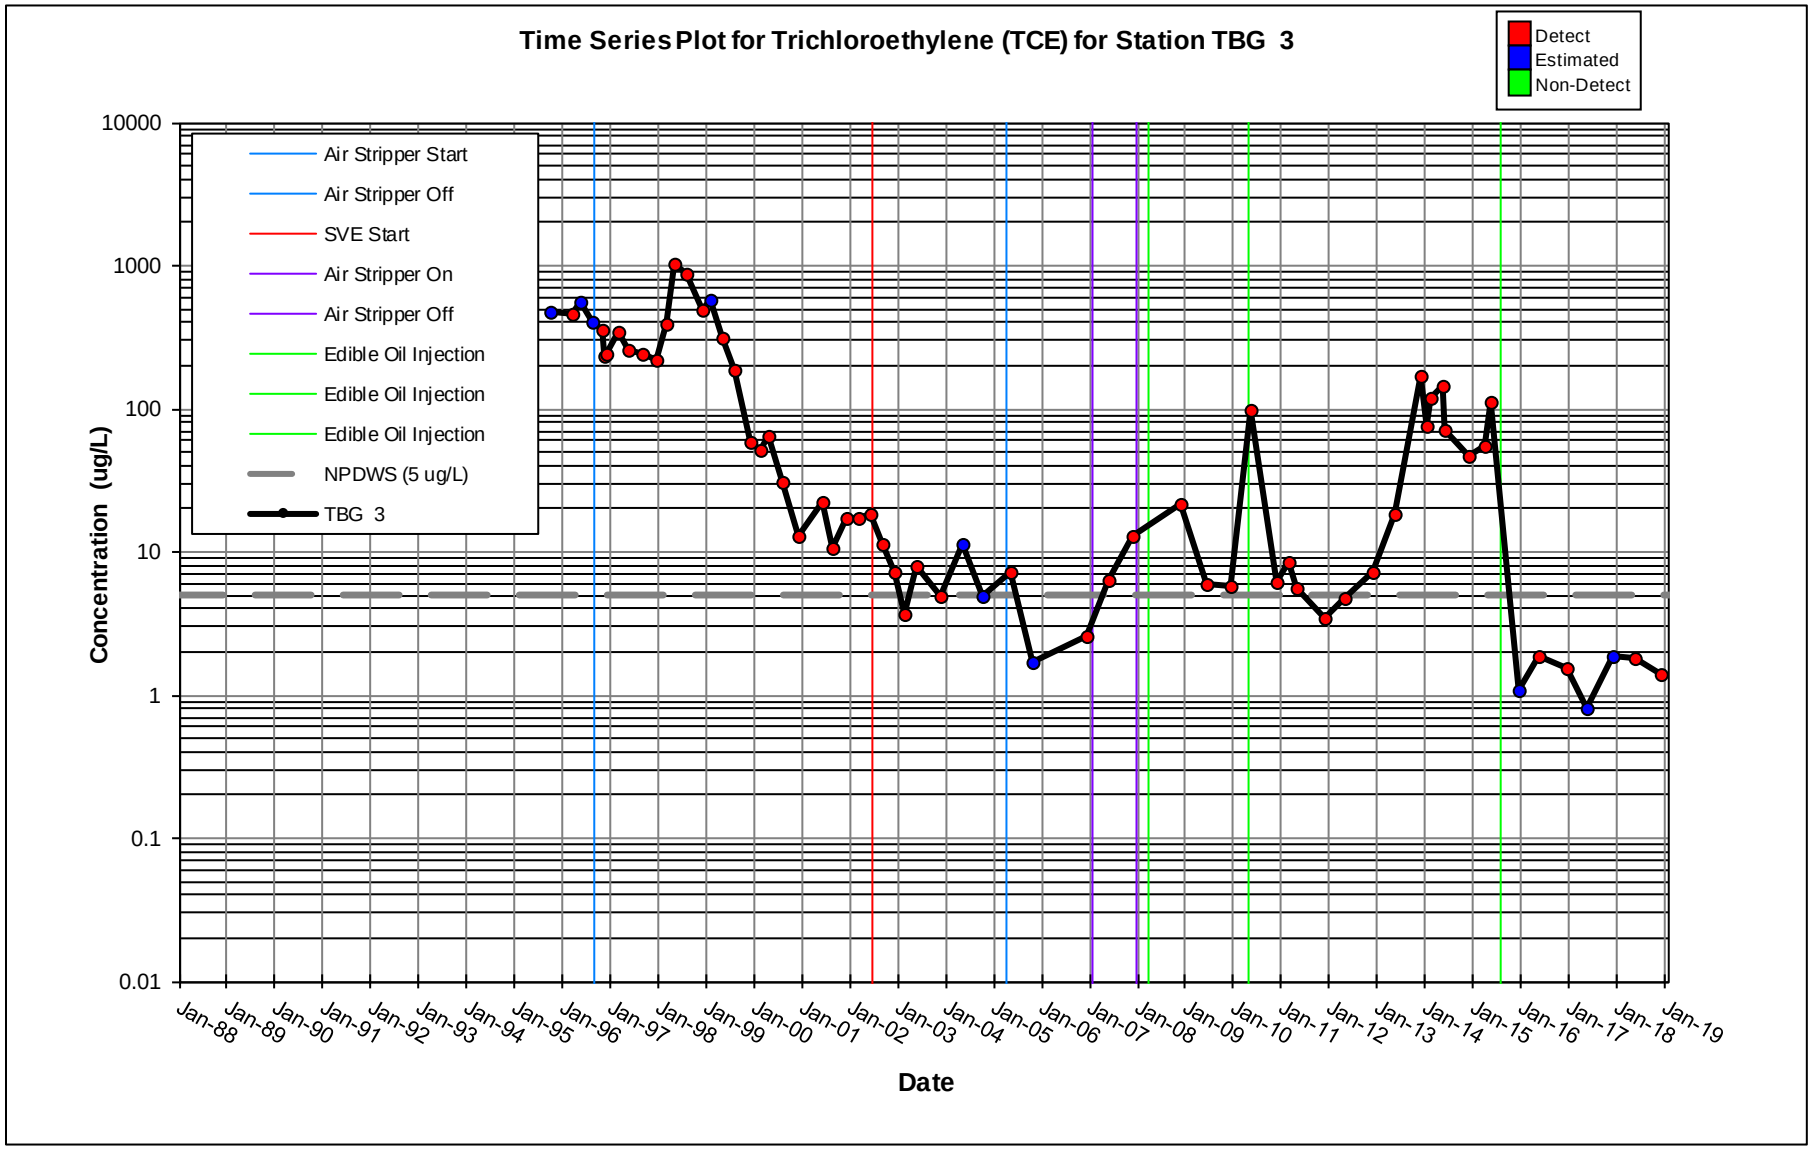
Time Series Plot for Trichloroethylene (TCE) for Station TBG 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TBG 3
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

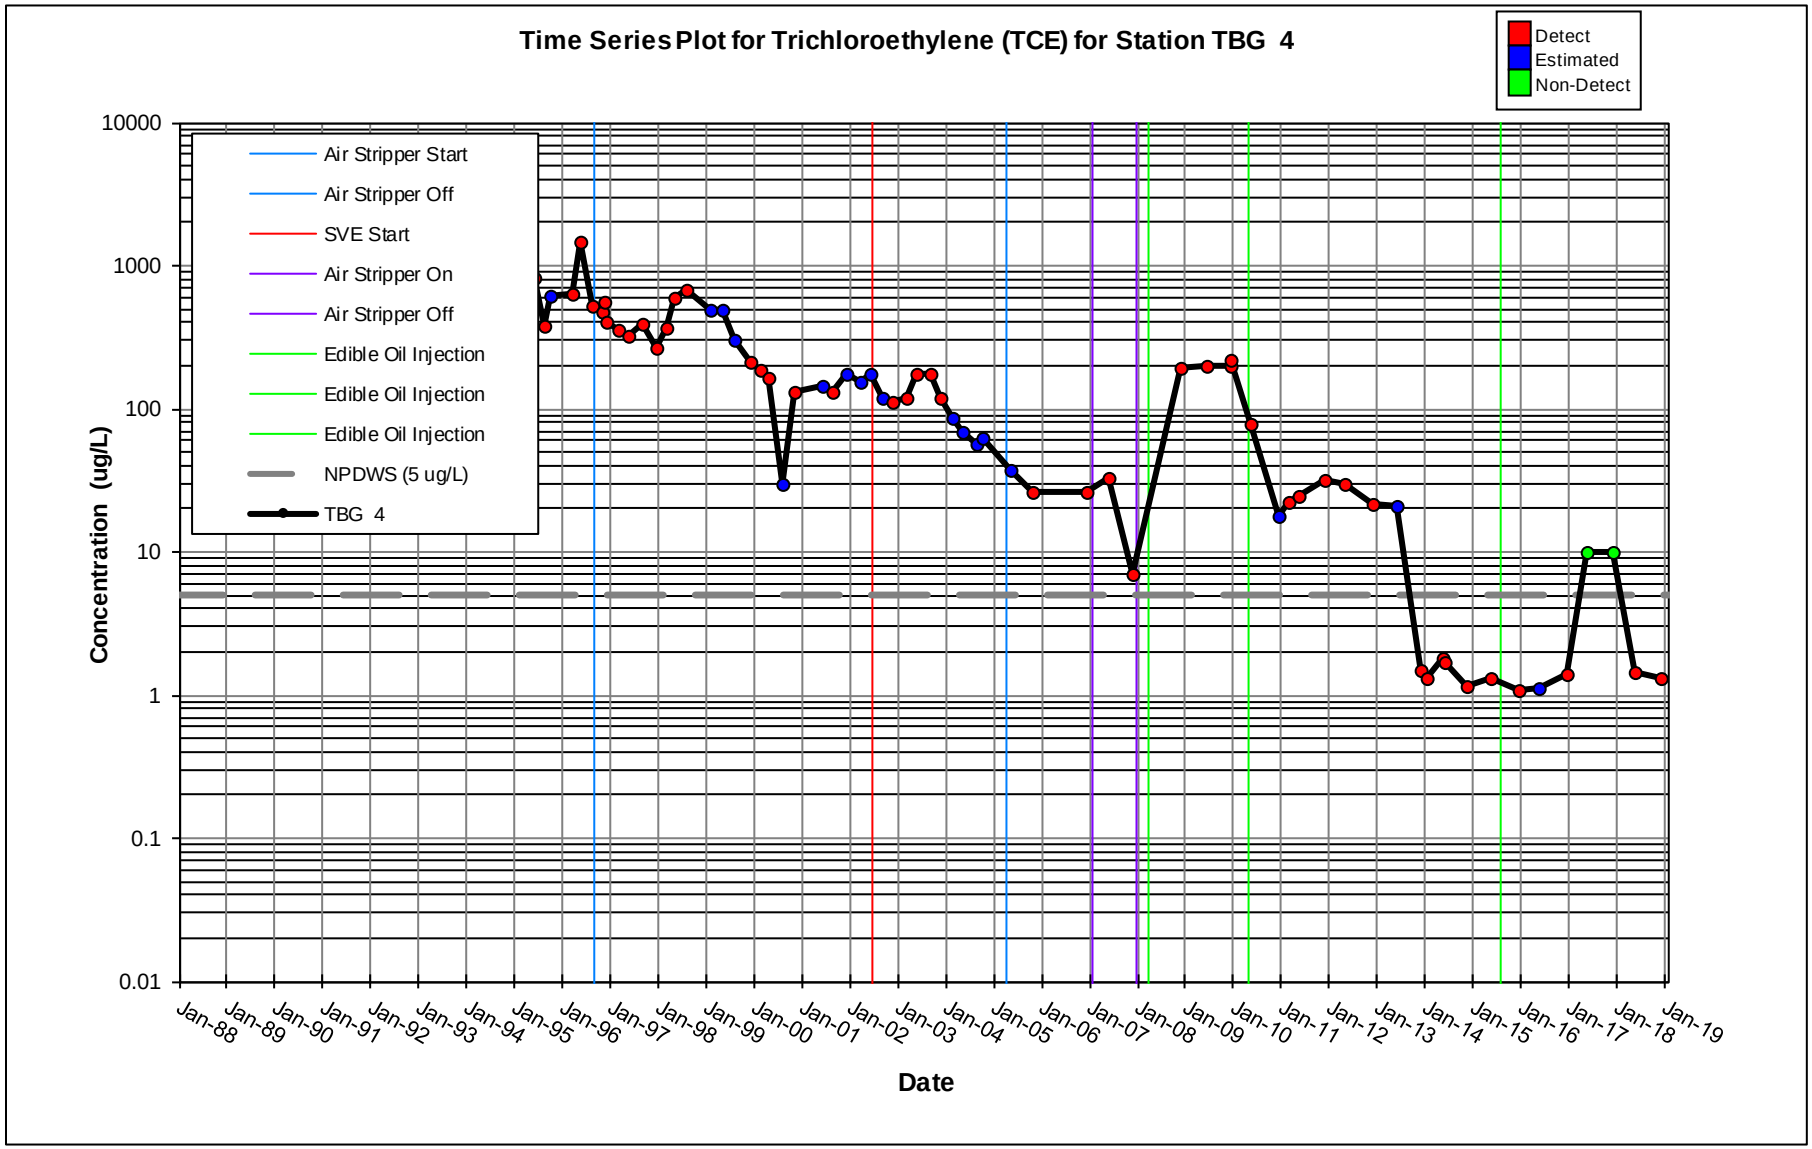
Time Series Plot for Trichloroethylene (TCE) for Station TBG 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TBG 4
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

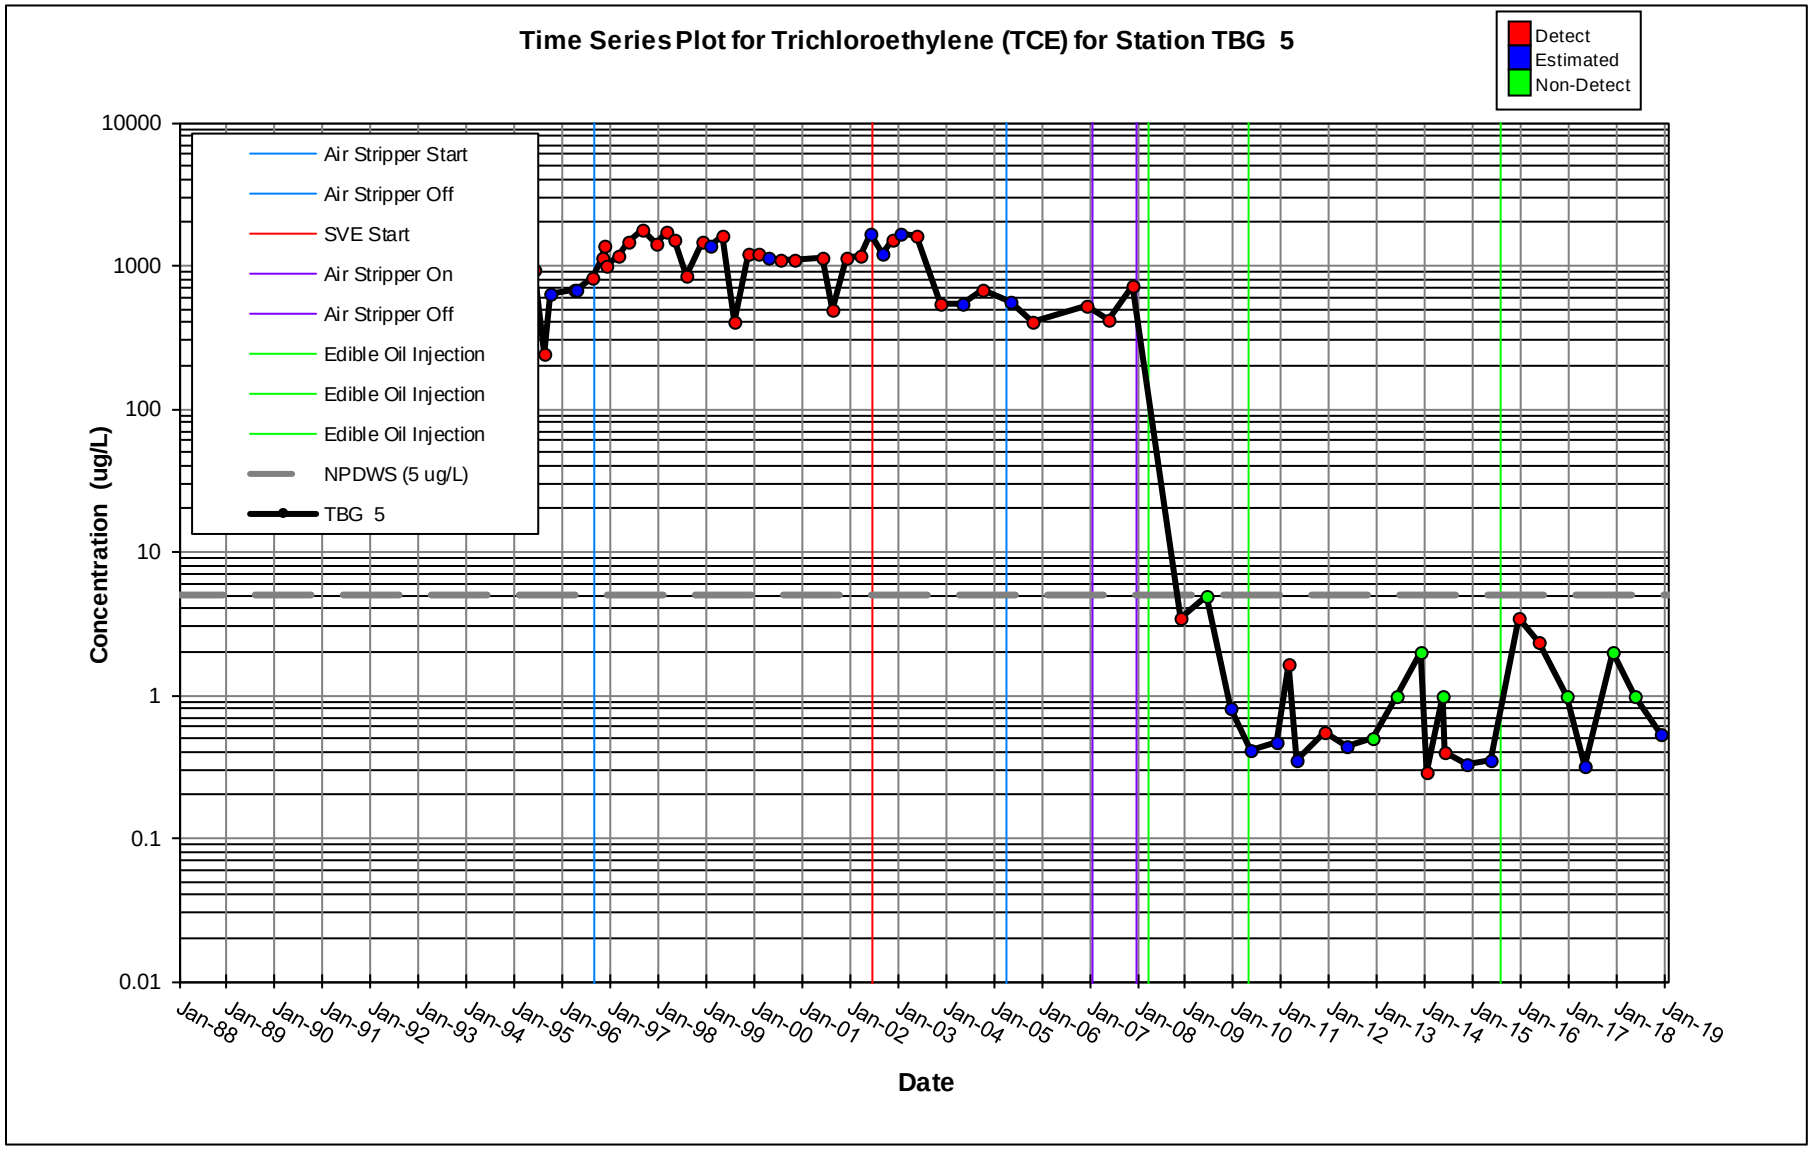
Time Series Plot for Trichloroethylene (TCE) for Station TBG 5
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TBG 5
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

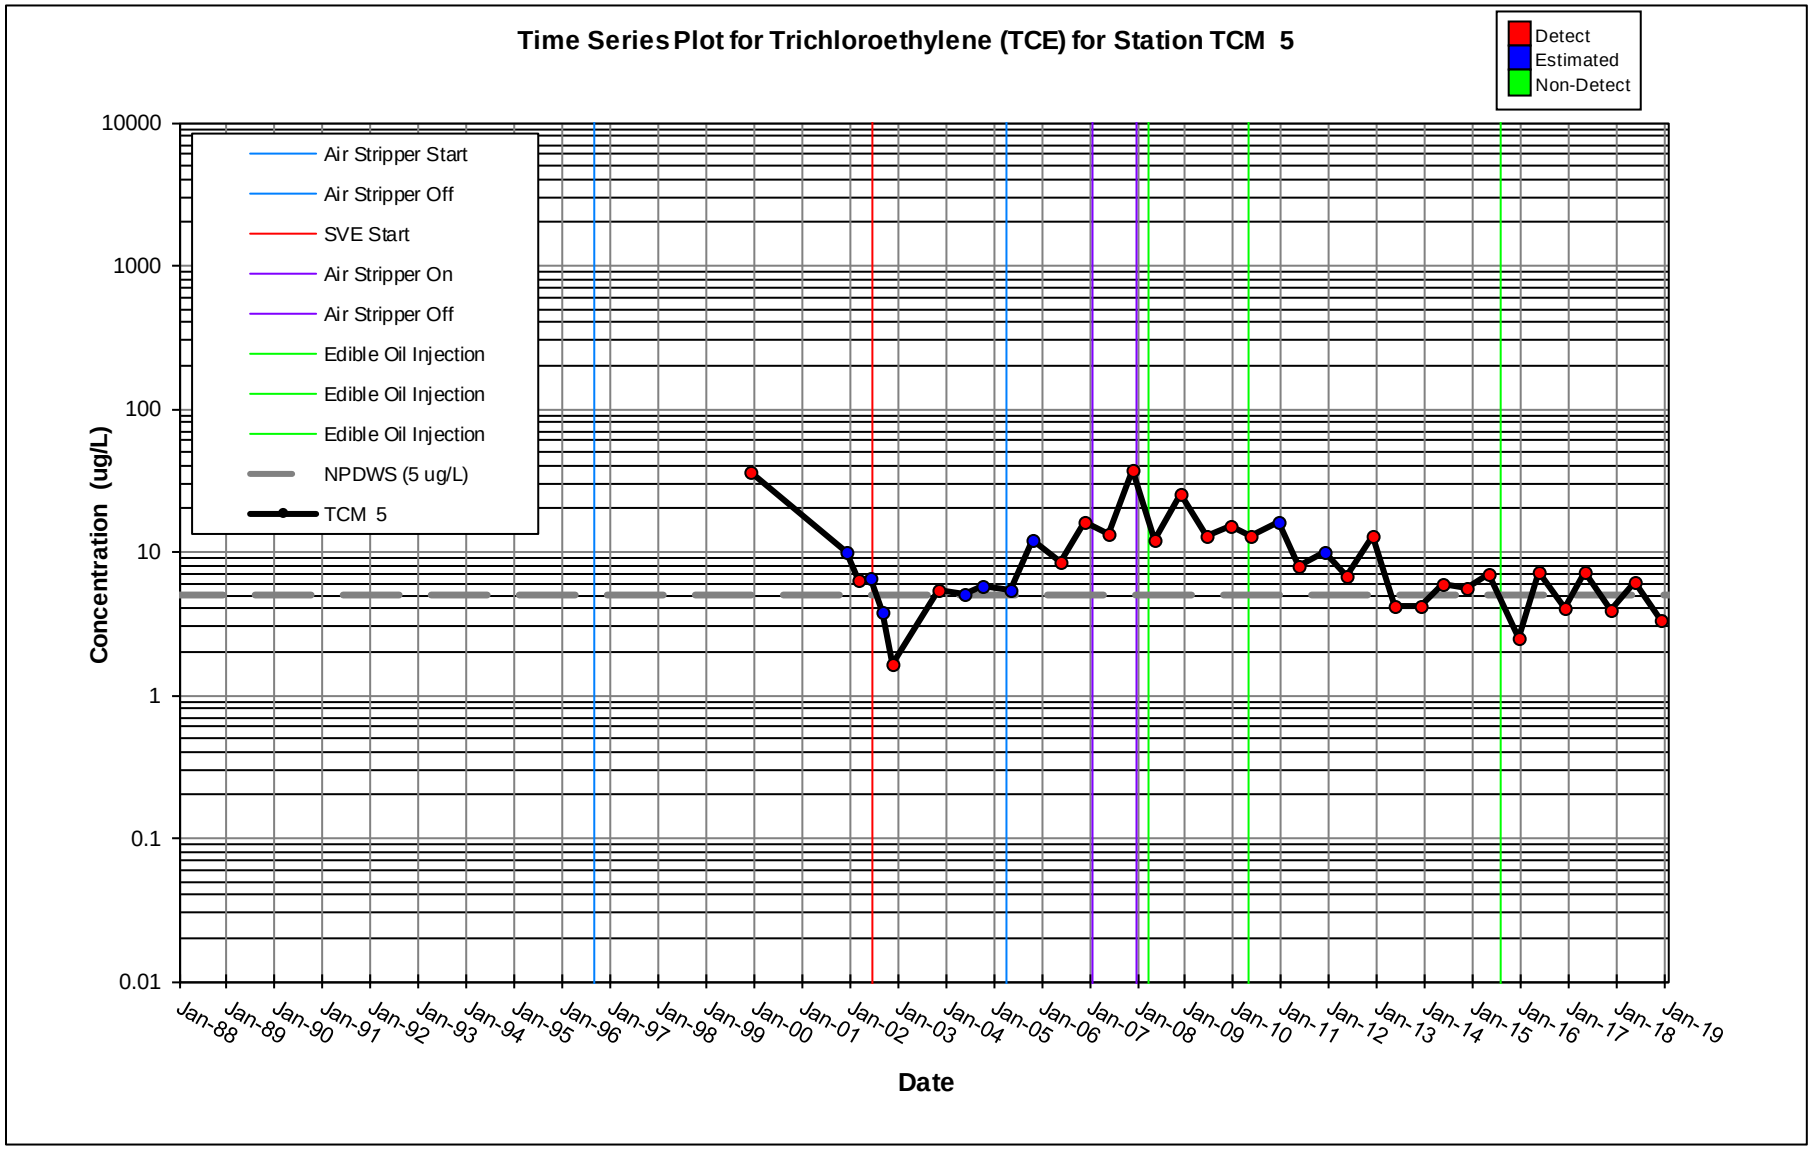
Time Series Plot for Trichloroethylene (TCE) for Station TCM 5
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TCM 5
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

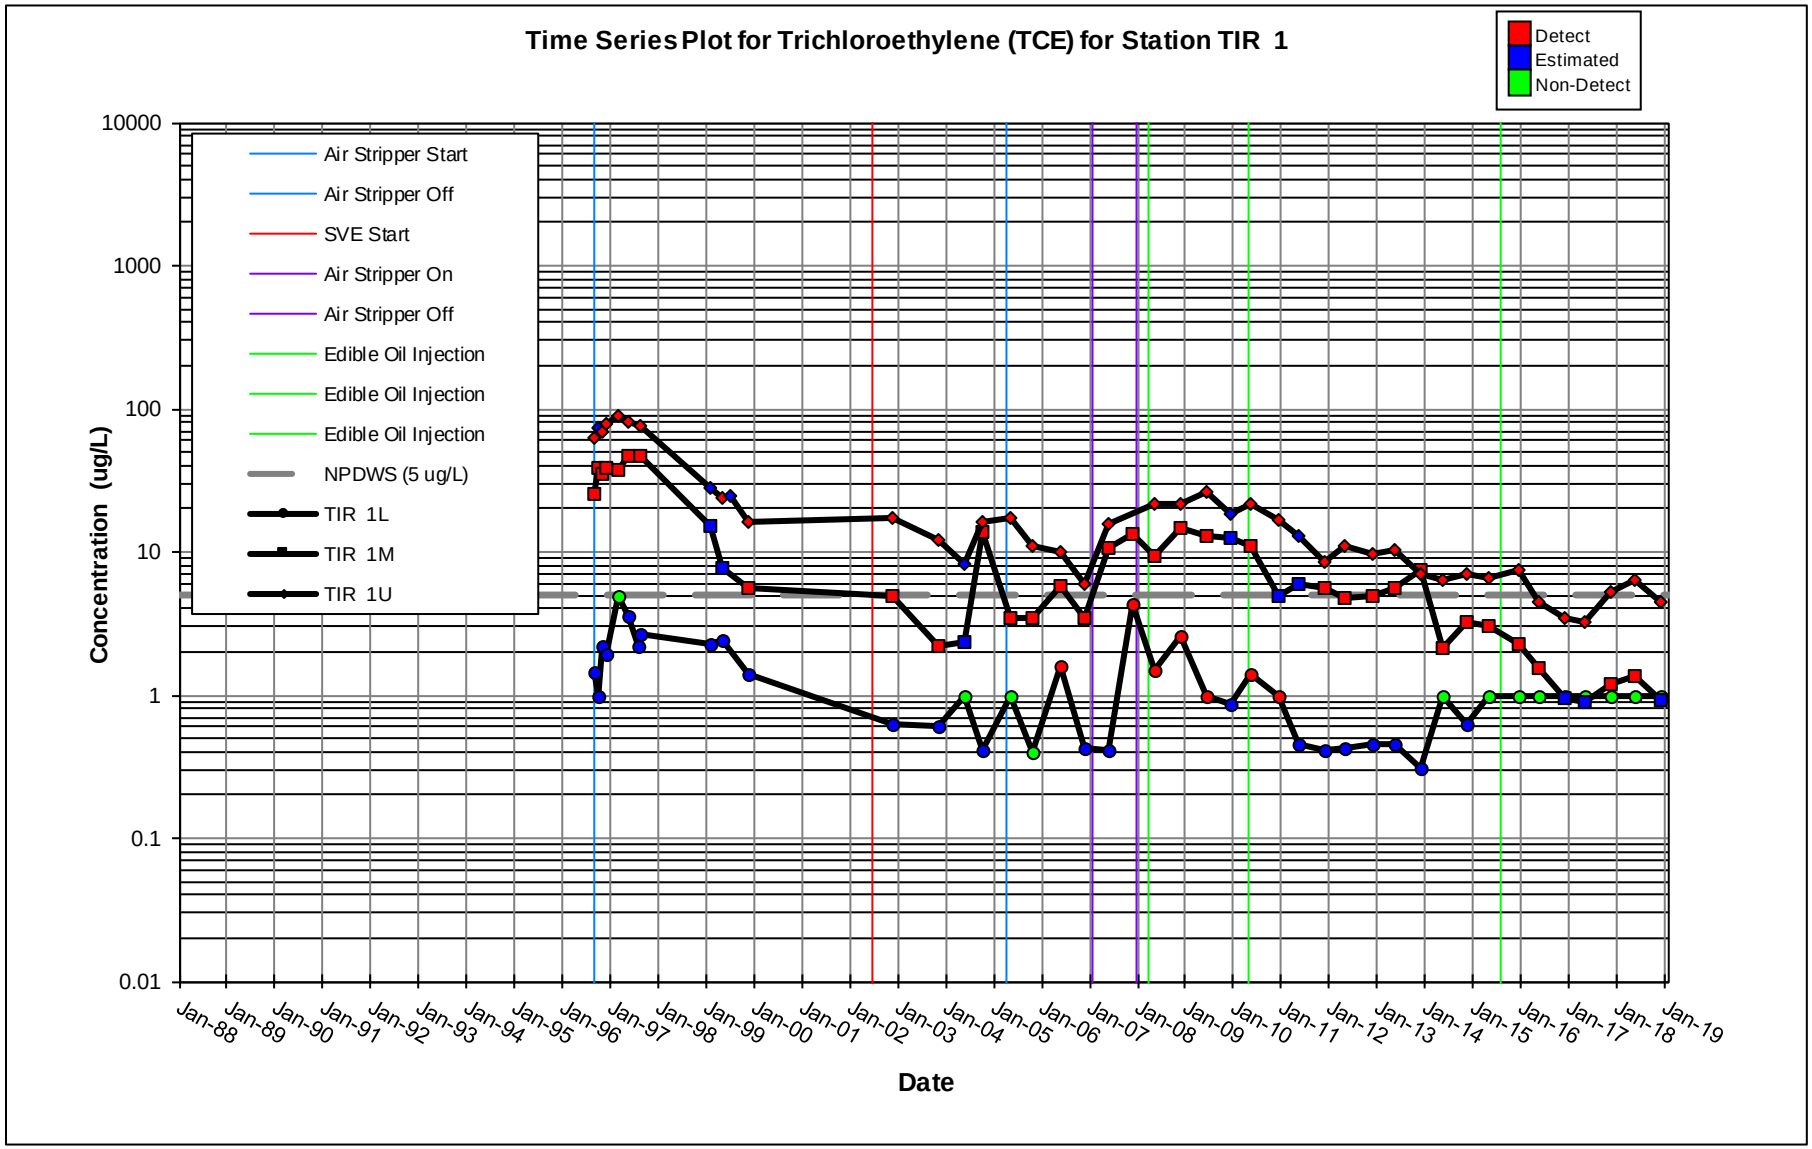
Time Series Plot for Trichloroethylene (TCE) for Station TIR 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TIR 1L
TIR 1M
TIR 1U
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

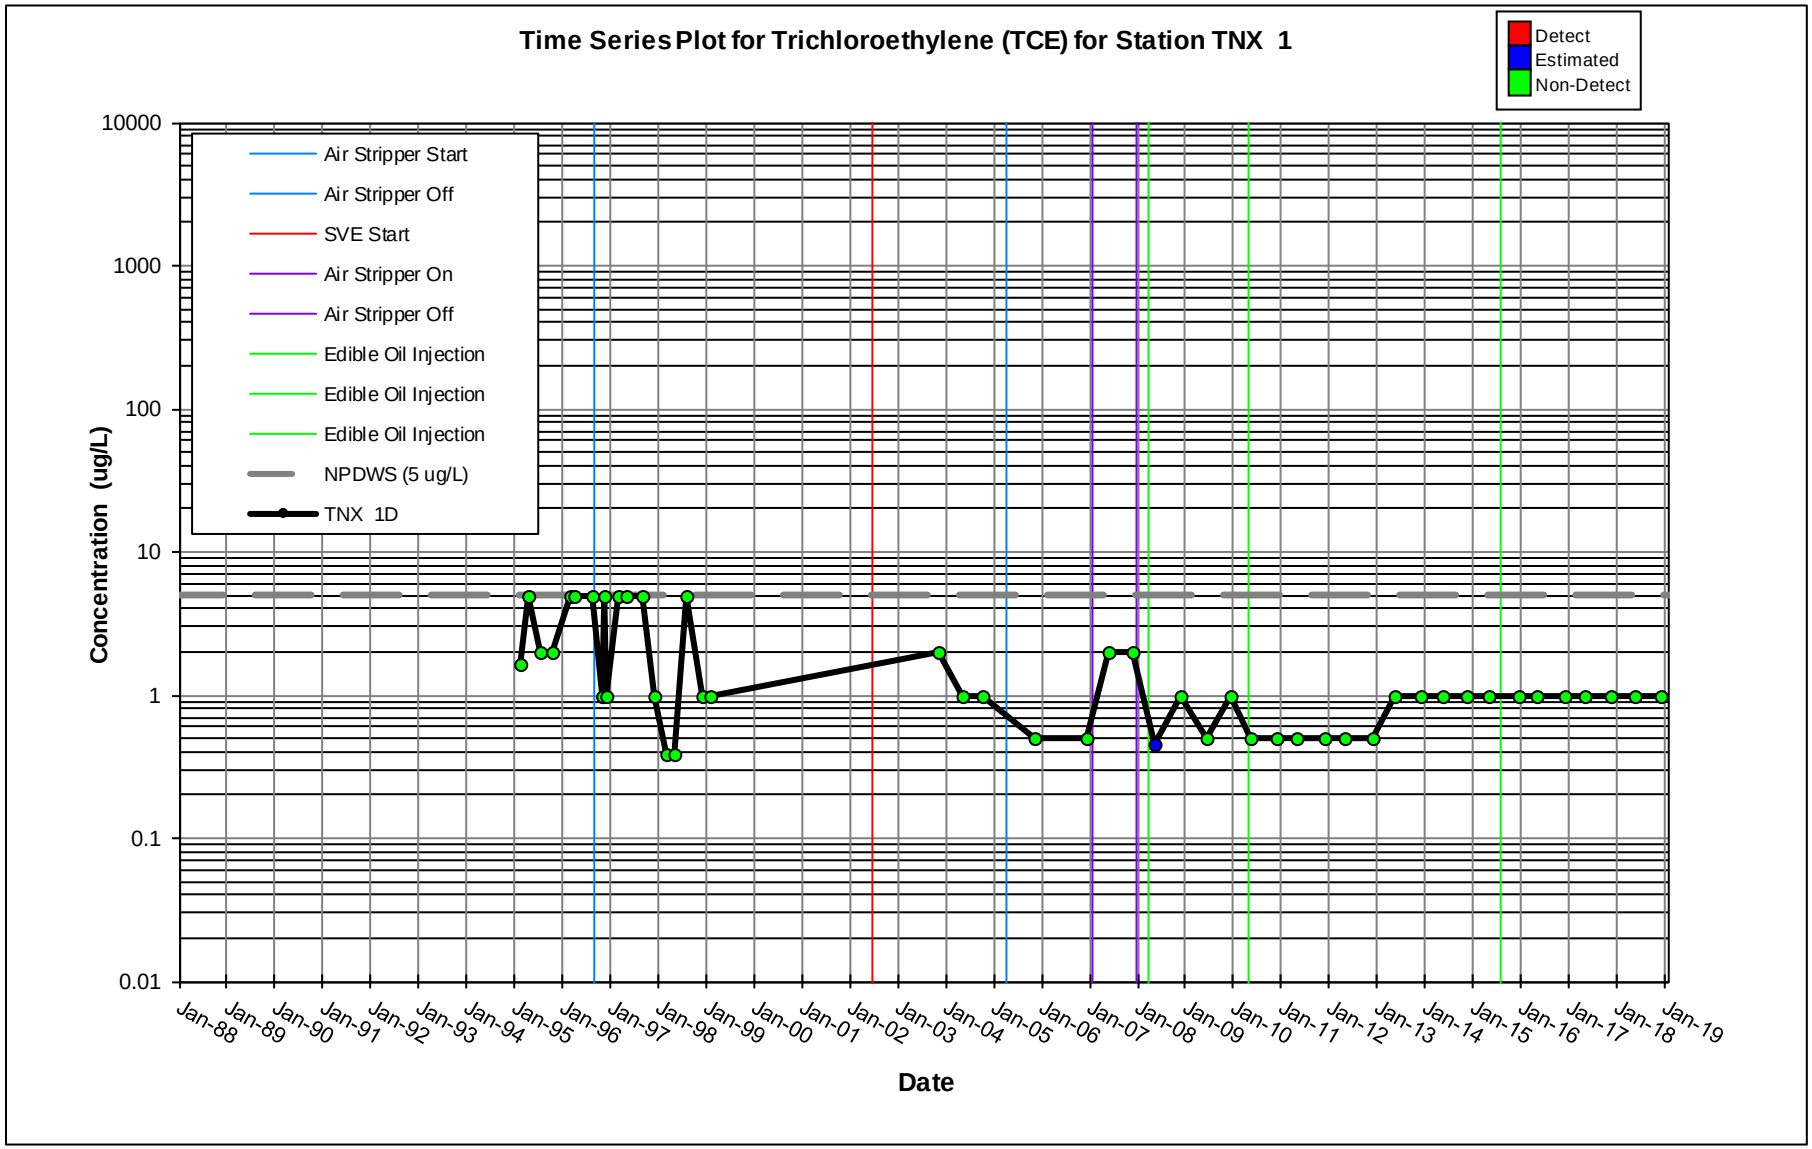
Time Series Plot for Trichloroethylene (TCE) for Station TNX 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX 1D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

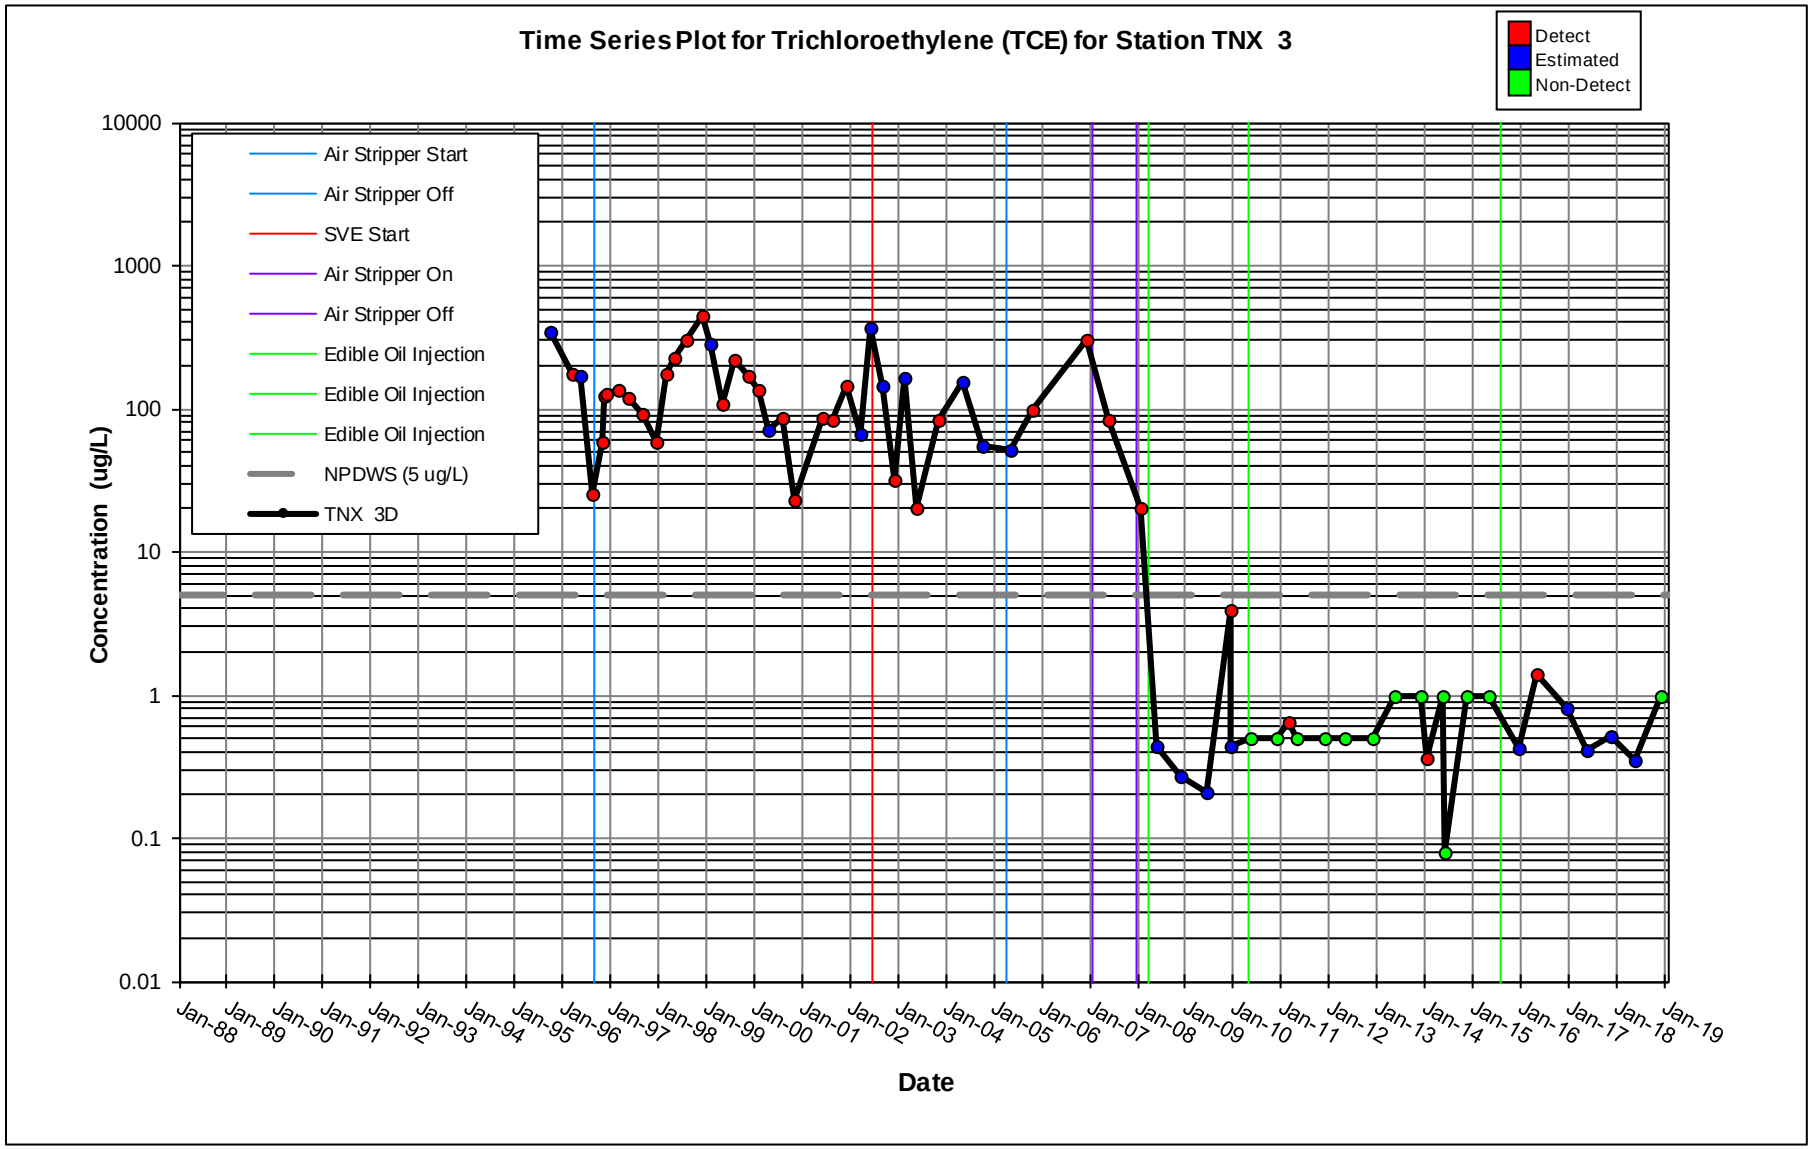
Time Series Plot for Trichloroethylene (TCE) for Station TNX 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX 3D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

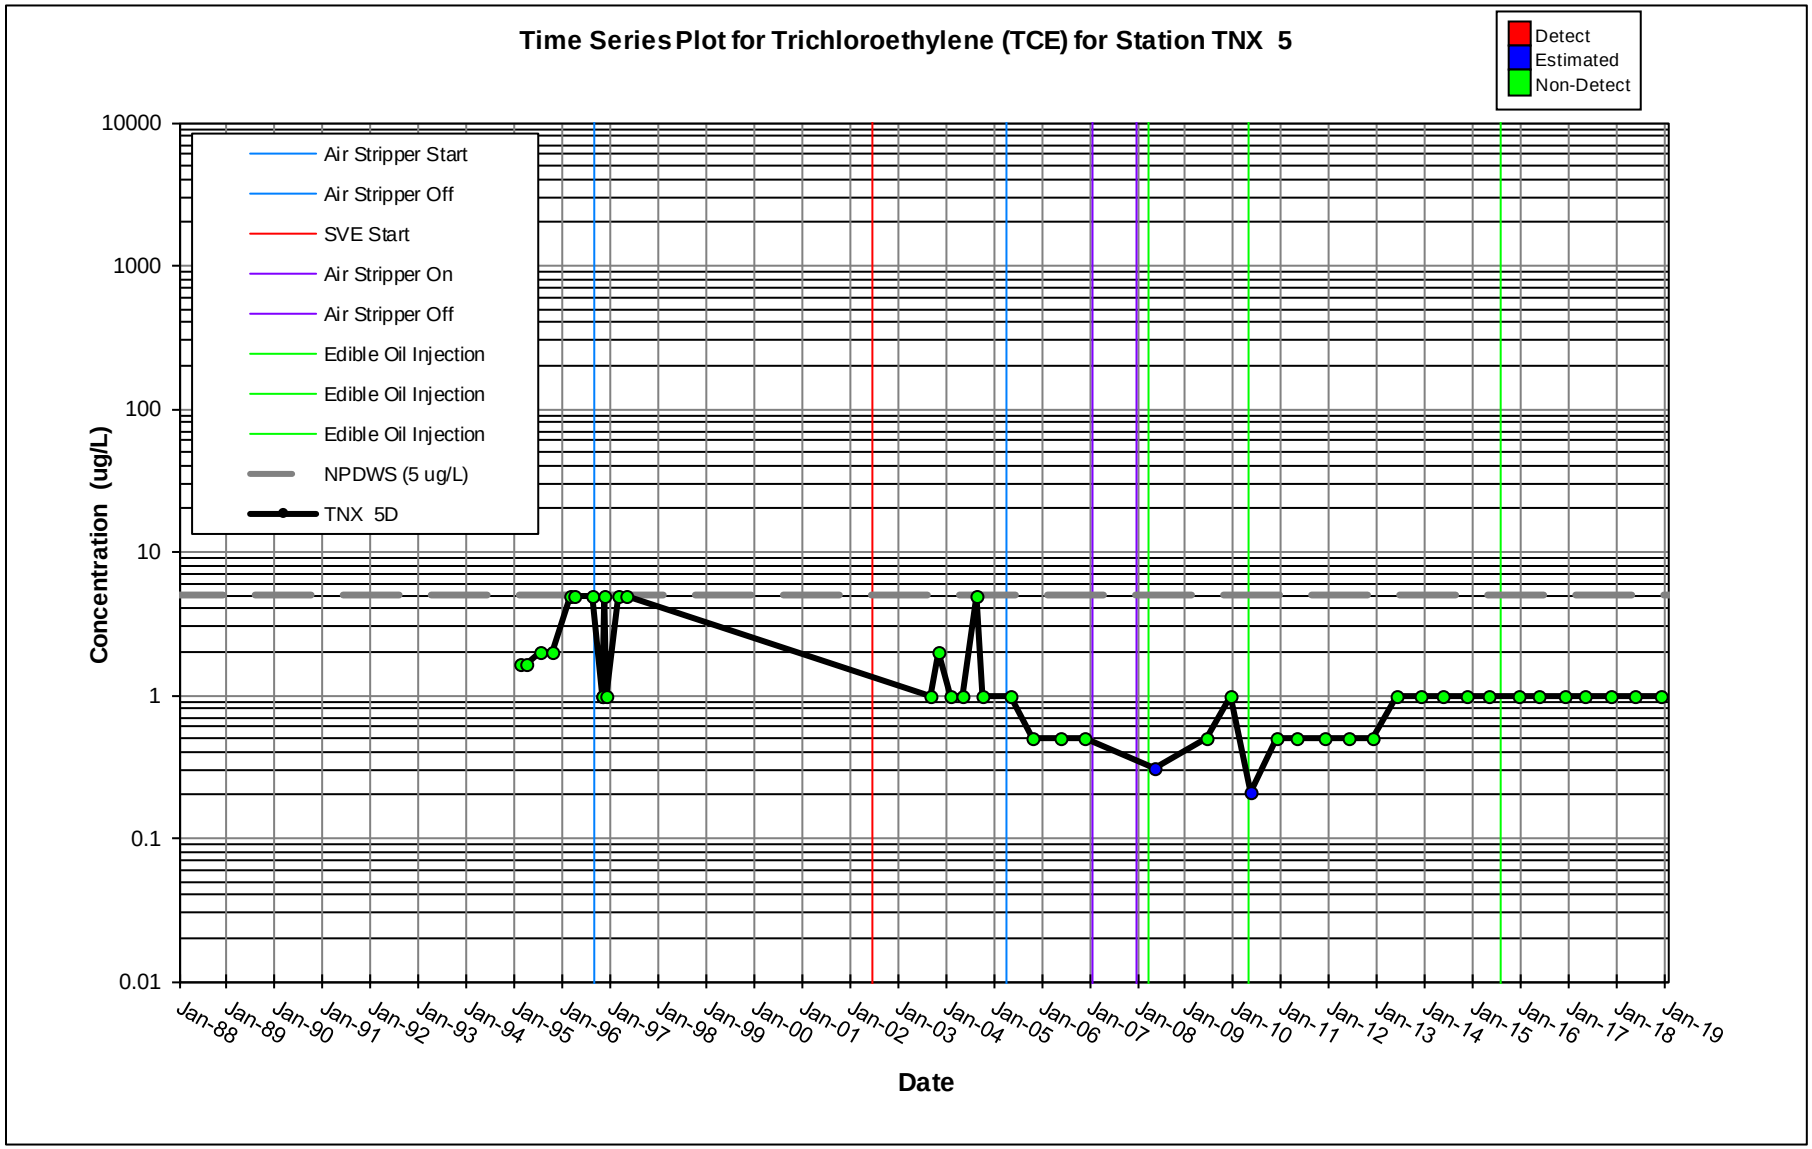
Time Series Plot for Trichloroethylene (TCE) for Station TNX 5
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX 5D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

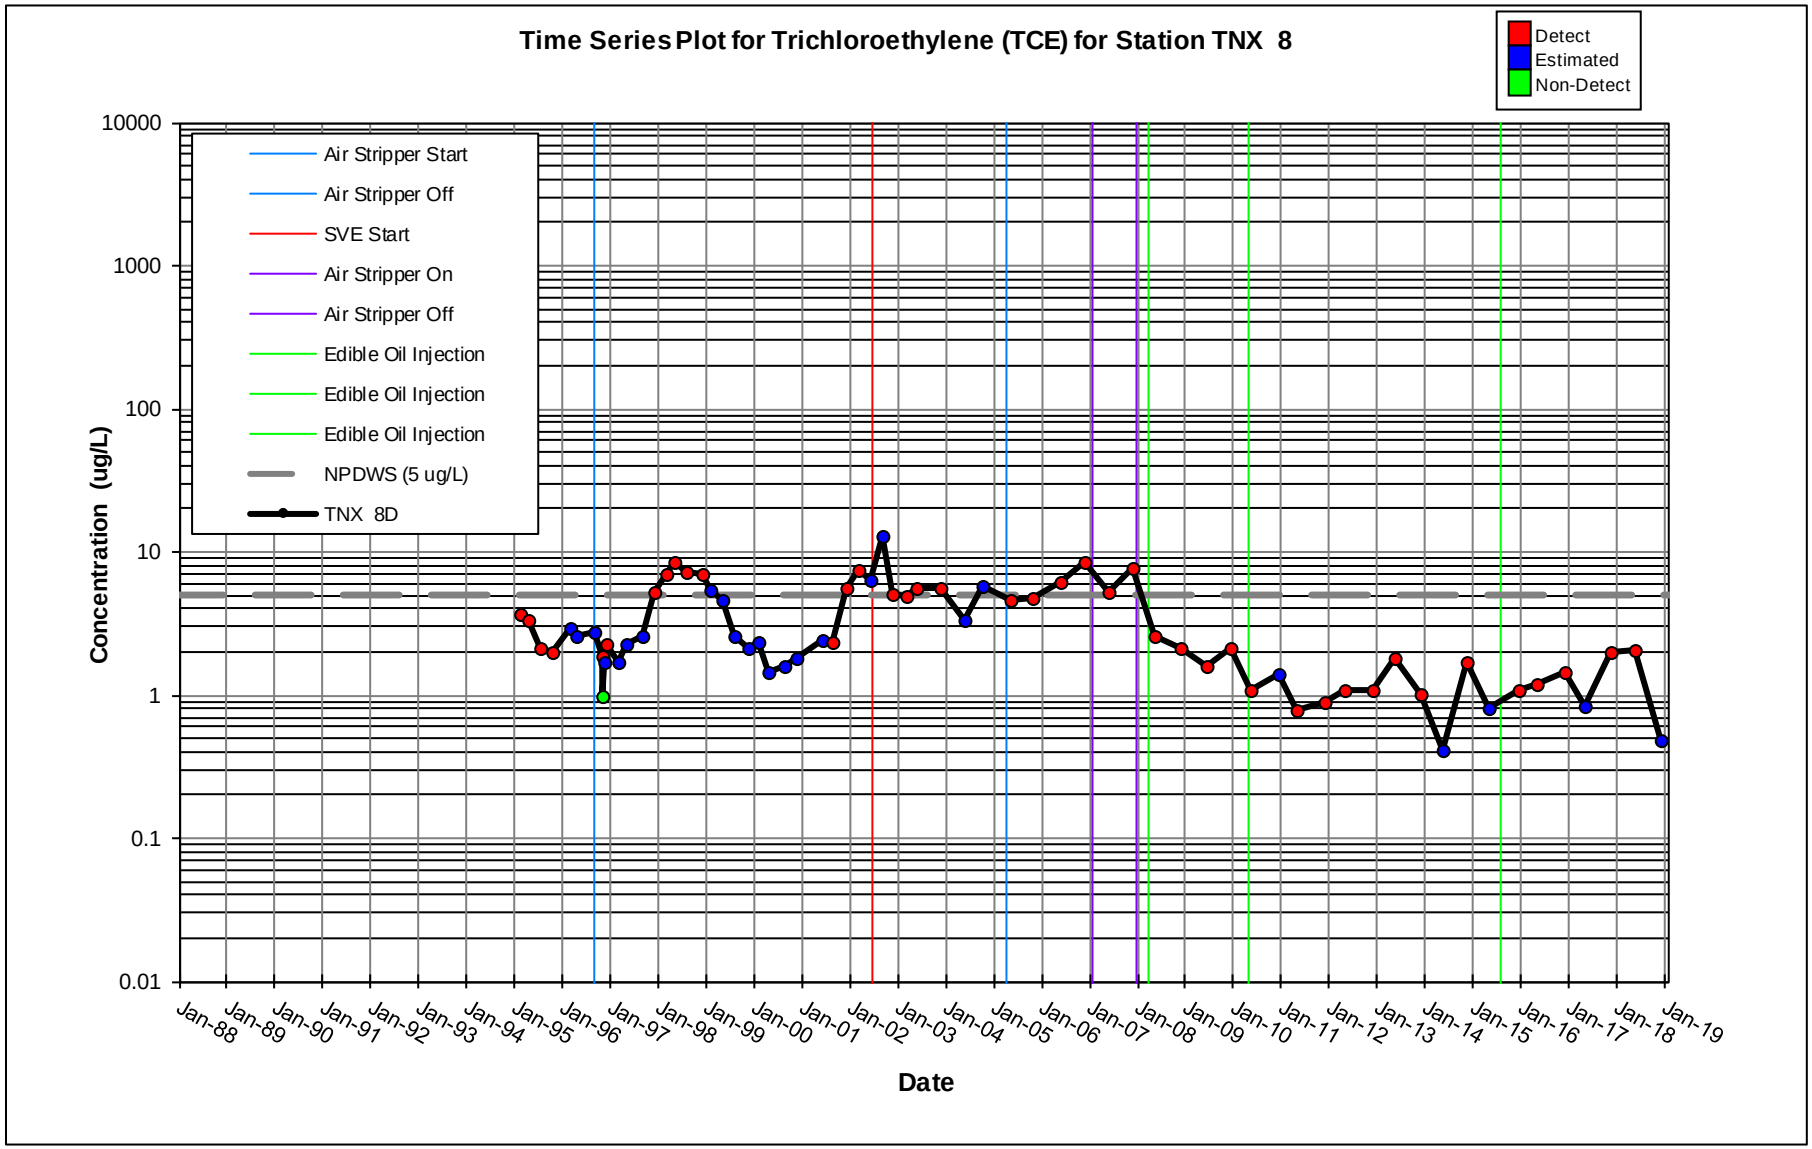
Time Series Plot for Trichloroethylene (TCE) for Station TNX 8
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX 8D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

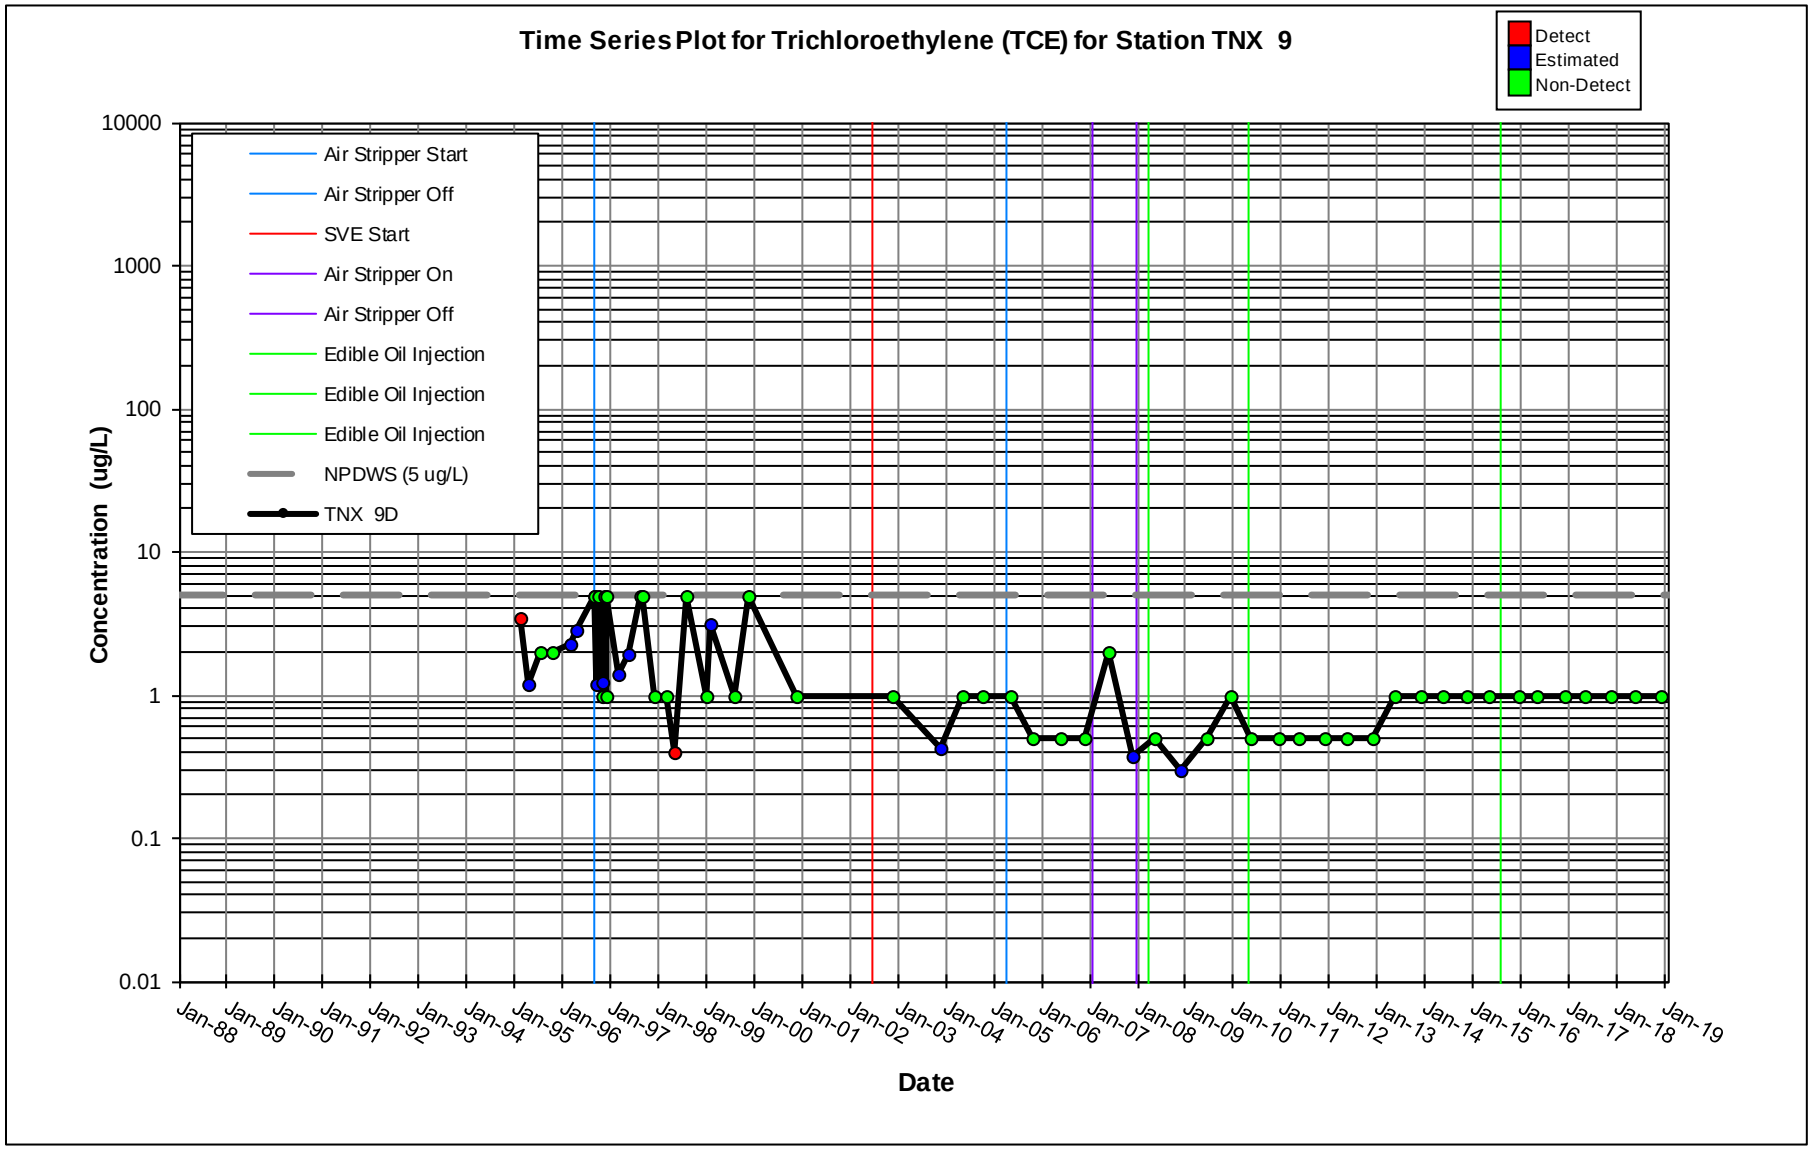
Time Series Plot for Trichloroethylene (TCE) for Station TNX 9
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX 9D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

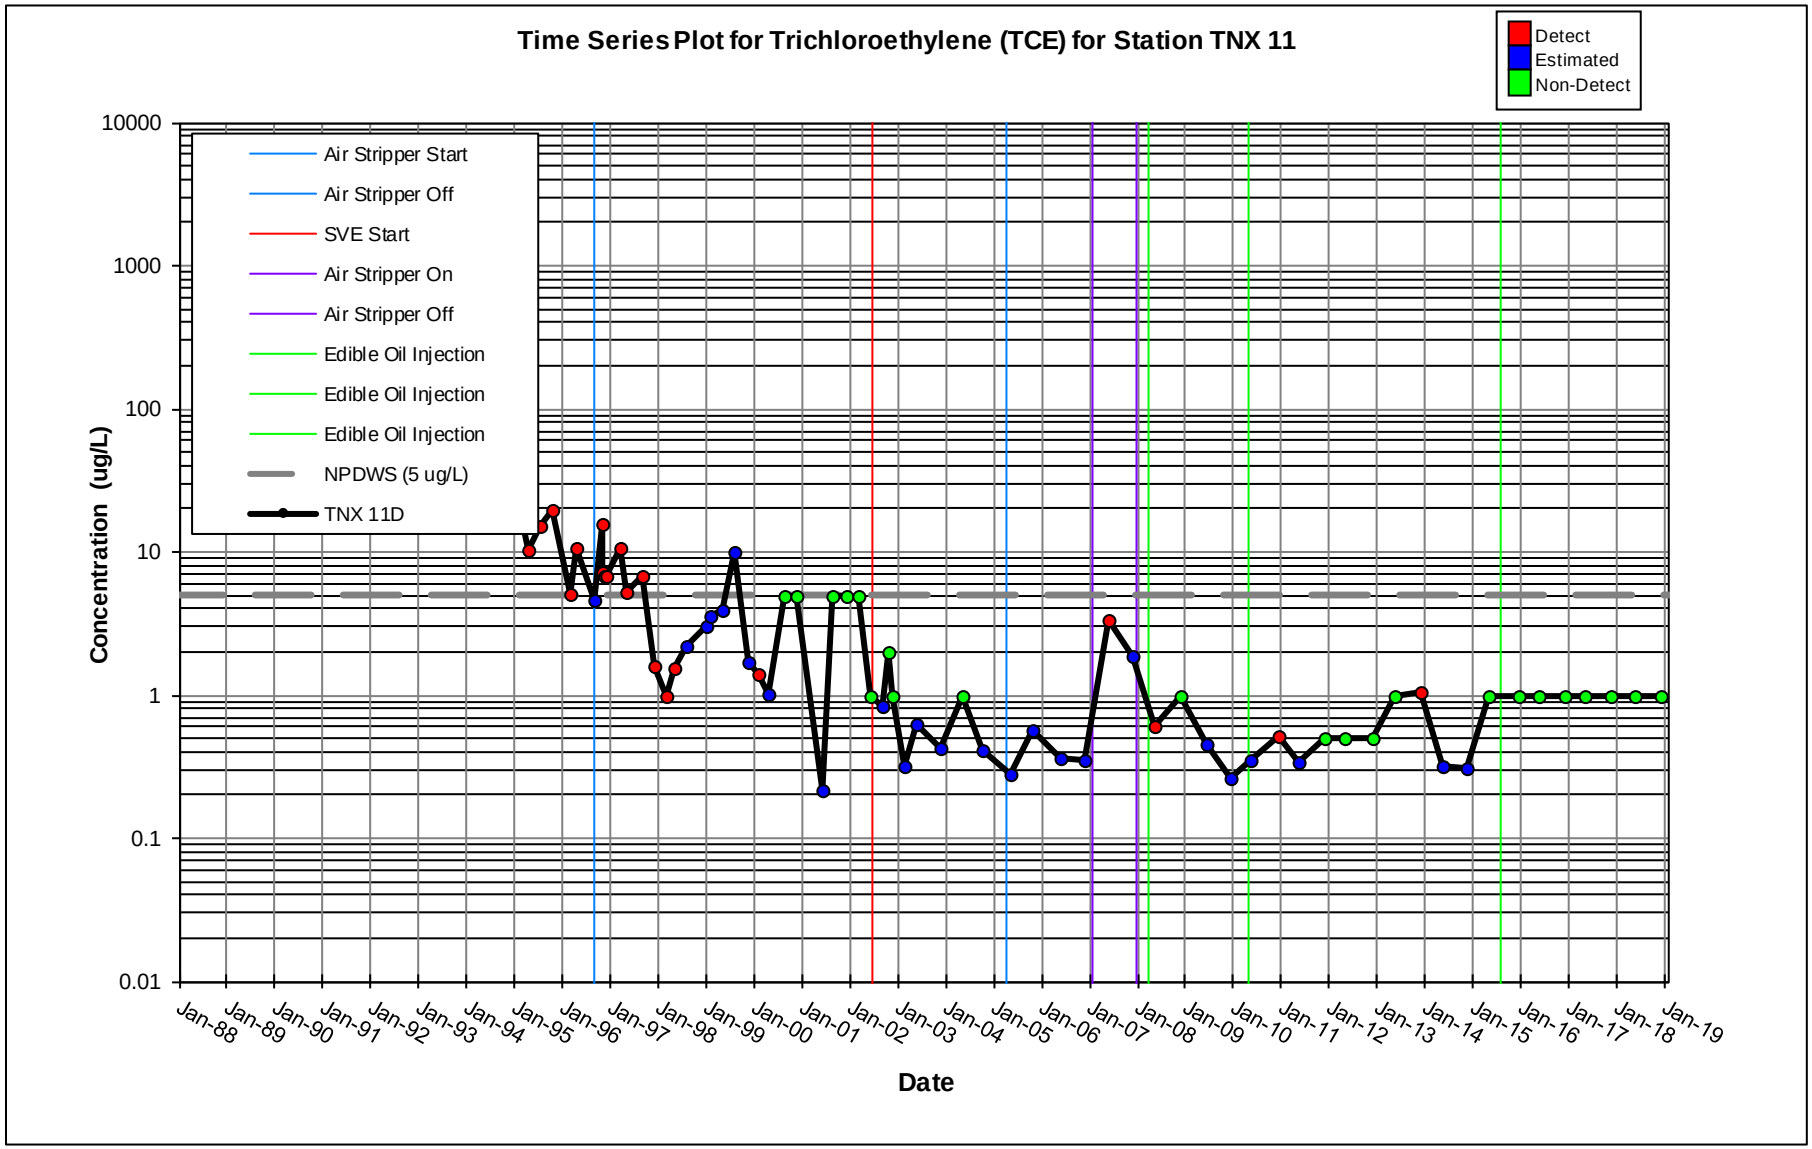
Time Series Plot for Trichloroethylene (TCE) for Station TNX 11
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX 11D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

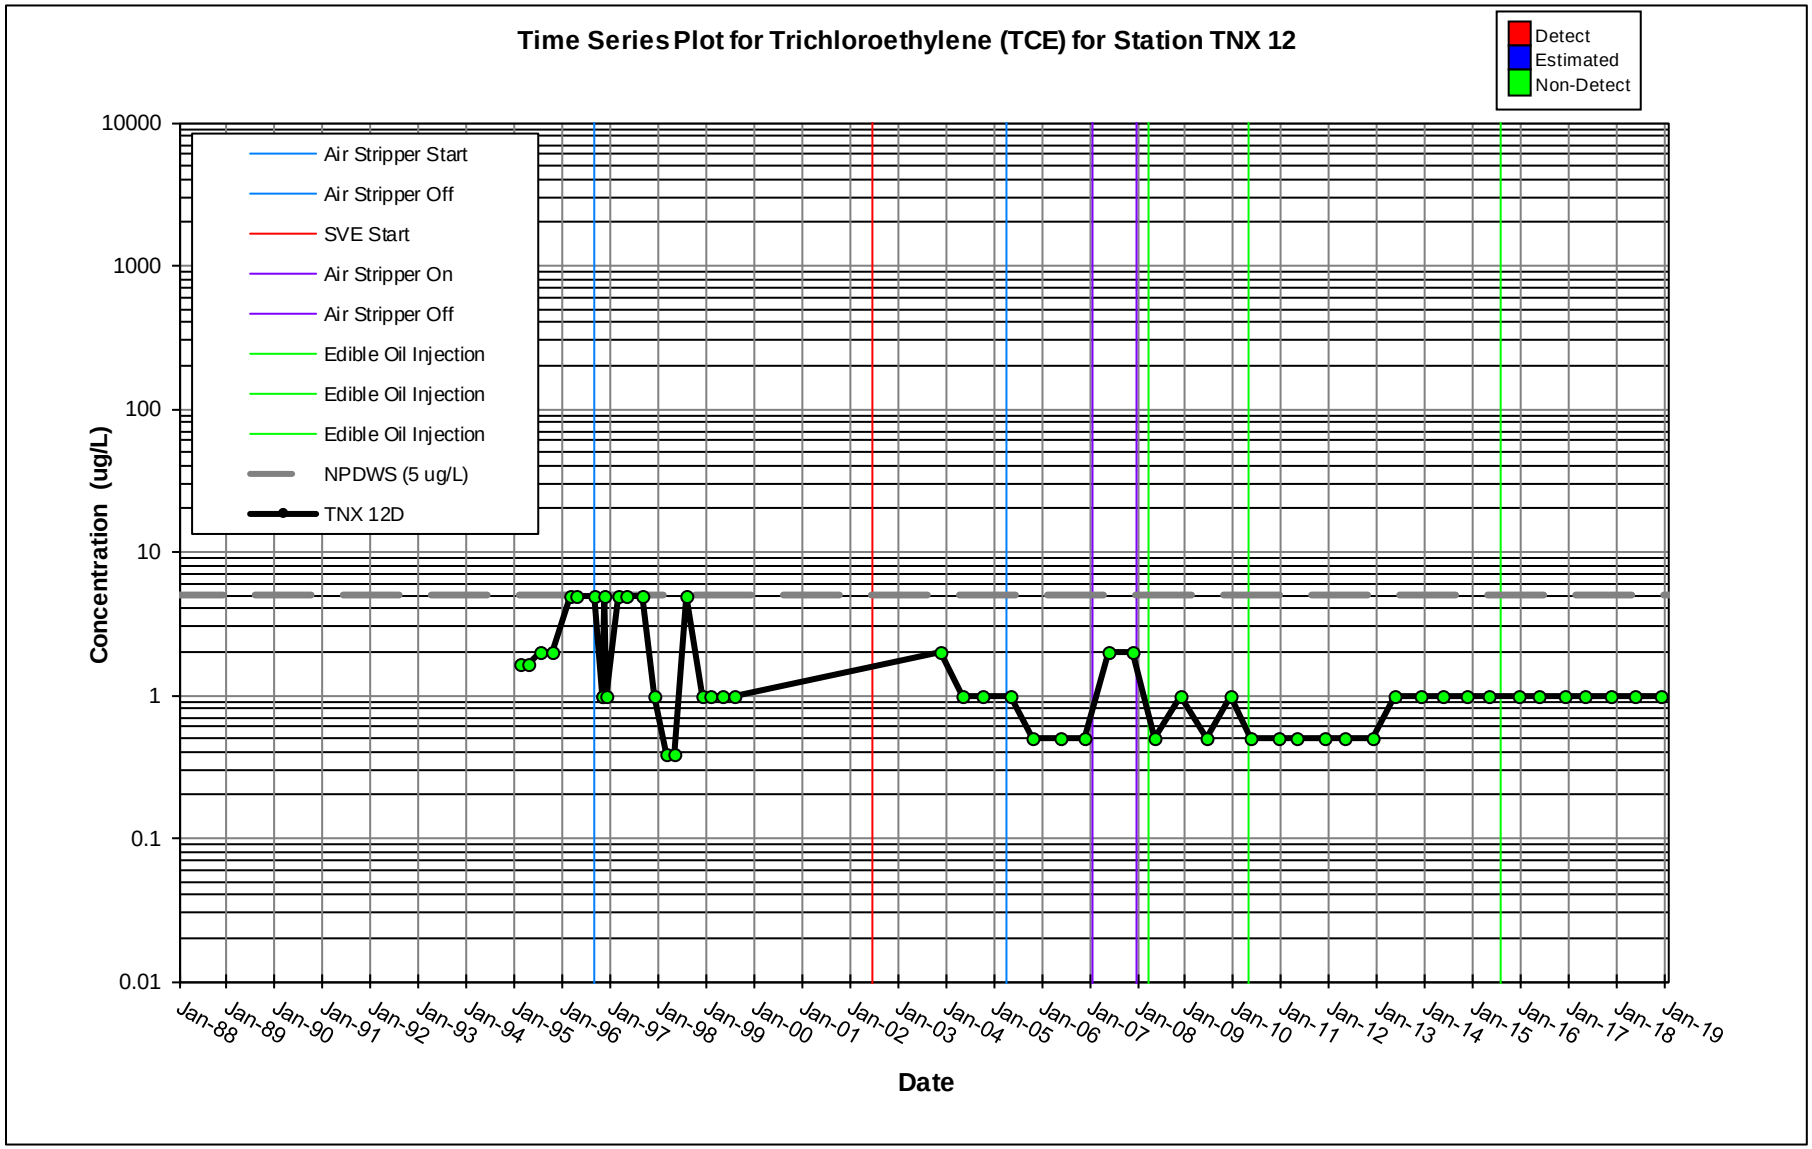
Time Series Plot for Trichloroethylene (TCE) for Station TNX 12
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX 12D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

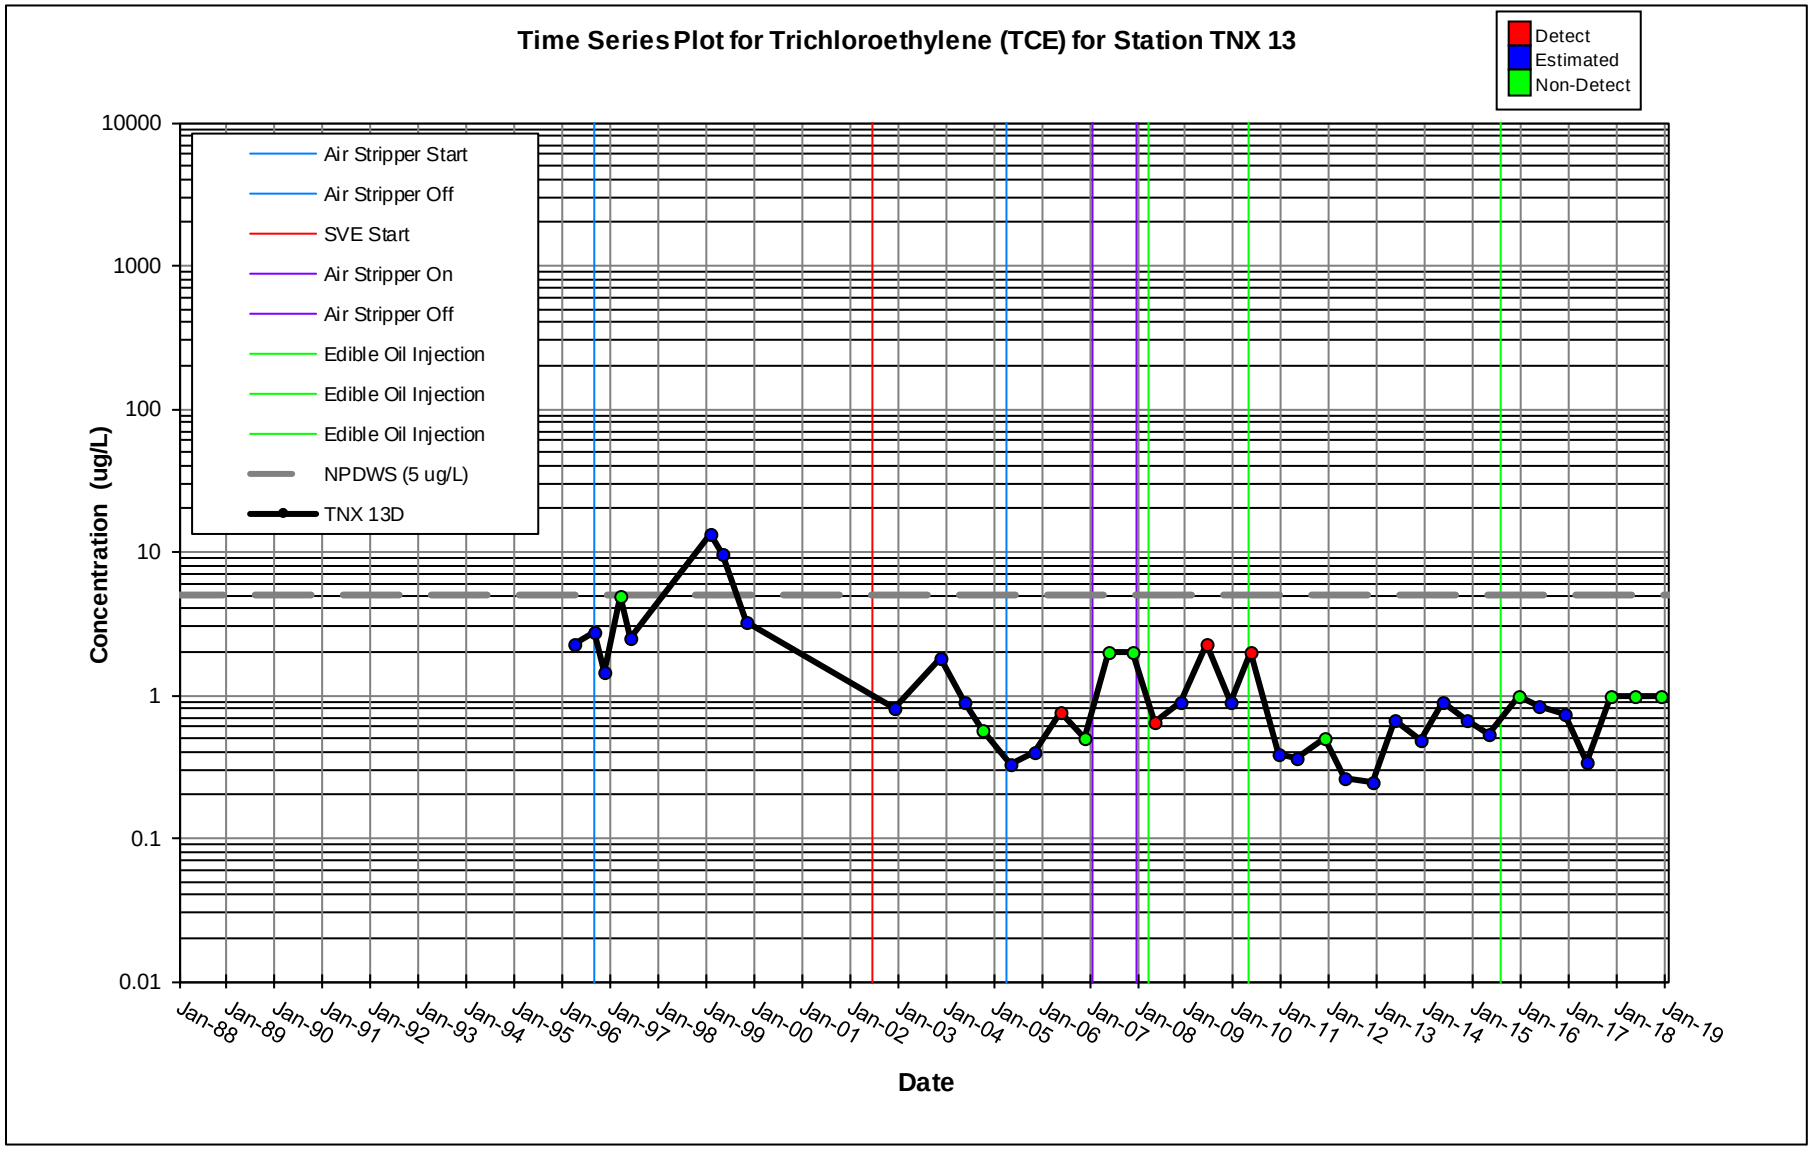
Time Series Plot for Trichloroethylene (TCE) for Station TNX 13
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX 13D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

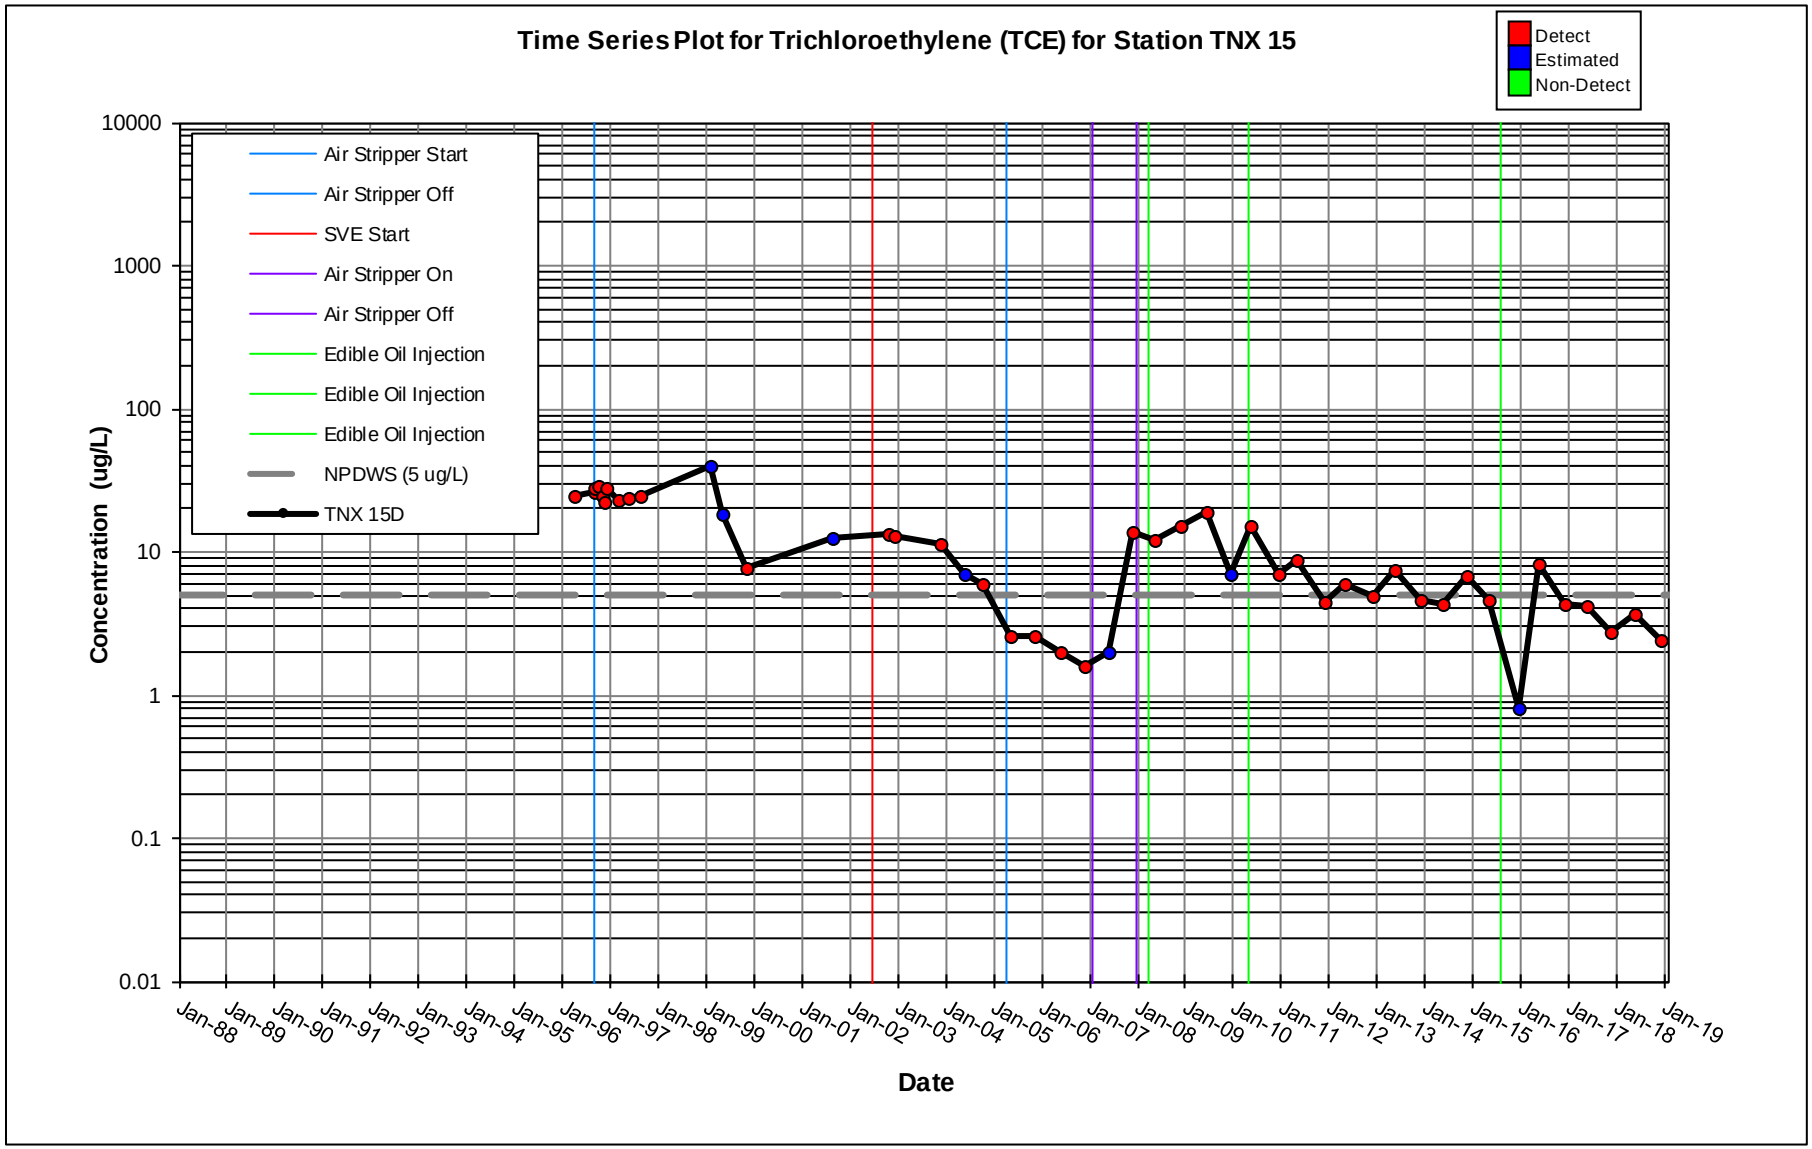
Time Series Plot for Trichloroethylene (TCE) for Station TNX 15
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX 15D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

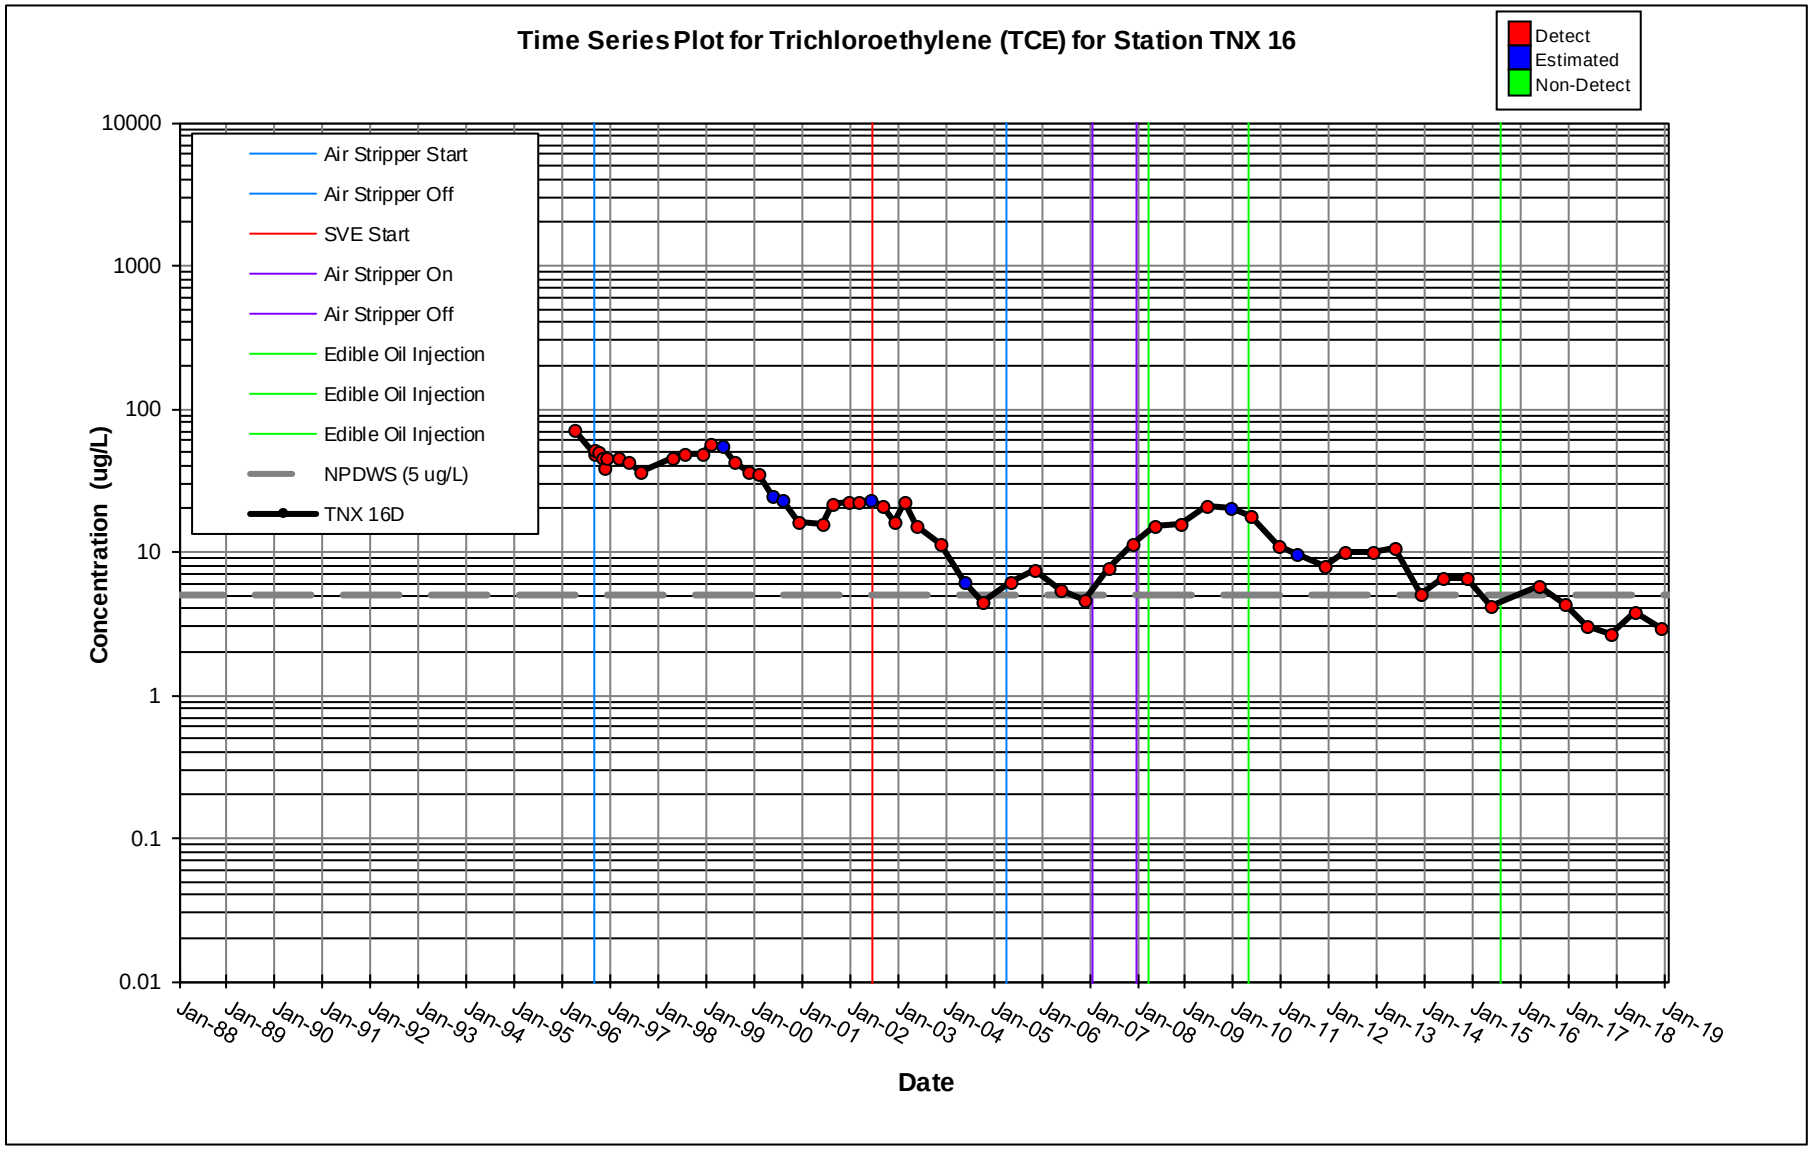
Time Series Plot for Trichloroethylene (TCE) for Station TNX 16
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX 16D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

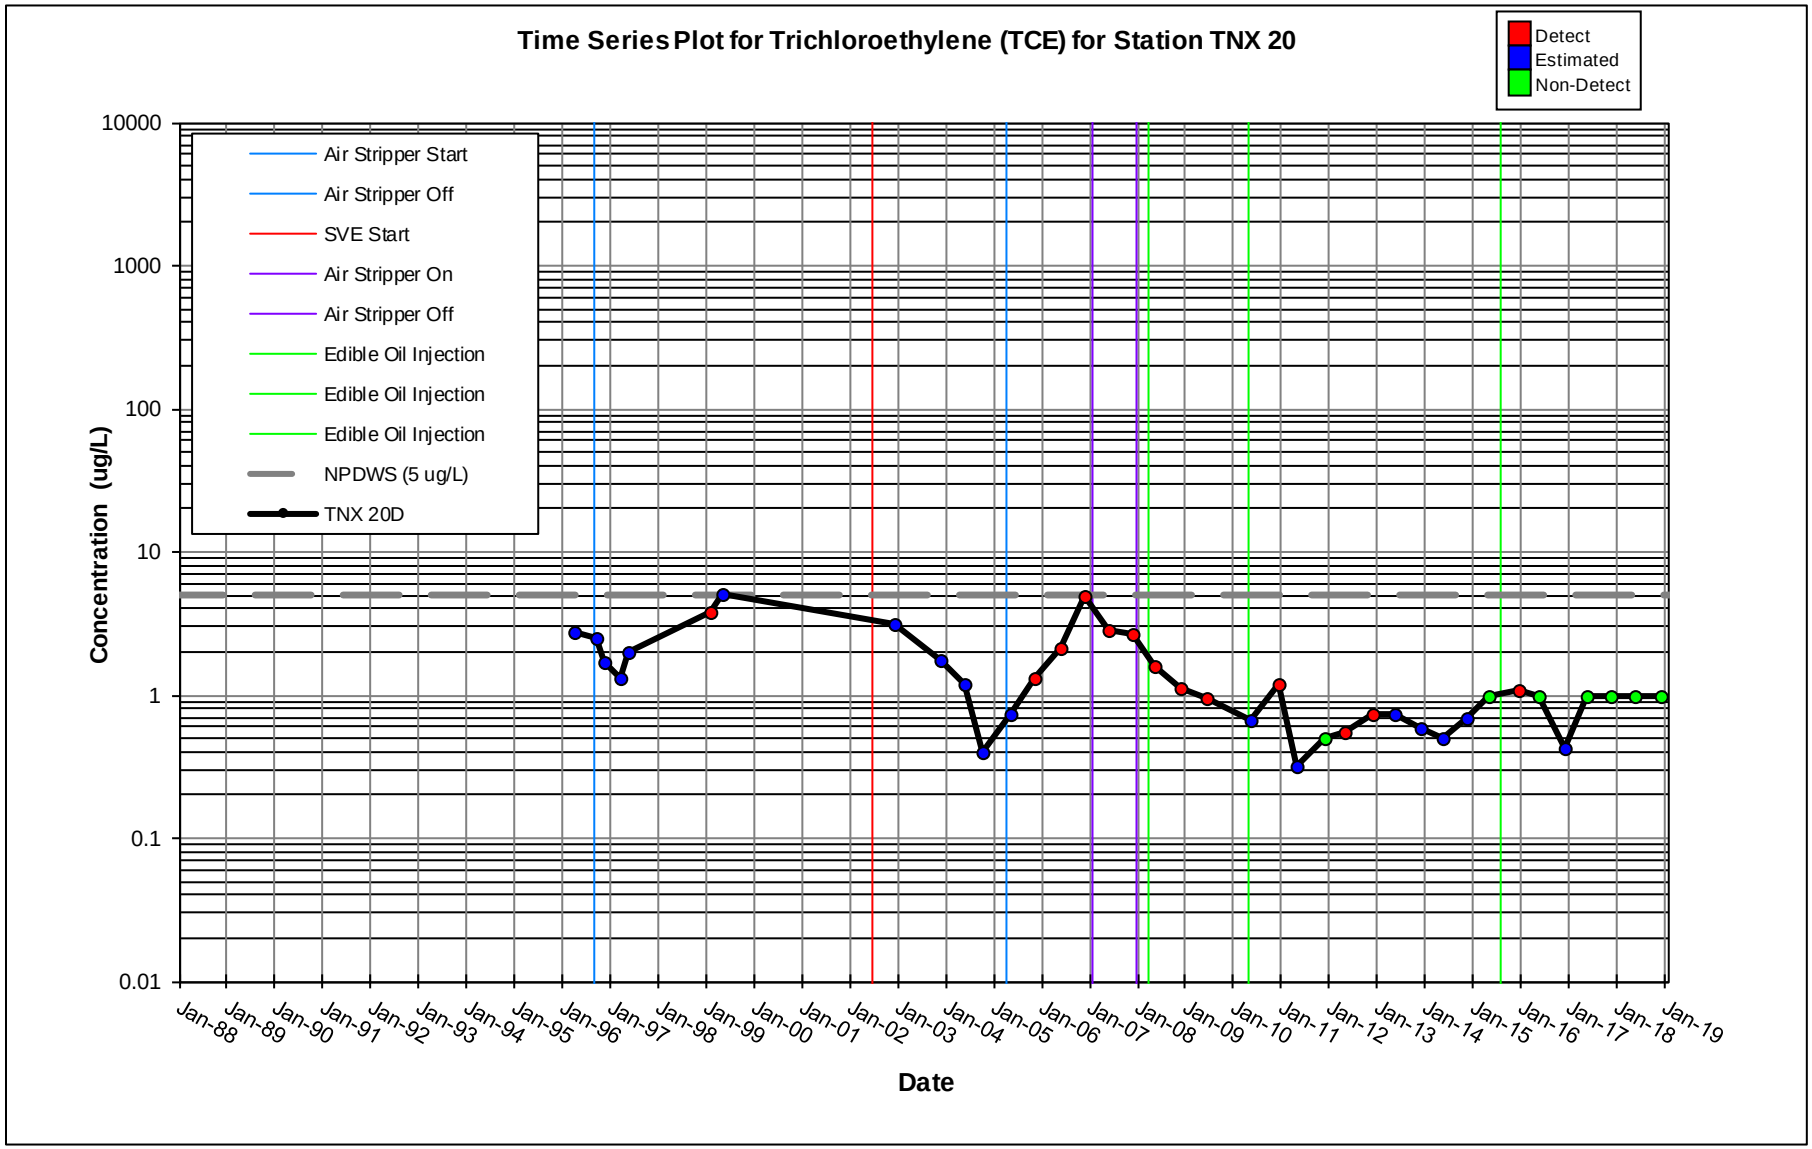
Time Series Plot for Trichloroethylene (TCE) for Station TNX 20
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX 20D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

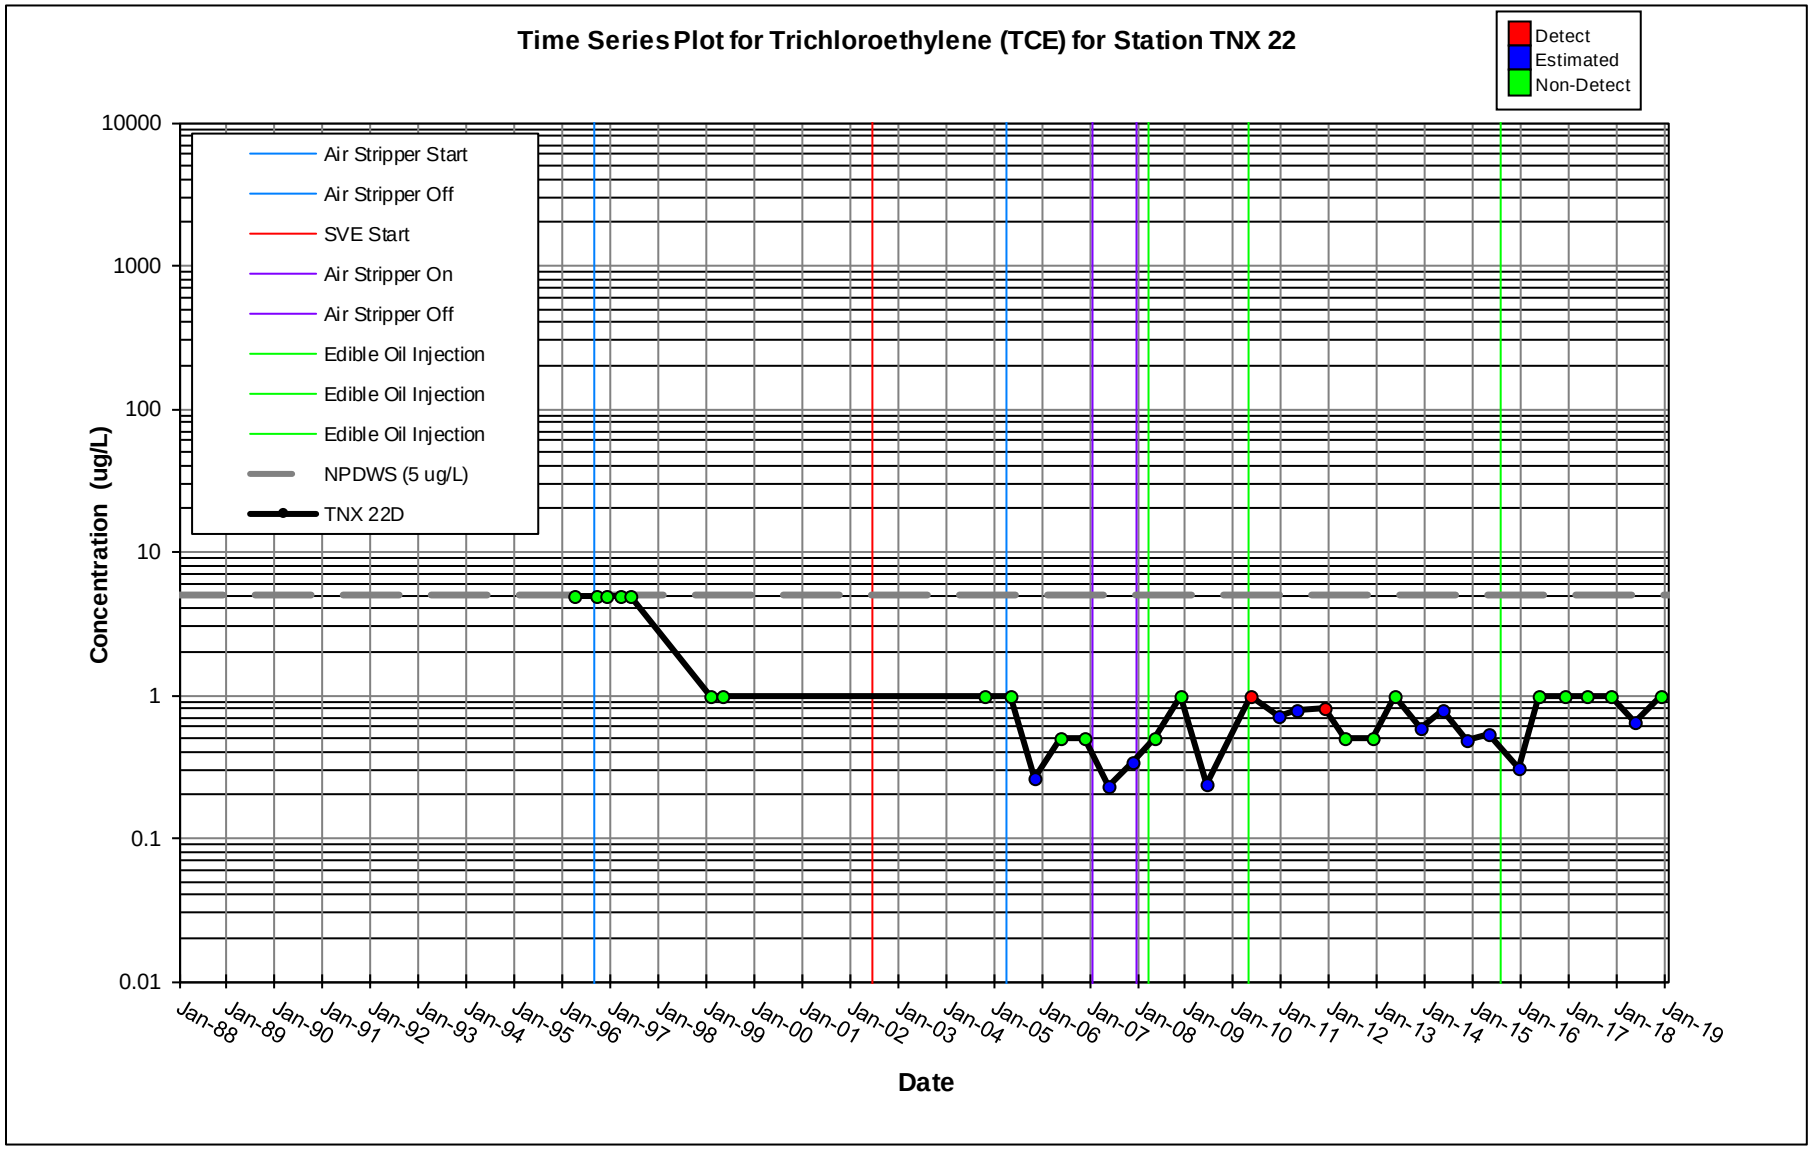
Time Series Plot for Trichloroethylene (TCE) for Station TNX 22
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX 22D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

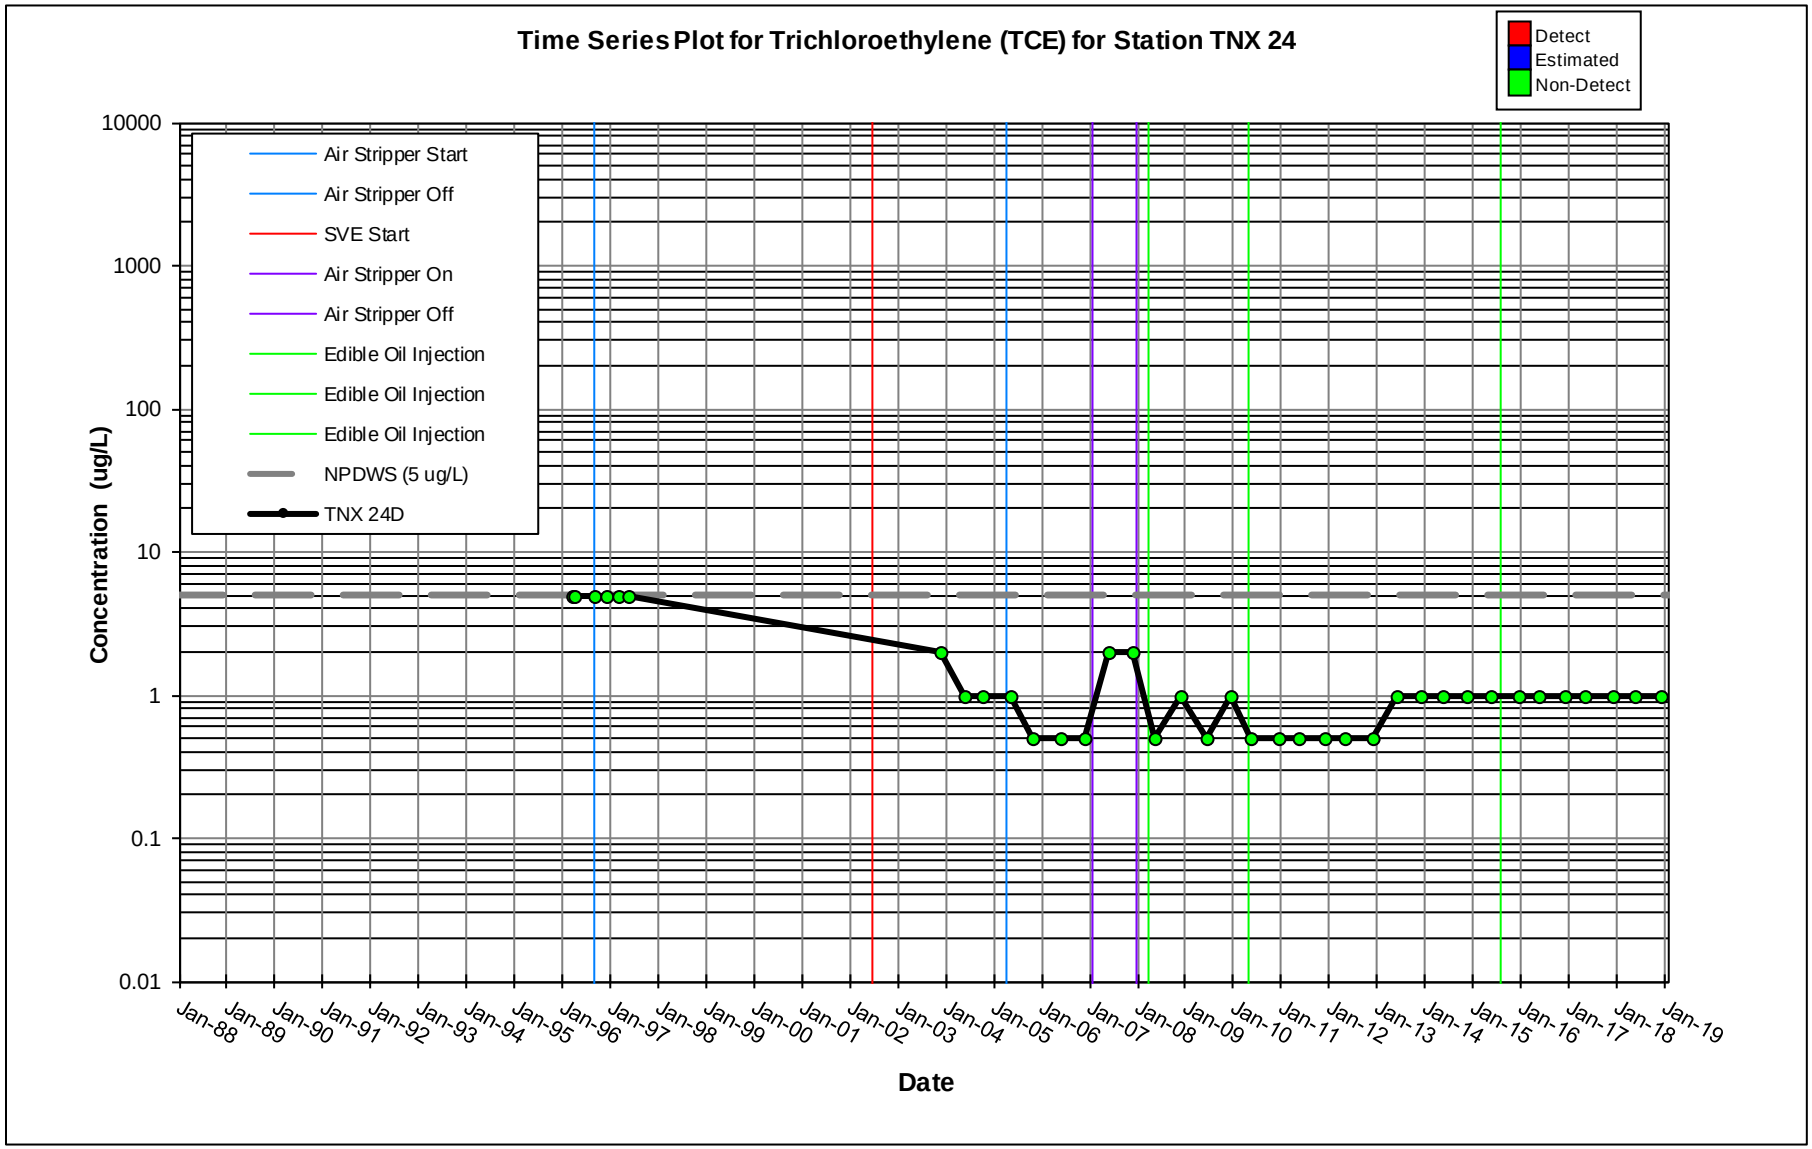
Time Series Plot for Trichloroethylene (TCE) for Station TNX 24
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX 24D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

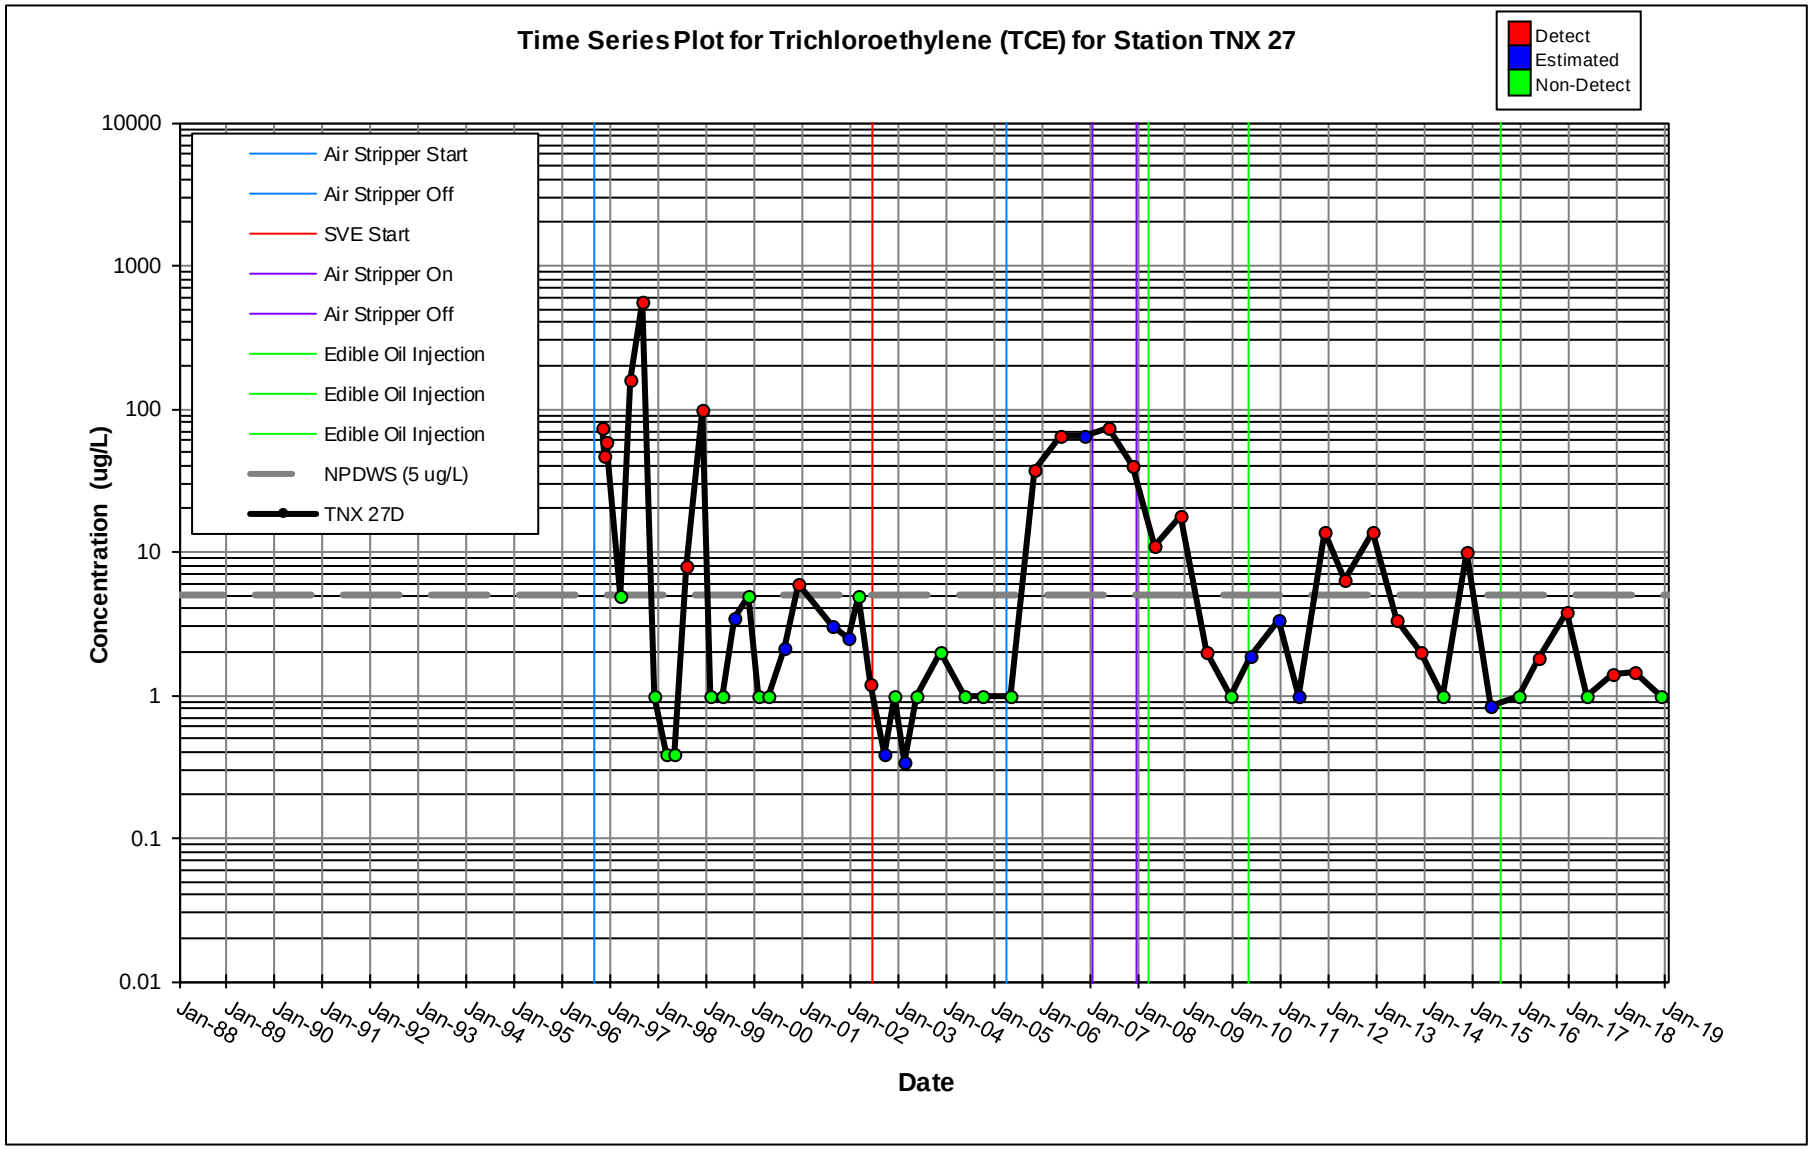
Time Series Plot for Trichloroethylene (TCE) for Station TNX 27
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX 27D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

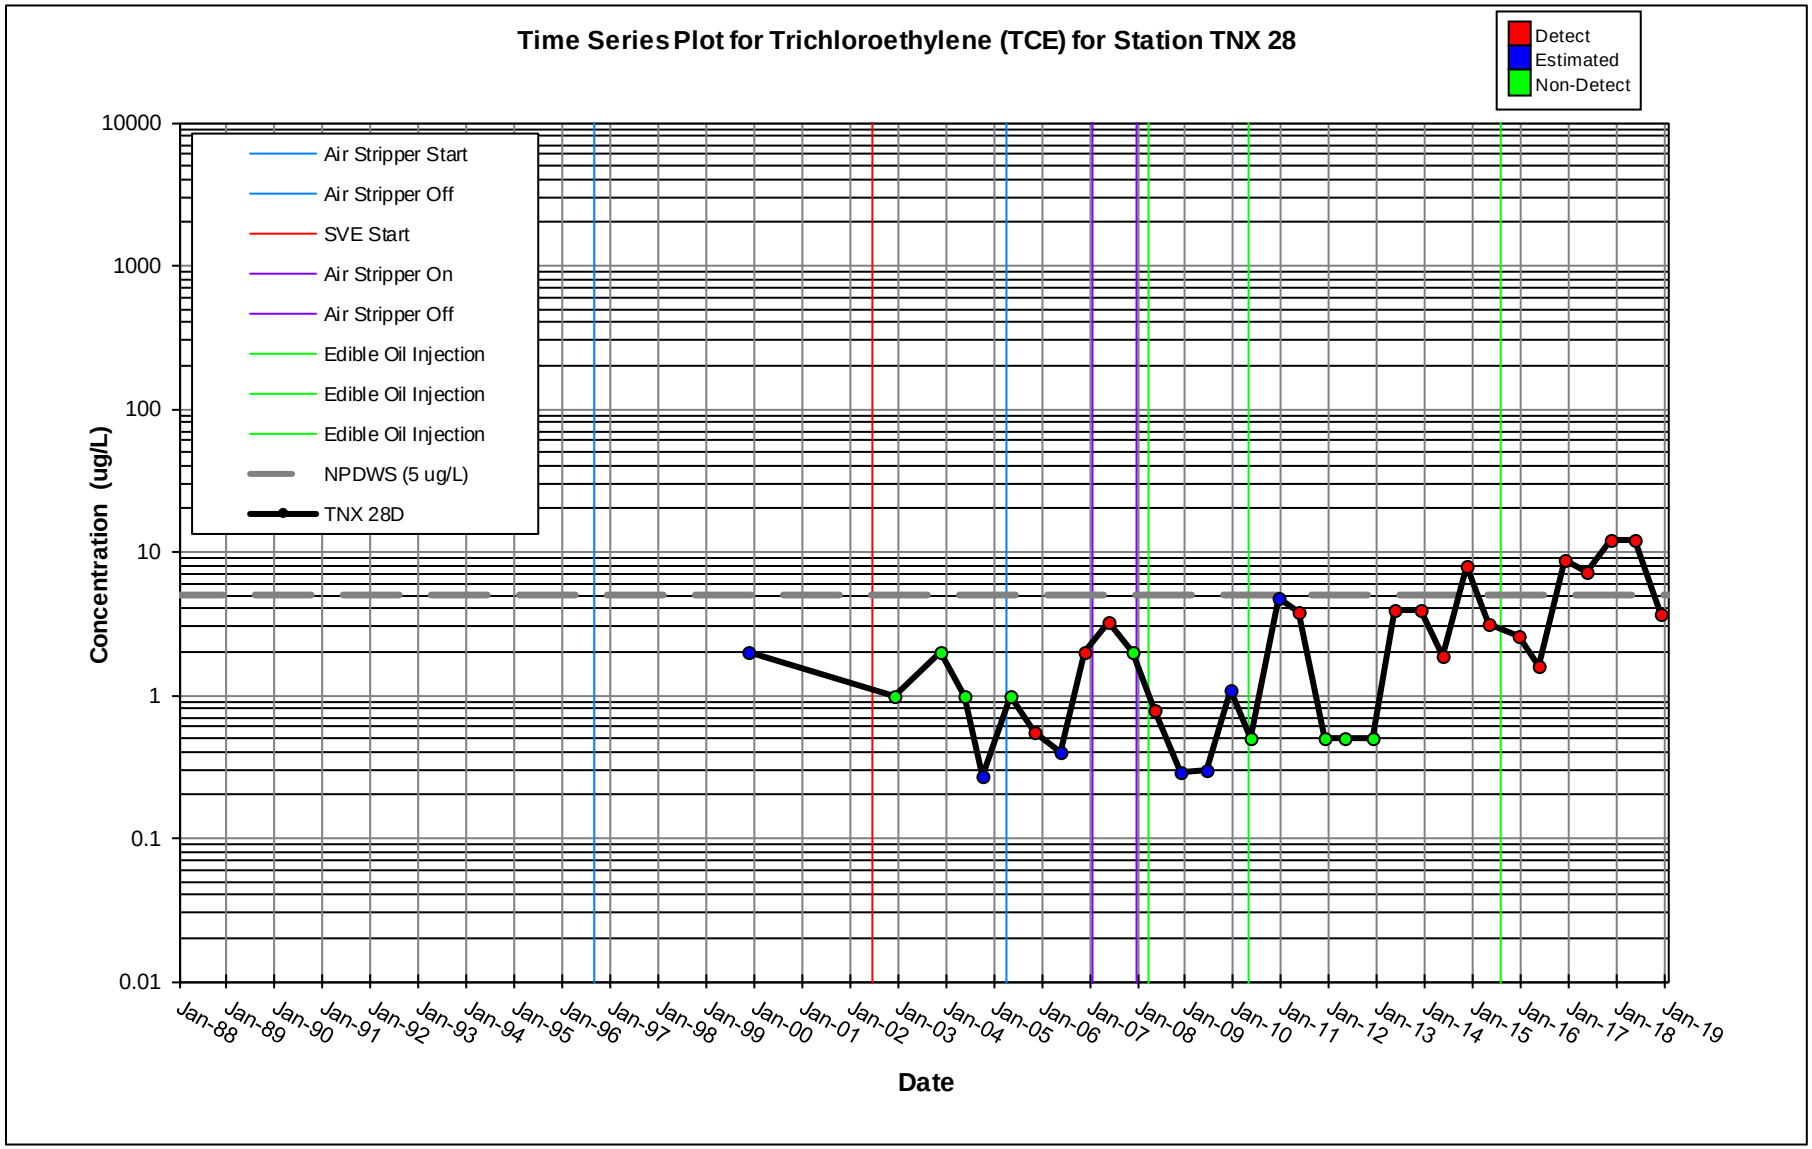
Time Series Plot for Trichloroethylene (TCE) for Station TNX 28
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX 28D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

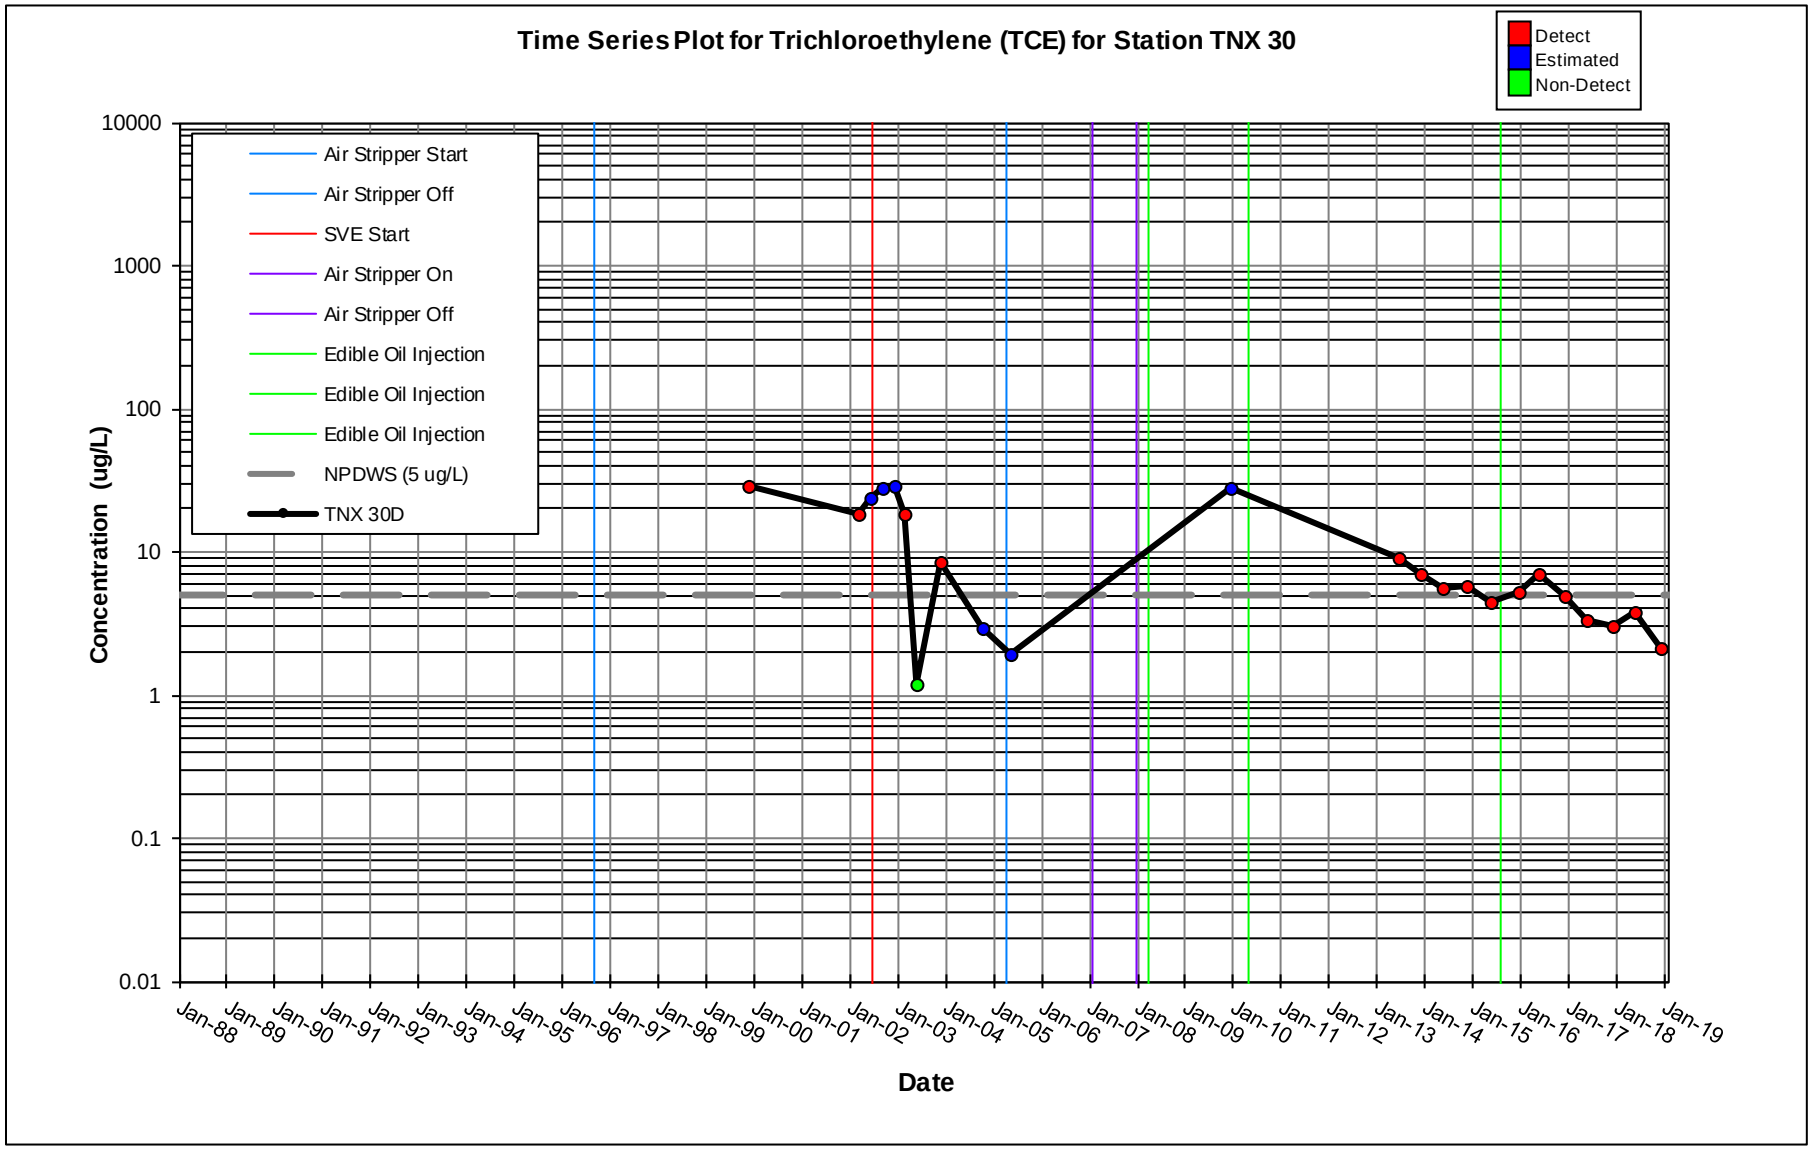
Time Series Plot for Trichloroethylene (TCE) for Station TNX 30
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX 30D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

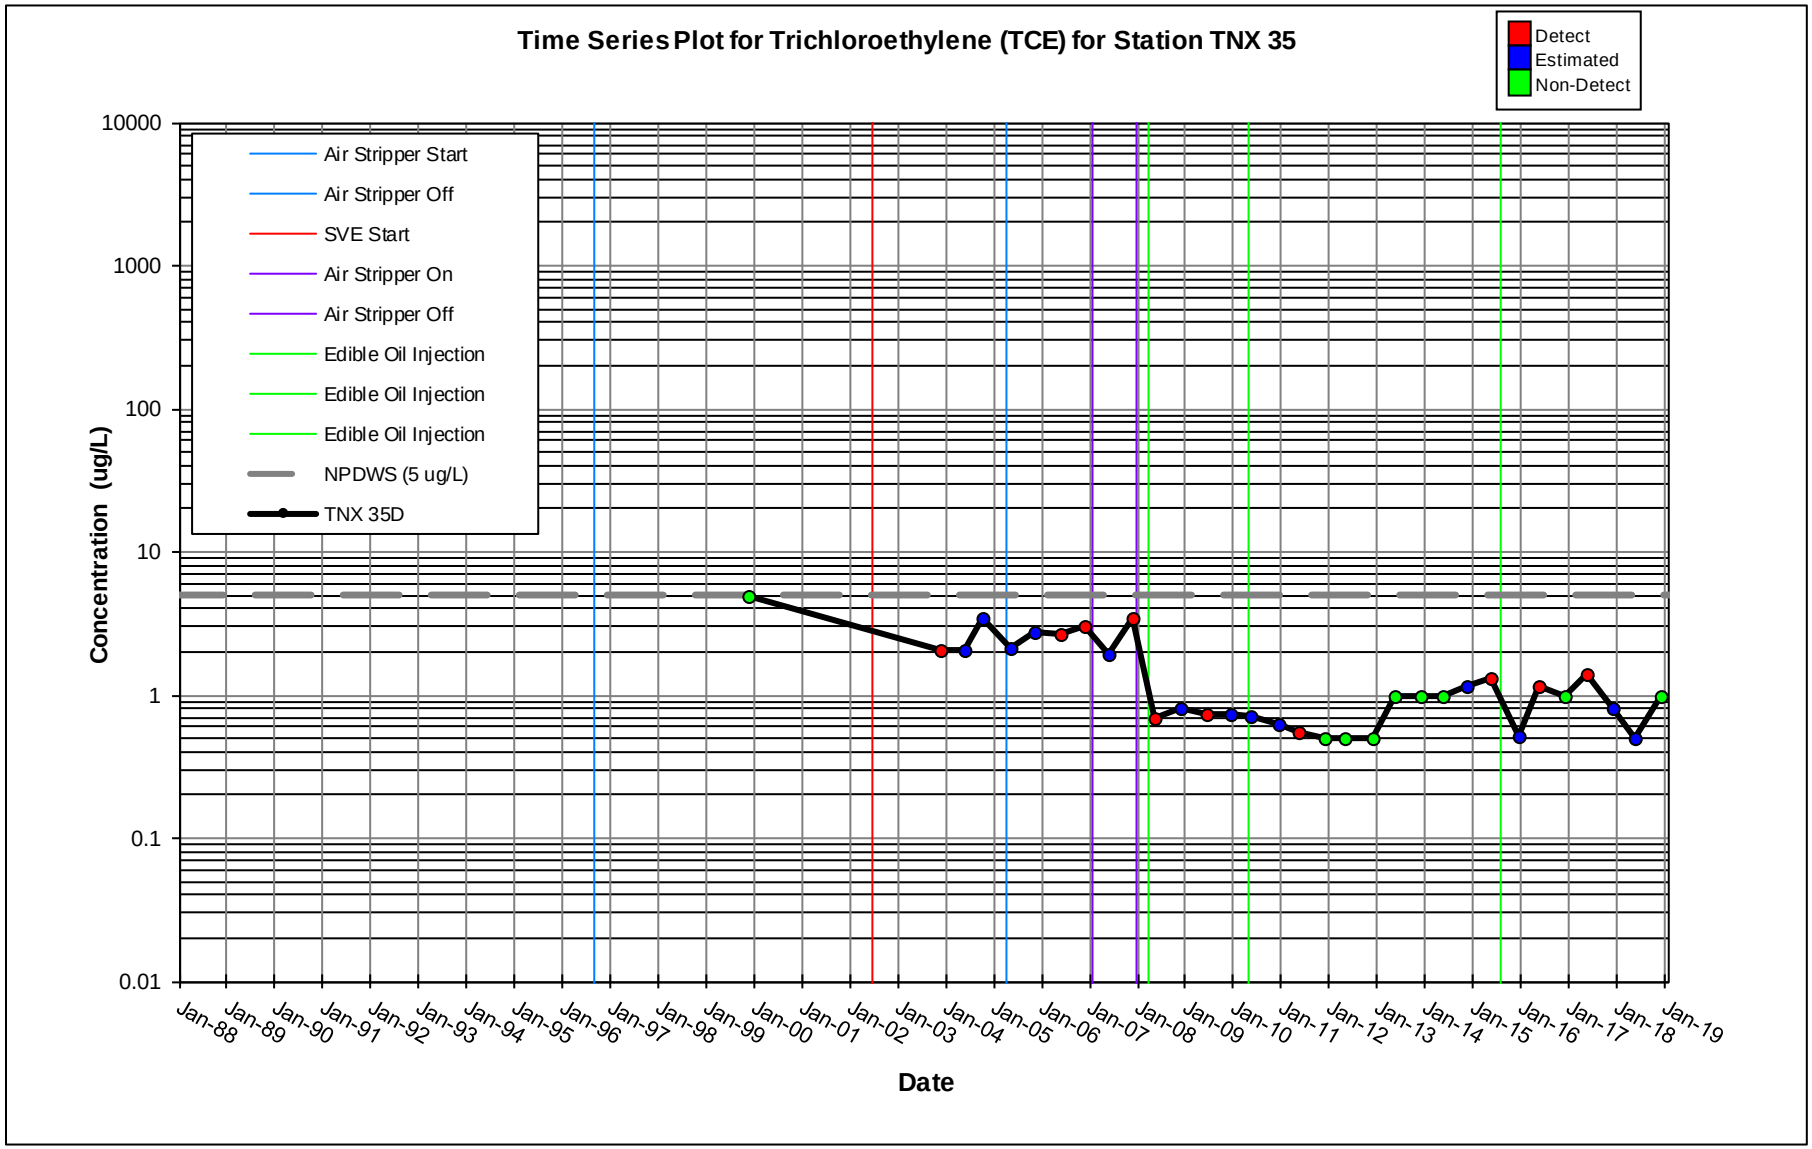
Time Series Plot for Trichloroethylene (TCE) for Station TNX 35
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX 35D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

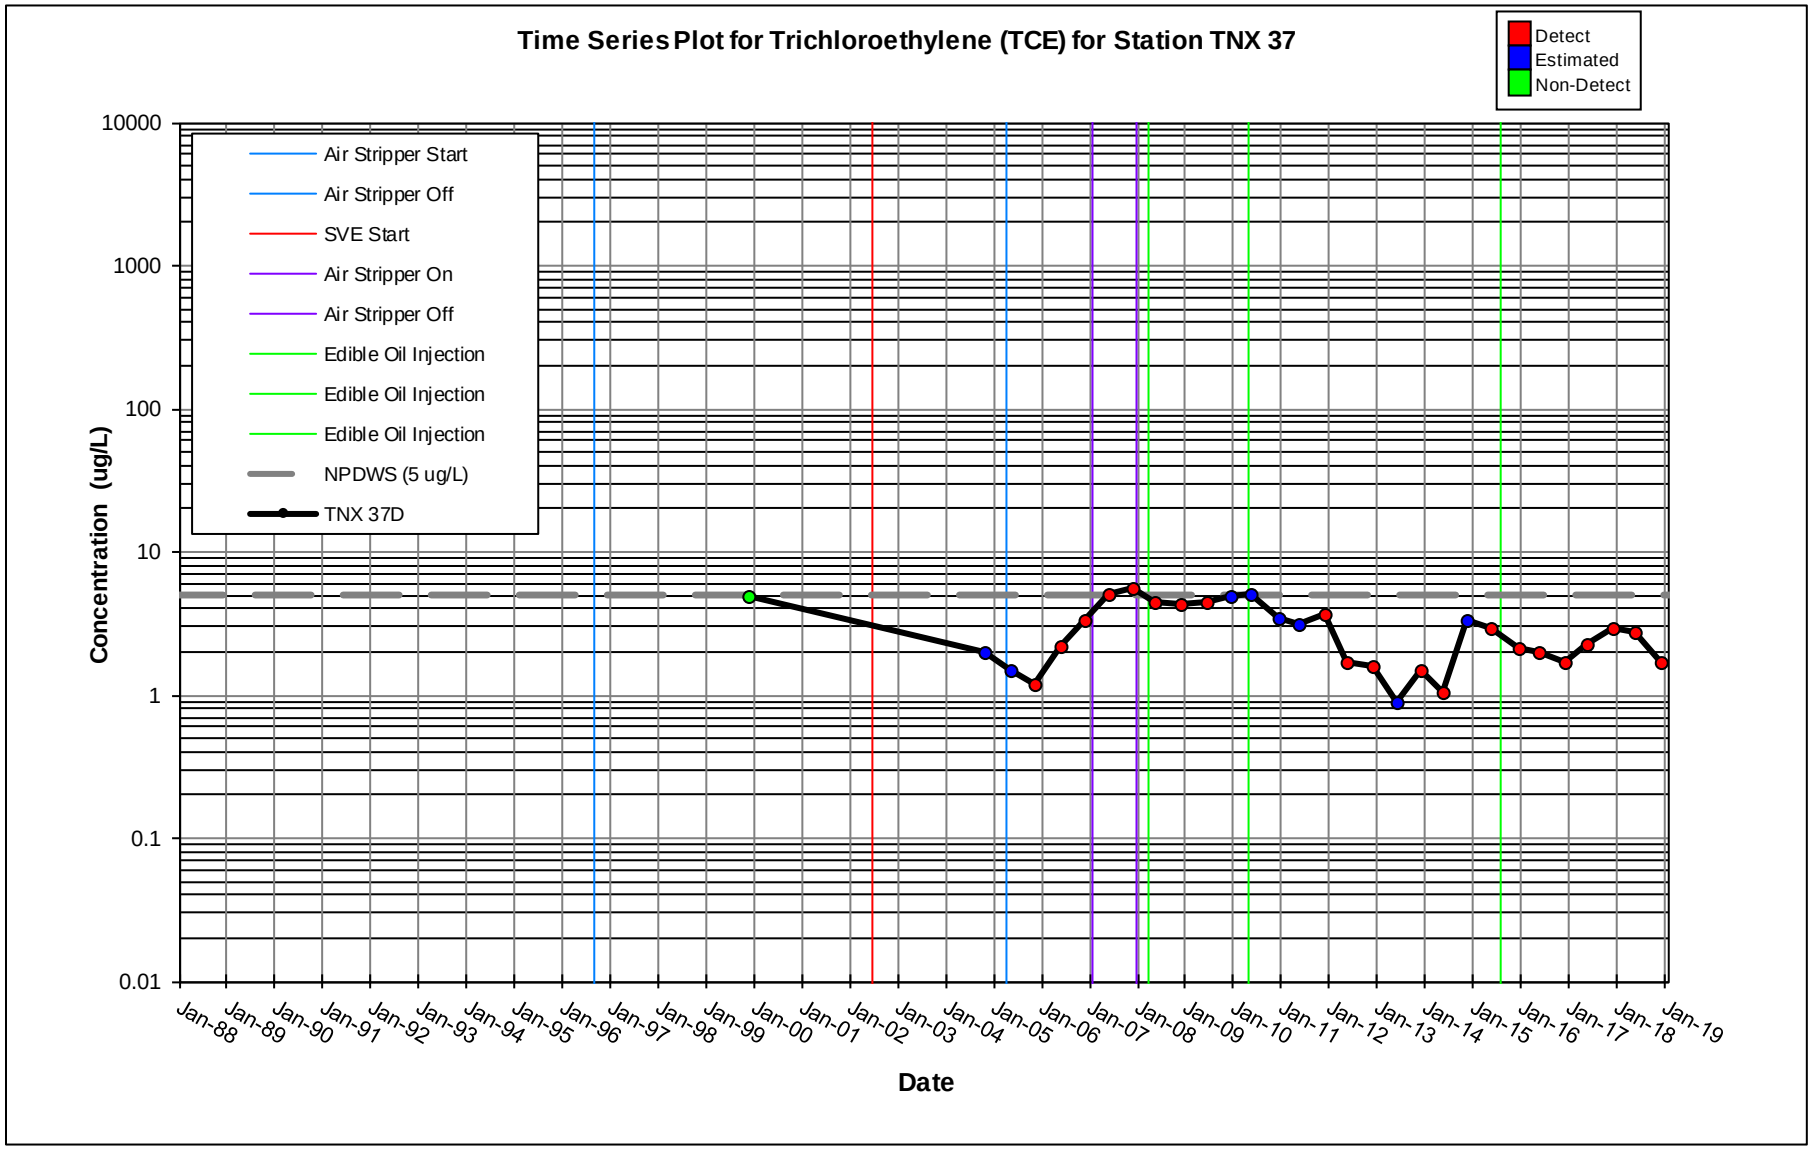
Time Series Plot for Trichloroethylene (TCE) for Station TNX 37
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX 37D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

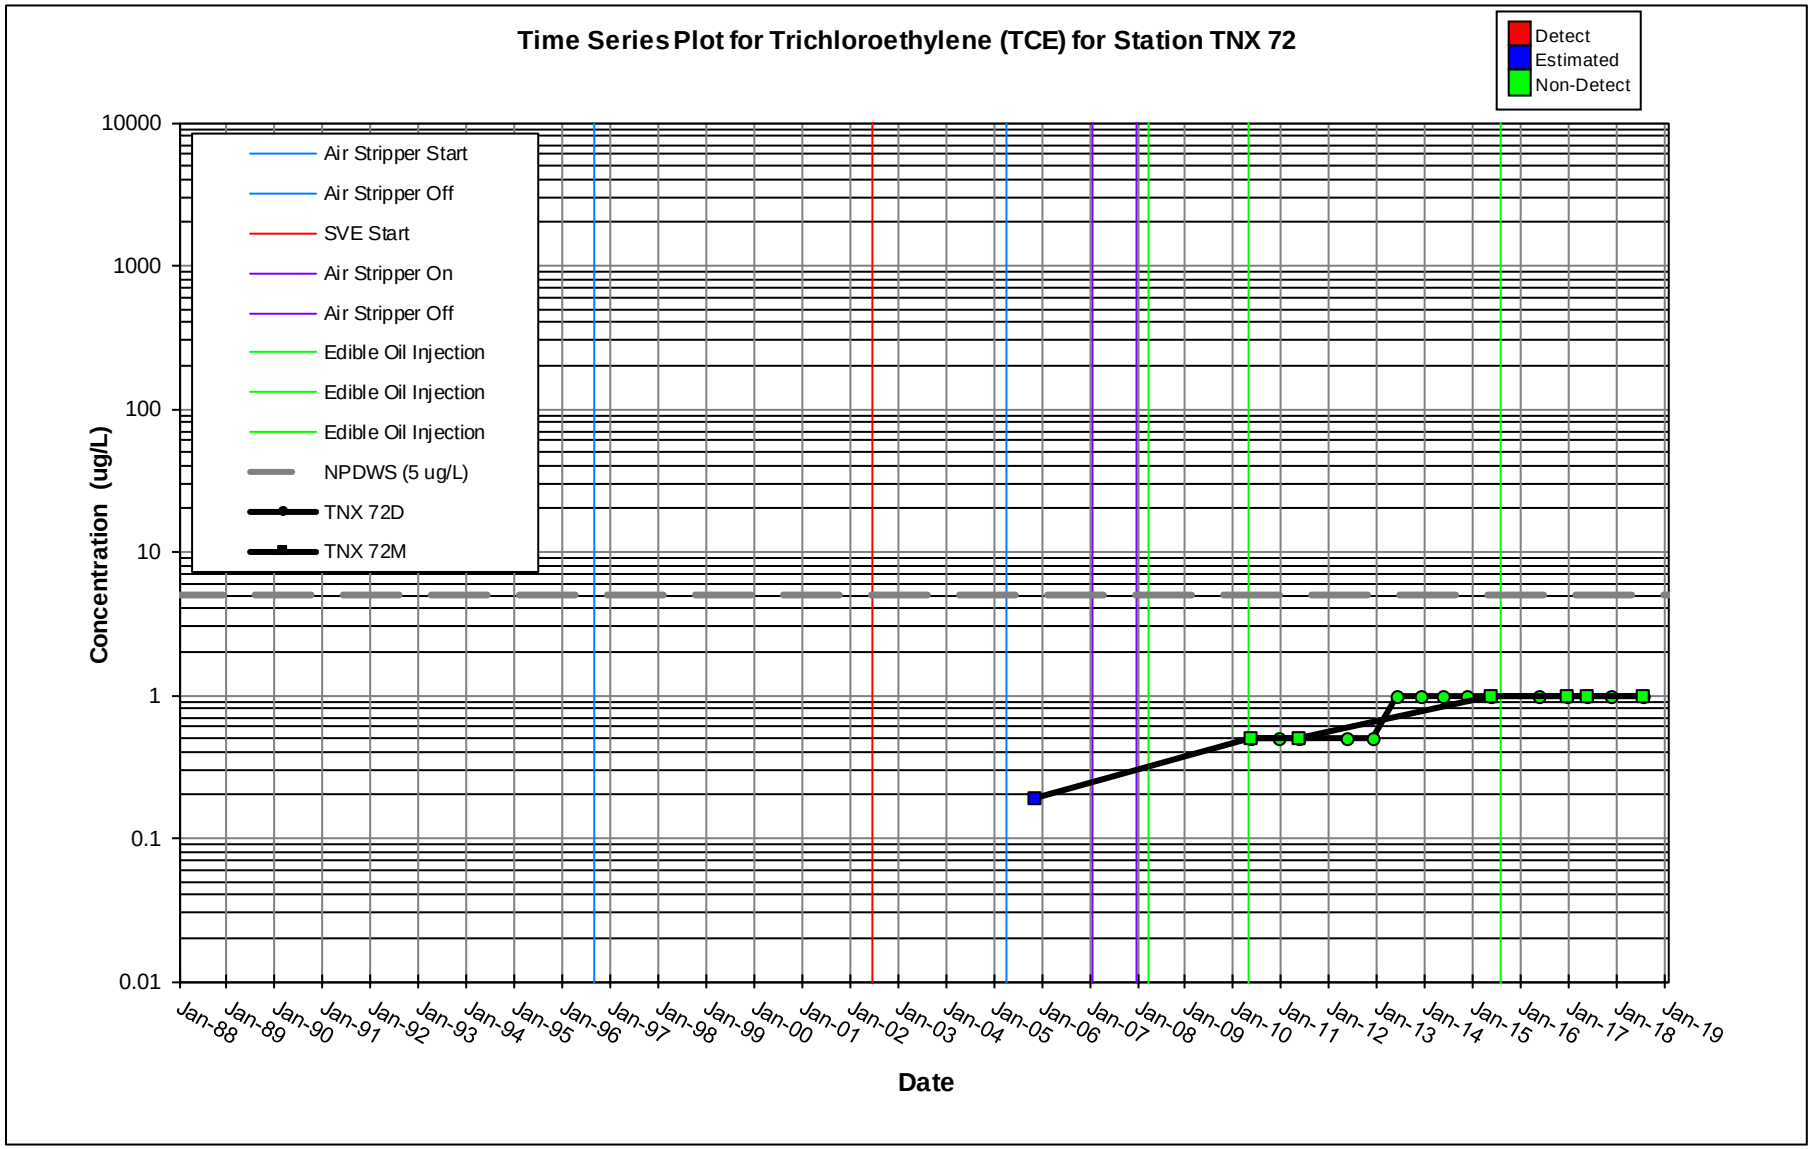
Time Series Plot for Trichloroethylene (TCE) for Station TNX 72
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX 72D
TNX 72M
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

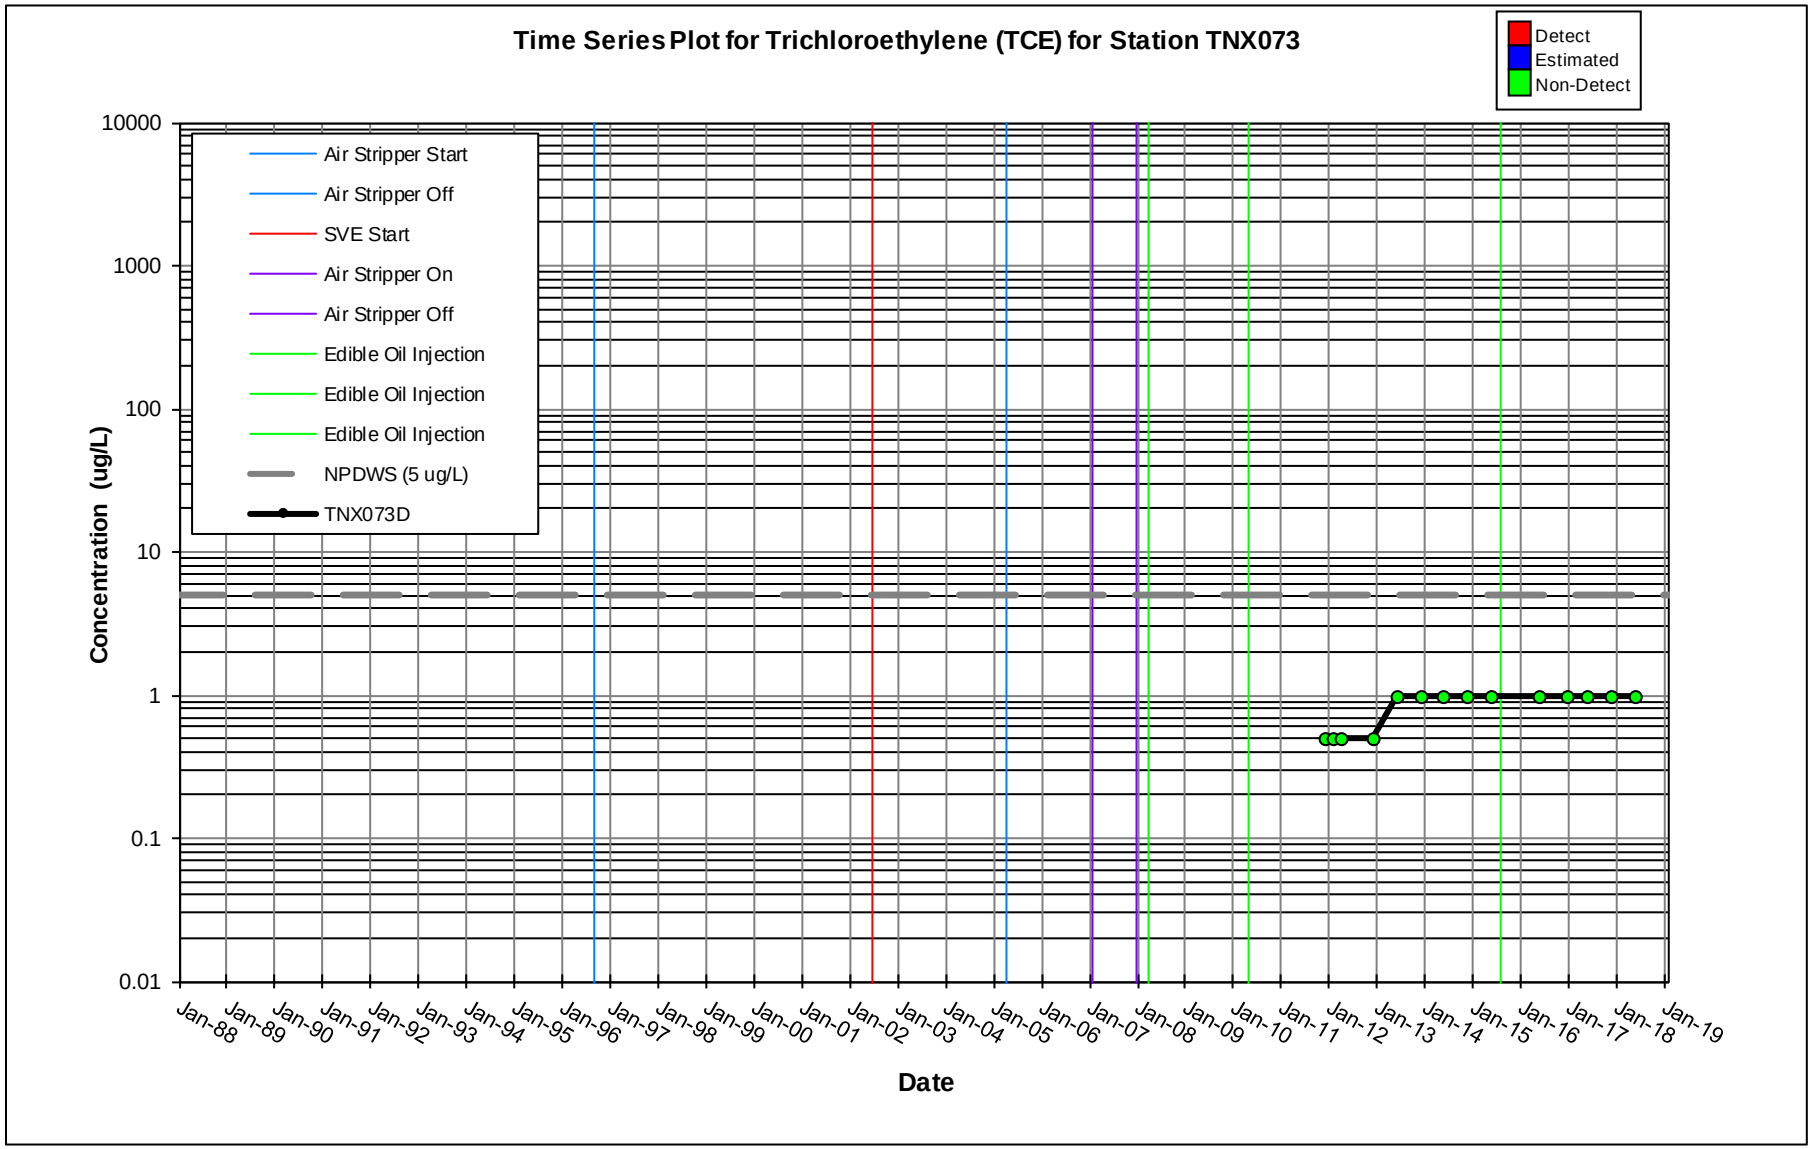
Time Series Plot for Trichloroethylene (TCE) for Station TNX073
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX073D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

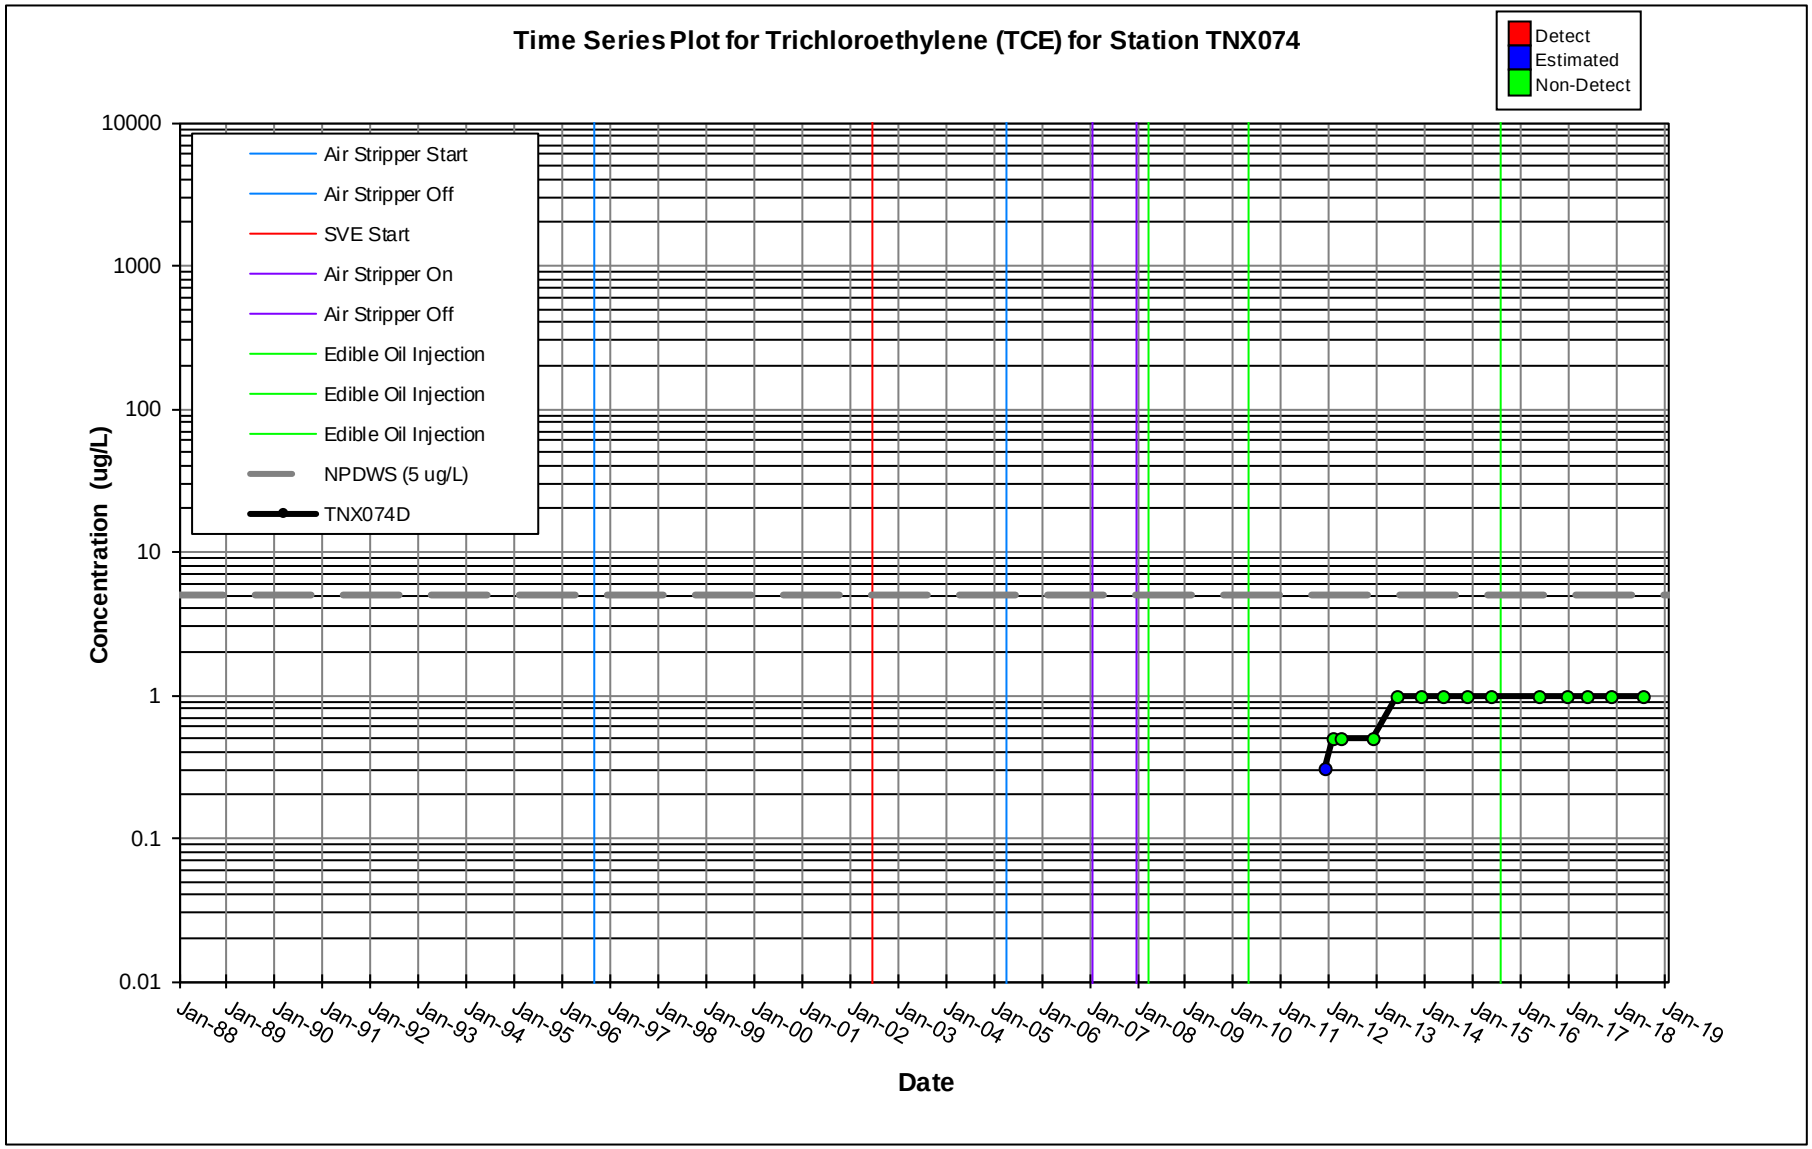
Time Series Plot for Trichloroethylene (TCE) for Station TNX074
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX074D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

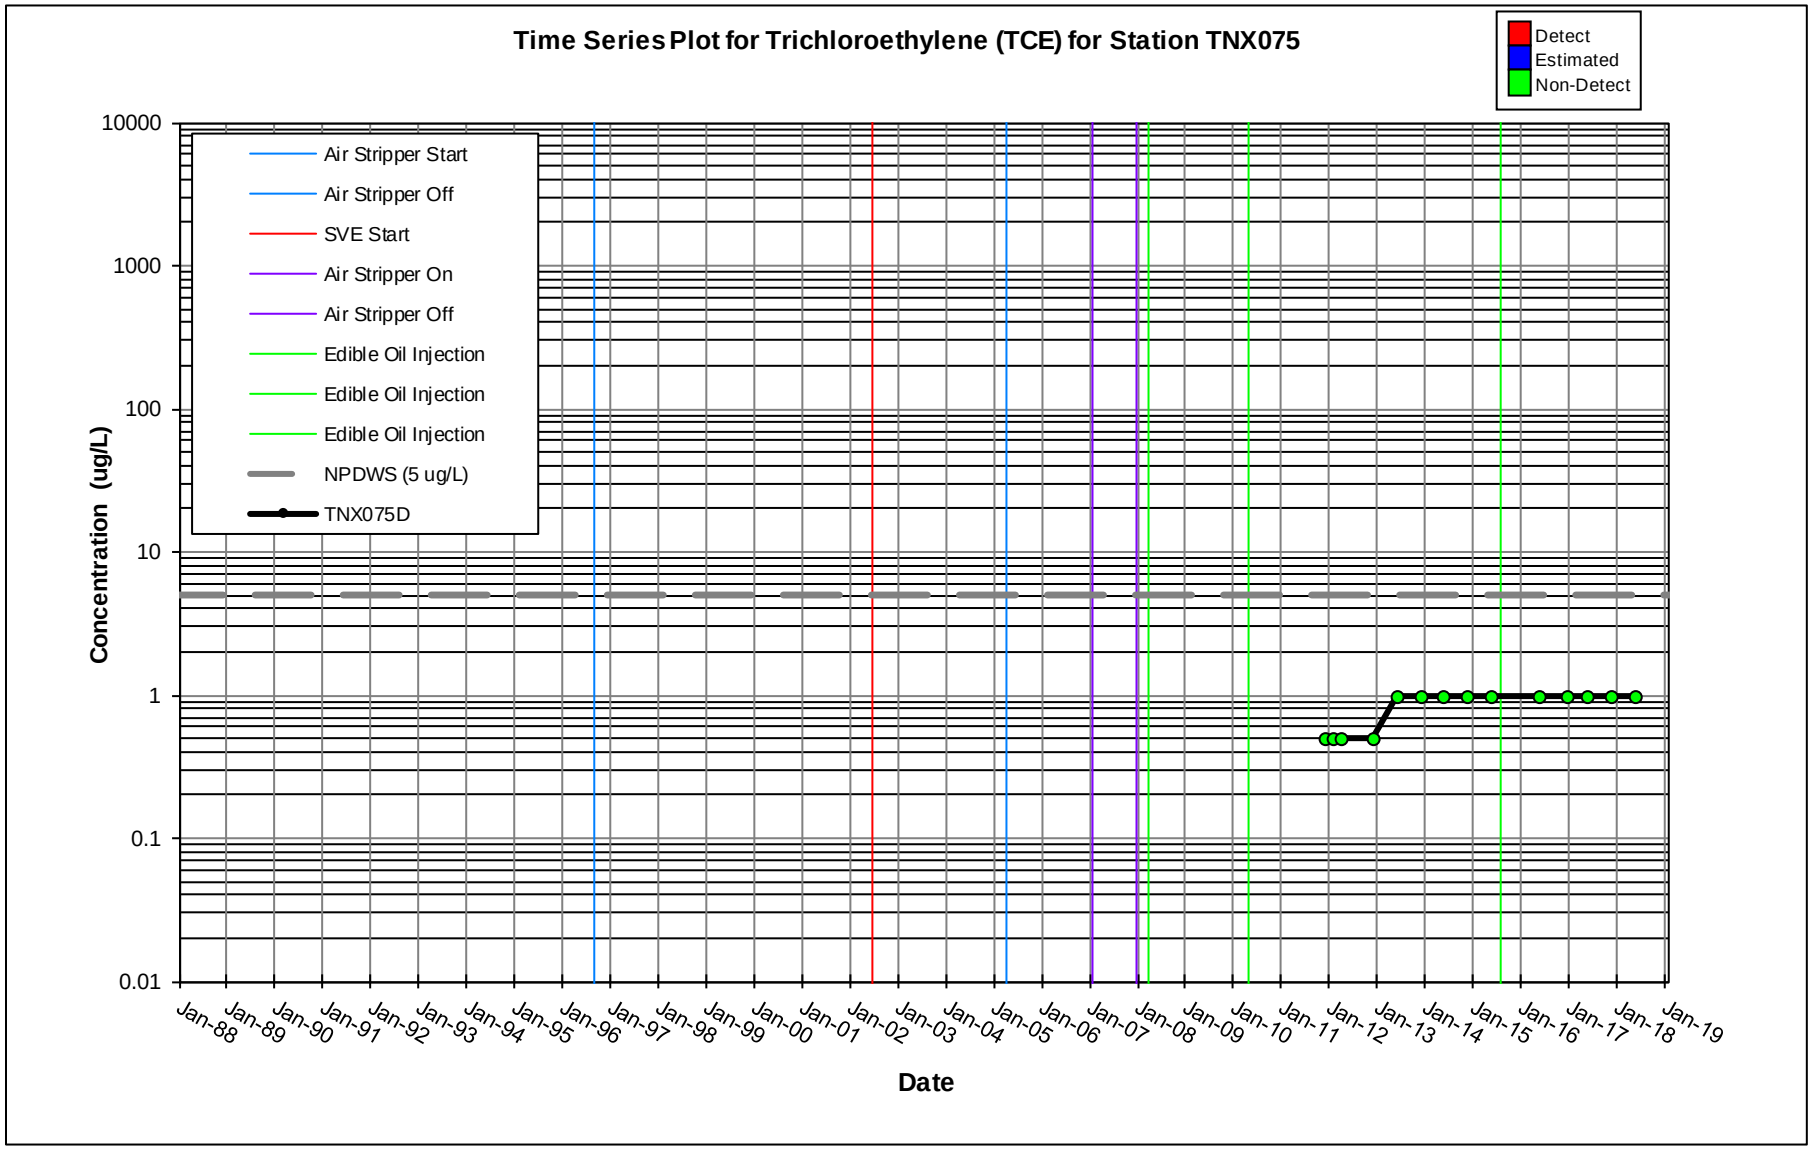
Time Series Plot for Trichloroethylene (TCE) for Station TNX075
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TNX075D
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

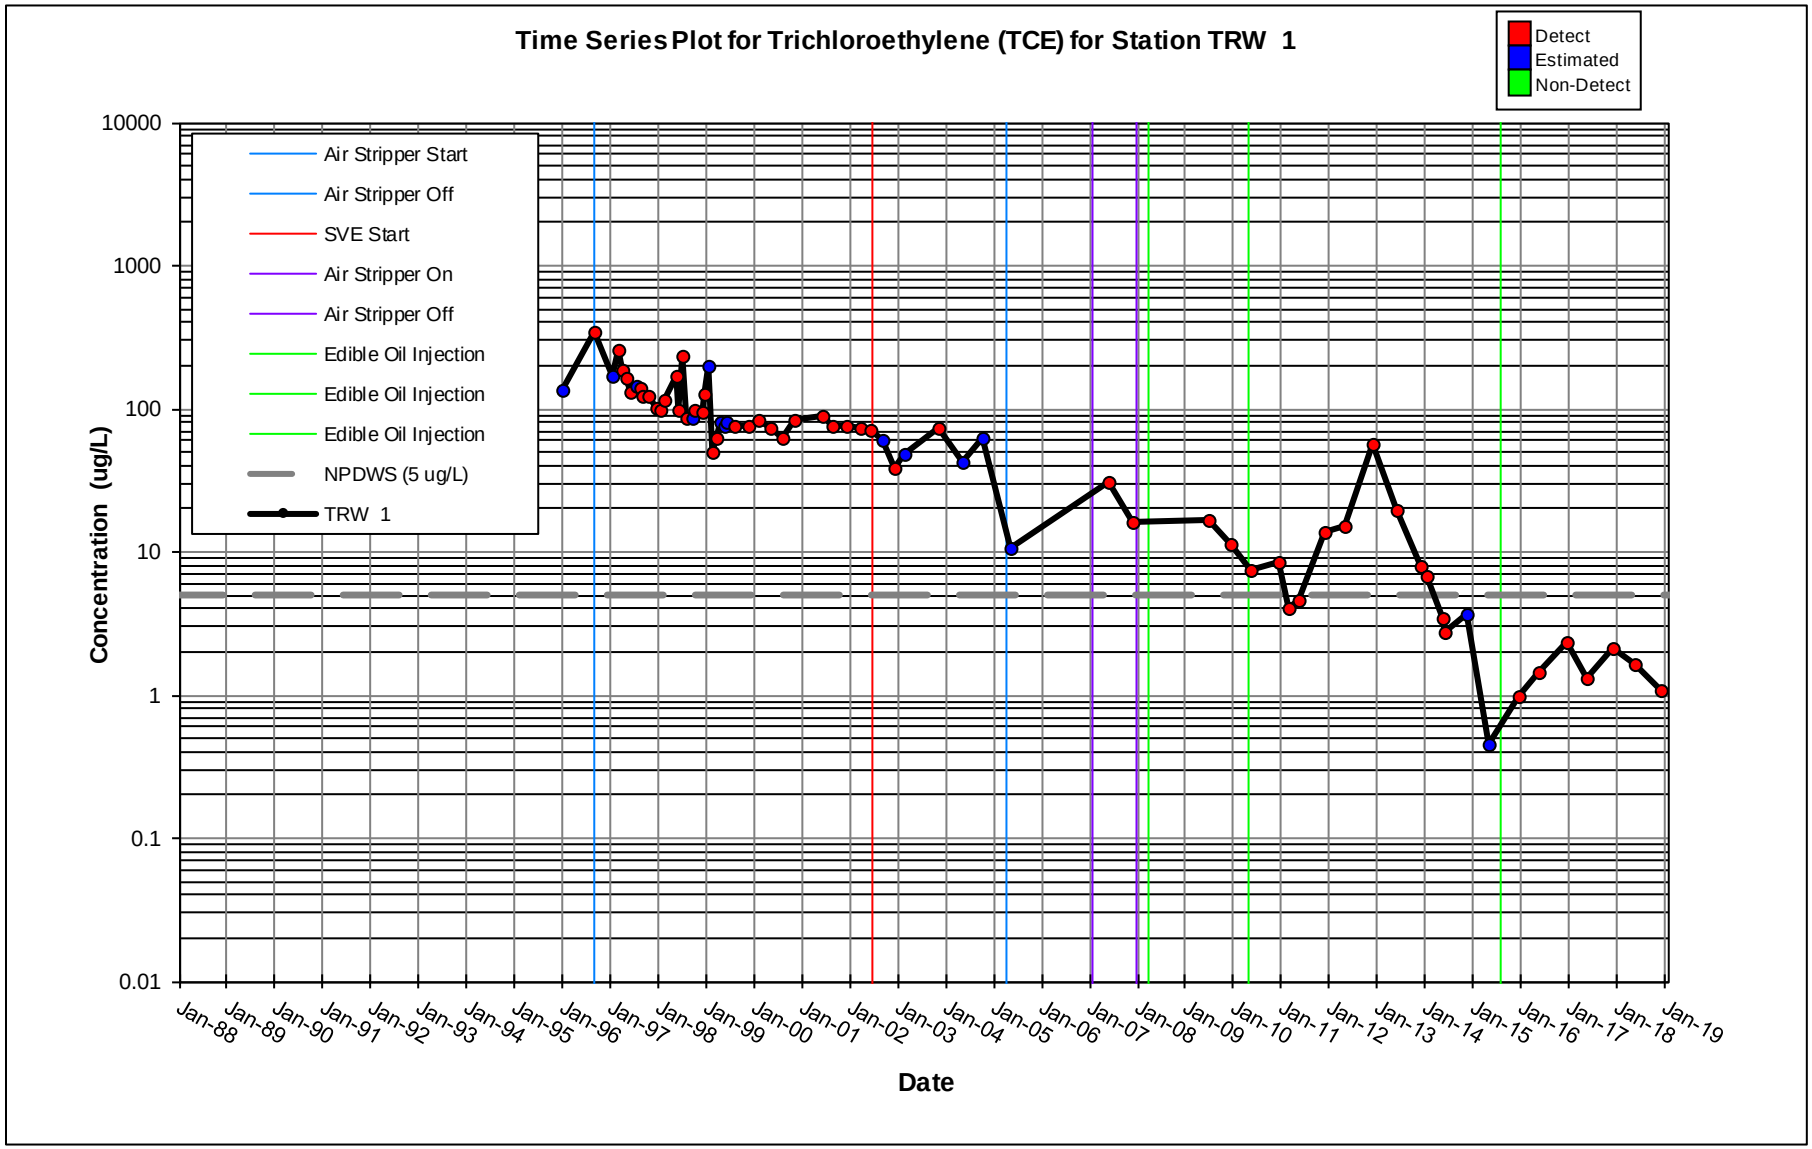
Time Series Plot for Trichloroethylene (TCE) for Station TRW 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TRW 1
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

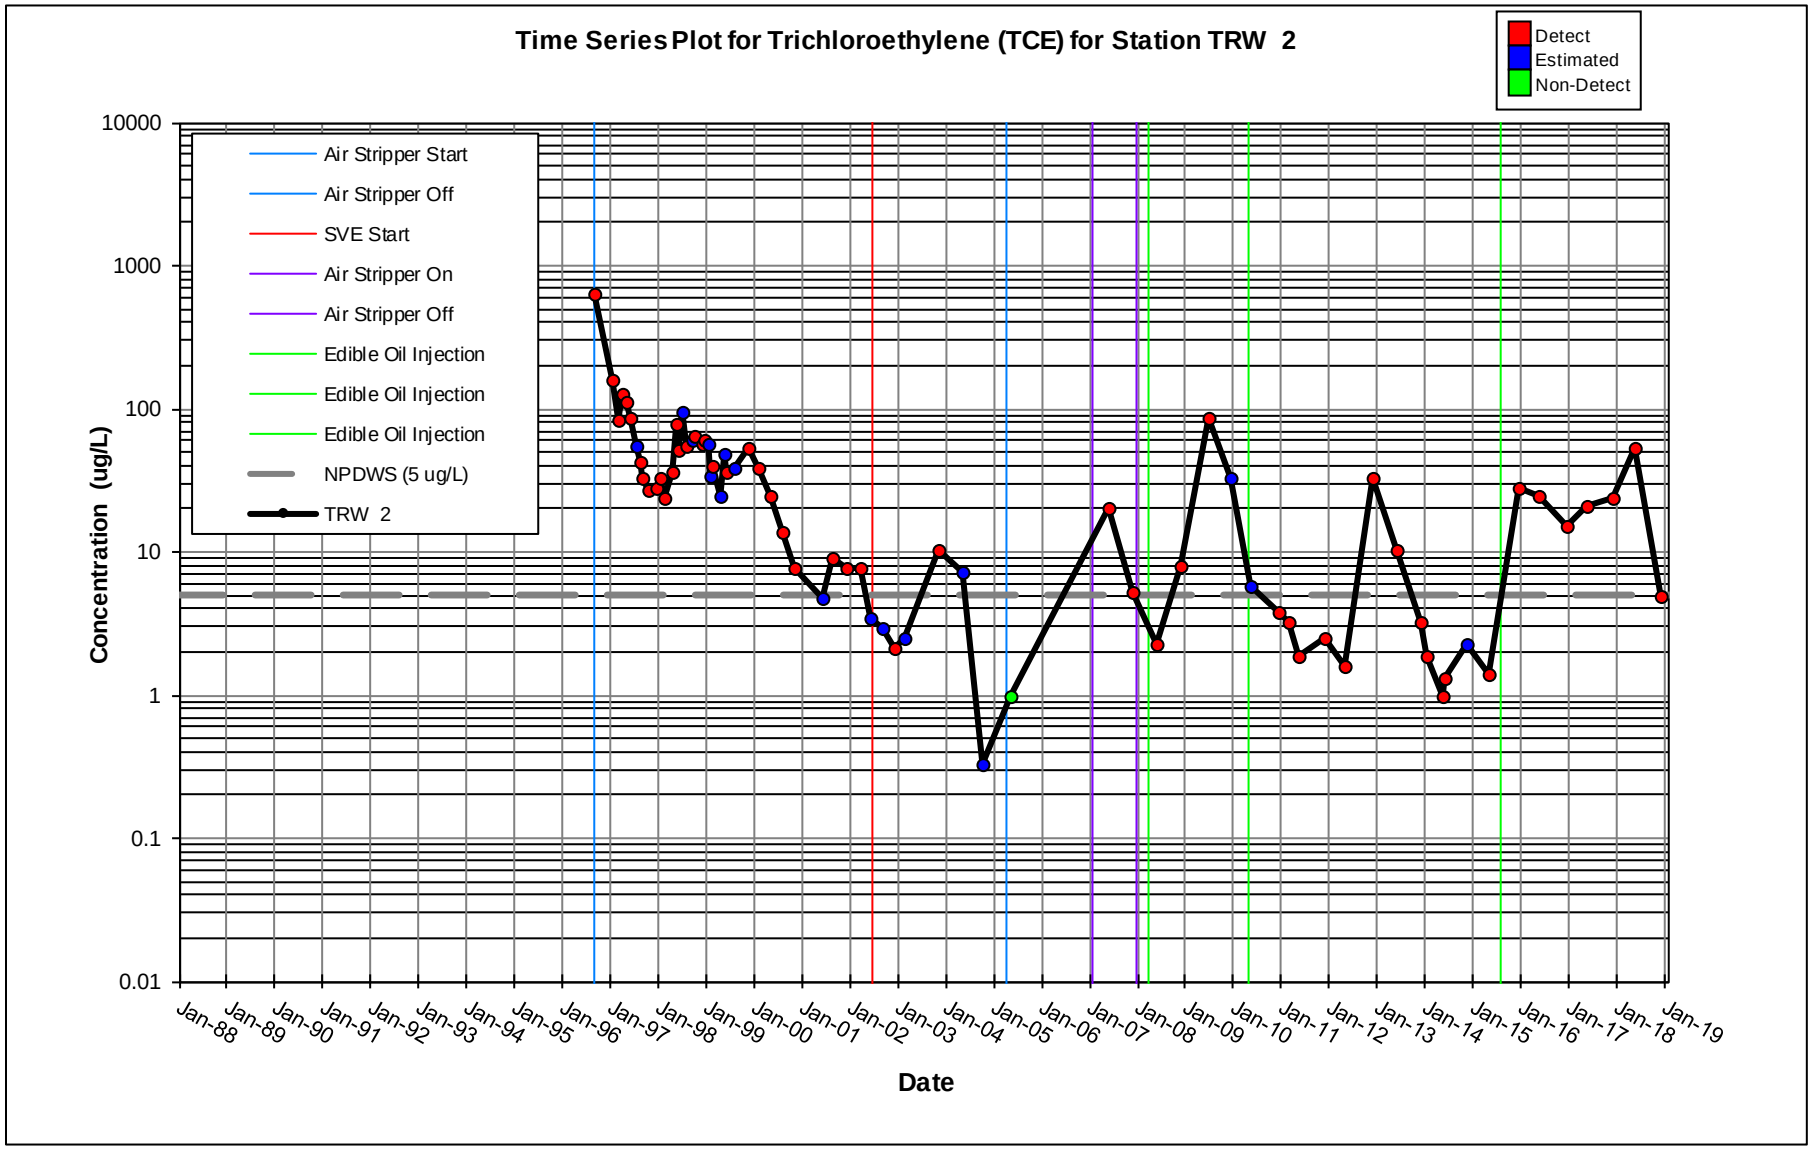
Time Series Plot for Trichloroethylene (TCE) for Station TRW 2
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TRW 2
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

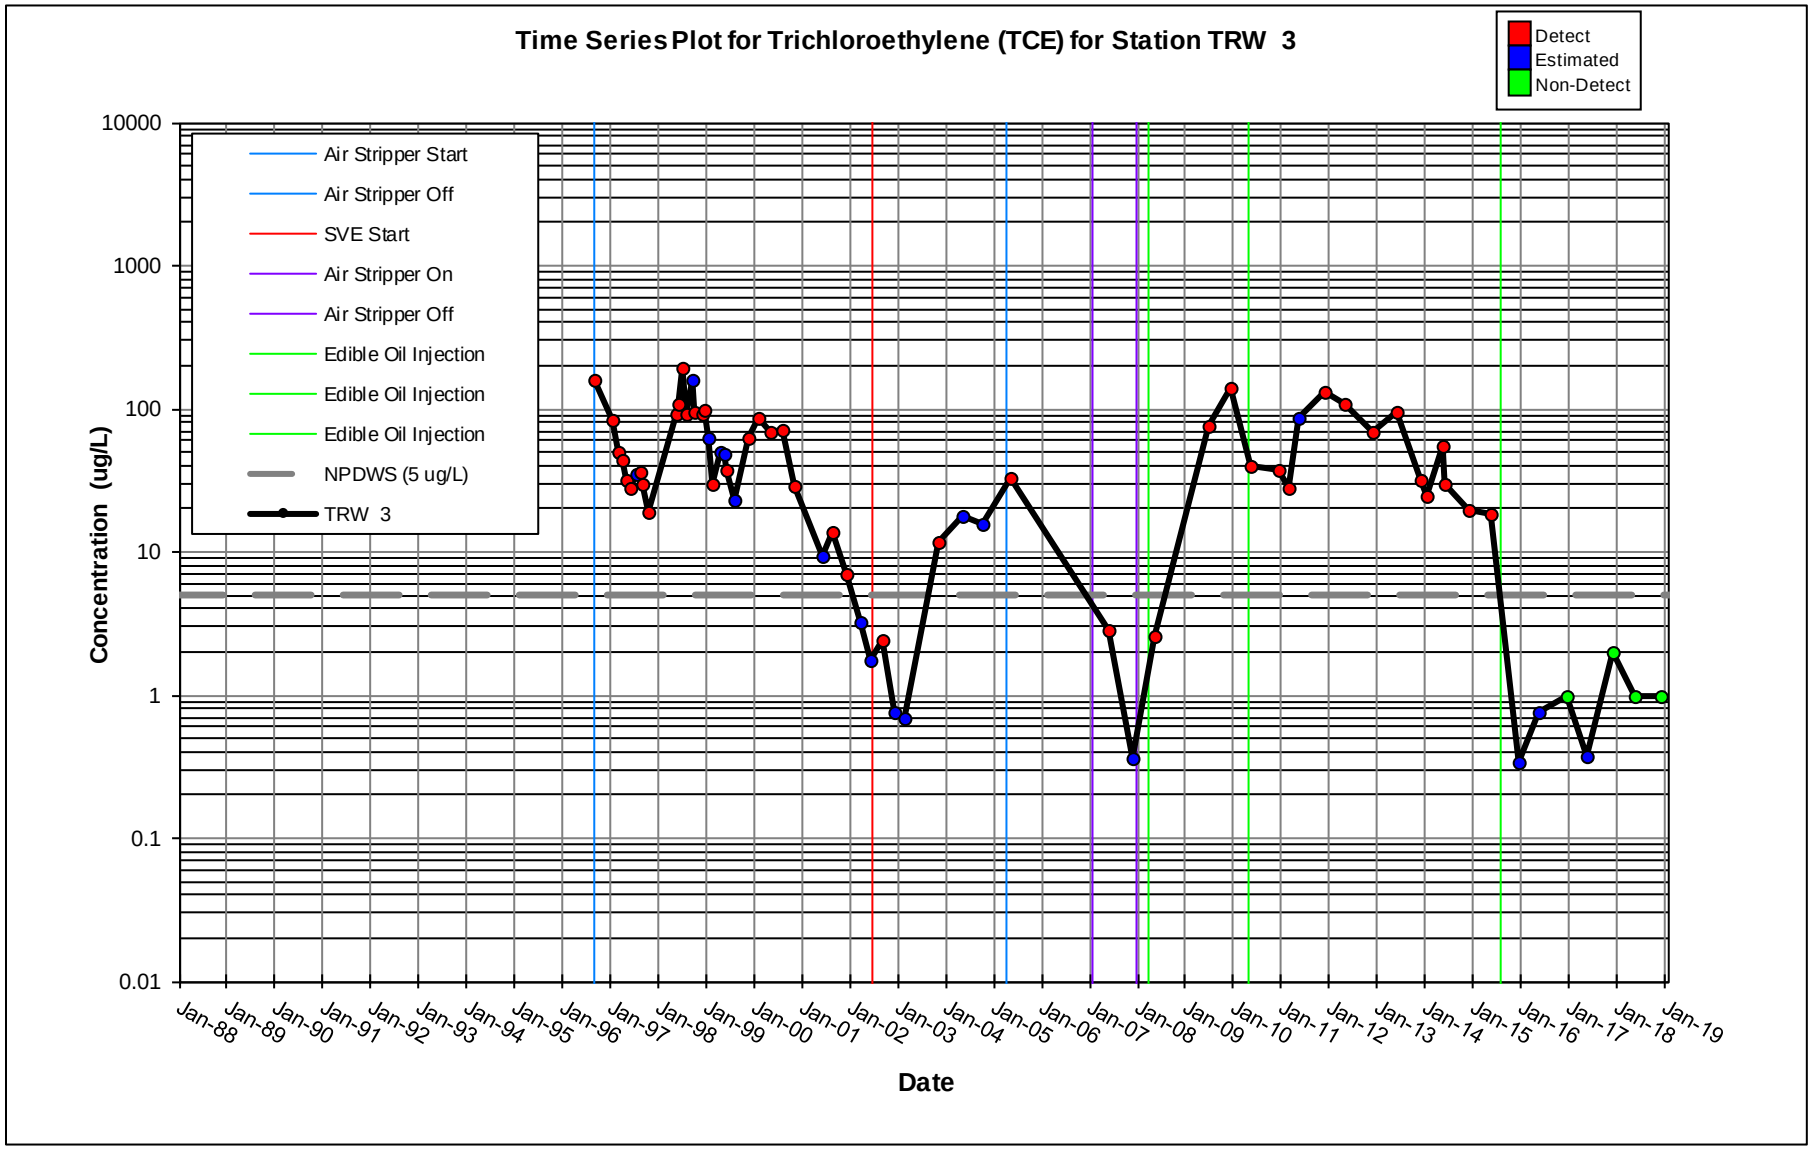
Time Series Plot for Trichloroethylene (TCE) for Station TRW 3
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TRW 3
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

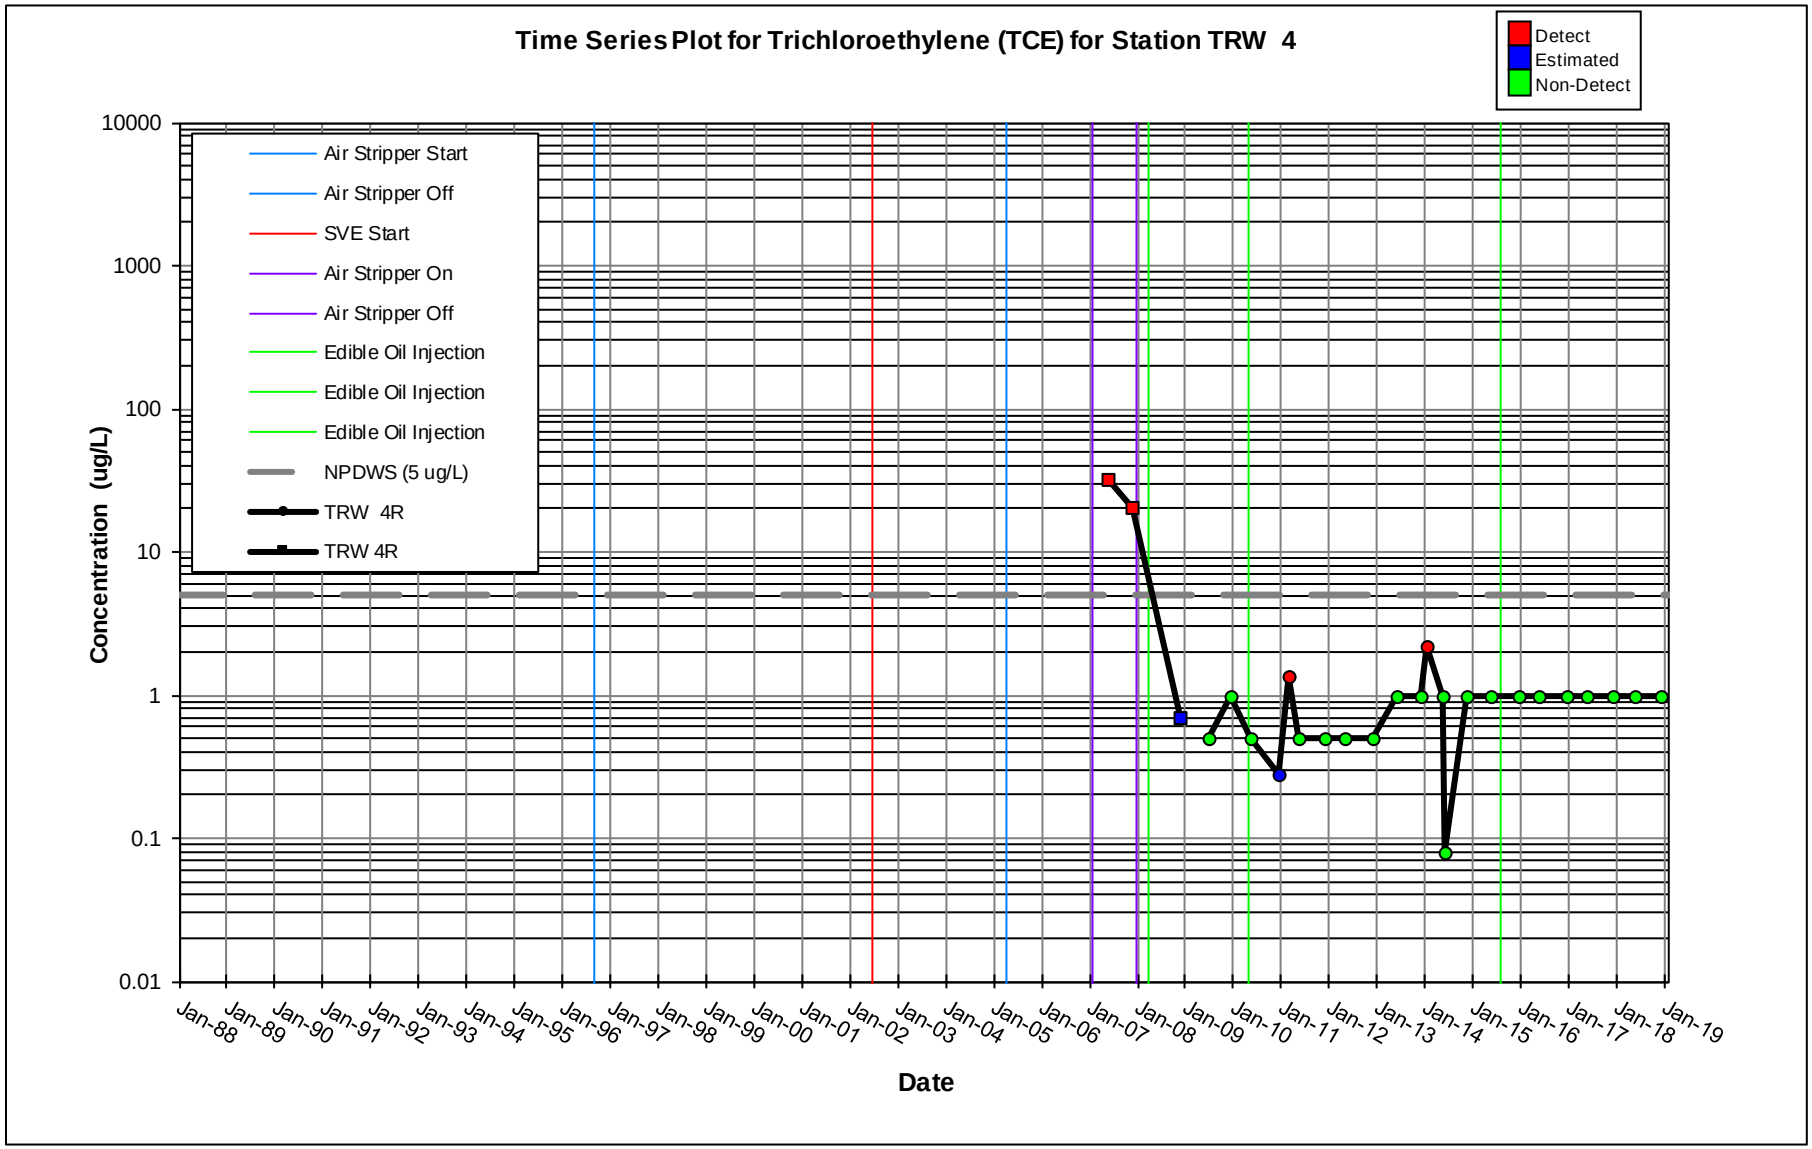
Time Series Plot for Trichloroethylene (TCE) for Station TRW 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TRW 4R
TRW 4R
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

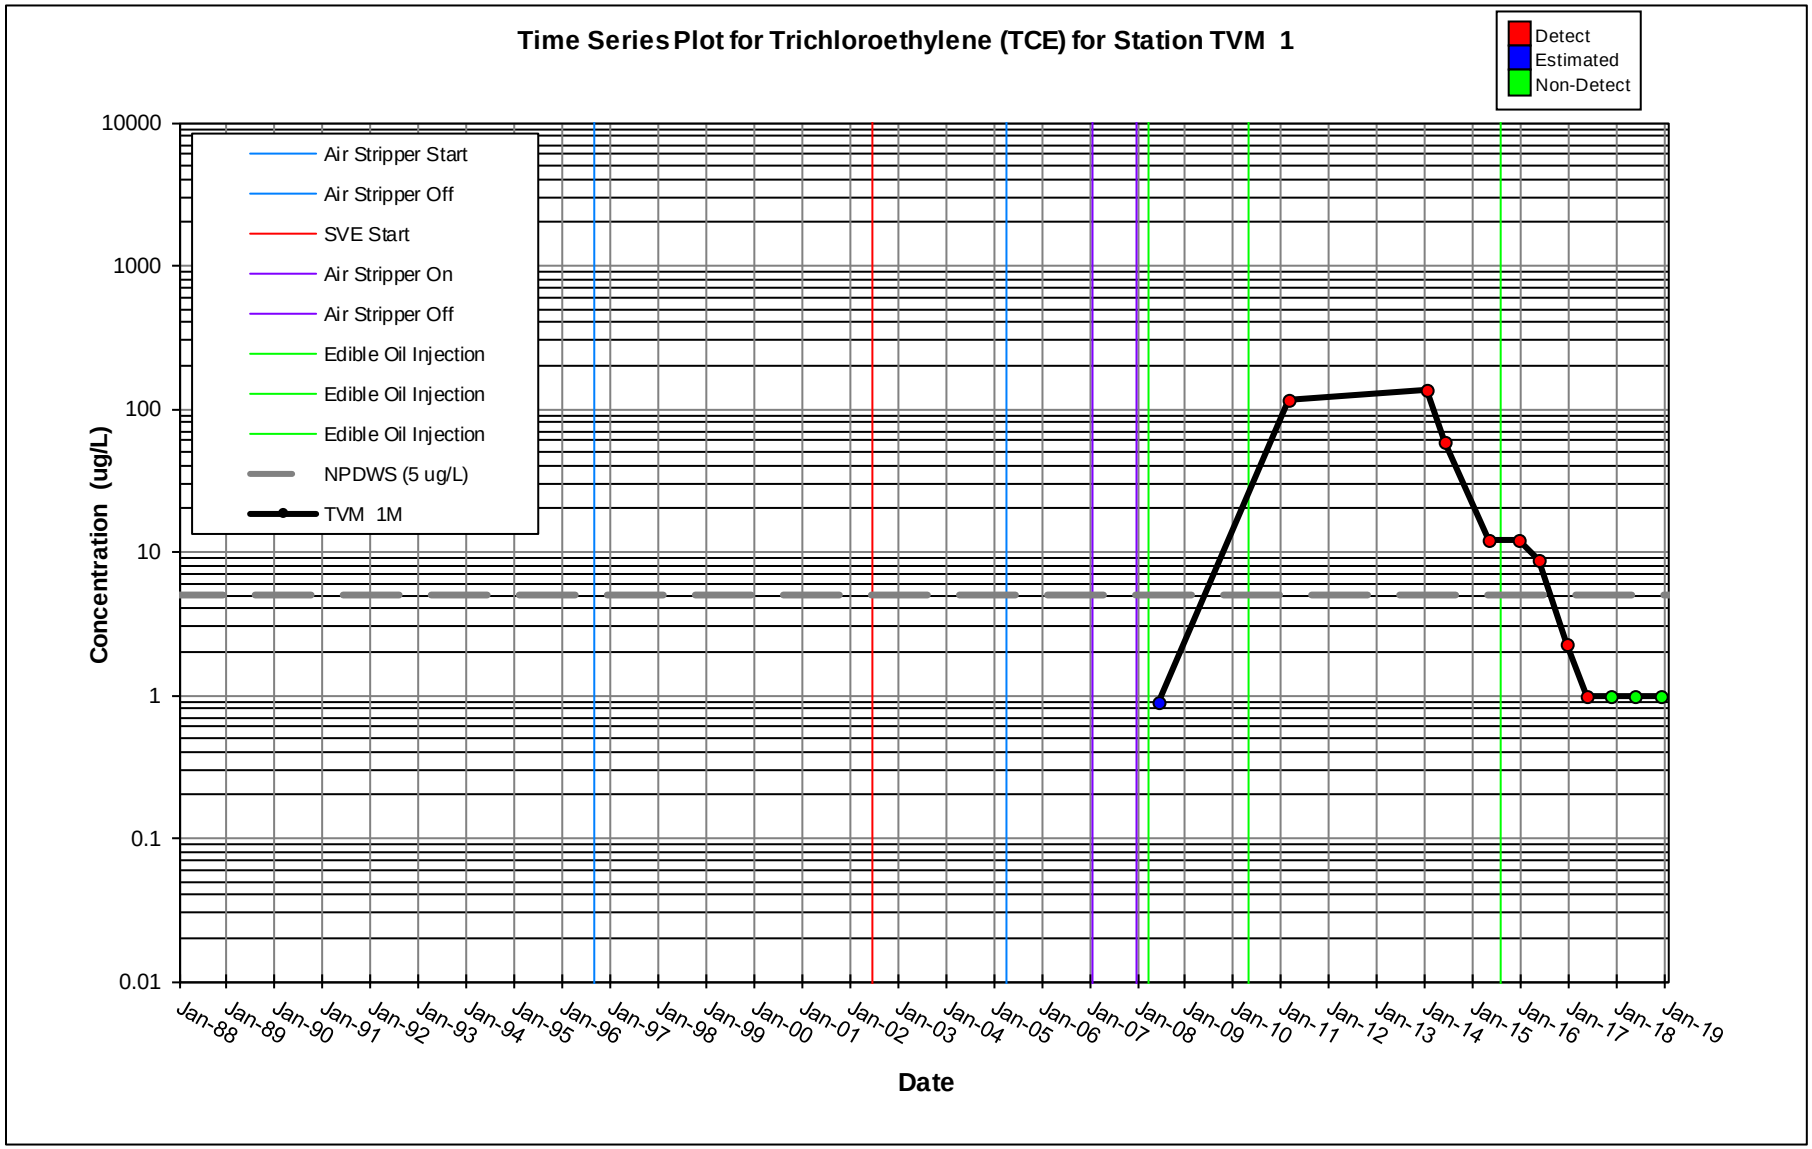
Time Series Plot for Trichloroethylene (TCE) for Station TVM 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TVM 1M
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

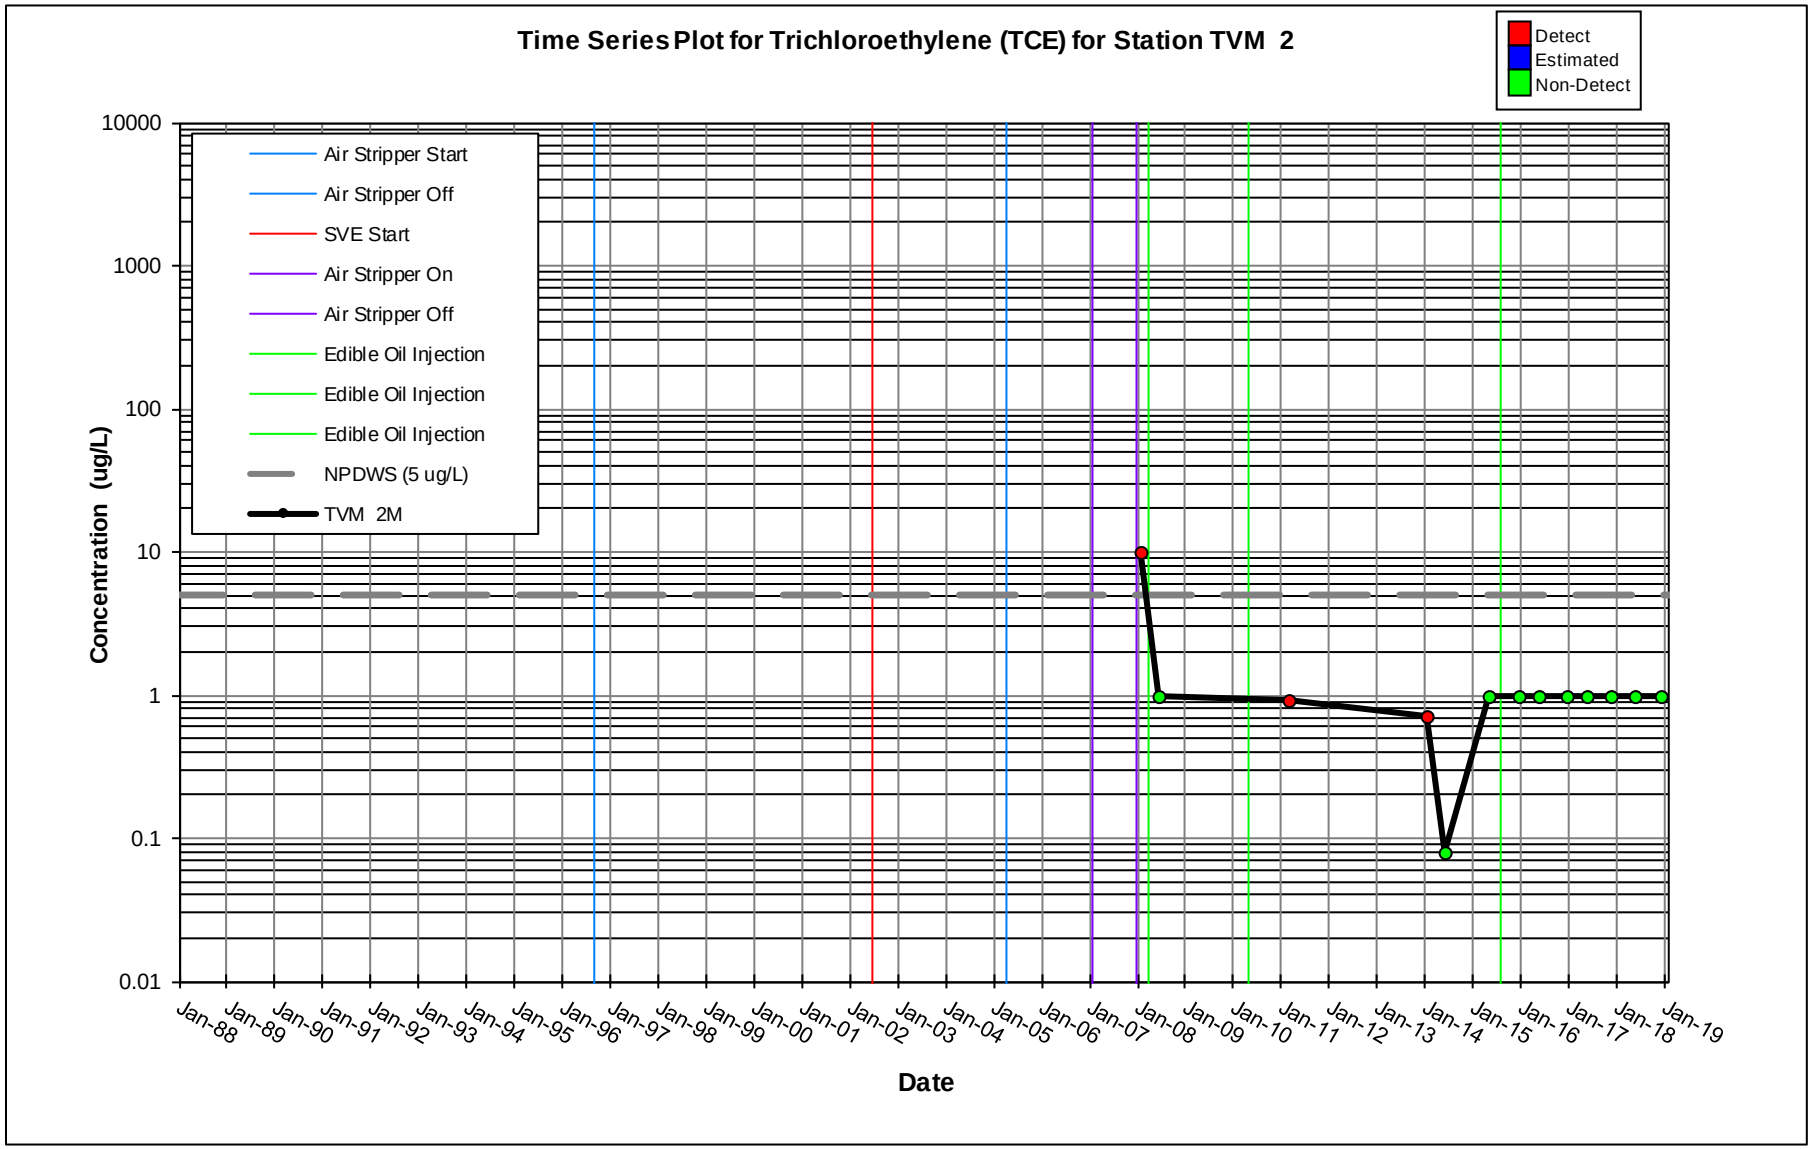
Time Series Plot for Trichloroethylene (TCE) for Station TVM 2
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TVM 2M
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

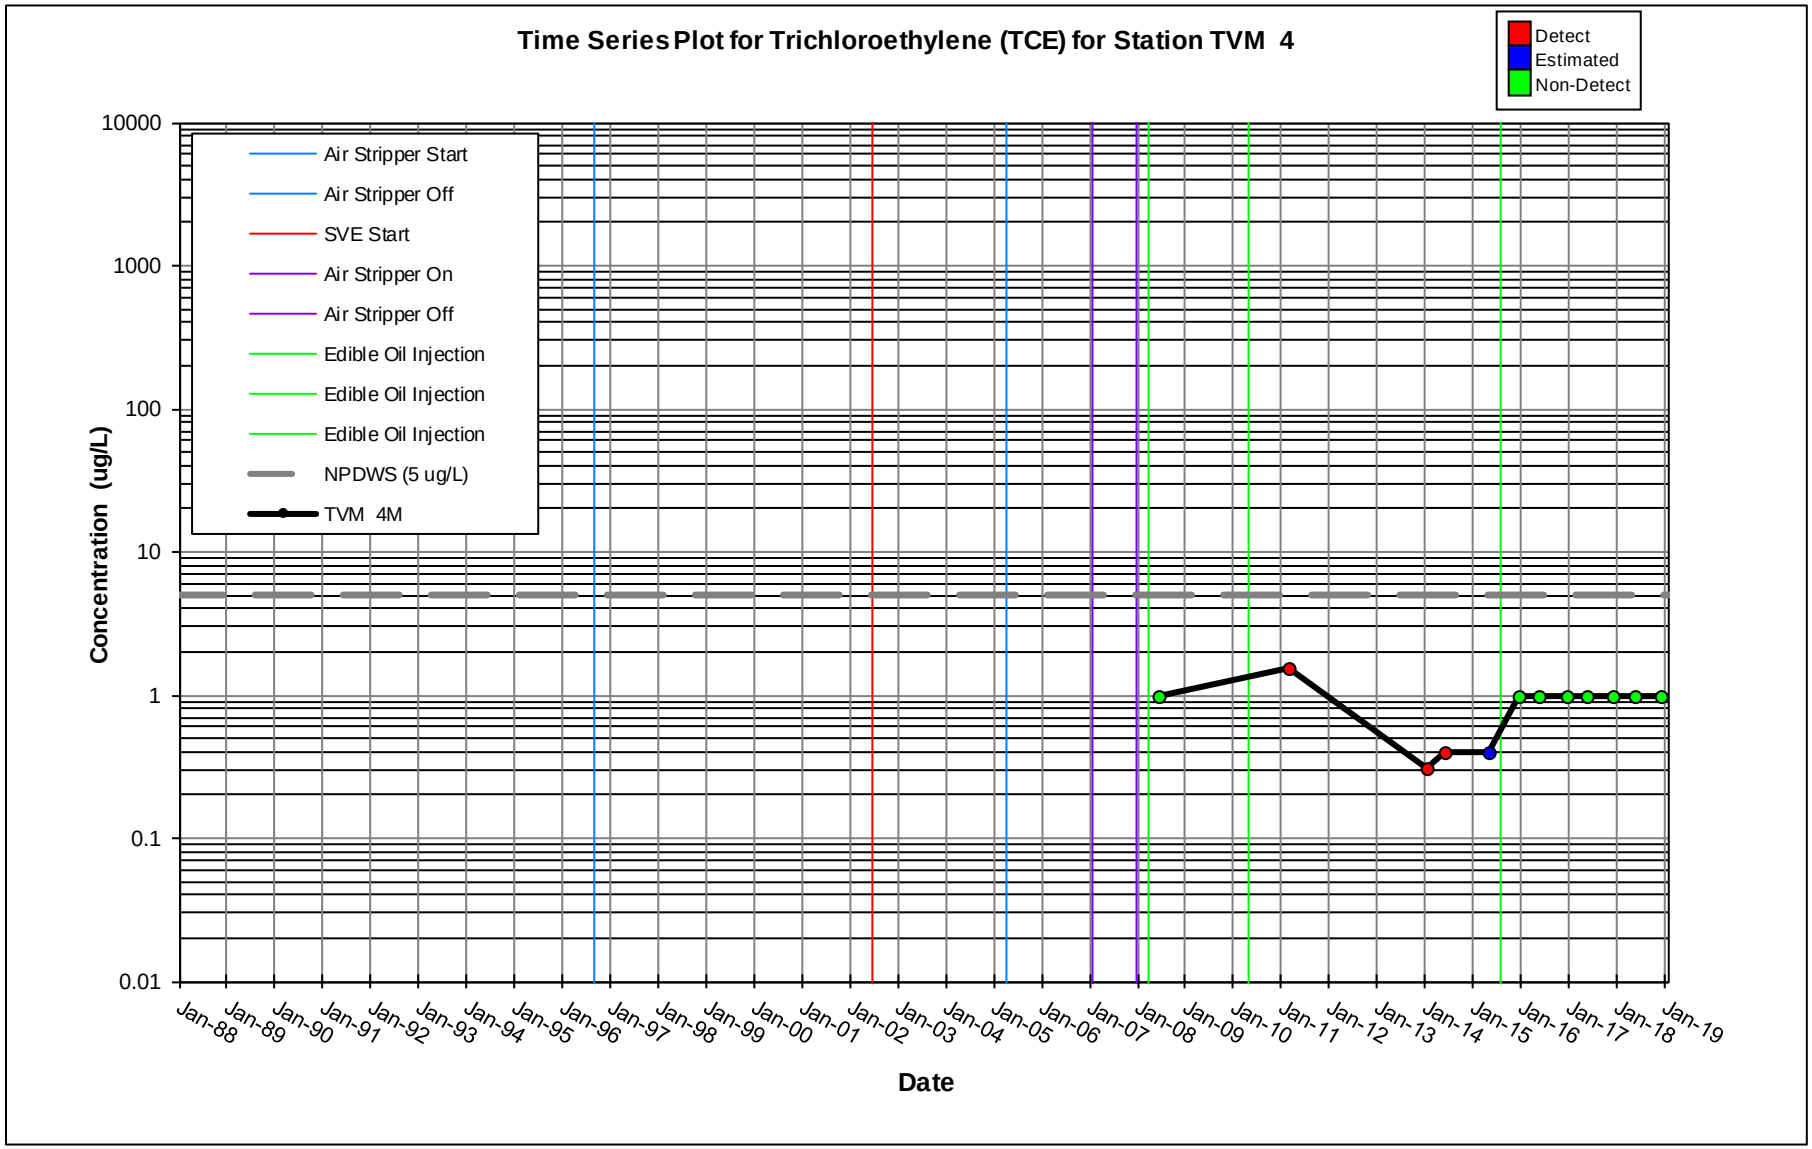
Time Series Plot for Trichloroethylene (TCE) for Station TVM 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TVM 4M
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

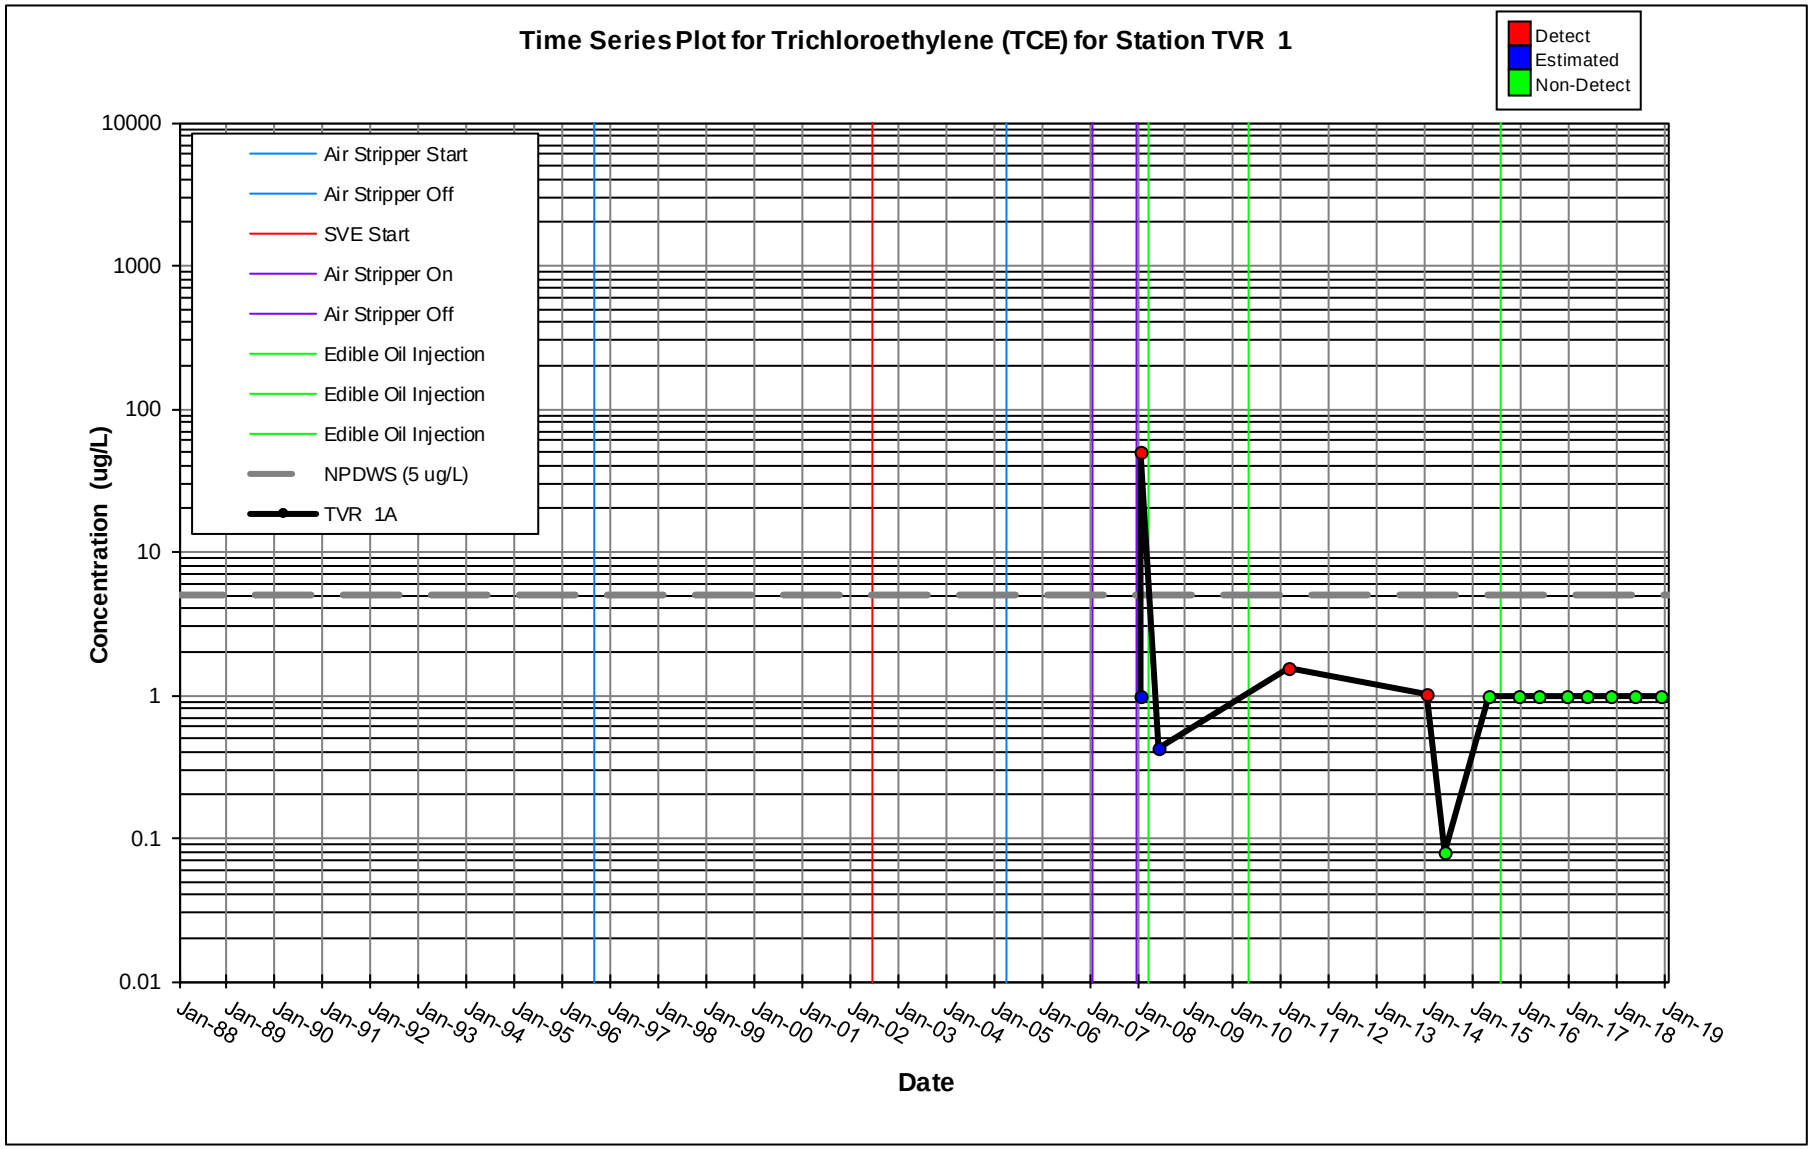
Time Series Plot for Trichloroethylene (TCE) for Station TVR 1
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (5 ug/L)
TVR 1A
Concentration (ug/L)
10000
1000
100
10
1
0.1
0.01
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

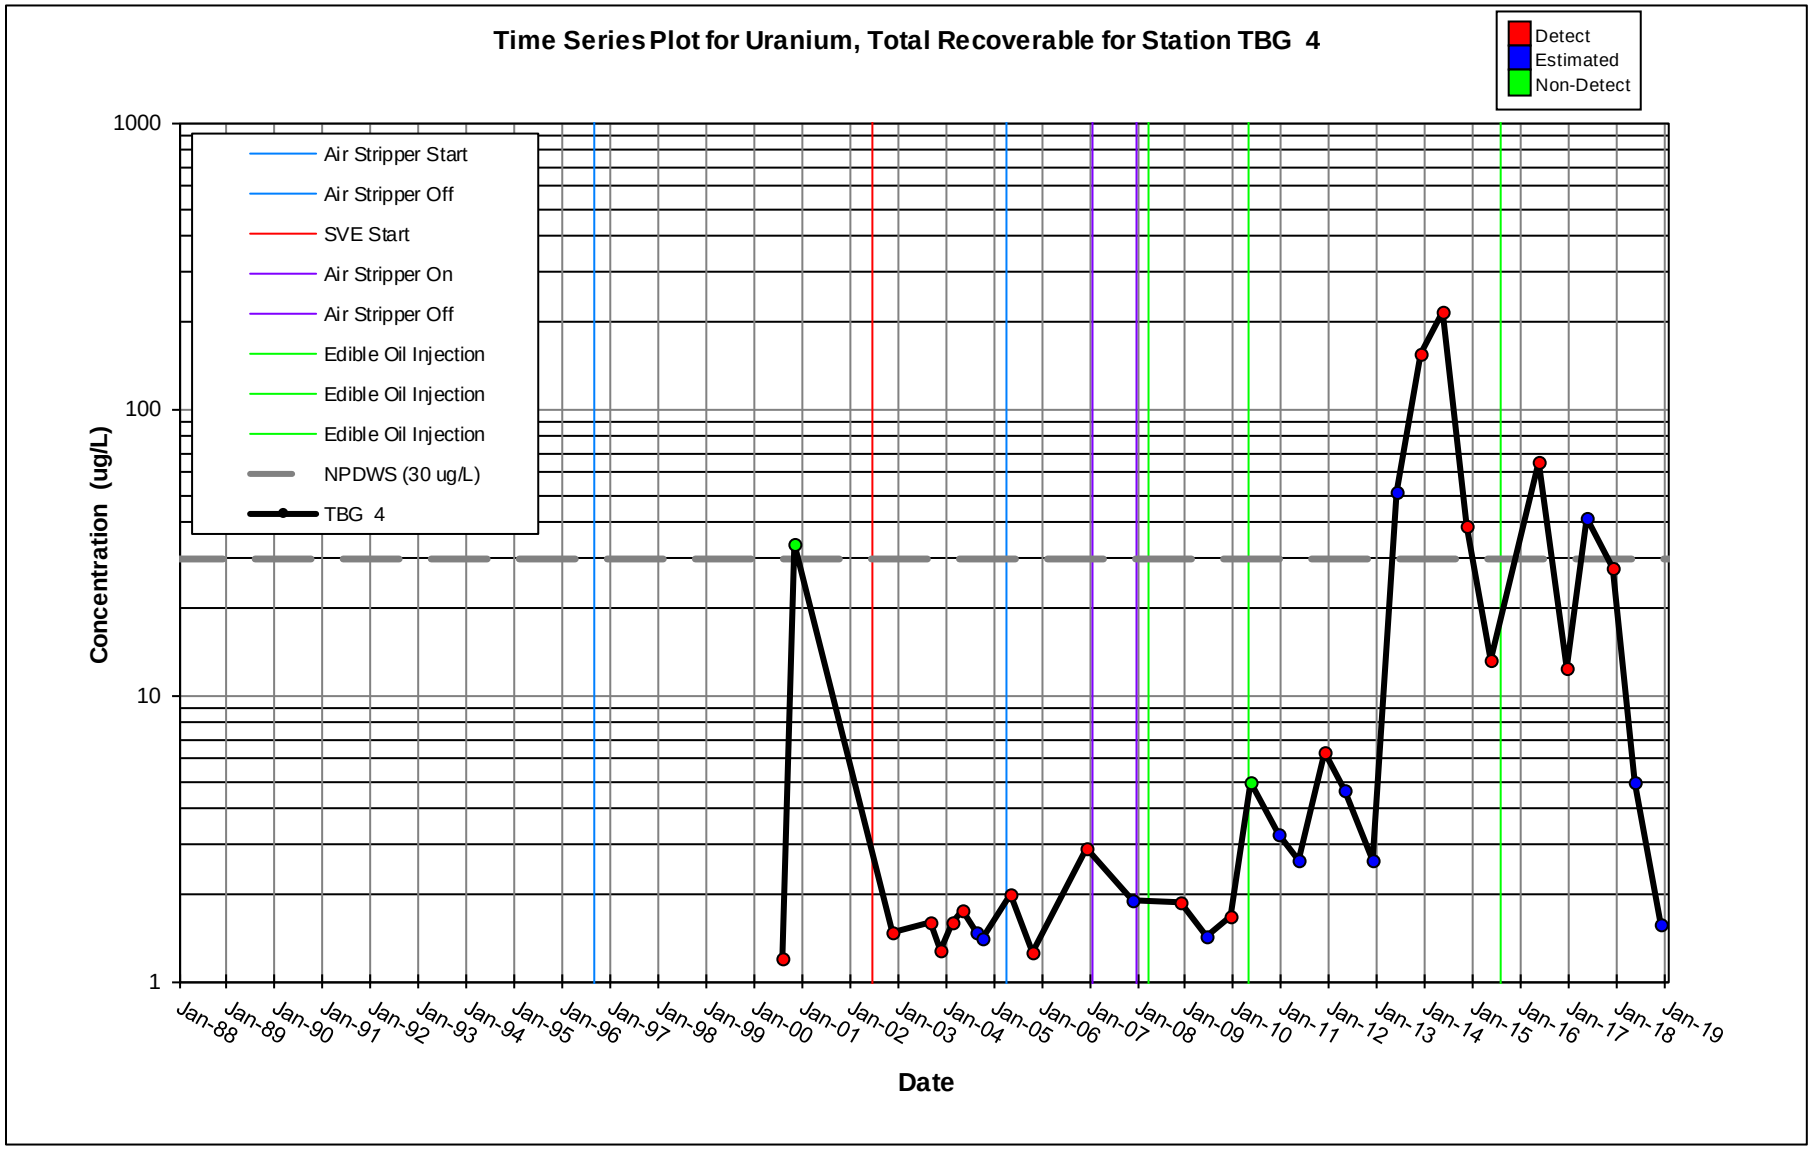
Time Series Plot for Uranium, Total Recoverable for Station TBG 4
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (30 ug/L)
TBG 4
Concentration (ug/L)
1000
100
10
1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

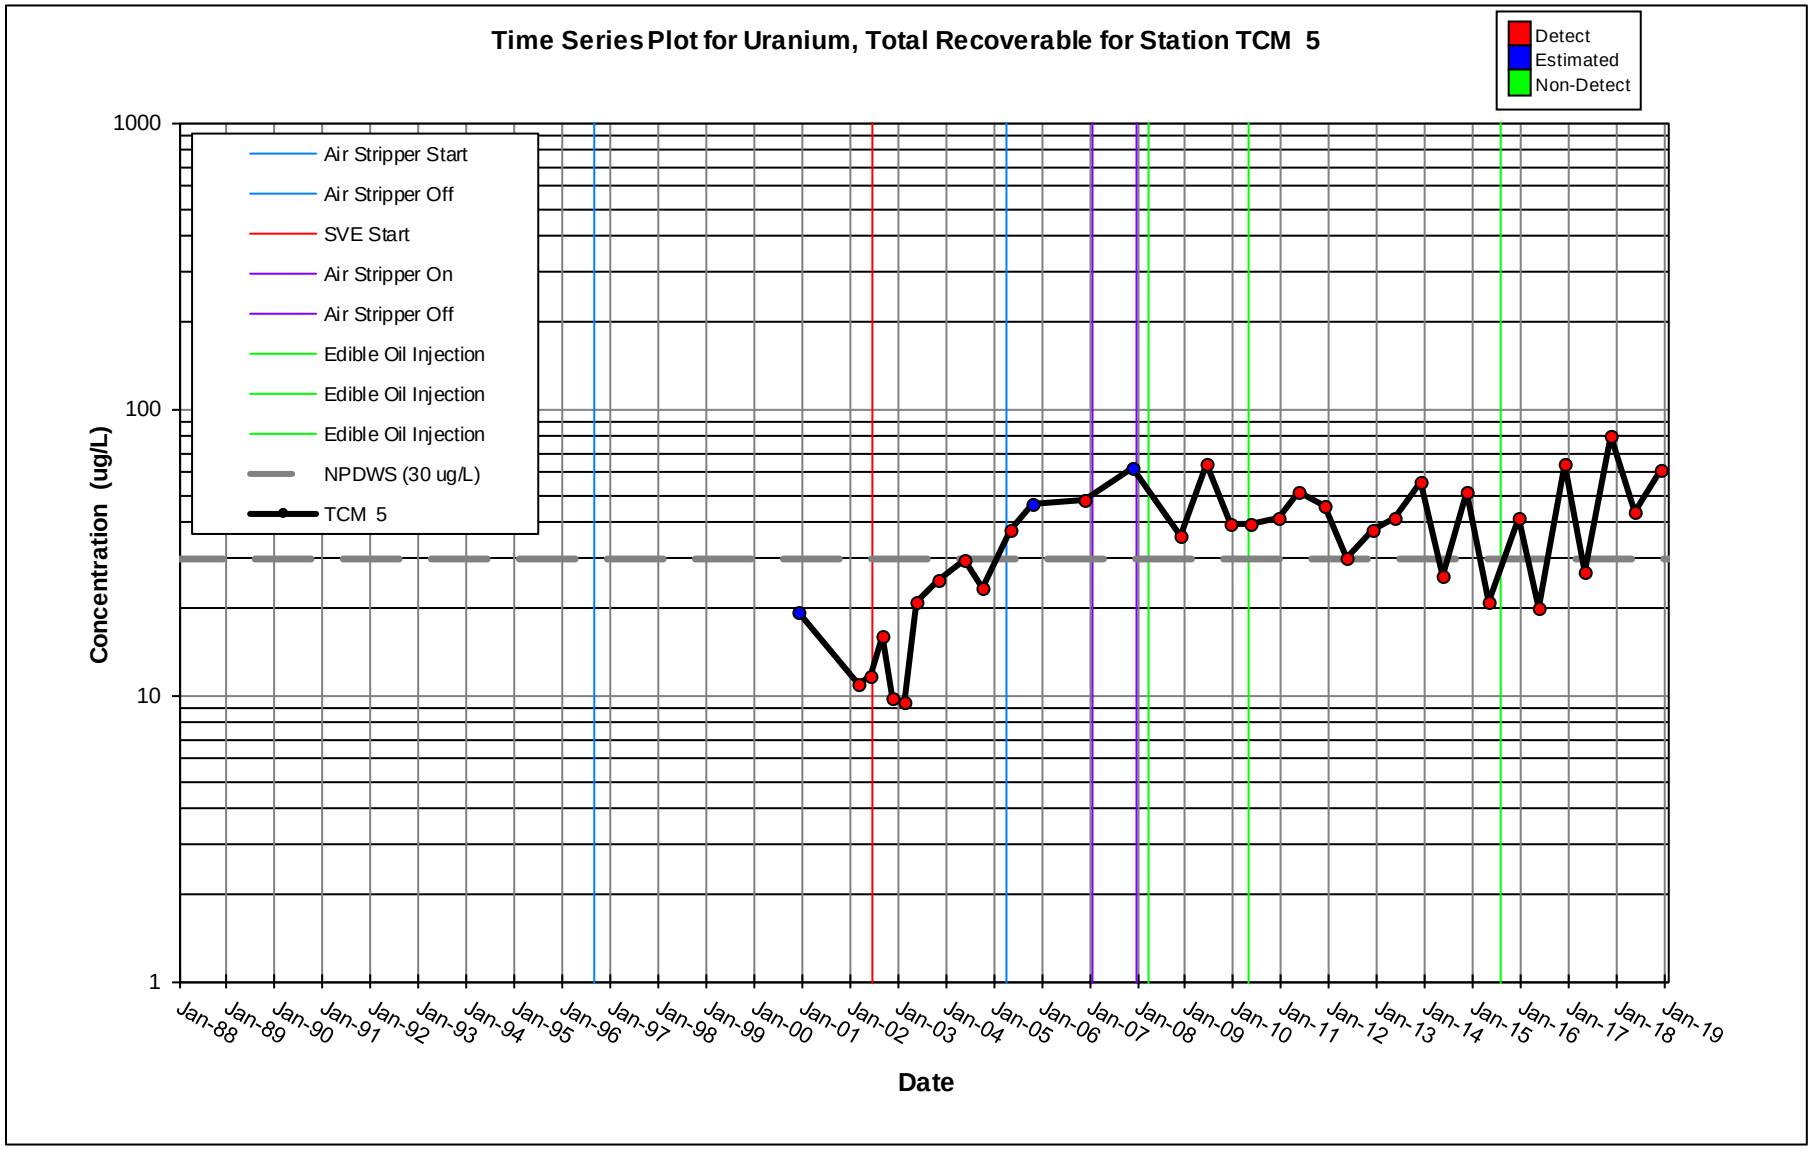
Time Series Plot for Uranium, Total Recoverable for Station TCM 5
Detect
Estimated
Non-Detect
Air Stripper Start
Air Stripper Off
SVE Start
Air Stripper On
Air Stripper Off
Edible Oil Injection
Edible Oil Injection
Edible Oil Injection
NPDWS (30 ug/L)
TCM 5
Concentration (ug/L)
1000
100
10
1
Jan-88
Jan-89
Jan-90
Jan-91
Jan-92
Jan-93
Jan-94
Jan-95
Jan-96
Jan-97
Jan-98
Jan-99
Jan-00
Jan-01
Jan-02
Jan-03
Jan-04
Jan-05
Jan-06
Jan-07
Jan-08
Jan-09
Jan-10
Jan-11
Jan-12
Jan-13
Jan-14
Jan-15
Jan-16
Jan-17
Jan-18
Jan-19
Date

This page intentionally left blank.